

# ASSEMBLY AND INSTALLATION INSTRUCTIONS

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTES:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## Hardware Package (included):



Mounting Plate (A)



Mounting Screw (B)



Green Grounding Screw (C)



Fixture Mounting Screw (D)




Wire Nut (E)



Lock Nut (F)



Ball Nut (G)

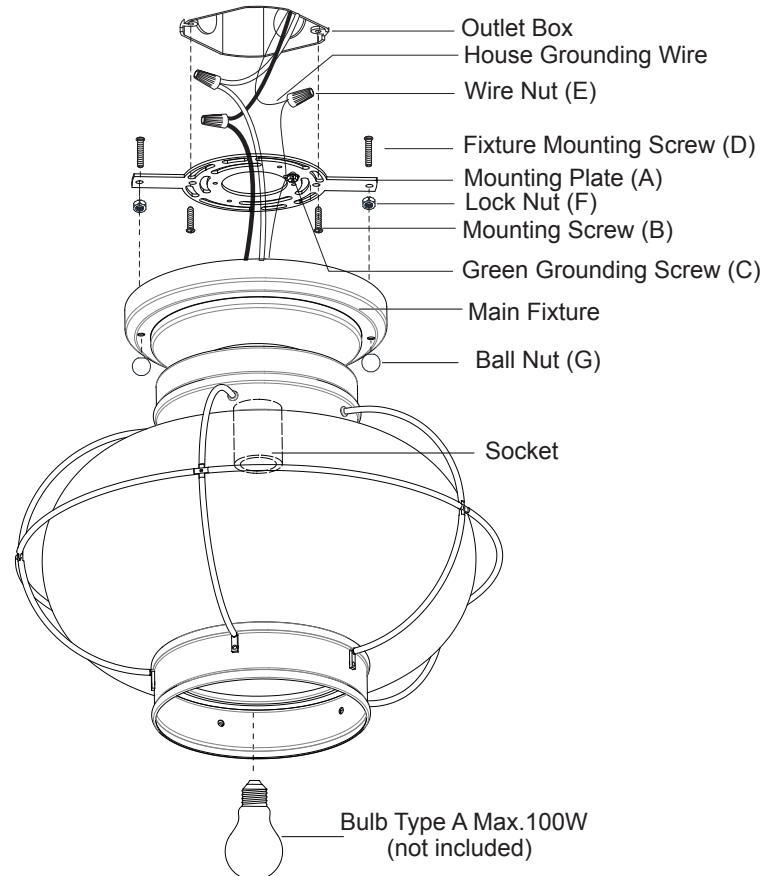


## Installation Steps

Turn off the power at the main fuse or circuit breaker box.


1. Attach two fixture mounting screws to the mounting plate, and secure them with two lock nuts.
2. Attach the mounting plate to the outlet box using two mounting screws.
3. Pull out the wires and grounding wire from the outlet box. Make wire connections using the wire nuts, as follow:
  - Connect the hot wire (usually black insulation) from the fixture to the black wire from the power source.
  - Connect the neutral wire (usually white insulation) from the fixture to the white wire from the power source.
  - Attach the fixture grounding wire (usually green insulation or bare wire) to the mounting plate with the green grounding screw. Then connect it to the house grounding wire with the wire nut.Carefully put the wires back into the outlet box.
4. Attach the main fixture to the mounting plate by inserting the fixture mounting screws, and secure it with two ball nuts.
5. Install bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.

Turn on the power at the main fuse or circuit breaker box.


The following parts are available for re-order if damaged or missing.




Mounting Plate (A)




Mounting Screw (B)




Green Grounding Screw (C)




Fixture Mounting Screw (D)



Wire Nut (E)




Lock Nut (F)



Ball Nut (G)

→ Assembly Kit  
(1 SET)

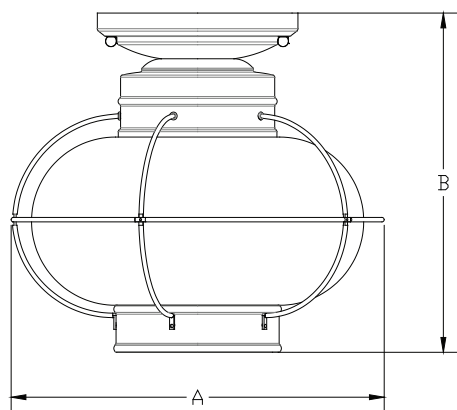

**A: 13"**  
**B: 11-7/8"**