

# FRESNEL LENS

LED Mini-Pendant • Damp Location



## Specifications:

### Description:

The Fresnel Lens P5050 features a 120V alternating current (AC) source which eliminates the need for a traditional LED driver.

### Construction:

- Fresnel Glass lens
- Plated Brushed Nickel (-09), painted Oil Rubbed Bronze (-108)
- Steel construction
- One 6" and four 12" lengths of stems included
- 6 links of 9 gauge chain supplied
- 10 feet of wire supplied
- LED Module is replaceable (part # 93054049)
- Flicker-free dimming to 10% brightness with most ELV type dimmers (See Dimming Notes)
- CA Title 24 Compliant
- Covers a standard 4" recessed outlet box
- Mounting strap for outlet box included

### Performance:

Number of Modules	1
Input Power	9W
Input Voltage	120V
Input Frequency	60Hz
Lumens	1211 (LM-79)
CCT	3000K
CRI	90
LPW	71
Life	60,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Min. Start Temp	-30° C
Max. Operating Temp	30° C
Warranty	5 yrs.
Labels	cCSAus certified for damp locations ENERGY STAR® qualified

**P5050-0930K9**  
**P5050-10830K9**


### Images:



### Dimensions:

A B  
6-1/8" 6-1/4"

C  
72-1/4"

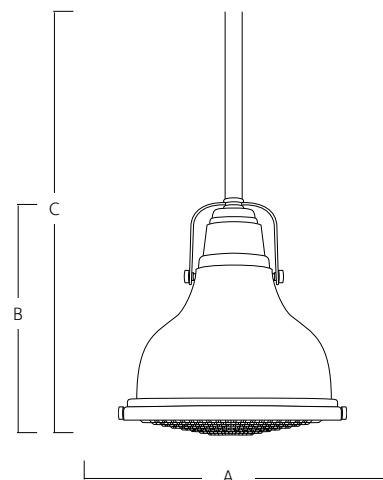

### Catalog number:

Base	Finish	Color Temp	CRI
<b>P5050</b>	<b>09</b> - Brushed Nickel	<b>30K</b> - 3000K	<b>9</b> - 90 CRI
	<b>108</b> - Oil Rubbed Bronze		

# FRESNEL LENS

LED Mini-Pendant • Damp Location



**P5050-0930K9**  
**P5050-10830K9**

**Dimming Notes:**

P5050 is designed to be compatible with many Electronic Low Voltage (ELV-Reverse Phase) controls.  
The following is a partial list of known compatible dimmer controls:

**Electronic Low Voltage ELV Reverse Phase Controls**

Lutron	Diva Series	(Part Number DVELV-300P)
Lutron	Nova T Series	(Part Number NTELV-300)
Lutron	Vierti Series	(Part Number VTELV-600)
Lutron		(Part Number MAELV-600)
Lutron		(Part Number SPELV-600)
Lutron		(Part Number AYCL-153P)
Lutron		(Part Number DVCL-153P)
Leviton		(Part Number AWRMG-EAW)
Leviton		(Part Number 6615-P)

Digital type dimmers are not recommended.

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.  
Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.