

INSTALLATION INSTRUCTIONS

LED VANITY LIGHT

120VAC Input, Dimmable

READ AND FOLLOW SAFETY INFORMATION

Turn off the main power at the circuit breaker before installing and servicing the fixture to prevent possible injury from electric shock.

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.


INSTALLATION & ASSEMBLY

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

1. Thread the 8-32 HEX NUT (9) onto the FIXTURE SCREW (8), and screw the FIXTURE SCREW (8) into the MOUNTING BRACKET (3), without tightening the HEX NUT.
2. Pull the power supply wires out from the OUTLET BOX (1) and mount the MOUNTING BRACKET (3) to the OUTLET BOX (1), using MOUNTING SCREWS (2).
3. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (11), WHITE to WHITE (10). Attach the POWER SUPPLY GROUND WIRE (6) from the OUTLET BOX and the FIXTURE GROUND WIRE (12) by using WIRE NUT (7).
4. After wires are connected, tuck them carefully inside the outlet box.
5. Place ceiling canopy (13) over the OUTLET BOX, and make sure FIXTURE SCREW (8) feed through the two holes on the canopy. Thread 2 CAP NUT (14) onto the fixture screws (8), tighten them until ceiling canopy is securely mounted.
6. Installation complete, restore power at the circuit breaker and turn light switch on to activate this fixture.

Care and maintenance – Use dry and clean cloth to wipe the surface of the fixture

Replacement- This LED product has no bulb to replace.

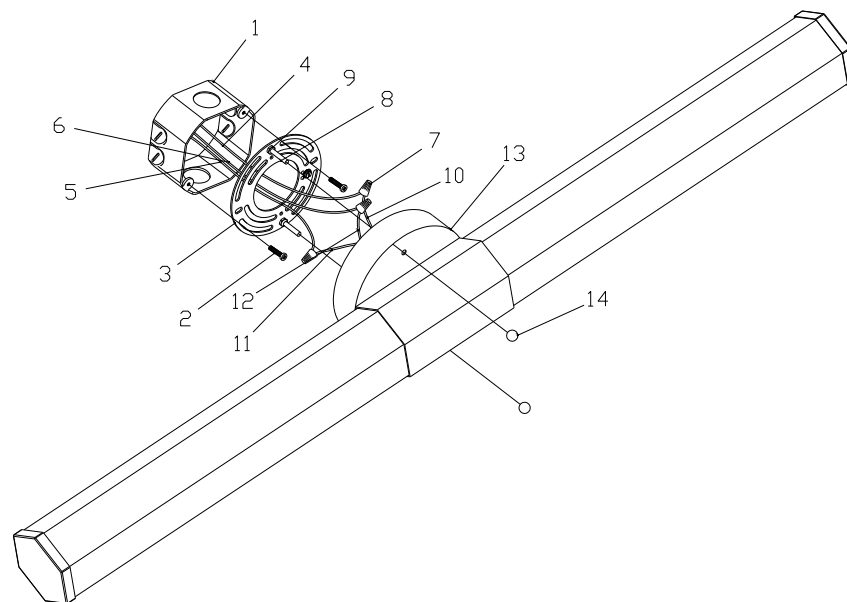

- | | |
|------------------------------|-------------------------|
| 1. OUTLET BOX (NOT INCLUDED) | 8. #8-32 FIXTURE SCREW |
| 2. MOUNTING SCREW | 9. #8-32 HEX NUT |
| 3. MOUNTING BRACKET | 10. WHITE FIXTURE WIRE |
| 4. WHITE SUPPLY WIRE | 11. BLACK FIXTURE WIRE |
| 5. BLACK SUPPLY WIRE | 12. FIXTURE GROUND WIRE |
| 6. SUPPLY GROUND WIRE | 13. CEILING CANOPY |
| 7. WIRE NUT | 14. CAP NUT |