

Michael Amini

LIGHTING

ITEM NO:LT-CH905-24ABR

***Congratulations on your purchase of Michael Amini Lighting!
You have selected a quality product that offers unique styling and built to last.
We thank you for your purchase and know you will be satisfied as you entertain friends and family!***

IMPORTANT SAFETY INSTRUCTIONS:

Before Assembly/Installation:

- * If you are unfamiliar with electrical wiring, we recommend you obtain the services of a qualified electrician.
- * The manufacturer and distributor accepts no liability for incorrect installation.
- * This fixture has been rated for maximum 25-watt E12 standard bulbs. Do not exceed the recommended wattage.
- * The ceiling must have a holding capacity of 230 lbs.
- * For indoor use only.
- * Components of this fixture are pre-wired. Use caution when removing from packaging .
- * Deviation from instructions may result in a risk of fire or electric shock.

PRODUCT DESCRIPTION:

General material: Crystal, Metal and Glass

Height: 128.0 cm (50½")

Diameter: 100.0 cm (39½")

Weight: 21kg (46Lbs)

Grounded/Hardwired

TO ASSEMBLE:

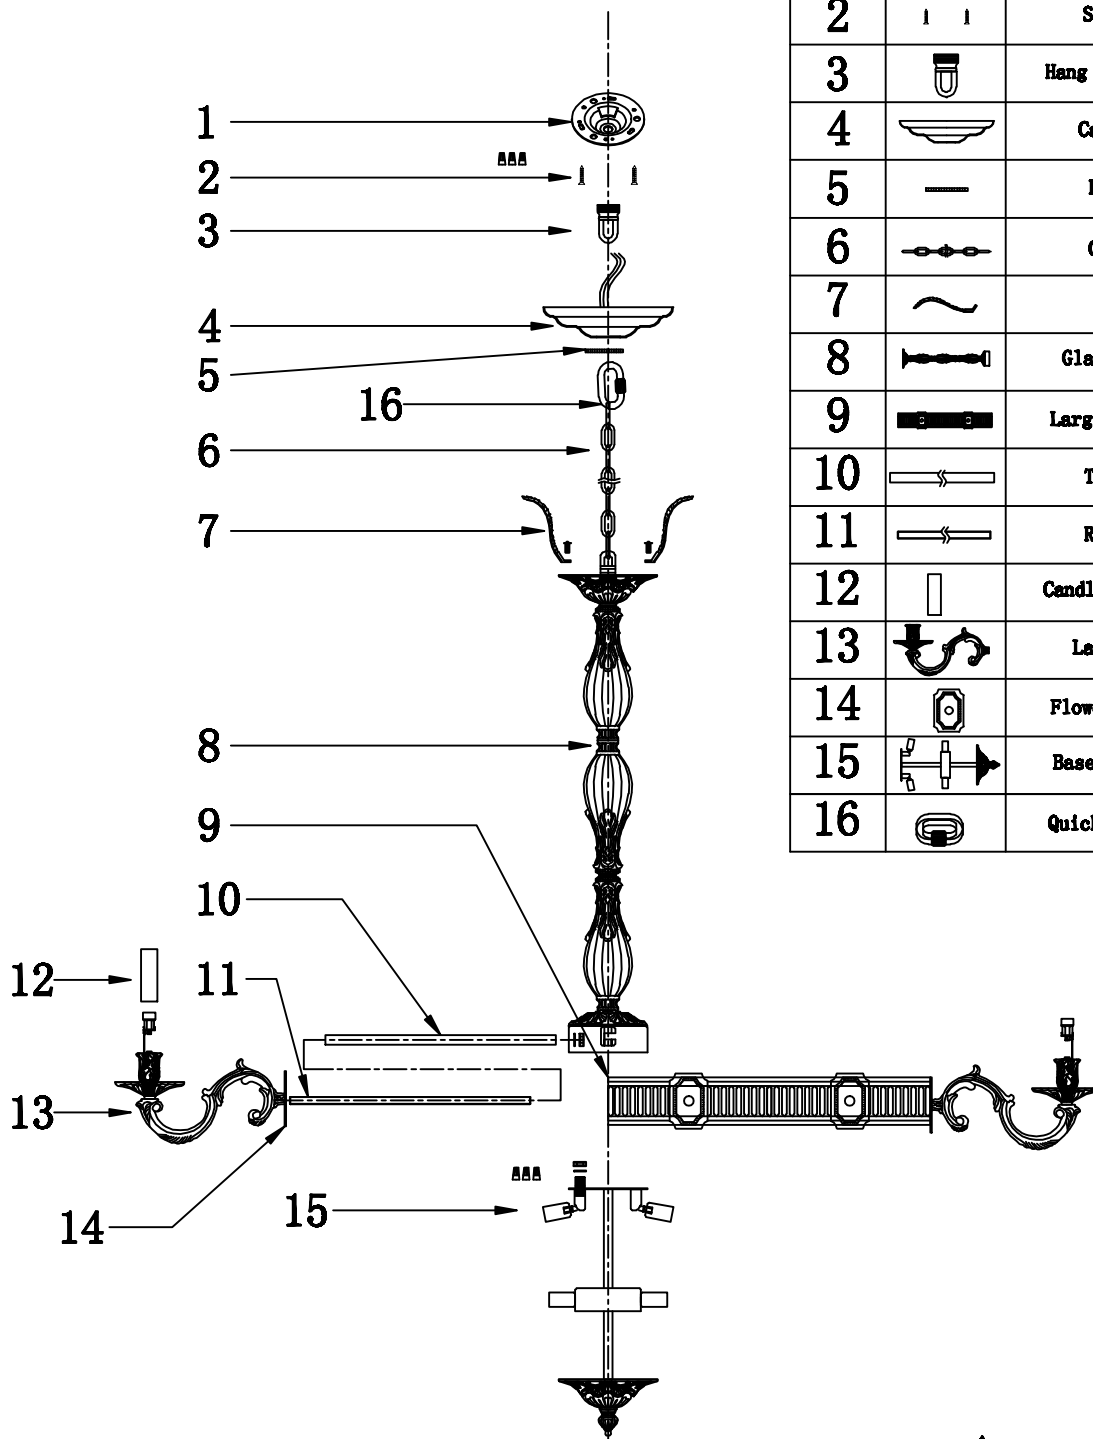
- 1.Thread main wire through Mounting Bracket (1) and secure with Mounting screws(2), cover with Canopy (4).
- 2.Hook and Lock Chain (6) to Quick Link (16) and securely connect to Mounting Bracket (1) and Glass Post (8); Install Leafs (7) to Glass Post (8);
- 3.Install Large Ring (9) to Glass Post (8);
- 4.Securely connect Lamp Base Stem (14) to the Glass Post (8) as shown;
- 5.Install Lamp Arm (13), Dish and Insert Candle Sleeve (12) as shown to Large Ring (9);
- 6.Connect wire and secure with Wire Nuts as shown in Cable Assembly Instruction;
- 7.Install Crystal Components as shown (A)(B)(C)(D)(D)(E)(F) in Crystal Assembly Instruction;

CARE INSTRUCTIONS:

- 1.Make sure that the power is turned off and bulb has cooled before handling.
- 2.Wipe clean with a dry or damp cloth.Do not use corrosive cleaners.

Frame Assembly Instruction

ITEM NO:LT-CH905-24ABR



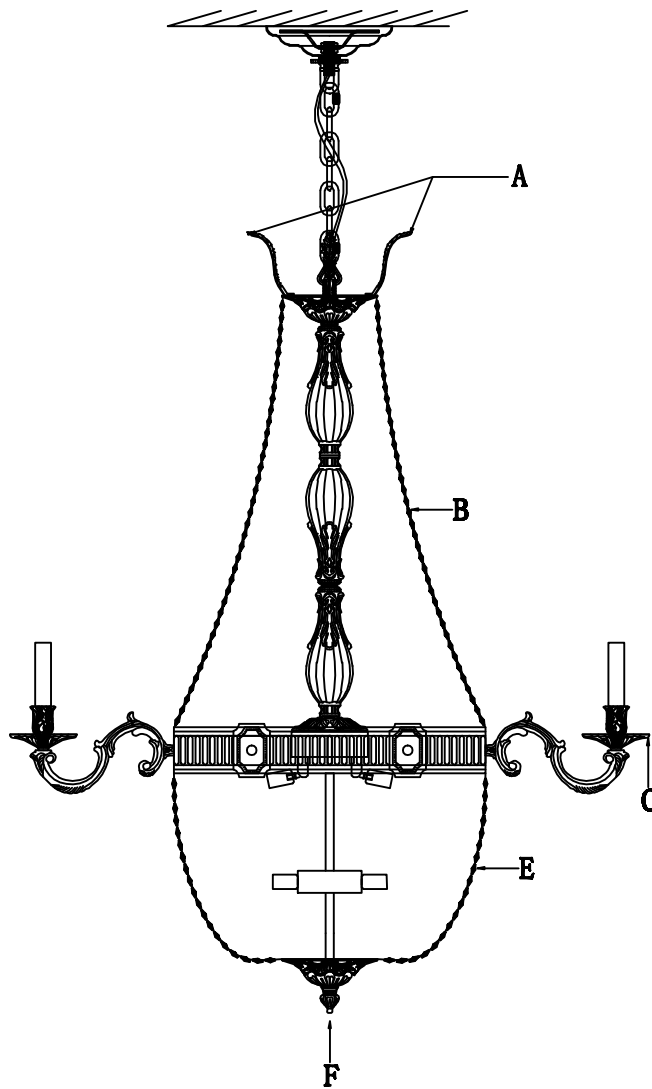


NO.	Photo	Name	Q' ty
1		Mounting Bracket	1PCS
2		Screw	2PCS
3		Hang Straight	1PCS
4		Canopy	1PCS
5		Ring	1PCS
6		Chain	1PCS
7		Leaf	6PCS
8		Glass Post	1PCS
9		Large Ring	1PCS
10		Tube	12PCS
11		Rod	12PCS
12		Candle Sleeve	12PCS
13		Lamp Arm	12PCS
14		Flower Circle	12PCS
15		Base Lamp Stem	1PCS
16		Quick Link	1PCS








Michael Amini

LIGHTING

Crystal Assembly Instruction

ITEM NO:LT-CH905-24ABR



<p>A</p> <p>#14x12+#14x1+#53x1</p>  <p>6PCS</p>	<p>B</p> <p>#24x1+#22x1+#20x4+#18x5+ #16x5+#14x7+#12x6</p>  <p>28PCS</p>	<p>C</p> <p>#14x1+#63x1</p>  <p>48PCS</p>	<p>D</p> <p>#14x14+#76x12</p>  <p>12PCS</p>
<p>E</p> <p>(#26x1+#26x2+#24x2+#22x2+#20x2+ #18x2+#16x2+#14x1)x2+#14x1</p>  <p>24PCS</p>	<p>F</p> <p>#14x1+#40x1</p>  <p>1PCS</p>	<p>3/4</p> <div style="text-align: right;">  </div>	

Michael Amini

LIGHTING

Cable Assembly Instruction

ITEM NO:LT-CH905-24ABR

