
SERA
BATHROOM
DESIGNS

60" LED Mirror: Aura Collection

Model: M-60AU

Size: 1500*750*34MM

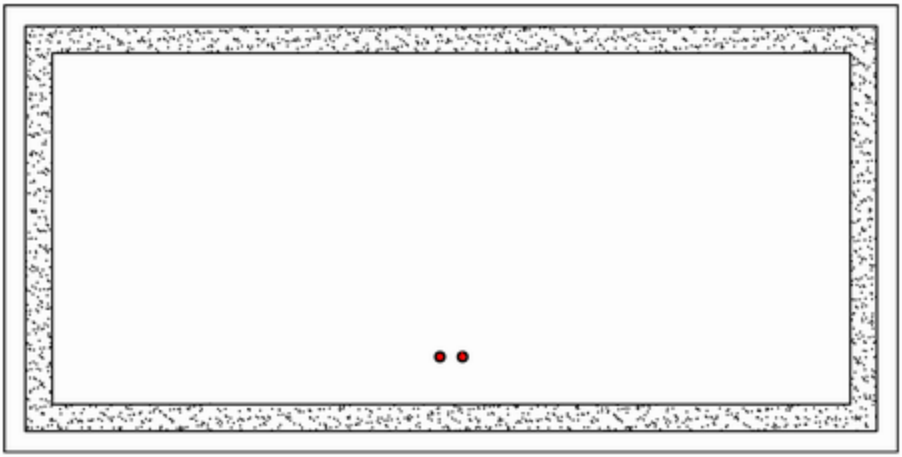

LED Lighted Mirror with Internal LED Light

Installation • Operation • Safety • Warranty

Support:

support@serabathroomdesigns.com

1-833-411-7372

www.serabathroomdesigns.com

80+ CRI
Minimum 80 CRI

5mm thick copper-free mirror

Anti-fog and dimming function

Touch sensor switch

Over 50,000 hours life expectancy

Internal LED light guides

Brightness 5185 lumens

Four sides frost lighted

Anodized aluminum rustproof


SERA BATHROOM DESIGNS

60" LED Mirror

LED Mirror with Internal LED Light Guides

Model: M-60AU
Size: 1500*750*34MM

PRODUCT FEATURES

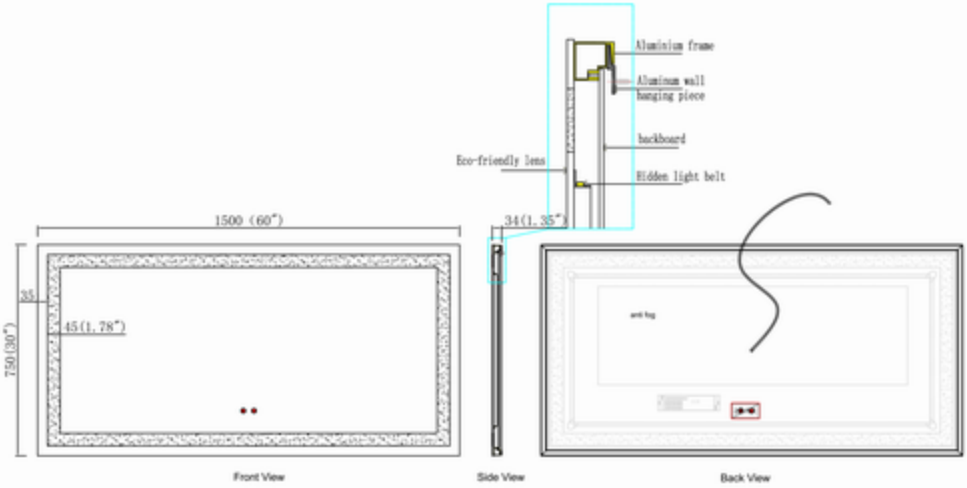

- Features an anodized aluminum construction with a durable rustproof and chip-resistant finish
- Internal LED light guides provide optimal lighting
- Brightness of 5185 lumens ensures consistent lighting
- Minimum 80 CRI (colour rendering index) is ideal for makeup application, grooming, and skincare routine
- Integrated LED bulbs have an estimated life expectancy of over 50,000 hours
- Includes a touch sensor switch
- Anti-fog and dimming function
- Four sides frost lighted
- 5mm thick copper-free mirror

CONTACT US AT:

support@serabathroomdesigns.com

1-833-411-7372

www.serabathroomdesigns.com

SERA BATHROOM DESIGNS

60" LED Mirror

LED Mirror with Internal LED Light Guides

Model: M-60AU
Size: 1500*750*34MM

QUICK START

1. Turn OFF power at the breaker (verify with tester).
2. Locate studs and mark centerline
3. Install hanging bar/brackets level.
4. Make hard-wired electrical connections.
5. Hang mirror; lock-catch for horizontal mount.
6. Restore power; test touch sensors (light, anti-fog).

SAFETY & COMPLIANCE

- Installation by a licensed electrician only.
- Connect to a GFCI-protected, properly grounded circuit (120 V~ 60 Hz).
- Do not connect to any wall dimmer (ELV/triac). Use a standard ON/OFF switch if desired; dimming happens on the mirror.
- Two-person lift required; use PPE.
- Mount into wall studs whenever possible; use proper anchors for wall type.




GFCI Protected


No wall dimmer


Ground properly


Two-person lift


PPE

CONTACT US AT:

support@serabathroomdesigns.com

1-833-411-7372

www.serabathroomdesigns.com

SERA BATHROOM DESIGNS

60" LED Mirror

LED Mirror with Internal LED Light Guides

Model: M-60AU
Size: 1500*750*34MM

WHAT'S IN THE BOX & TOOLS

INCLUDED



Mirror assembly



Hanging bar



Wall screws (x2)



Anchors (x2)

TOOLS NEEDED



Band tap



Level



Pencil



PPE



Drill bits



Electronic drill



Cross screwdriver



Stud finder

CONTACT US AT:

support@serabathroomdesigns.com

1-833-411-7372

www.serabathroomdesigns.com

SERA BATHROOM DESIGNS

60" LED Mirror

LED Mirror with Internal LED Light Guides

Model: M-60AU
Size: 1500*750*34MM

HARDWIRE INSTRUCTIONS


Warning: Manufacturer's warranty shall be void if product is not installed by a licensed professional


Prior to commencing installation, please ensure the following:
- The wall where the product is being installed is able to support the weight of the product
- The main electrical supply has been powered off to complete installation

IMPORTANT: Wiring Instructions for Canada & USA
This fixture's wiring colors may not align with standard North American guidelines. For a safe installation, please re-identify the fixture wires with electrical tape as follows:

LIVE: Wrap black tape on the fixture's White wire. Connect this to your home's Black (Live) wire.
NEUTRAL: Wrap white tape on the fixture's Black wire. Connect this to your home's White (Neutral) wire.
GROUND: Connect the Green wire to your home's Green or Bare Copper ground wire.

Please consult a licensed electrician if you are unsure.

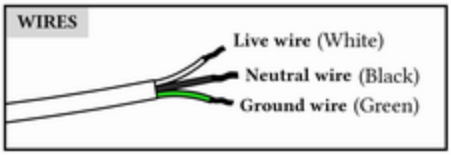

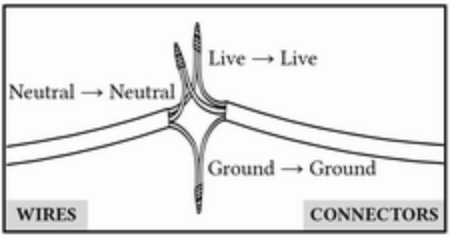

Important
- Hard-wire only. Do not attach a cord-and-plug.
- Use listed wire connectors; make all splices inside approved boxes.
- Do not use a wall dimmer. Use a standard ON/OFF switch if wall control is required.

CONTACT US AT:
support@serabathroomdesigns.com
1-833-411-7372
www.serabathroomdesigns.com

SERA BATHROOM DESIGNS


60" LED Mirror

LED Mirror with Internal LED Light Guides

Model: M-60AU
Size: 1500*750*34MM


WALL MOUNTING INSTRUCTIONS

1 Measure the distance between the bottom of the mirror and point **a**.

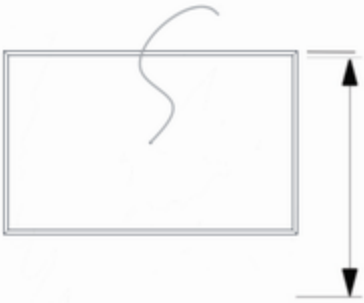


WARNING: Mounting bracket must be attached to furring strip/channel or wall stud.


2 Draw a horizontal line from the point **a** using a level.



3 Attach the mounting bracket to the wall.



4 Connect the Hard Wire to the mirror.

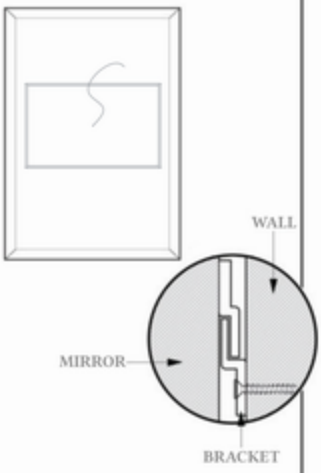

5 Hang the mirror on the bracket.



CONTACT US AT:

support@serabathroomdesigns.com

1-833-411-7372

www.serabathroomdesigns.com

SERA BATHROOM DESIGNS

60" LED Mirror

LED Mirror with Internal LED Light Guides


Model: M-60AU
Size: 1500*750*34MM

OPERATION & FEATURES



MIRROR DEFOGGING USE

Short touch the left Touch sensor to turn on / off the mirror defogging function.



MIRROR LIGHT USE

Short touch the right Touch sensor to turn on / off the mirror light.



DIMMING LIGHT USE

Long touch the right Touch sensor to dimming the mirror light.

15%, 50%, and 100% dimming levels.

CONTACT US AT:
support@serabathroomdesigns.com
1-833-411-7372
www.serabathroomdesigns.com

SERA BATHROOM DESIGNS

60" LED Mirror

LED Mirror with Internal LED Light Guides

Model: M-60AU
Size: 1500*750*34MM

CARE & CLEANING AND TROUBLESHOOTING

CARE & CLEANING

- Wipe with a soft, lint-free cloth; mild non-ammonia cleaner.
- Do not use abrasives, pads, acids, or solvents.
- Apply cleaner to cloth, not directly on sensor areas.

TROUBLESHOOTING (QUICK FIXES)

- No light at install: Confirm breaker ON, correct wiring, internal quick-connects fully seated.
- Touch unresponsive: Power cycle at breaker for 60 seconds; clean/dry glass over sensors.
- Buzz/Hum: Ensure unit is not on a wall dimmer; verify solid ground.
- Anti-fog not warming: Ensure left sensor is ON; feature auto-turns-off after 1 hour.

CONTACT US AT:

support@serabathroomdesigns.com
1-833-411-7372
www.serabathroomdesigns.com