


Assembly Instruction Sheet for Model HL529150

Package Contents

Part	Description	Quantity
A	Mounting Bracket	1 pc.
B	Fixture Arm	multi pcs.
C	Fixture Body	1 pc.
D	Central Column	1 pc.
E	Chain	1 pc.
F	Canopy	1 pc.
G	Decorative Chain	multi pcs.
H	Bowl Glass Shade	1 pc.
I	Parrot Shade	multi pcs.
J	Decoration	multi pcs.

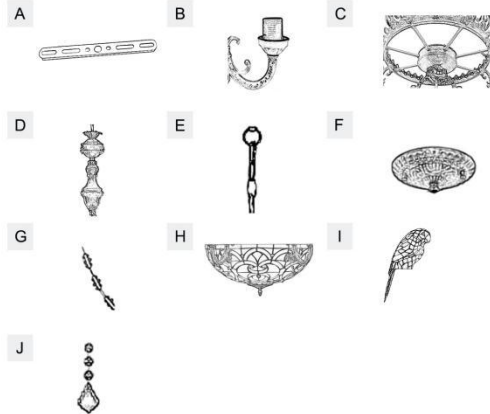

STEP 1

Mark the drilling position on ceiling with the help of the Mounting Bracket(A).
Drill holes on the marks and stick the expansion anchors into the holes.
Fix the Mounting Bracket(A) to the expansion anchors with self-tapping screws.

STEP 2

Thread the wire of Fixture Arm(B) through threaded tube to the central plate of Fixture Body(C),
and screw the Fixture Arm(B) to the Fixture Body(C).
Repeat the above step to fix the other Fixture Arms(B).

STEP 3

Thread the main line to the bottom disc of Central Column(D).
Connect wire color Black/Red of the main line and of the central plate of Fixture Body(C) as one strand of wire.
Connect wire color White/Blue of the main line and of the central plate of Fixture Body(C) as another strand.
Fix the bottom disc of Central Column(D) to the central plate of Fixture Body(C).

STEP 4

Thread the wire of Central Column(D) to the Chain(E), and fix the Chain(E) to the Central Column(D).
Thread wire of the Chain(E) to the Canopy(F) and attach the Chain(E) to the Canopy(F).

STEP 5

Hold the fixture close to the ceiling.
Connect live line to wire color Black/Red from the Canopy(F).
Connect neutral line to wire color White/Blue from the Canopy(F).

STEP 6

Attach the Canopy(F) to the Mounting Bracket(A).

STEP 7

Install your bulb to the bulb base.

STEP 8

Attach the Decorative Chain(G) to the loop of the Fixture Body(C) and the Central Column(D).

STEP 9

Position the threaded tube to the bottom of Fixture Body(C),
and fix the Bowl Glass Shade(H) to the Fixture Body(C) with the help of threaded tube and finials.
Fix the Parrot Shade(I) to the socket of Fixture Arm(B).

STEP 10

Hang the Decorations(J) on the scroll of Fixture Arm(B).

Your fixture is now assembled and ready to use.