


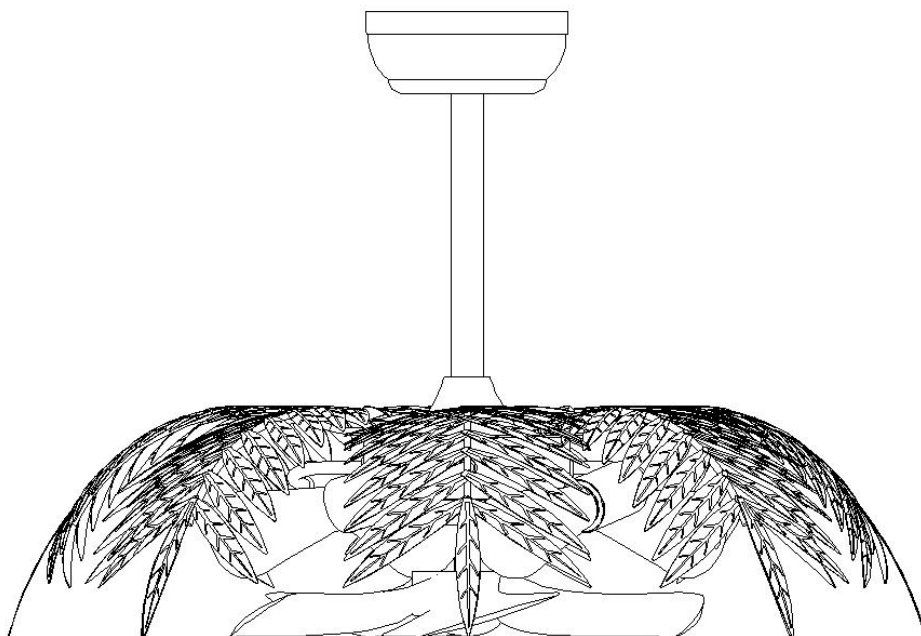

Ceiling Fan with Light

CAUTION
READ INSTRUCTIONS CAREFULLY FOR
SAFE INSTALLATION AND FAN OPERATION

Catalogue

Safety Rules.....	3
Package Content.....	4
Installation Preparation.....	5
Wiring Diagram.....	6
DC converter (bedroom)fan and other remote control instructions	8

SAFETY RULES

1. To reduce the risk of electric shock, turn off the electricity to the fan at the main fuse box or circuit panel before beginning.
2. All wiring must be in accordance with the local electrical codes or National Electrical Code. Electrical installation should be performed by a qualified licensed electrician.
3. To avoid personal injury, the use of gloves may be necessary while handling fan parts with sharp edges.
4. The outlet box and ceiling support structure must be securely mounted and capable of supporting at least 10 KGS.
5. To avoid personal injury or damage to the fan and other items, be cautious when working around or cleaning the fan.
6. Do not use water or detergents when cleaning the fan or fan blades. A dry dust cloth or lightly dampened cloth will be suitable for most cleaning.
7. After making electrical connections, spliced conductors should be turned upward and pushed carefully up into the outlet box. The wires should be spread apart with the grounded conductor and the equipment- grounding conductor on one side of the outlet box.
8. Electrical diagrams are for reference only.

PACKAGE CONTENT


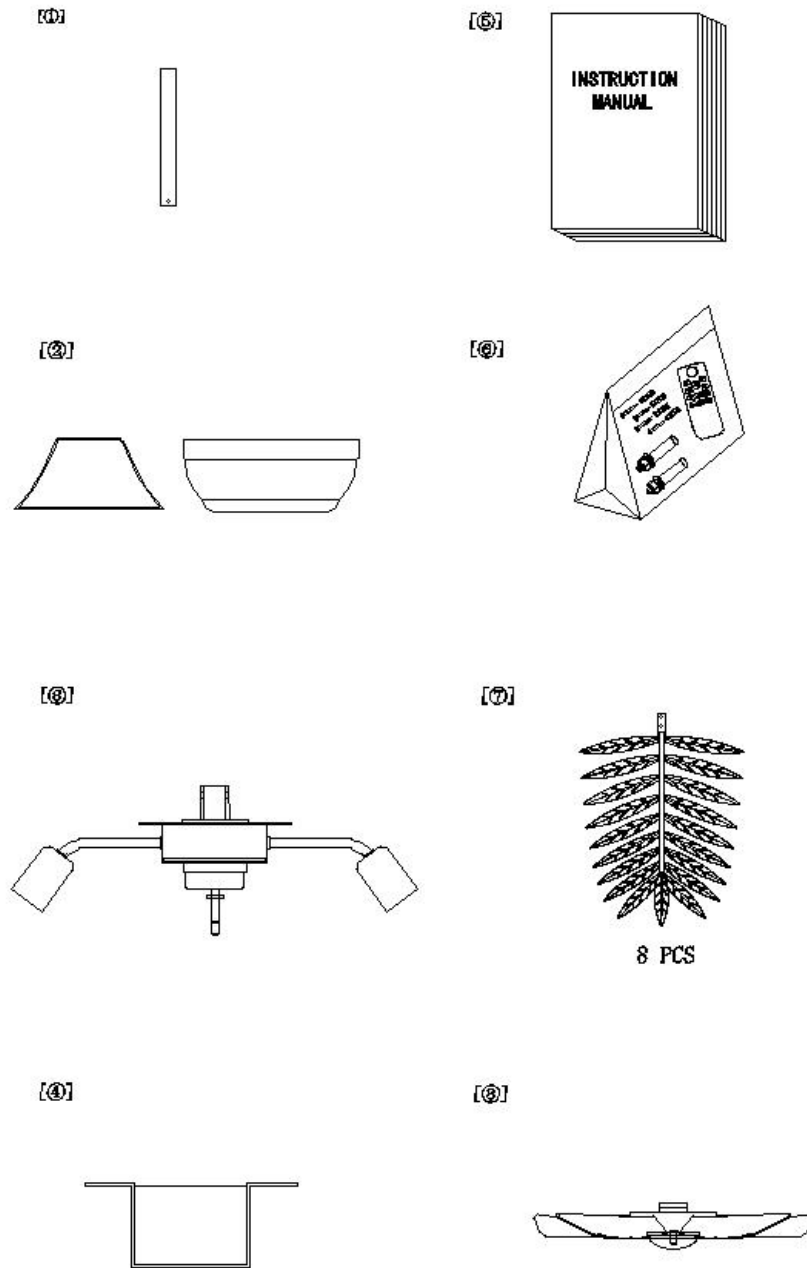


Figure 1

Name	QTY	Name	QTY
①Suspension Rod	1	⑤Manual	1
②Flared Cover	2	⑥Hardware Kit	1
③Fan light main body	1	⑦Metal Fan Blade	8
④Ceiling Mounting Assembly&Base plate	1	⑧Plastic Fan Blade	1

Installation Preparation


Tools Required

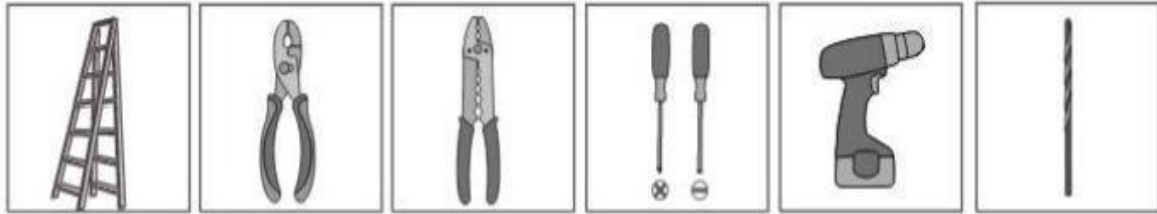

☒ Ladder ☒ Pliers ☒ Wire Strippers ☒ Screwdrivers ☐ Power Drill (Optional) ☐ Drill Bit (Optional)

Figure 2

What to Expect with Your Installation Conditions

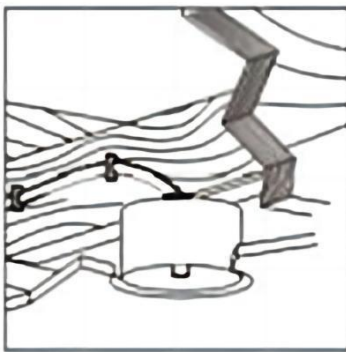

☒ Be able to secure the fan to ceiling support structure and electric box




☒ Easy installation can be performed by one person




☒ Available for slanted ceiling angle less than 90°

Figure 3

Mounting Options

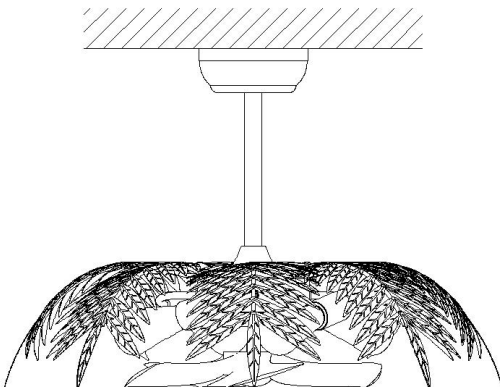

☒ Concrete ceiling installation

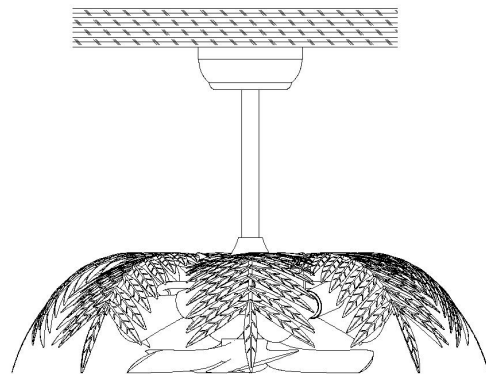

☒ Wooden ceiling installation

Figure 4

Wiring Diagram

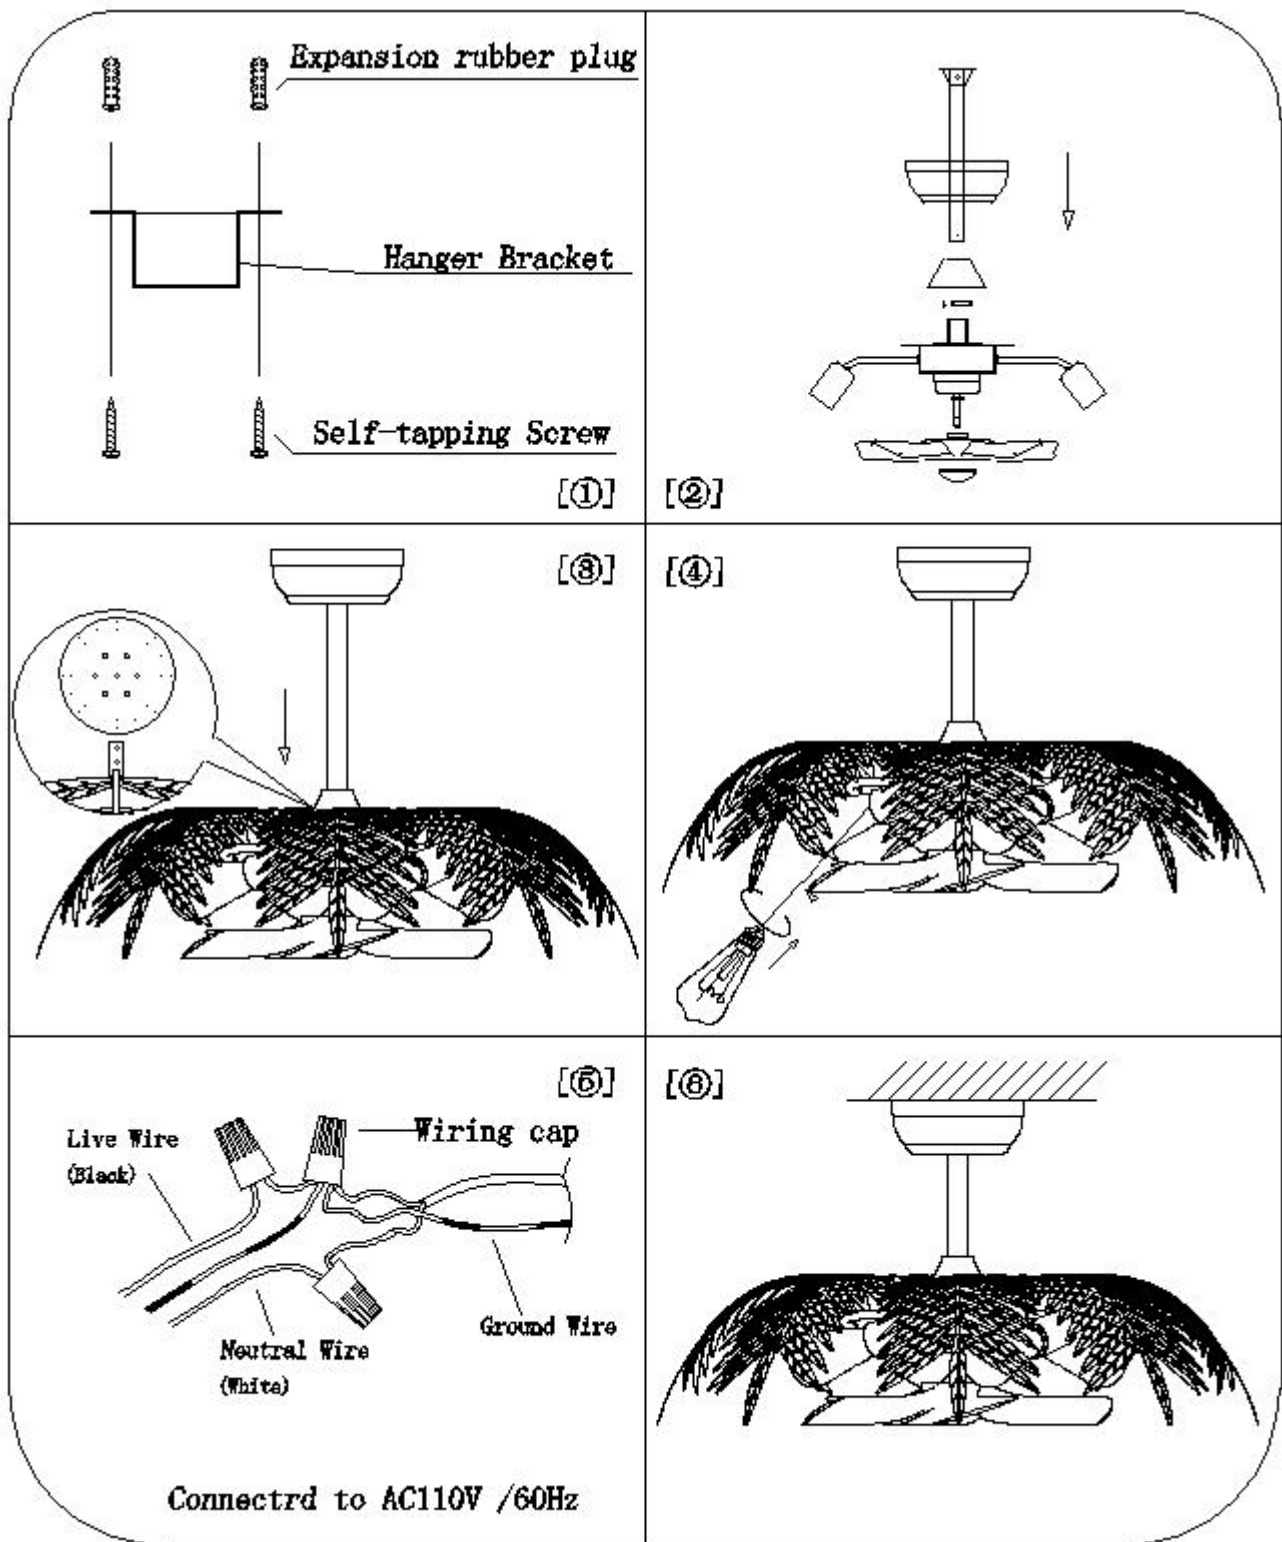


Figure 5

1. When installing this product, first cut off the power supply and determine the installation plan and the weight borne by the ceiling.
2. Drill installation holes on the ceiling according to the installation holes on the chassis, insert expansion plugs, and fix the iron frame with self tapping screws On the ceiling. Ensure that the external power cord passes through the wire inlet hole of the lamp body and ensure that it is securely installed. (As shown in Step ①)
3. Insert the accessories into the hanging rod in sequence, then attach the rod to the main body of the fan light and tighten all screws. (as shown in Step ②).
4. Connect 110V mains power to one end of the terminal block, connect the live wire to L, the neutral wire to N, and the ground wire to  . Pay attention to wire contact when wiring Good, the copper wire at the end is not exposed. (As shown in Step ⑤)
5. Hang the fan light body onto the installation bracket (Hanger Bracket), place the ceiling canopy cover over it, rotate to align with the mounting holes, and finally tighten all screws. Only after confirming that the installation is correct can the power be connected and used normally. (As shown in Step ⑥)

BLDC Fan Light Remote Control Manual

2.4GHZ frequency controller

ALL OFF
MATCHING
WIND SPEED
FORWARD



LIGHT ON/OFF
WIND SPEED+
NATURAL WIND
REVERSE
TIMER



Battery model

7#1.5V*2

Code matching: _After powering on, within 5 seconds, press and hold the code matching fan to turn off, and the code matching is successful

Kind reminder:

When the remote control cannot be effectively controlled: please check the battery. If it is not used for a long time, please remove the battery

CAUTION: Scan the QR code on the left to download the app and control the fan light with your mobile phone.