


OWNER'S MANUAL

2 Tier Individual Pull-Out Cabinet Organizer

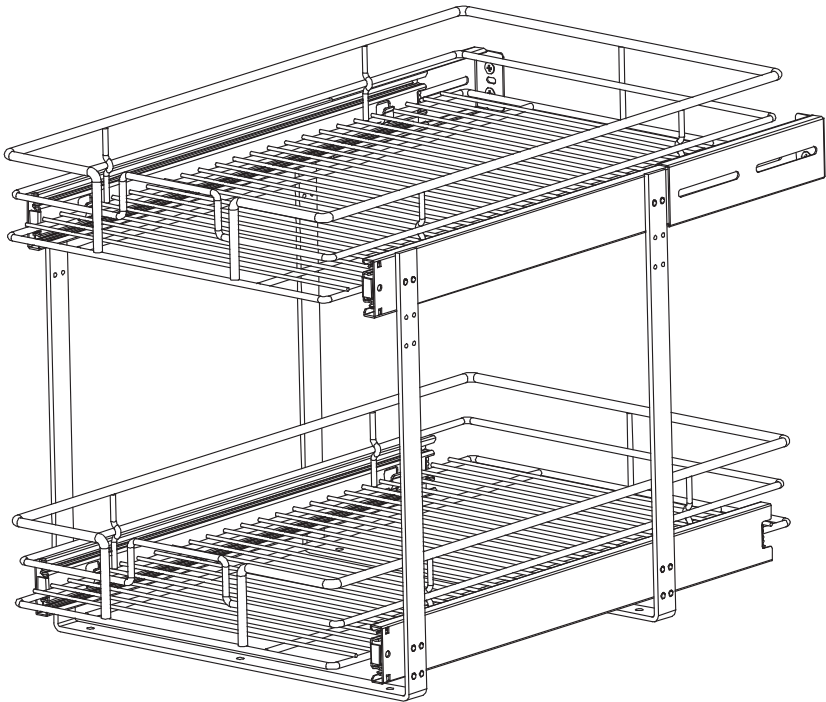


CARE & MAINTENANCE

- For daily cleaning, use a dry cloth and a soft liquid cleaner.
- Never use abrasive cleaners containing acetone, chlorine or strong bleach. Also, do not use tools such as scrapers, metallic brushes, and other products which can scratch or tarnish surfaces.

PRIOR TO INSTALLATION

- Carefully remove all the items from the carton and place them individually on a soft cloth to prevent scratches or other damage.
- Check the included items. If any items are missing or have been damaged during shipment, please contact our service team to obtain any missing or damaged items.
- Carefully and strictly follow these installation instructions to ensure a completed product is as designed.
- Do not tighten all the screws until the product is properly installed.
- Have the necessary tools ready.

TOOLS REQUIRED



Tapemeasure




Electrical Drill



Screwdriver











Pencil /Marker




Tape

PARTS LIST

Your 2 tier pull-out cabinet organizer should include the following parts, please inspect your box contents to ensure you have received all components.

A  2PCS <i>Basket</i>	B  2Pairs <i>Slide Rail</i>
C  10PCS <i>ST4*18 Tapping Screw</i>	D  16PCS <i>M4*6 Screw</i>
E  1PC <i>Mounting Template</i>	F  <i>just for: 27x22, 30x22, 33x22 model</i> 2PCS <i>Flat Iron Mounting Bracket</i>
G  2PCS <i>Back Panel Mounting Bracket</i>	H  1PC <i>just for: 27x22, 30x22, 33x22 model</i> <i>Stable Support Frame</i>
I  4PCS <i>just for: 27x22, 30x22, 33x22 model</i> <i>M4*8 Screw</i>	

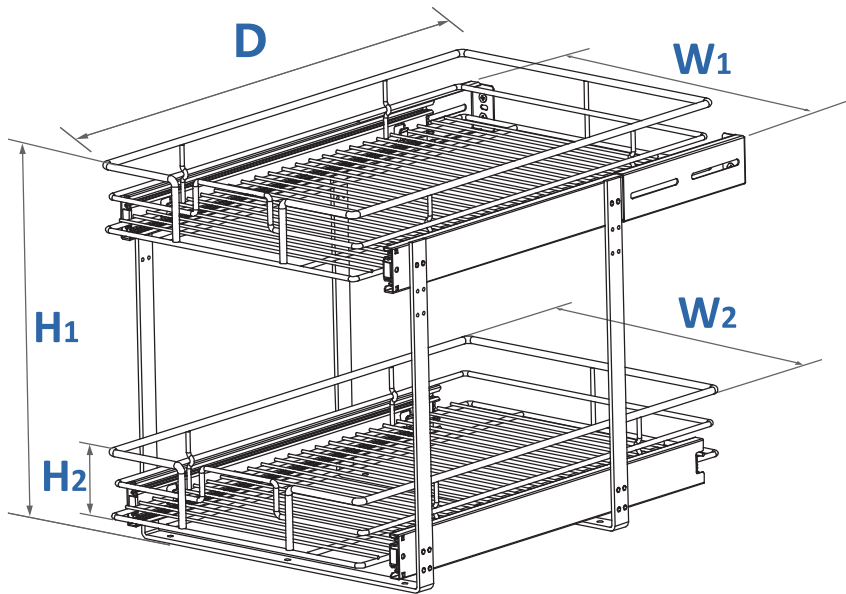


W1: The widest size of the product.

W2: Basket width.

H1: The highest size of the product.

H2: Basket height.

OR

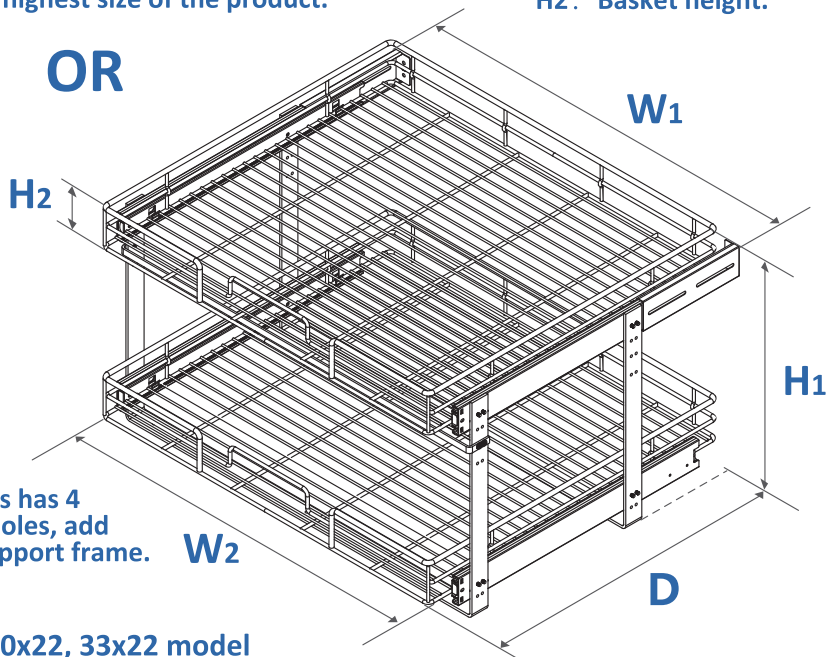

Note: This has 4 rows of holes, add Stable support frame.

W2

Just For:
27x22, 30x22, 33x22 model

D


Product Model	W1	W2	D	H1	H2
6×22	5 $\frac{1}{2}$ "	4 $\frac{1}{4}$ "	21 $\frac{1}{2}$ "	13 $\frac{1}{2}$ " / 15 $\frac{1}{2}$ "	2 $\frac{3}{4}$ "
9×22	7 $\frac{1}{2}$ "	6 $\frac{1}{4}$ "	21 $\frac{1}{2}$ "	13 $\frac{1}{2}$ " / 15 $\frac{1}{2}$ "	2 $\frac{3}{4}$ "
12×22	10 $\frac{1}{2}$ "	9 $\frac{1}{4}$ "	21 $\frac{1}{2}$ "	13 $\frac{1}{2}$ " / 15 $\frac{1}{2}$ "	2 $\frac{3}{4}$ "
15×22	13 $\frac{1}{2}$ "	12 $\frac{1}{4}$ "	21 $\frac{1}{2}$ "	13 $\frac{1}{2}$ " / 15 $\frac{1}{2}$ "	2 $\frac{3}{4}$ "
18×22	16 $\frac{1}{2}$ "	15 $\frac{1}{4}$ "	21 $\frac{1}{2}$ "	13 $\frac{1}{2}$ " / 15 $\frac{1}{2}$ "	2 $\frac{3}{4}$ "
21×22	19 $\frac{1}{2}$ "	18 $\frac{1}{4}$ "	21 $\frac{1}{2}$ "	13 $\frac{1}{2}$ " / 15 $\frac{1}{2}$ "	2 $\frac{3}{4}$ "
24×22	22 $\frac{1}{2}$ "	21 $\frac{1}{4}$ "	21 $\frac{1}{2}$ "	13 $\frac{1}{2}$ " / 15 $\frac{1}{2}$ "	2 $\frac{3}{4}$ "
27×22	25 $\frac{1}{2}$ "	24 $\frac{1}{4}$ "	21 $\frac{1}{2}$ "	13 $\frac{1}{2}$ " / 15 $\frac{1}{2}$ "	2 $\frac{3}{4}$ "
30×22	28 $\frac{1}{2}$ "	27 $\frac{1}{4}$ "	21 $\frac{1}{2}$ "	13 $\frac{1}{2}$ " / 15 $\frac{1}{2}$ "	2 $\frac{3}{4}$ "
33×22	31 $\frac{1}{2}$ "	30 $\frac{1}{4}$ "	21 $\frac{1}{2}$ "	13 $\frac{1}{2}$ " / 15 $\frac{1}{2}$ "	2 $\frac{3}{4}$ "
12×18	10 $\frac{1}{2}$ "	9 $\frac{1}{4}$ "	18"	13 $\frac{1}{2}$ " / 15 $\frac{1}{2}$ "	2 $\frac{3}{4}$ "
15×18	13 $\frac{1}{2}$ "	12 $\frac{1}{4}$ "	18"	13 $\frac{1}{2}$ " / 15 $\frac{1}{2}$ "	2 $\frac{3}{4}$ "
18×18	16 $\frac{1}{2}$ "	15 $\frac{1}{4}$ "	18"	13 $\frac{1}{2}$ " / 15 $\frac{1}{2}$ "	2 $\frac{3}{4}$ "
21×18	19 $\frac{1}{2}$ "	18 $\frac{1}{4}$ "	18"	13 $\frac{1}{2}$ " / 15 $\frac{1}{2}$ "	2 $\frac{3}{4}$ "

ARE YOU CHOOSING THE CORRECT SIZE ?

Ensure the Correct Measurement of the Cabinet

Note: Do not measure from the frame of the cabinet

If your cabinet has hinges, measure the width from the hinges, otherwise the hinges will prevent the basket from being pulled out

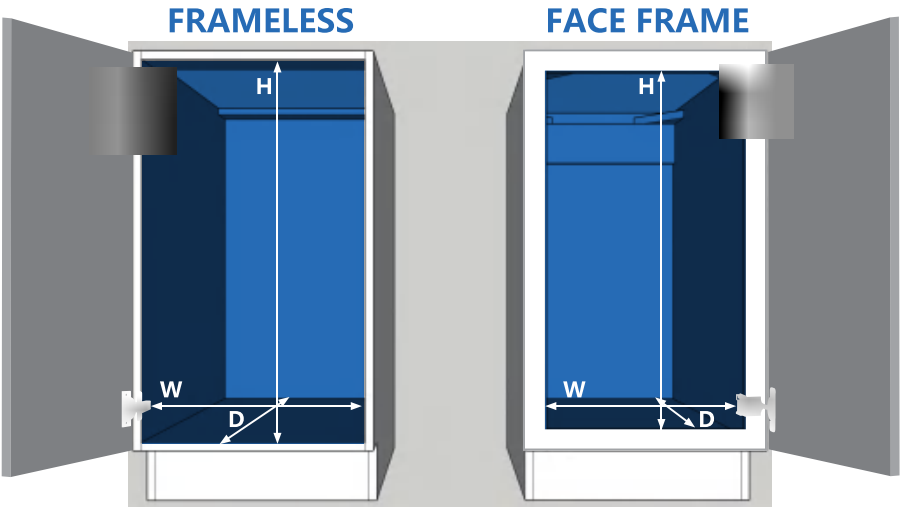

Minimum Cabinet Opening Size Requires


Product Model	Minimum Cabinet Opening Width (W)	Minimum Cabinet Depth (D)
6×22	6"	22"
9×22	9"	22"
12×22/18	12"	22"/18"
15×22/18	15"	22"/18"
18×22/18	18"	22"/18"
21×22/18	21"	22"/18"
24×22	24"	22"
27×22	27"	22"
30×22	30"	22"
33×22	33"	22"

Manufactures products that fit into nearly all cabinet sizes.
Make sure to correctly measure your cabinets to allow the best fit.


INSTALLATION INSTRUCTIONS

STEP 1

Using the measuring tape,first measure the cabinet empty size, select the appropriate size, and then prepare for installation.

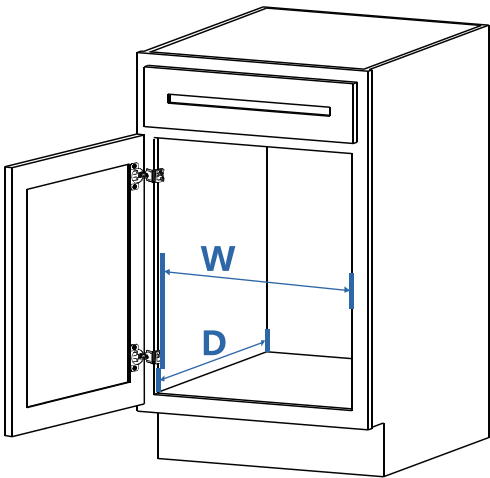

Minimum Cabinet Opening Size Requires		
Product Model	Minimum Cabinet Opening Width (W)	Minimum Cabinet Depth (D)
6×22	6"	22"
9×22	9"	22"
12×22/18	12"	22"/18"
15×22/18	15"	22"/18"
18×22/18	18"	22"/18"
21×22/18	21"	22"/18"
24×22	24"	22"
27×22	27"	22"
30×22	30"	22"
33×22	33"	22"

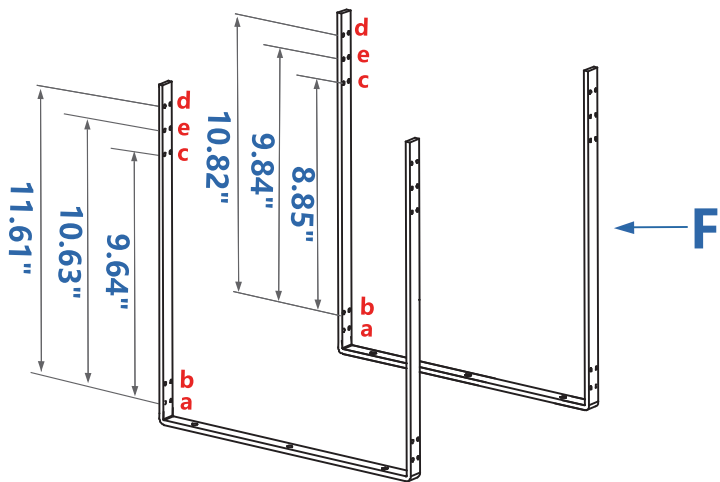



STEP 2

Use 16 pieces M4 *6 Screws (D) to connect Slide Rail (B) and Flat Iron Mounting Bracket (F) together, and the upper assembly position can be selected according to the actual height of the cabinet. When installing, please let Flat Iron Mounting Bracket (F) lie on its side for easy and safe installation.

①

NOTE:


Pull out the slide rails for clear visual of the two slots. Align the slide rail (B) with the slots of the support bracket before installation.

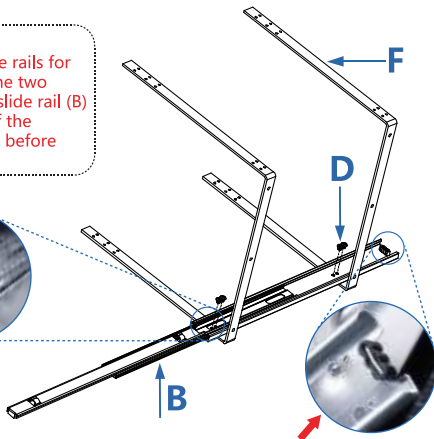


NOTE:

Identify the front end and back end of the slide rails. The back end of each slide rail (B) has a black rubber and the front end does not, which should face inward.

②

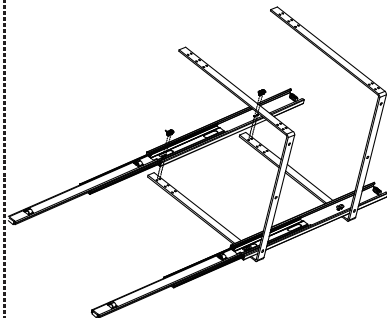


③




Rotate 180 °

④



⑤

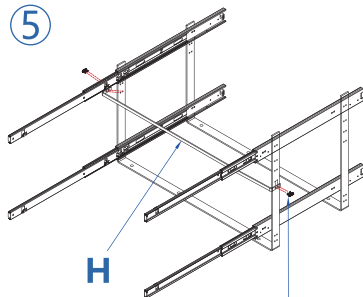

just for: 27x22, 30x22,
33x22 model


Stable support frame (H) is
installed at the second hole
position below the slide Rail.

Installation Suggestion:


During installation do not let the support bracket (F) stand upright to avoid injury.

STEP 3


Insert the Back Panel Mounting Bracket (G) onto the desired slide rail (B). Reference shown figure.

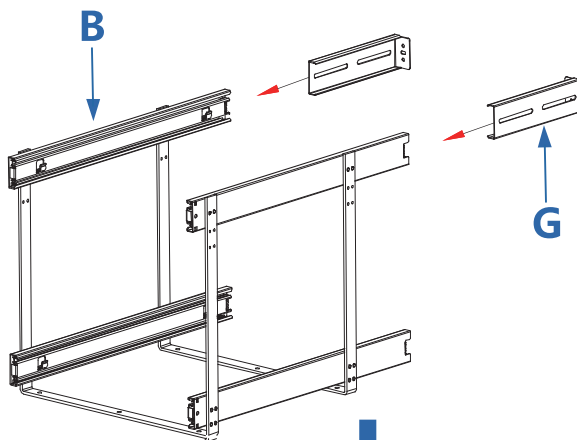

This is a wrong installation, don't lock the back Panel Mounting Bracket into the screw.

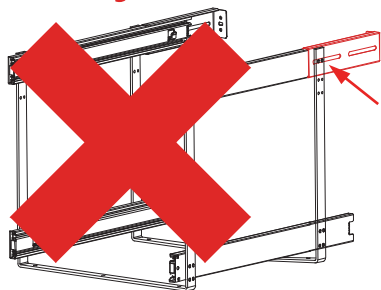

Incorrect

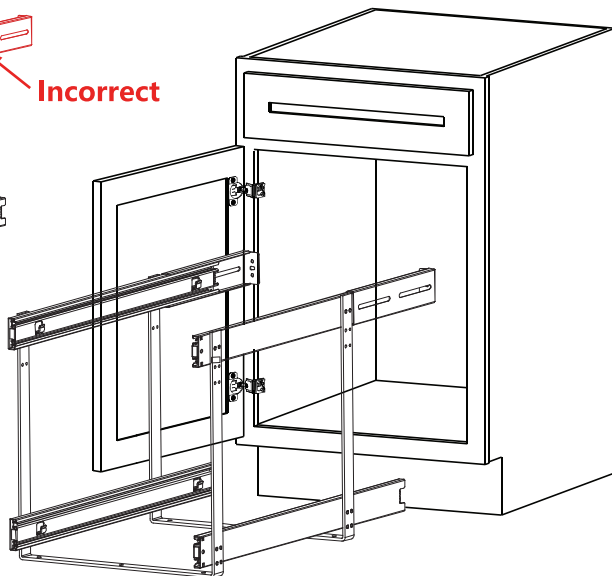


STEP 4

Fold the cabinet mounting template (E) on the dotted line to fit the front edge of the cabinet. Then place the cabinet mounting template(E) onto the floor of your cabinet. Using the cabinet mounting template (E) locations, pre-drill the 6 holes ($\Phi 2.5\text{mm}$) at the marked locations, and then remove the template.

note: The hole position of the Mounting Template corresponds to the circular position of the slide rail.

STEP 4-1

Mark centerline in cabinet.(See Figure 1)

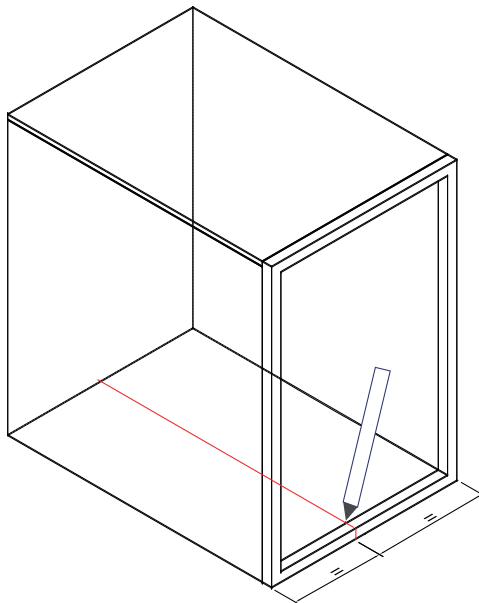


(Figure 1)

STEP 4-2

Use Mounting Template(E) to pre-drill holes as follows:

- (1) Lay template inside cabinet.
- (2) Fold template along the first dotted line or the second dotted line to fit the front edge of the cabinet.(See Figure 2, 3)
- (3) Align the template centerline with the centerline marked in the cabinet.
- (4) Taping template to the cabinet to keep template in place.
- (5) Pre-drill eight holes ($\Phi 2.5\text{mm}$) using the mounting template locations.

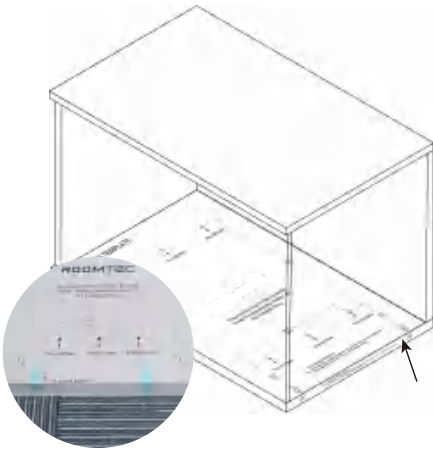

◆ **Frameless Cabinet:**

Fold template along the first dotted line

(Figure 2)



◆ **Face Frame Cabinet:**


Fold template along the second dotted line

(Figure 3)

Note: The mounting template can be fixed with adhesive tape.

STEP 5

Place the assembled bracket to the floor of the cabinet. Use six ST4*18 tapping screws (C) to secure placement. Reference figure shown.

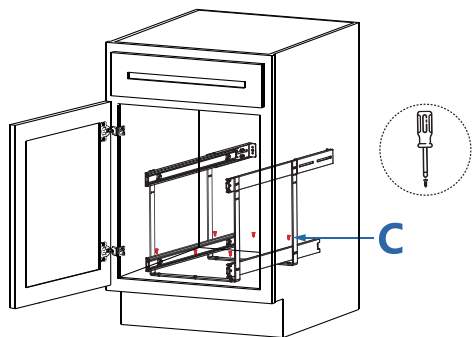


Minimum Cabinet Opening Size Requires

Product Model	Minimum Cabinet Opening Width (W)	Minimum Cabinet Depth (D)
6×22	6"	22"
9×22	9"	22"
12×22/18	12"	22"/18"
15×22/18	15"	22"/18"
18×22/18	18"	22"/18"
21×22/18	21"	22"/18"
24×22	24"	22"
27×22	27"	22"
30×22	30"	22"
33×22	33"	22"


STEP 6

Use two ST4*18 tapping screws (C) to secure the assembled bracket on the back panel of the cabinet. Reference figure shown.

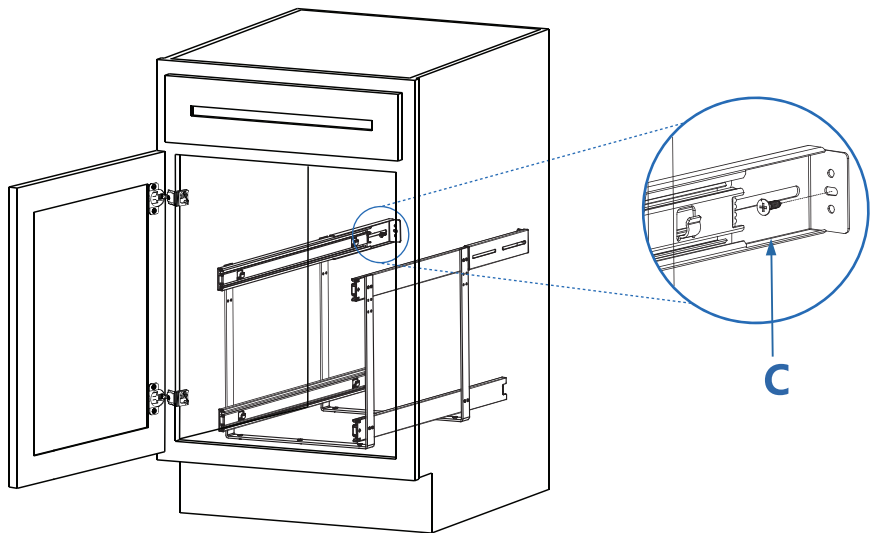

STEP 7


Pull the inner slide rails out, carefully place the upper basket (A) on to the rail. Repeat this step for placing the lower basket (A). Reference figure shown.

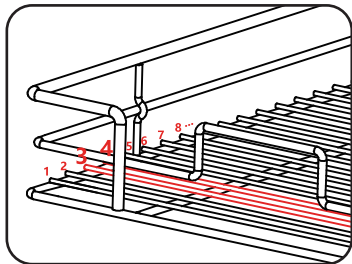

View From Front



- If the product you purchased is **18** inches deep, please stuck in the basket between the **3th** line and **4th** line.

or

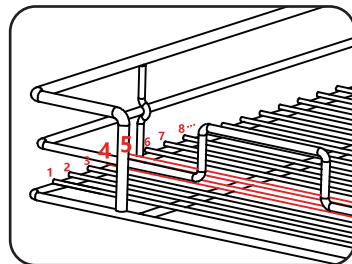

- If the product you purchased is **21.5** inches deep, please stuck in the basket between the **4th** line and **5th** line.

NOTE: Fully extend the lower basket slides. Place lower basket on the slides and push basket into hooks on left hand slide and right hand slide. (you will hear a click sound) Repeat process for upper basket. Slide the baskets in and out several times and make sure the baskets are firmly installed.

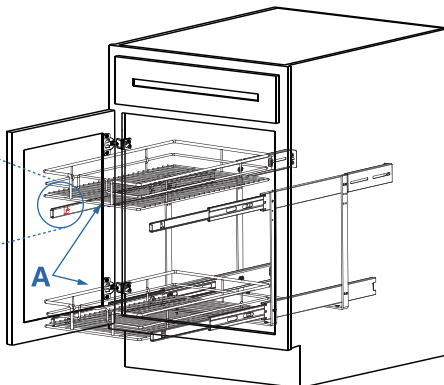


Installation Suggestion:

During the installation process, make sure to hold the baskets (A) to avoid injury.

STEP 8

After the two baskets are installed, the positioning is successful. Remove the two baskets and fix the Back Panel Mounting Bracket again.

Use two ST4*18 tapping screws (C) to secure the assembled bracket on the back panel of the cabinet. Reference figure shown.

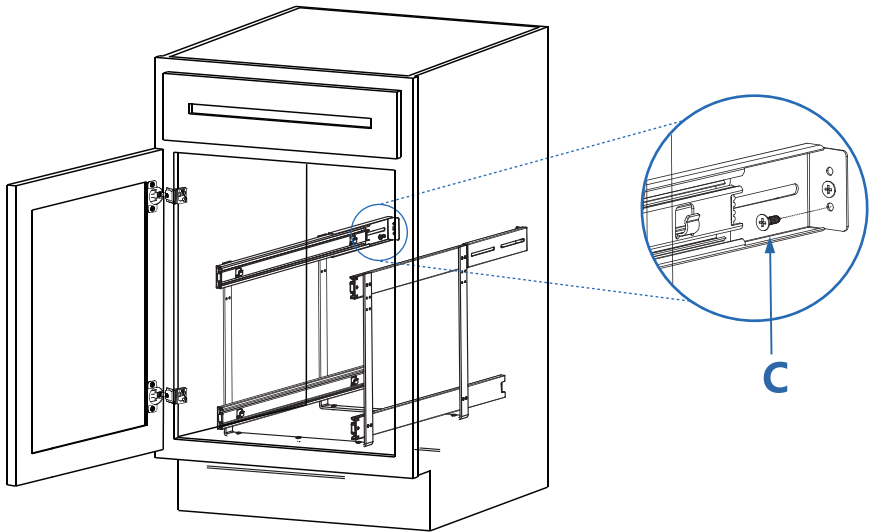

The installation is complete