


INSTALLATION MANUAL

Wall-Sconce

Model No.: HLW466WF-1A

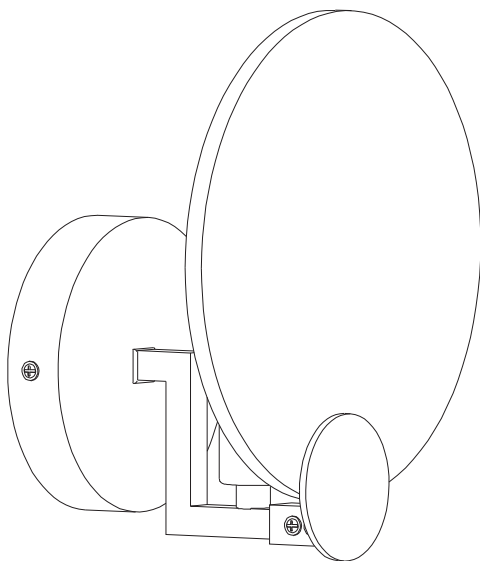

Safety Rules

WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS TURNED OFF. TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions or situations that may occur. It must be understood that common sense, caution, and care, are factors which cannot be built into any product. These factors must be supplied by the person(s) installing this unit.

READ & SAVE THESE INSTRUCTIONS

CAUTION: Before assembling the lighting fixture, refer to the section titled Wiring Connections. If you feel you do not have enough electrical wiring experience, either refer to a do-it-yourself wiring handbook or have your lighting fixture installed by a qualified, licensed electrician.

INSTALLATION & OPERATION INSTRUCTIONS GENERAL

Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the appropriate fuse at the fuse box.

Turning the power off using the light switch is not sufficient to prevent electrical shock.


All electrical connections must be in accordance with local and National Electrical Code (NEC) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

Installation Preparation


Tools You Need




☒ Ladder




☒ Pliers




☒ Wire Strippers



☒ Screwdrivers



☒ Wrench




☒ Power Drill
(optional)



☒ Drill Bit
(optional)

Packing List

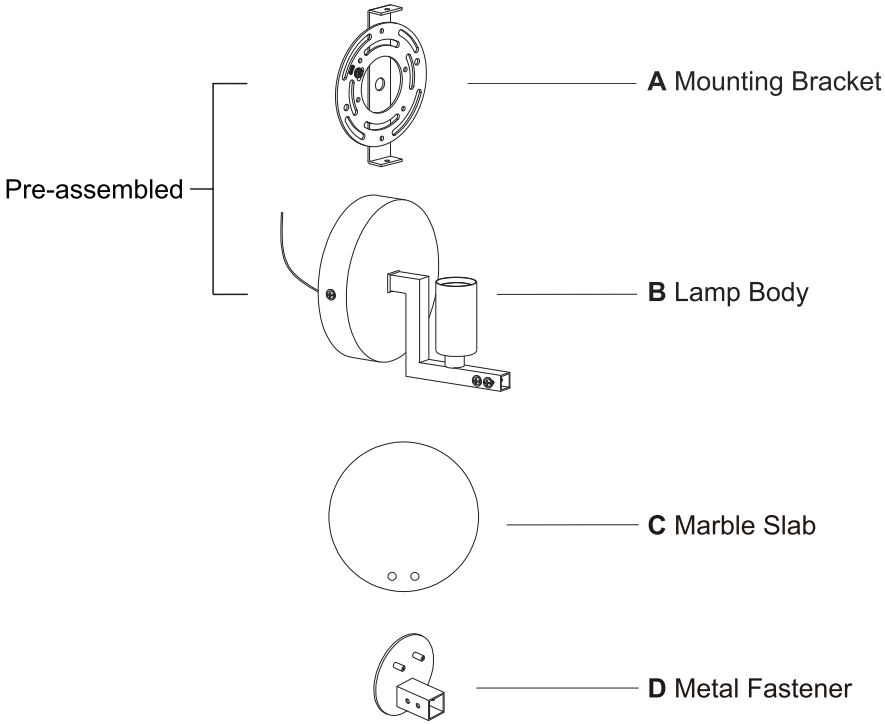

Installation Kit


AA	3x	BB	2x	CC	2x
					
Wire Nut		Outlet Box Screw		Wood Screw	
DD	2x	EE	2x	FF	1x
					
Washer		Plastic Anchor		Gloves	

- NOTE:
- 1. The listed quantity is for installation, extra hardware may be included.
 - 2. The mounting bracket (A) is pre-assembled on the lamp body (B).


Installation Instructions

1. Remove the Mounting Bracket

Step 1: Remove the mounting bracket screw from the lamp body (B).

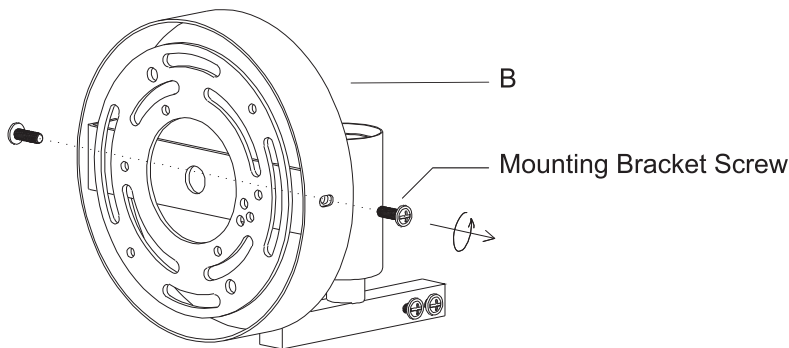


Step 2: Take out the mounting bracket (A) from lamp body (B).

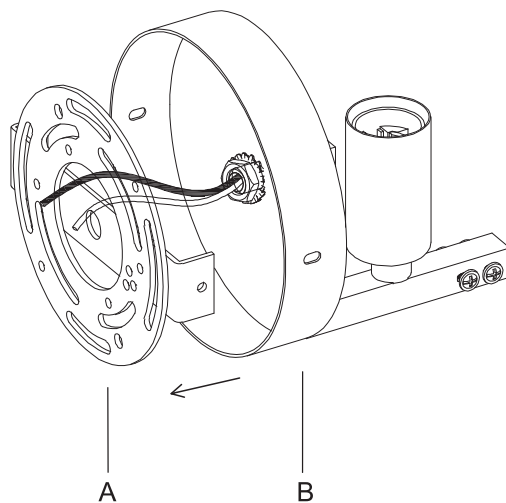

2. Mount the Bracket (3 Options)


Option1. (For Outlet Box)

Secure the mounting bracket (A) to the outlet box with screws taken off from outlet box or screws (BB) provided.

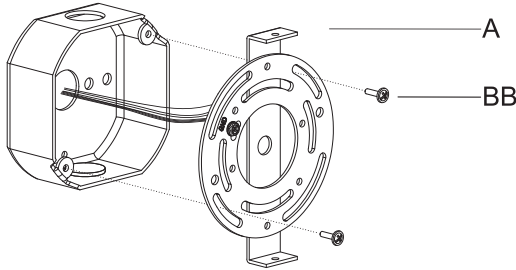


Option 2. (For Solid Wood Structure)

Mark and drill the screw holes on the solid wood structure. Mount the mounting bracket with wood screws (CC) and washers (DD).

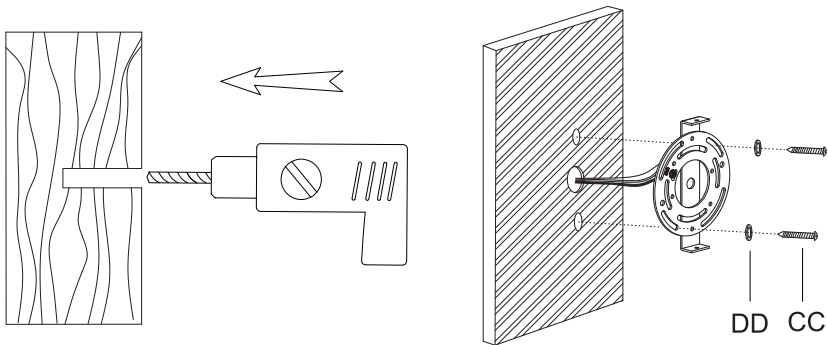


Option 3. (For Concrete Structure)

Mark and drill the anchor holes on the concrete structure, and then insert the plastic anchors (EE). Mount the mounting bracket to the concrete structure with wood screws (CC) and washers (DD).

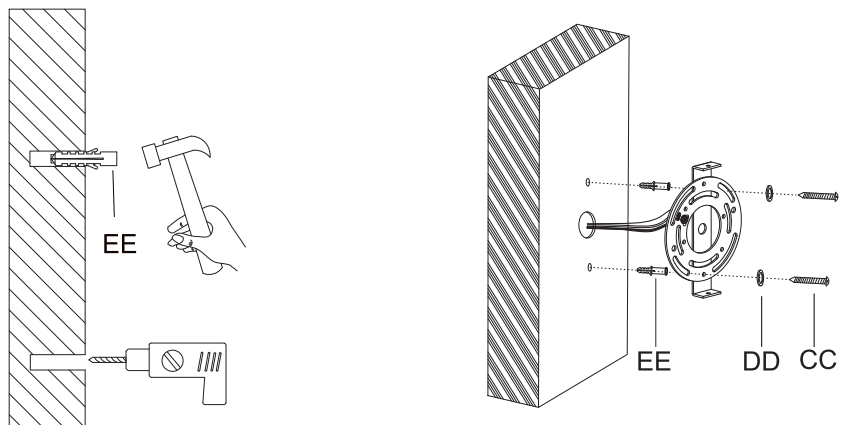


3. Install the Marble Slab and Metal Fastener


Step 1: Remove the metal fastener screw and metal fastener washer from the metal fastener (D).

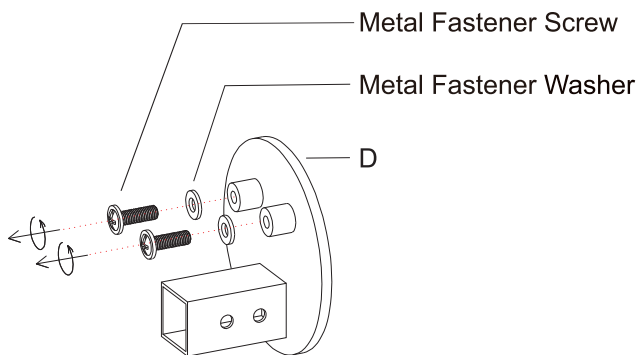


Step 2: Secure the marble slab (C) to the metal fastener (D) with metal fastener washer and metal fastener screw.

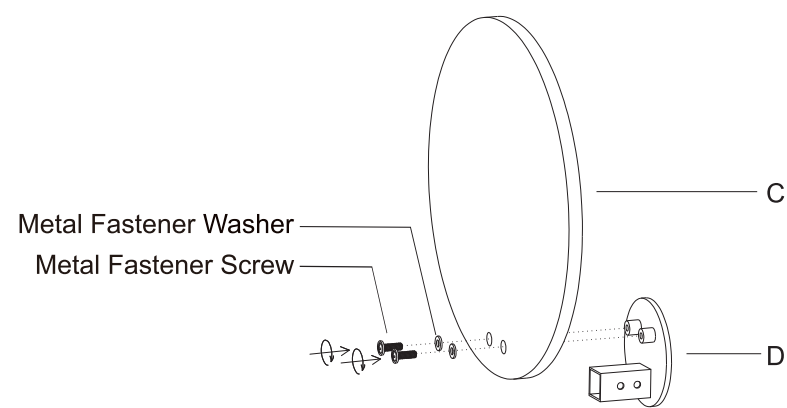

Step 3: Remove the lamp body screw from the lamp body (B).

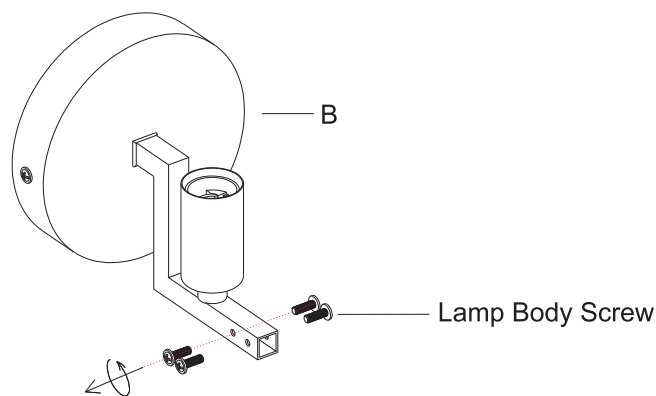


Step 4: Secure the metal fastener (D) to lamp body (B) with lamp body screw.

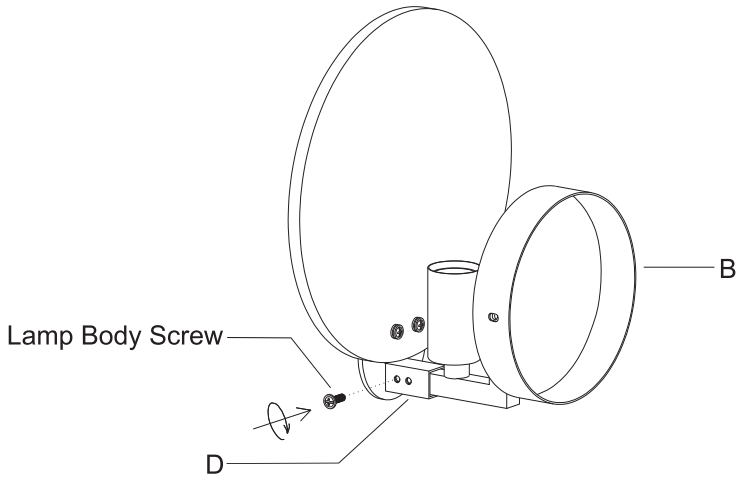


4. Connect the Wires

Connect the wires from the fixture to the house supply wires with wire nuts (AA), ground wire (green, green / yellow, or bare copper) to ground wire, neutral wire (white) to neutral wire, and hot wire (black) to hot wire. Wrap the connection with electrical tape.

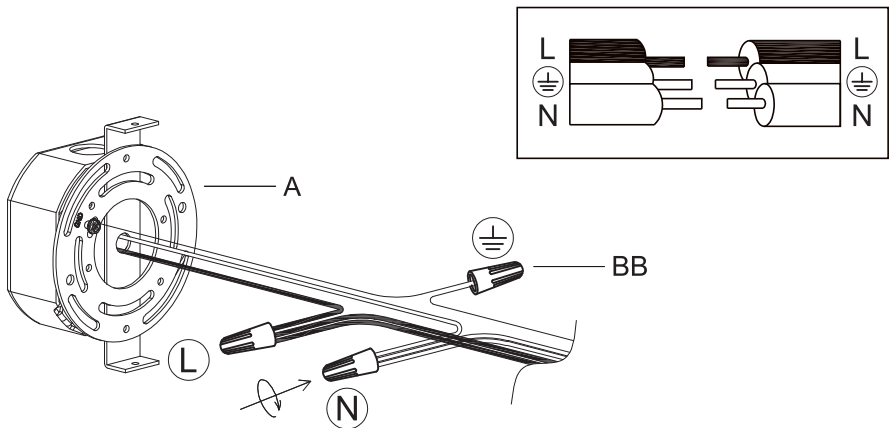


5. Install the Lamp Body

Attach the lamp body (B) onto the mounting bracket (A) with the mounting bracket screw.

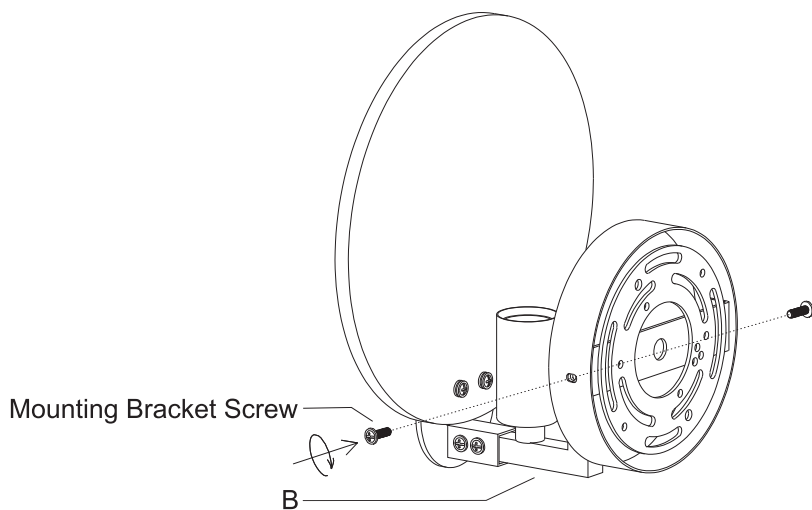

6. Install the Bulb

Install Bulbs (E12 Bulbs x 1, max 40W each, not included).

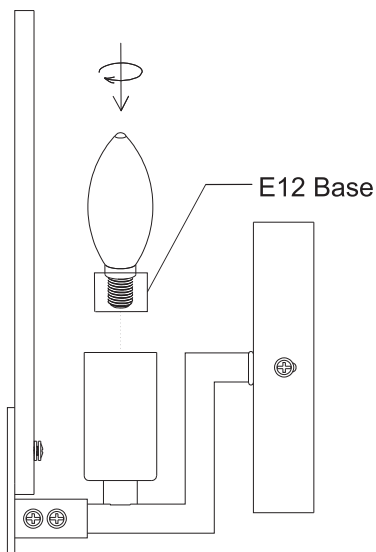

NOTE:

1. The illustrated bulb is recommended and compatible alternatives may be selected as needed.
2. To achieve dimming functionality, you need to use dimmable bulbs and a dimmer switch.
3. For bulbs with color temperature control, repeatedly switch “on” and “off” using the wall switch to change settings.

Trouble Shooting

1. Missing / Broken Parts

- Make a list of the missing/broken parts according to the packing list, take photos for broken parts, then email us for free replacements.

2. Bulbs Do Not Light Up

- Check your power and switch to make sure it's power on.
- For regular bulbs, make sure it is connected to the ON/OFF wall switch, not the dimmer switch.
- Replace the bulb with a new one.

3. Bulbs Flicker

- If it is a dimmer switch, use a dimmable bulb.
- Replace the bulb with a new one.

4. Could Not Install / Assemble

- Take photos of the ceiling / fixture, contact seller for technical support.

Clean And Care

To clean, wipe the fixture with a soft cloth. Spraying from chemical cleaners can discolor the finish of the fixture.

Do not use scouring pads, powders, steel wool, or abrasive paper to clean this fixture.

Ordering Parts

Keep this manual for future reference, and in case replacement parts are needed. Available parts can be ordered from the place of purchase. Use exact wording from diagrams when ordering parts.