



# Artifacts® | K-22656-CH03

22" chandelier

## Features

- Complements Artifacts faucets and accessories
- Versatile design that features three frosted shades surrounded by one large clear glass shade
- For a vintage look, remove the optional frosted glass and add any E26 medium-base Edison bulb (sold separately)
- For soft lighting, use an E26 medium-base type B light bulb with the frosted shade (bulb sold separately)
- 6 accent chain offers additional height options
- Fixture is dimmable when paired with dimmer switch and compatible bulbs



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-30-2026 01:52 - US-CA

THE BOLD LOOK  
OF **KOHLER**®

## Codes/Standards

CSA C22.2 No. 250.0  
cETL Listed  
ETL Listed

## Warranty

*See website for detailed warranty information.*

KOHLER® Indoor Lighting Fixtures Limited Warranty

## Technical Information

*All product dimensions are nominal.*

|                   |                                        |
|-------------------|----------------------------------------|
| Number of Lights: | 3                                      |
| Lighting Type:    | Socket-based                           |
| Socket Type:      | E-26 Medium                            |
| Number of Shades: | 4                                      |
| Hanging Type:     | Chain                                  |
| Downrod Detail:   | 1 x 17-5/16" (439 mm)                  |
| Height:           | 38-9/16" (979 mm) - 108-5/8" (2759 mm) |

## Material

- Manufactured with quality materials and complemented with a meticulous finishing process
- Durable finishes engineered to last and designed to coordinate with KOHLER faucet finishes

## Recommended Products/Accessories

K-23723 Faucet cleaner

## Required Electrical Service


One circuit required.

Lights: 120 V, 1 A, 60 Hz

## Electrical Component Ratings

Socket Rating: 60 Hz, 40 W, 1200 Lumens



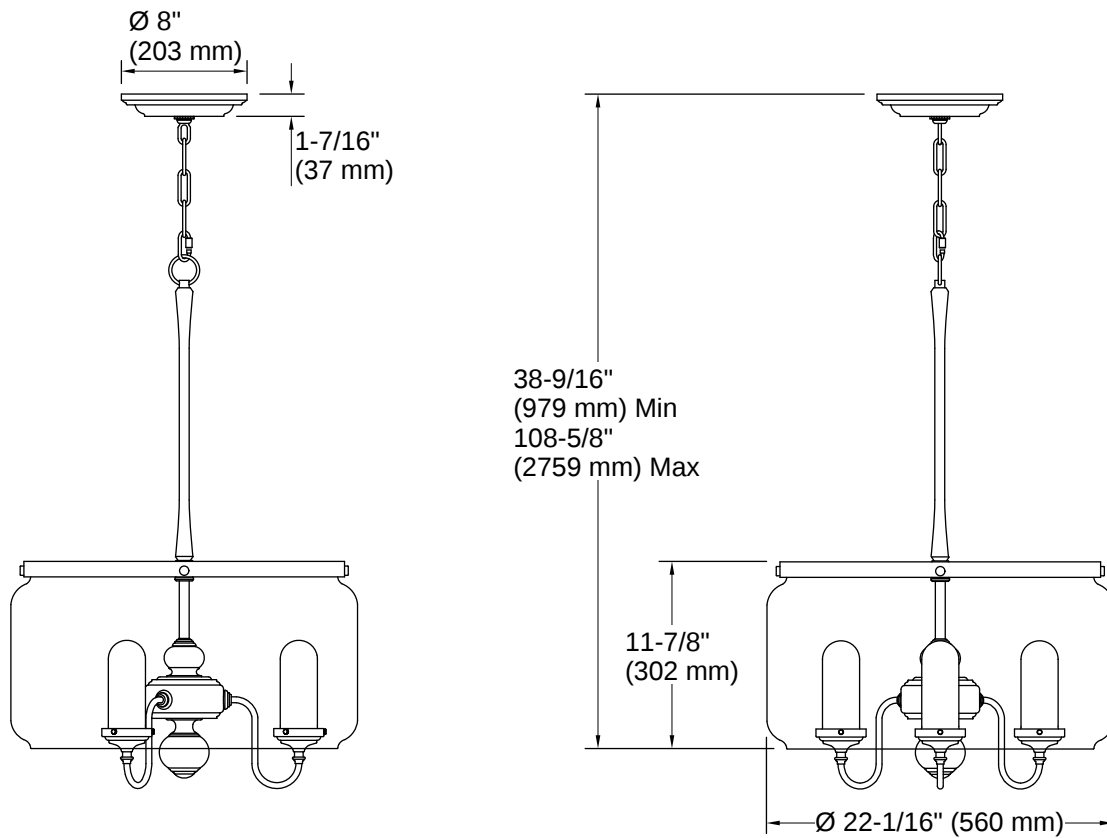

## Installation Notes

*Install this product according to the installation instructions.*

