

NOTICE

*Please make sure that you have all parts indicated and they are in good condition before you begin assembly of this item. Refer to part list and hardware list below for guidance.

*This item should be assembled on a soft surface to prevent scratching the finish during assembly.

*This item may require periodic tightening.

*If you are having difficulty, our friendly Customer Care team is always here to help.

PREPARATION

*Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.

*If any part is missing or damaged, do not attempt to assemble the product.

*Estimated Assembly Time: 90 minutes.


*Tools Required for Assembly (included): Allen Key

CARE AND MAINTENANCE


Always use felt pads under all articles to prevent discoloration or softening of the lacquer.

Plastic and rubber bases on items can discolor wood. Wipe up spills immediately and avoid common hazards such as hot dishes, harsh solvents and abrasives. Cleaning should be done with a soft lint free cotton cloth dampened with water or furniture polish. On highly used surfaces we recommend applying a quality paste wax which should be used on a regular basis to provide additional protection from scratches and spills. How often you apply the wax depends on how much wear the furniture receives.

Part List

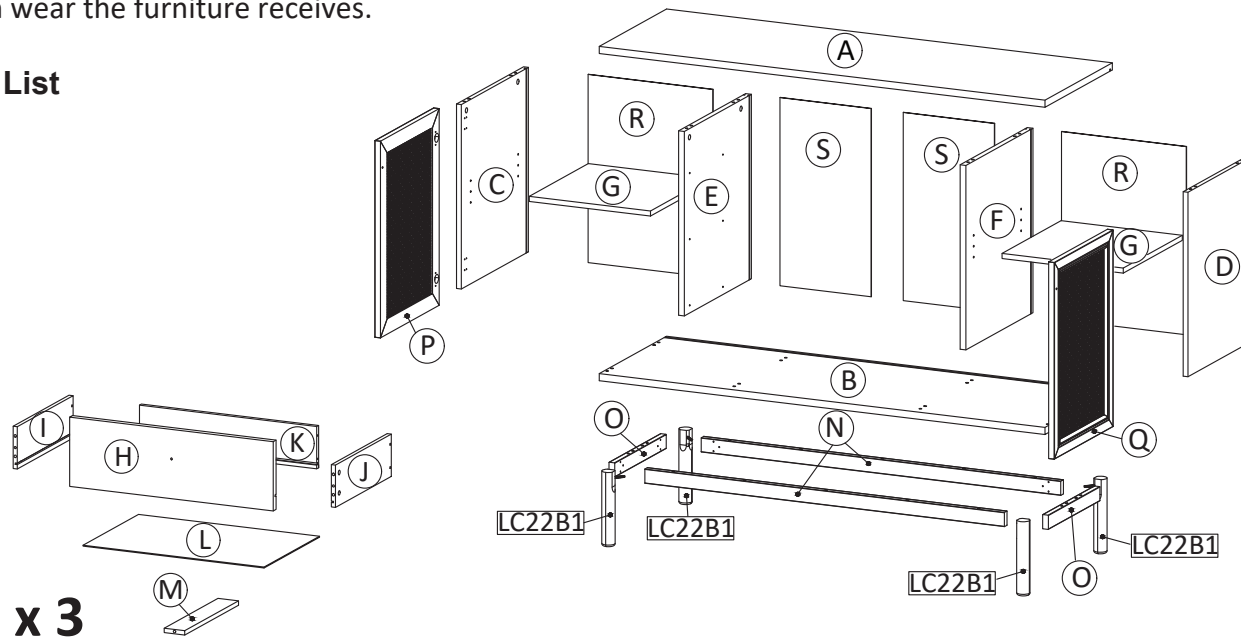

Product Dimensions: 55"Wx19"Dx32"H

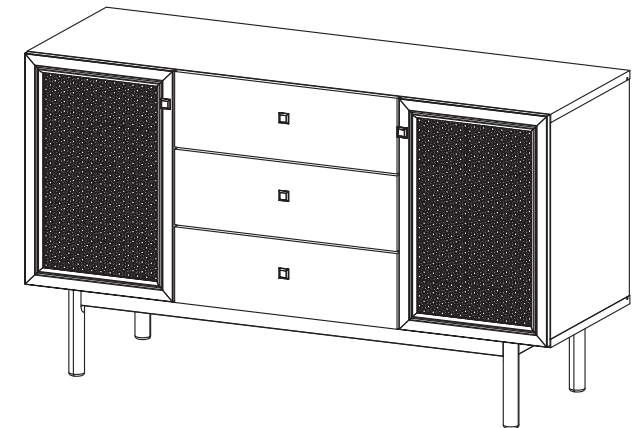

WARNING :




























WEIGHT CAPACITY: 90 LBS.

DRAWER LOAD CAPACITY : 26 lbs

Warning : Do not stand on media stand.

Warning : Do not over torque bolts.

Hardware List

<p>HW1x23</p>  <p>Ø 6 x 35 mm</p>	<p>HW2x8</p>  <p>Ø 15 mm</p>	<p>HW3x15</p>  <p>Ø 12 mm</p>	<p>HW4x24</p>  <p>Ø 8 x 30 mm</p>	<p>HW5x6</p>  <p>Ø 6 x 30 mm</p>
<p>HW6x2</p>  <p>L 4</p>	<p>HW7x8</p>  <p>M 7 x 50 mm</p>	<p>HW8x10</p>  <p>M 6.4 x 53 mm</p>	<p>HW9x24</p>  <p>M 4.5 x 12.5 mm</p>	<p>HW10x4</p>  <p>Ø 15 mm</p>
<p>HW11x18</p>  <p>M 3.5 x 13 mm</p>	<p>HW12x18</p>  <p>M 8 x 39 mm</p>	<p>HW13x26</p>  <p>M 6 x 10.5 mm</p>	<p>HW14x34</p> 	<p>HW15x34</p>  <p>M 3.5 x 15.5 mm</p>
<p>HW16x4</p> 	<p>HW17x1</p> 	<p>HW18x1</p> 	<p>HW19x8</p> 	<p>HW20x5</p> 
<p>HW21x5</p>  <p>M 4 x 25 mm</p>	<p>HW22x24</p>  <p>M 4 x 16 mm</p>	<p>HW23x2</p> 	<p>HW HS26Ax4</p> 	<p>HW US11x1</p> 
<p>HW BC410x4</p> 	<p>HW RM35Ax3</p> 			

Part List & HW For Multi-Box Items

Piece	Description	Qty	Carton Call
A	Top Board	1	1 of 2
B	Bottom Board	1	1 of 2
C	Side Board Left	1	1 of 2
D	Side Board Right	1	1 of 2
E	Center Board Left	1	2 of 2
F	Center Board Right	1	2 of 2
G	Adjustable Shelf	2	2 of 2
H	Front Drawer	3	2 of 2
I	Side Drawer Left	3	2 of 2
J	Side Drawer Right	3	2 of 2
K	Back Drawer	3	2 of 2
L	Bottom Drawer	3	2 of 2
M	Support Drawer	3	2 of 2
N	Bottom Skirt 1	2	1 of 2
O	Bottom Skirt 2	2	1 of 2
P	Door Left	1	1 of 2
Q	Door Right	1	1 of 2
R	Back Board 1	2	1 of 2
S	Back Board 2	2	1 of 2
LC22B1	Leg	4	1 of 2

Piece	Description	Qty	Carton Call
HW1	Cambolt	23	1 of 2
HW2	CamLock Big	8	1 of 2
HW3	CamLock Small	15	1 of 2
HW4	Dowel Big	24	1 of 2
HW5	Dowel Small	6	1 of 2
HW6	Allen Key	2	1 of 2
HW7	Screw M 7 x 50 mm	8	1 of 2
HW8	Screw M 6.4 x 53 mm	10	1 of 2
HW9	Screw M 4.5 x 12.5 mm	24	1 of 2
HW10	Screw Cap	4	1 of 2
HW11	Screw M 3.5 x 13 mm	18	1 of 2
HW12	Screw M 8 x 39 mm	18	1 of 2
HW13	Screw M 6 x 10.5 mm	26	1 of 2
HW14	Wedge	34	1 of 2
HW15	Screw M 3.5 x 15.5 mm	34	1 of 2
HW16	Flange Nut	4	1 of 2
HW17	Wrench	1	1 of 2
HW18	List Joint	1	1 of 2
HW19	Shelf Support	8	1 of 2
HW20	Handle	5	1 of 2
HW21	Screw M 4 x 25 mm	5	1 of 2
HW22	Screw M 4 x 16 mm	24	1 of 2
HW23	Cable Hole Rubber	2	1 of 2
HW HS26A	Hinge	4	1 of 2
HW US11	Anti Deflection Bar	1	1 of 2
HW BC410	Corner Brace	4	1 of 2
HW RM35A	Drawer Runner	3	1 of 2

PREPARATION


*Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.

*If any part is missing or damaged, do not attempt to assemble the product.


*Estimated Assembly Time: 90 minutes.

*Tools Required for Assembly (included): Allen Key


*If you are having difficulty, our friendly Customer Care team is always here to help.

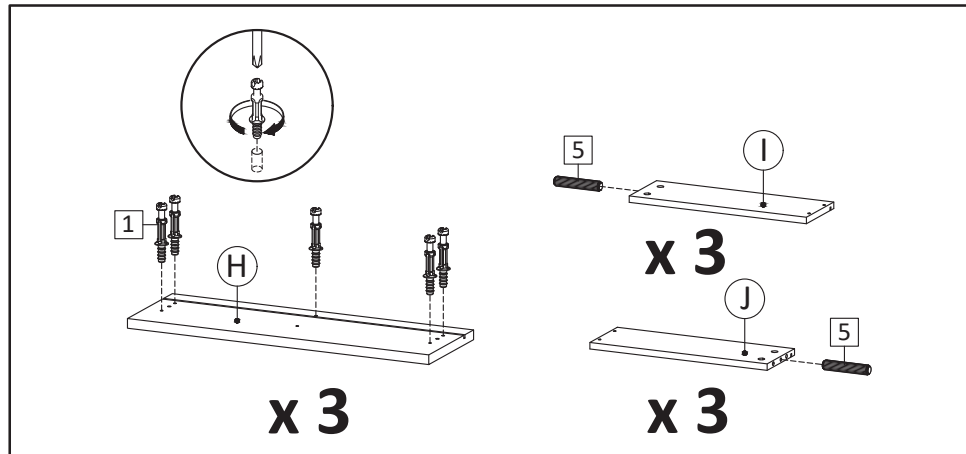


STEP1: Insert Cambolt (HW1) into Front Drawer (H). Insert Dowel Small (HW5) into Side Drawers (I&J).

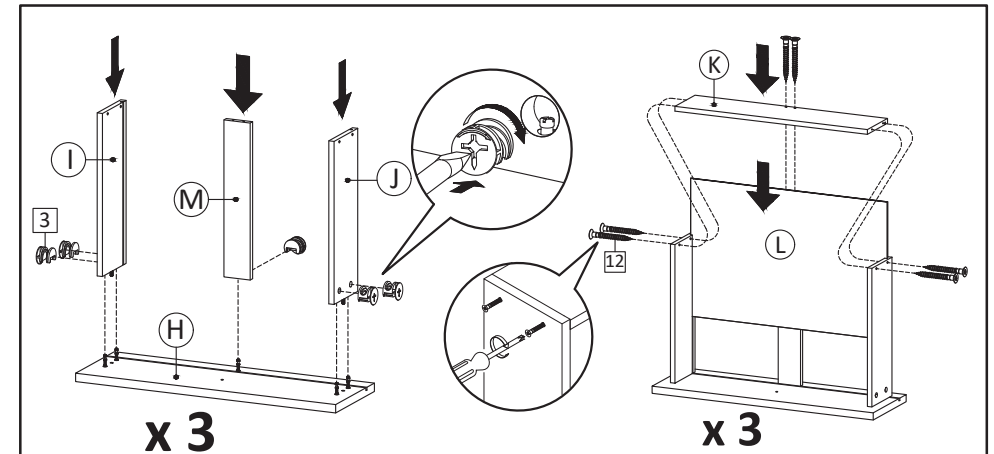

STEP2: Combine Side Drawers (I&J) and Support Drawer (M) into Front Drawer (H) then tighten Camlock Small (HW3) using screwdriver. Insert Bottom Drawer (L) with laminated face facing upward then put Back Drawer (K) and secure with Screw M8x39mm (HW12).

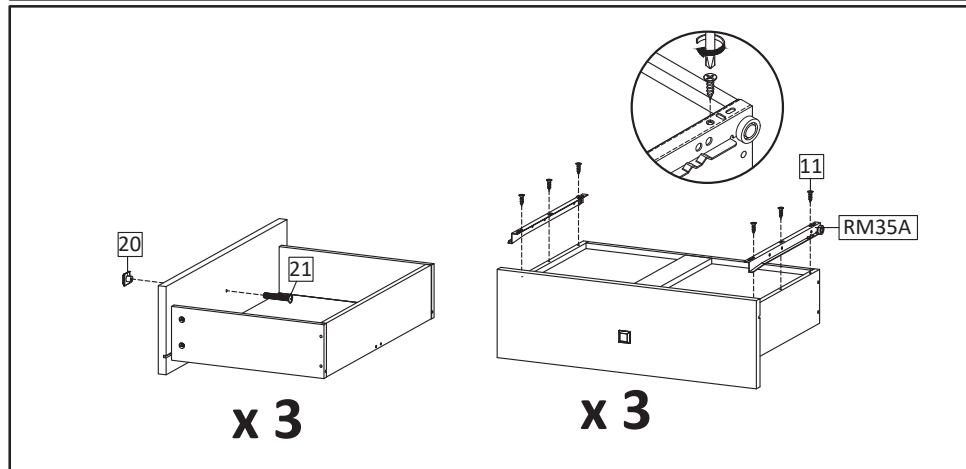

STEP3: Use Screw M4x25mm (HW21) to attach Handle (HW20) to the Front Drawer. Install the Drawer Runner (HW RM35A) into position as shown in picture. Secure with screws M3.5x13mm (HW11).

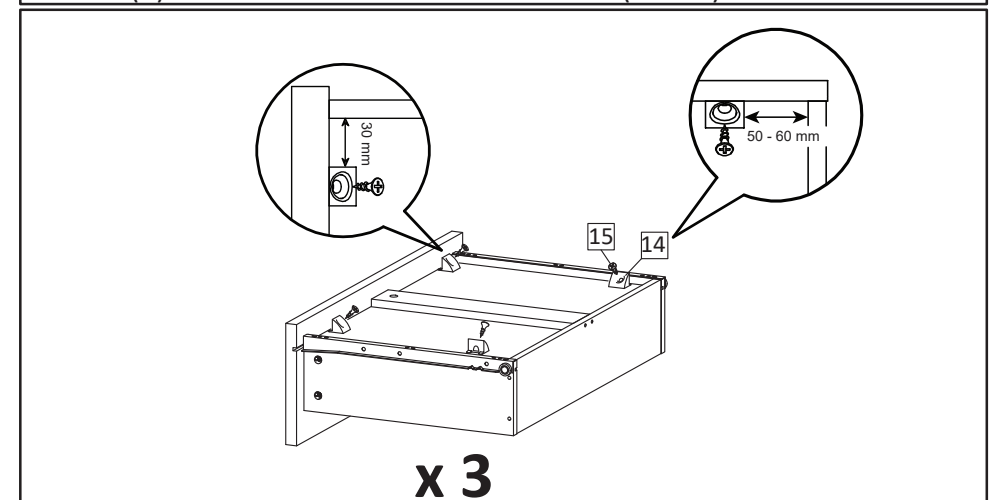

STEP4: Insert the Screw M3.5x15.5mm (HW15) and Wedge (HW14) into the bottom of the drawer according to the picture.

PREPARATION


*Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.

*If any part is missing or damaged, do not attempt to assemble the product.


*Estimated Assembly Time: 90 minutes.

*Tools Required for Assembly (included): Allen Key


*If you are having difficulty, our friendly Customer Care team is always here to help.

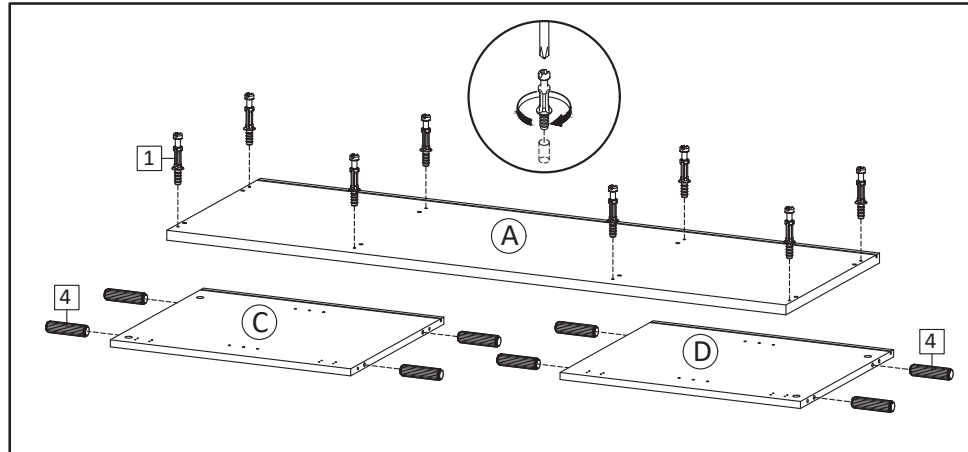


STEP5: Insert Cambolt (HW1) into Top Board (A). Insert Dowel Big (HW4) into Side Board Left (C) and Side Board Right (D) as figure.

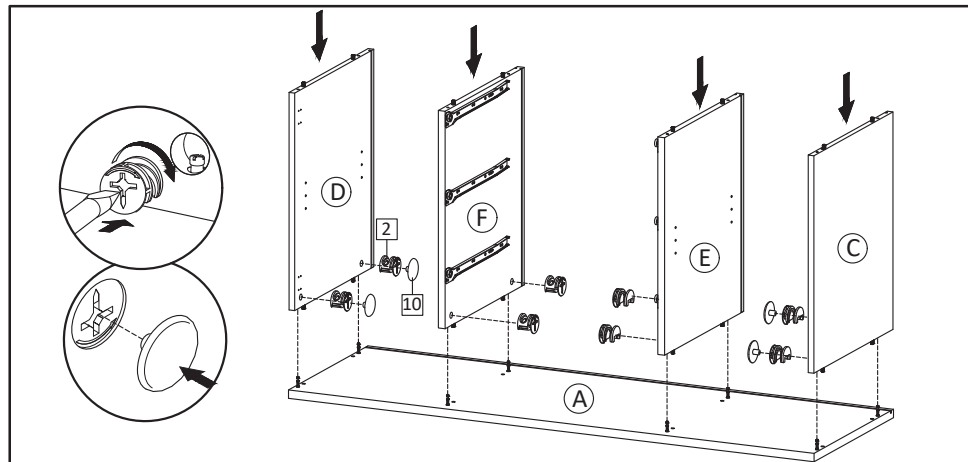

STEP7: Attach Side Boards (C&D) and Center Boards (E&F) into Top Board (A). Insert Camlock (HW2) then tighten using screwdriver. Put Screw Cap (HW10) over the camlock as picture.

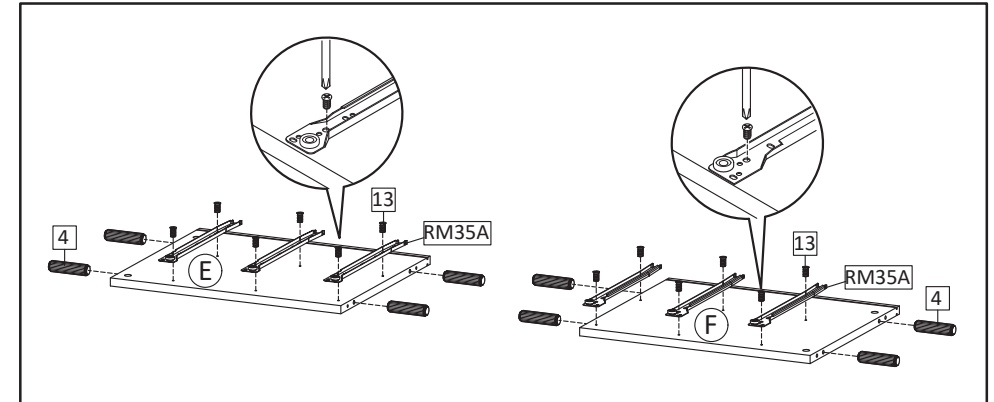


STEP6: Insert Dowel Big (HW4) into Center Board Left (E) and Center Board Right (F). Continue with securing part of the Drawer Runner (HW RM35A) into position as the above image, using screw M6x10.5mm (HW13).

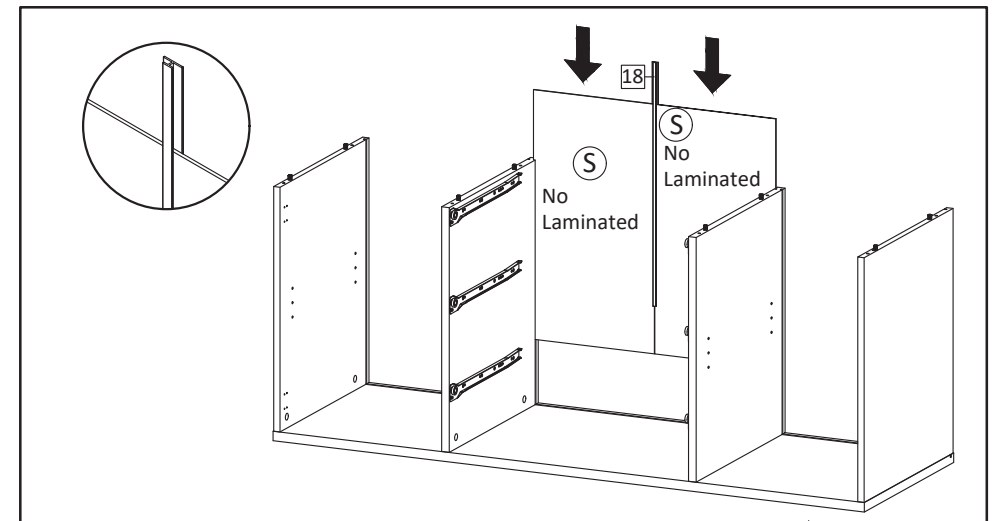


STEP8: Insert Back Board 2 (S) No lamination surface facing inward direction. Insert List Joint (HW18) in between the back boards.

PREPARATION


- *Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- *If any part is missing or damaged, do not attempt to assemble the product.
- *Estimated Assembly Time: 90 minutes.
- *Tools Required for Assembly (included): Allen Key
- *If you are having difficulty, our friendly Customer Care team is always here to help.

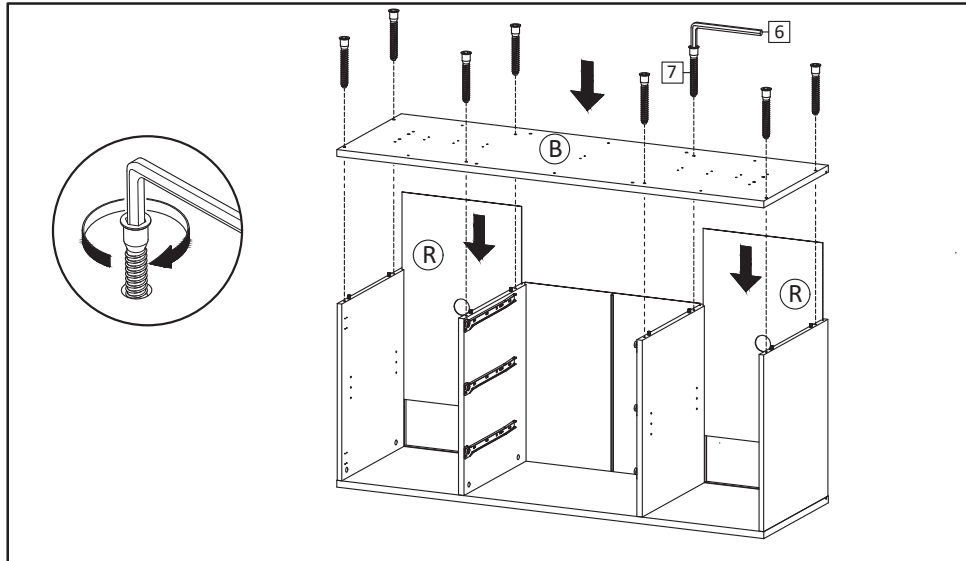


STEP9: Attach Back Board 1 (R) and Insert Bottom Board (B), secure with Screw M7x50mm (HW7), tighten screws using Allen Key (HW6).

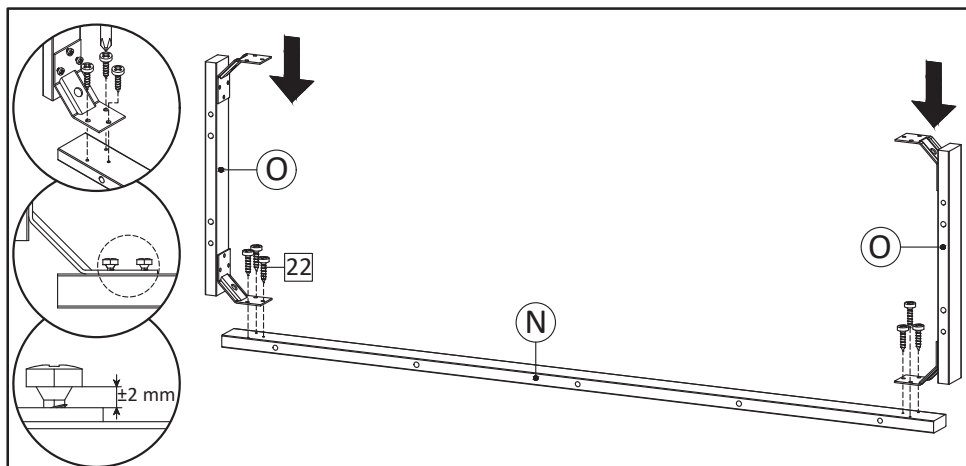

STEP11 : Combine the Bottom Skirt 2 (O) from step 10 with Bottom skirt 1 (N), using Screw M4x16mm (HW22). Do not overtight screw yet, leave around 2mm gap.

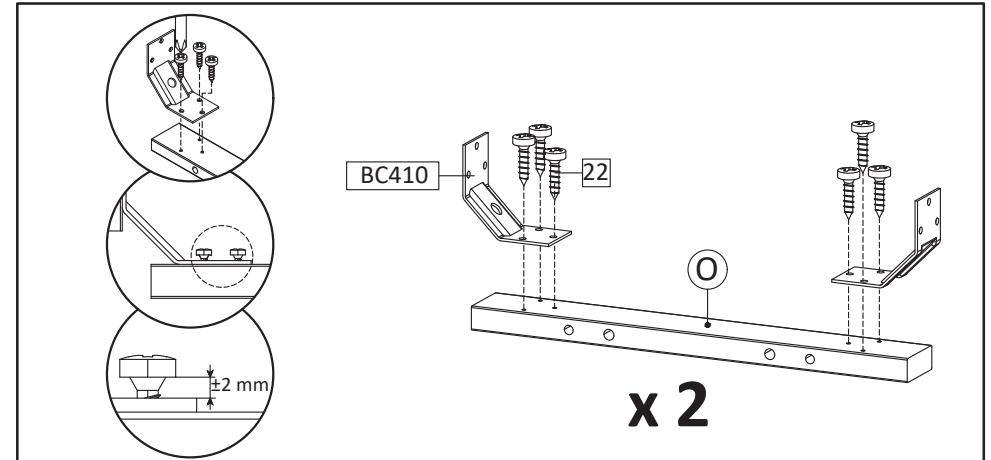





STEP10: Now let's combine the bottom skirt. Start with installing Corner Brace (HW BC410) into Bottom Skirt 2 (O) using Screw M4x16mm (HW22). Do not overtight screw yet, leave around 2mm gap.

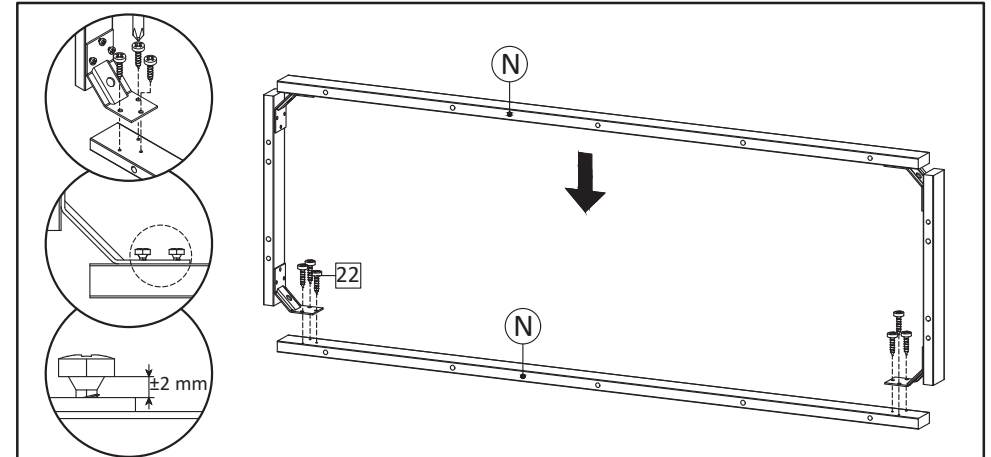

STEP12: Combine components from step 11 with remaining Bottom skirt 1 (N), using Screw M4x16mm (HW22). Do not overtight screw yet, leave around 2mm gap.


PREPARATION

- *Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- *If any part is missing or damaged, do not attempt to assemble the product.
- *Estimated Assembly Time: 90 minutes.
- *Tools Required for Assembly (included): Allen Key
- *If you are having difficulty, our friendly Customer Care team is always here to help.

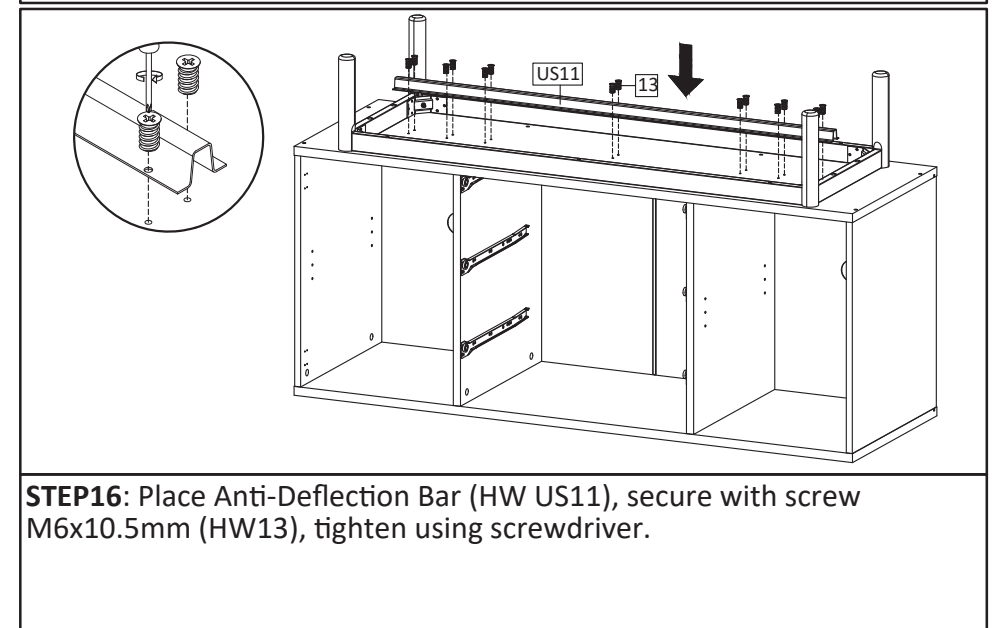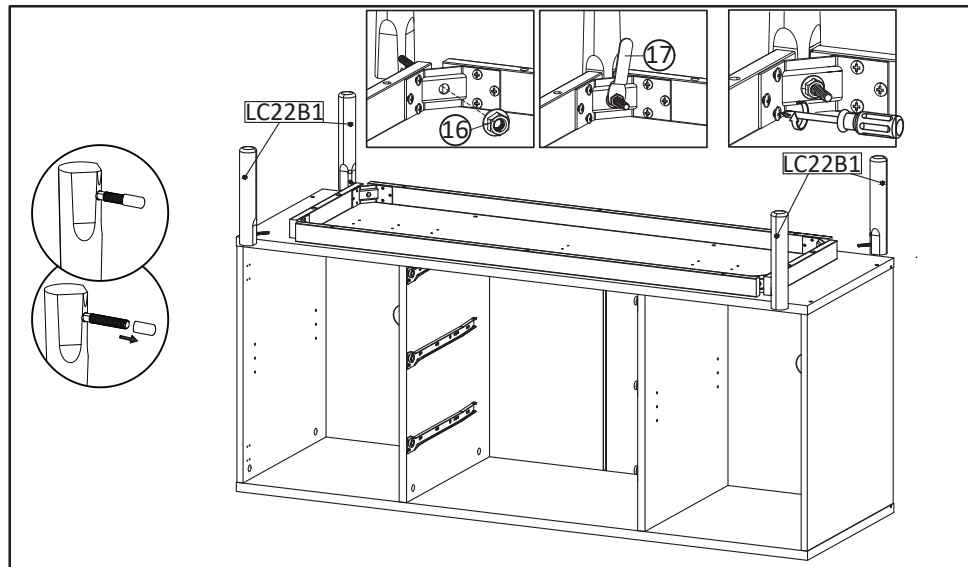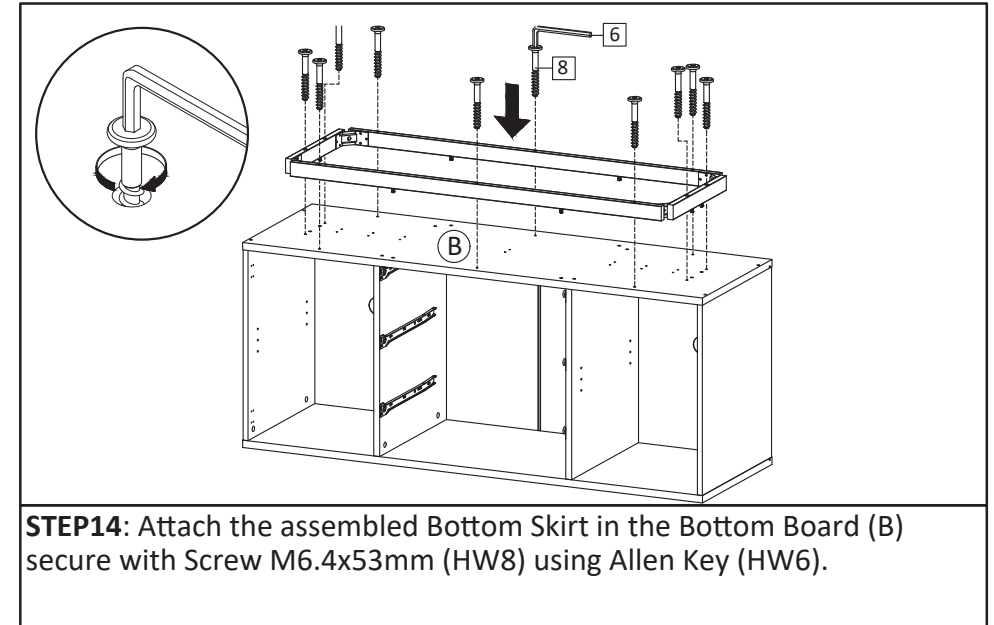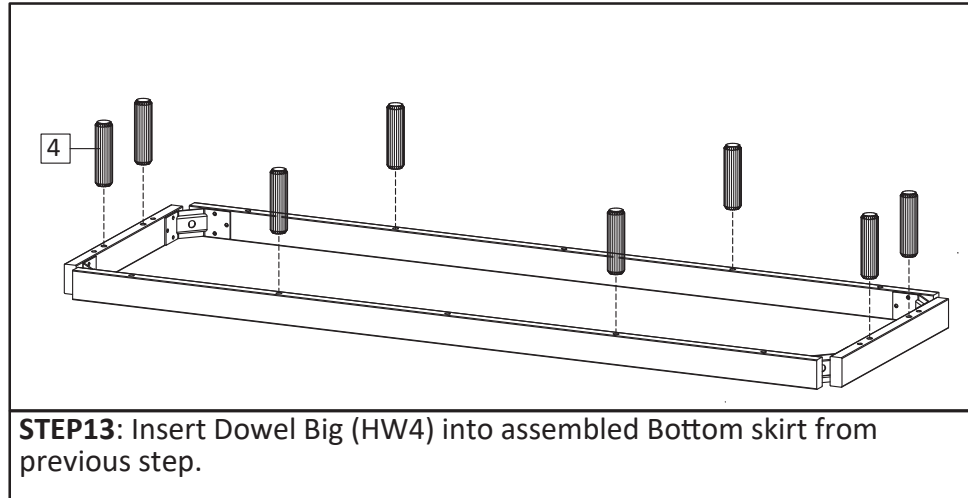


PREPARATION


- *Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- *If any part is missing or damaged, do not attempt to assemble the product.
- *Estimated Assembly Time: 90 minutes.
- *Tools Required for Assembly (included): Allen Key
- *If you are having difficulty, our friendly Customer Care team is always here to help.

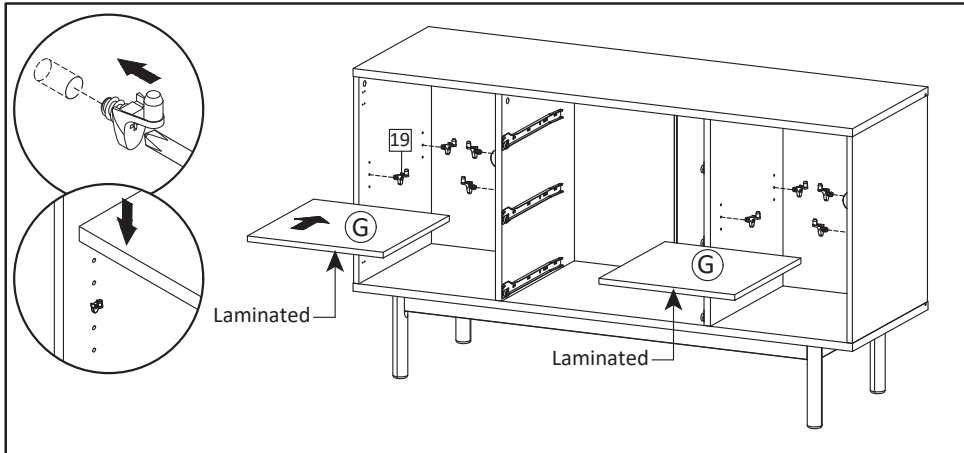


STEP17: After bringing the product upright, insert Shelf Support (HW19) into the holes on Sideboard & Centerboard, on the desired level. Then place the Adjustable Shelf (G) by inserting the hole on the shelf into the shelf support

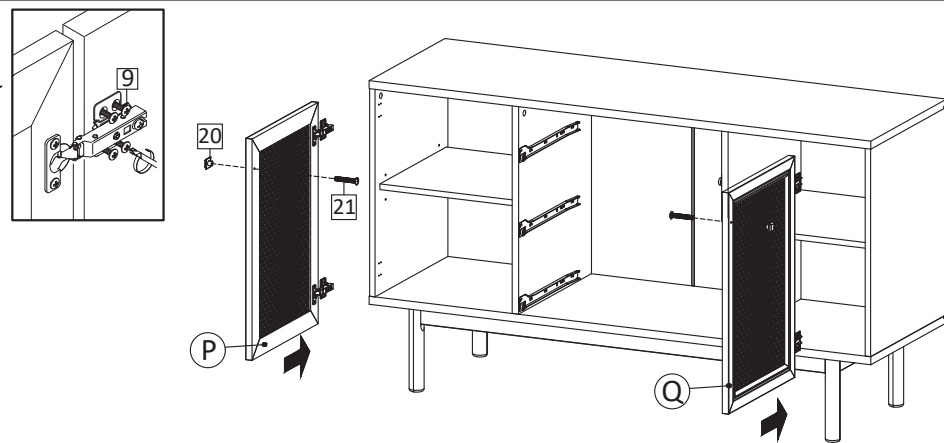

STEP19: Install Door Left (P) and Door Right (Q) into Side Boards and Center Board Please review above images carefully. Secure with Screw M4.5x12.5mm (HW9). Insert Handle (HW20) Secure with Screw M4x25mm (HW21) into Doors.

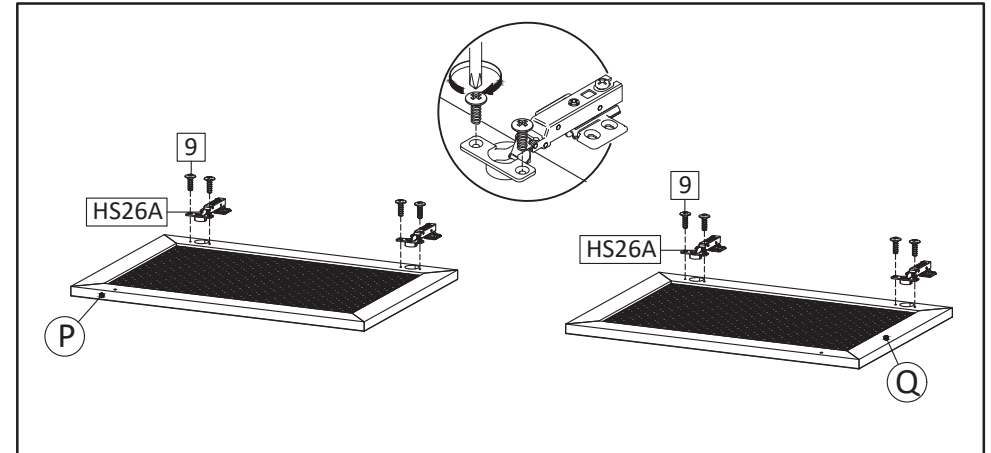


STEP18: Insert Hinge (HW HS26A) into Door Left (P) and Door Right (Q). Secure with Screw M4.5x12.5mm (HW9).

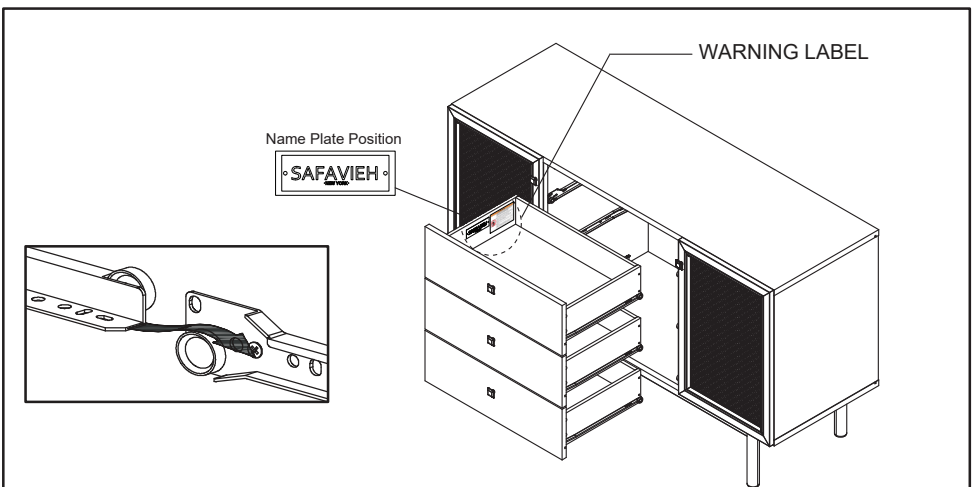


STEP20: Hold the sides of drawer, position the wheel of Drawer Runner at drawer back and the wheel of Drawer Runner at side boards, according to the image. Slide in the drawers one by one into the Sideboard.

PREPARATION

- *Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- *If any part is missing or damaged, do not attempt to assemble the product.
- *Estimated Assembly Time: 90 minutes.
- *Tools Required for Assembly (included): Allen Key
- *If you are having difficulty, our friendly Customer Care team is always here to help.

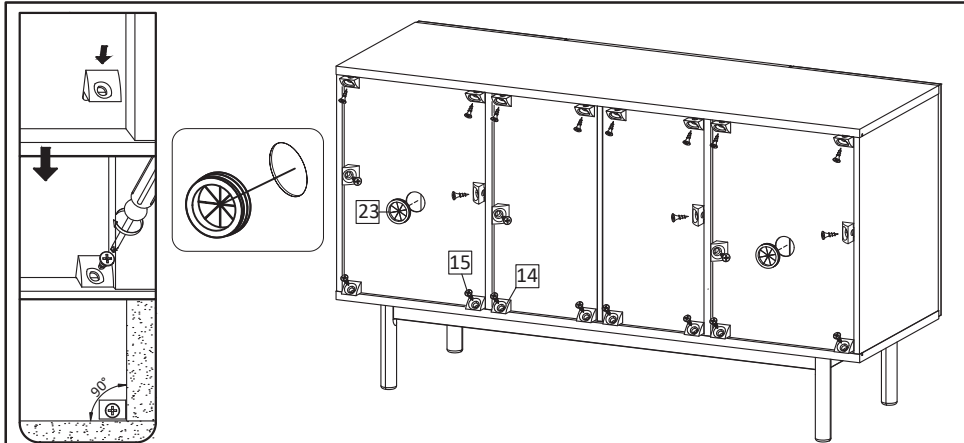

STEP21: Use Wedge (HW14), Screw M3.5x15.5mm (HW15) to tighten the back of Sideboard by using screwdriver. Please align the top board and bottom board in 90° position against the side board, before securing the wedges (HW14). Insert Cable Hole Rubber (HW23) as figure.

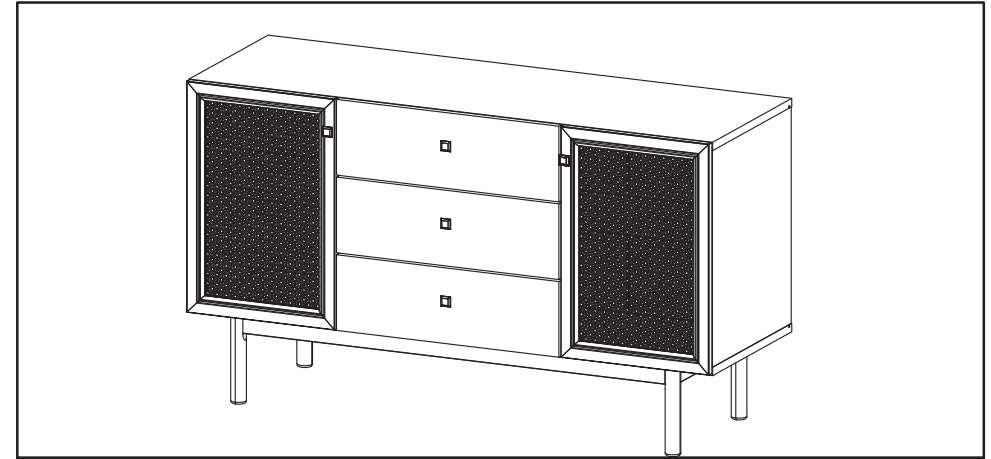






STEP22: Assembly is complete.

TIPPING RESTRAINTS KIT INSTALLATION GUIDANCE



Different wall materials require unique wall fasteners.

The wall plugs (AA2) and screws (AA3) are designed for fixing to concrete walls only.

Please consult your local hardware store to ensure you are using the correct hardware for your wall type.

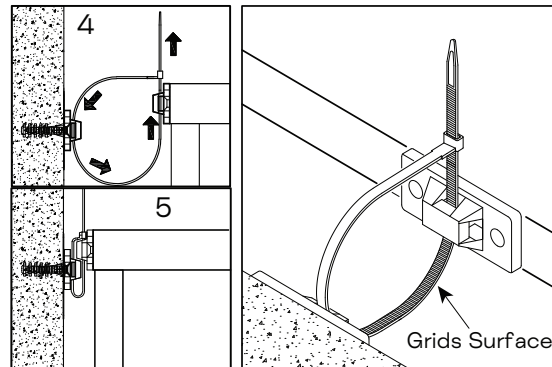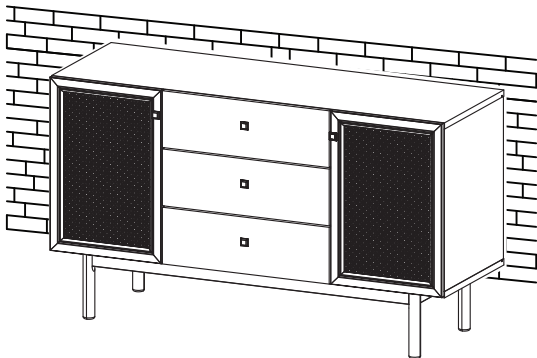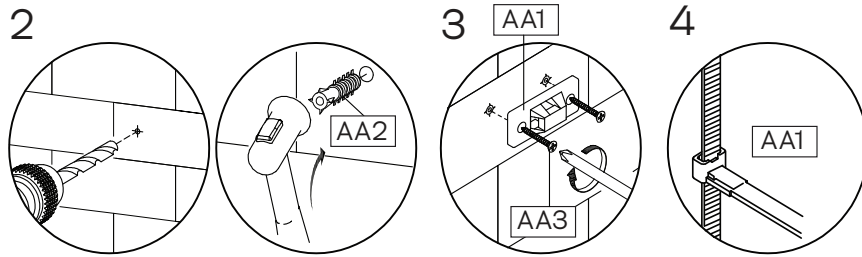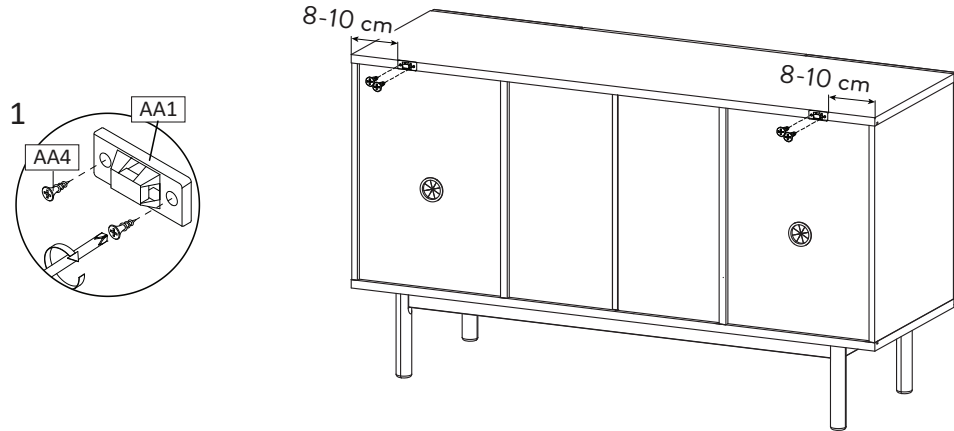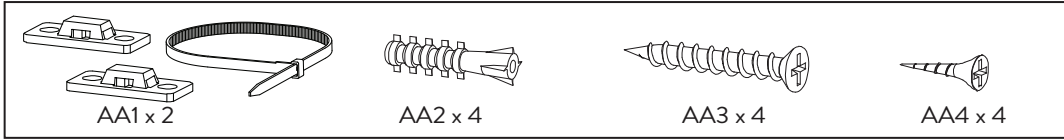


HOW TO ADJUST HINGES

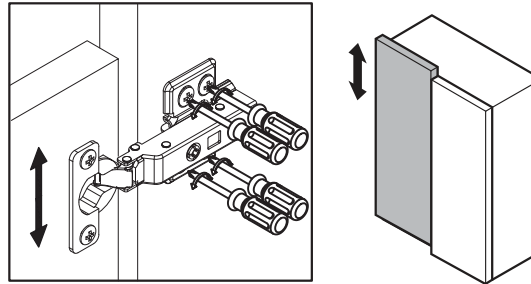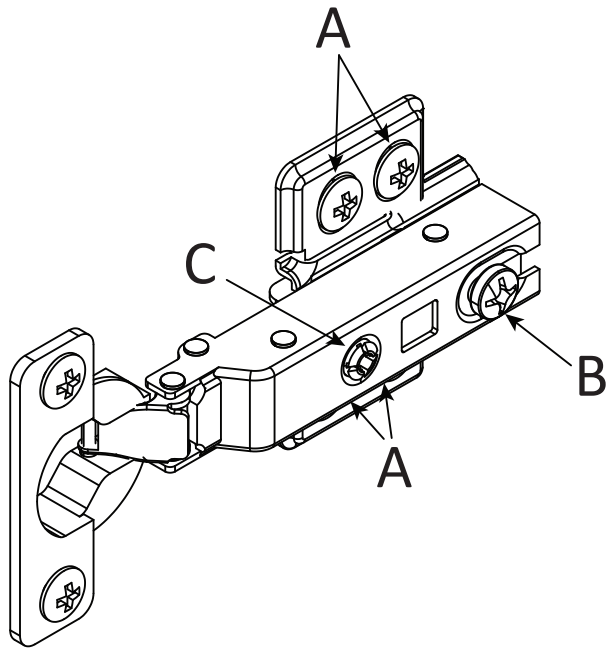


To adjust the vertical height.

Loosen the four screws "A" on both hinges. Two of them are usually in slotted holes which allows you to adjust up or down by few mm. Then tighten back up.

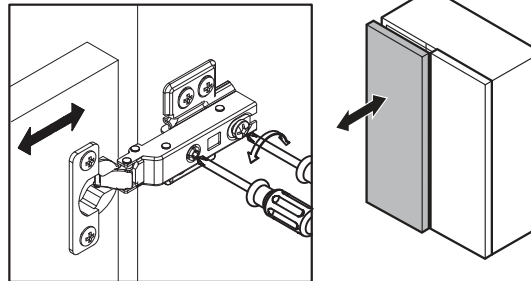

To adjust depth.

Loosen screw "B" and adjust door, if the door can not be adjusted, please loosen screw "C", then try again. Tighten screw "B" and "C".

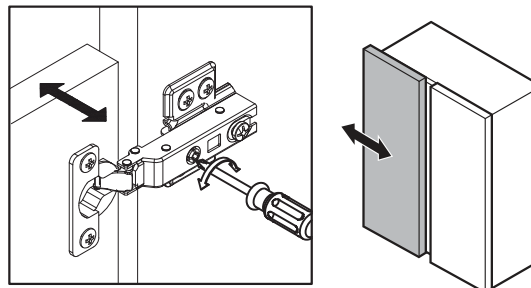

To adjust side ways.

Turning the screw "C" on BOTH hinges on each door.