


INSTALLATION MANUAL



- ◆ The installation process is long and requires your patience. Thank you!
- ◆ For transportation safety, the product needs to be assembled
- ◆ This product has a larger size and requires installation and wiring, WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.
- ◆ Require 36 pieces E12 bulbs(110V, Max 60W), not included in package, if you want it dimmable, please purchase a dimming bulbs with matched dimmer.
- ◆ please wear gloves for installation, especially when hanging crystals

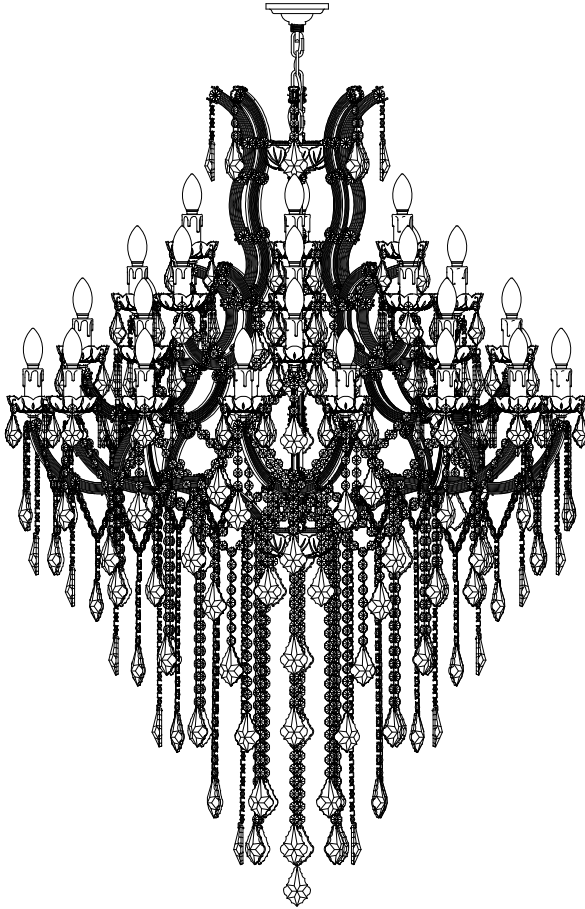

SAFETY INSTRUCTIONS

These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.

1. WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.
2. This fixture require 36 pieces E12 bulbs(not included in product) , bulb rated wattage Max 60W. To avoid risk of fire, do not exceed the recommended wattage.
3. If any special control devices are used with this fixture, follow the instructions carefully to assure full compliance with N.E.C. requirements. If there are any questions, contact a qualified electrical contractor.
4. please make sure shut off the main electrical supply before installation, changing bulbs or cleaning light fixture.



WARRANTY & SERVICES

1 year warranty services are provided for this light fixtures.

We provide 24-hour customer service, and any questions you have will be answered within 24 hours. If you have any questions or problems during the warranty period, please feel free to contact us via email, your order ID and details are preferred so that our customer service will help you more quickly and accurately!

Note: please use this light fixture accordingly to its intended purpose, do not retrofit or remodeling this light fixture. The warranty does not cover if the failure is caused by the third party product, or natural disasters.




PREPARATION

1. Before begining installation, make sure all parts are included refer to the contents diagrams(PACKAGE CONTENTS). if any Part is missing or damaged, do not attempt to assemble, install or operate the product.
2. 36 pieces E12 bulbs(Max.60W) are required.
3. Any question or problem, please feel free to contact us.

STRUCTURAL DIAGRAM & PART LISTS

The following is a list of all accessories and their positions on the chandelier (crystal parts will listed in next page)

Notes: There are spare parts available for the glass dish X and dish Y

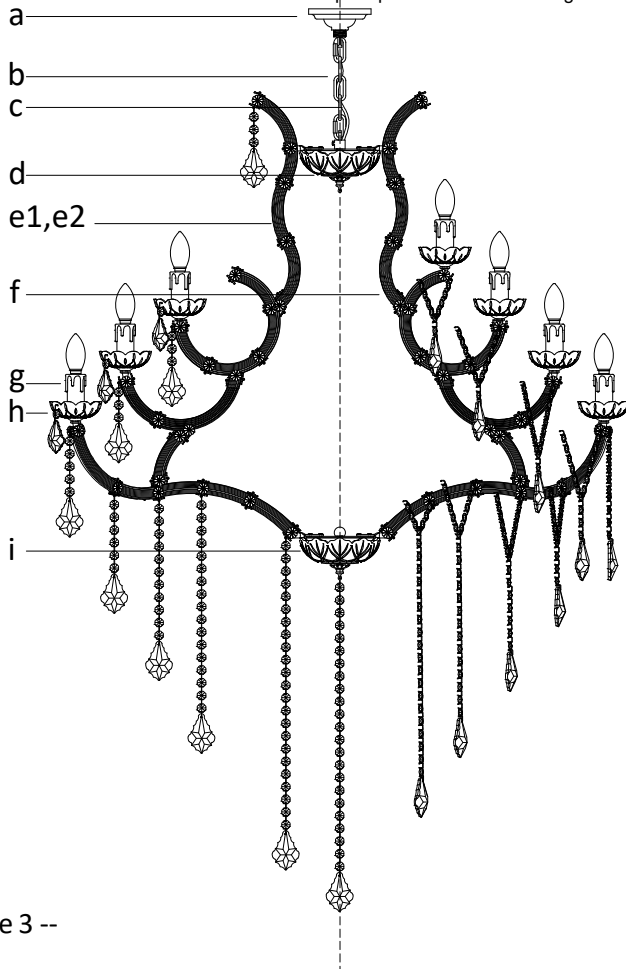

a:Ceiling Canopy

b:Metal Chain

c:Main Wire

d:Arm Supporter-1

i:Arm Supporter-2

g:Candle tube(36pcs)

h:Glass Dish(36pcs)

(5L)

f:Lamp Arm-1(4pcs)

(4L)

e1:Lamp Arm-2(1pcs)



(4L)

e2:Lamp Arm-3(3pcs)

INSTALLATION STEPS

Step I

Familiar with the arrangement order of light arms, 4 light arms and 5 light arms arranged in a staggered manner.

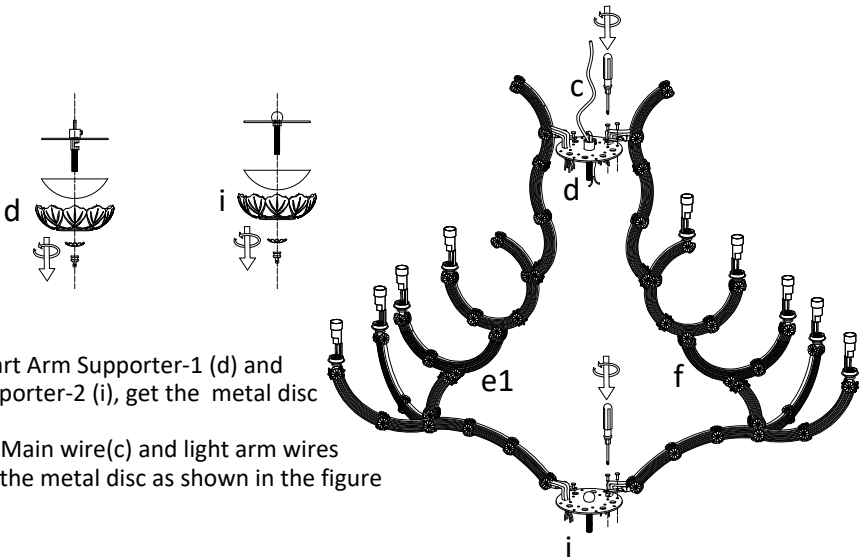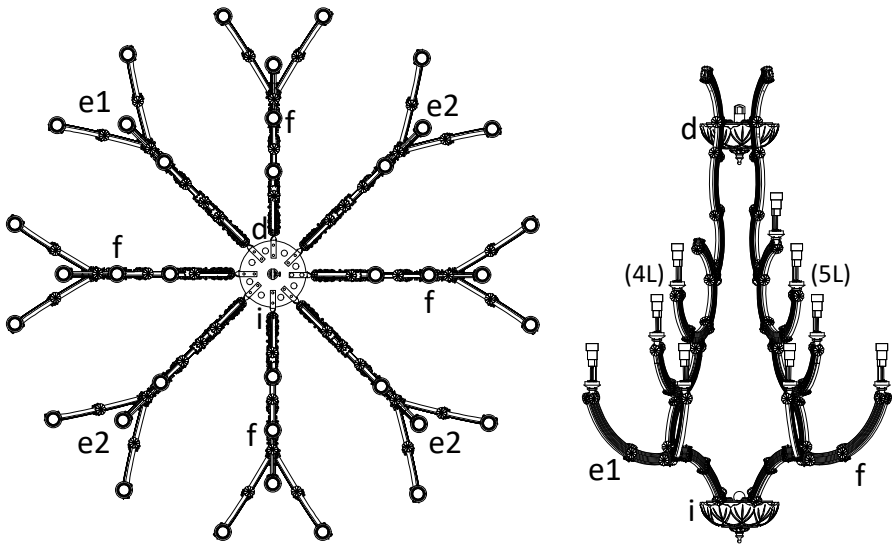


Step II

Take apart Arm Supporter-1 (d) and Arm Supporter-2 (i), get the metal disc

Pass the Main wire (c) and light arm wires through the metal disc as shown in the figure

Step III


Fix the lamp arms on the metal disc with screws according to the method and sequence as shown in the diagram

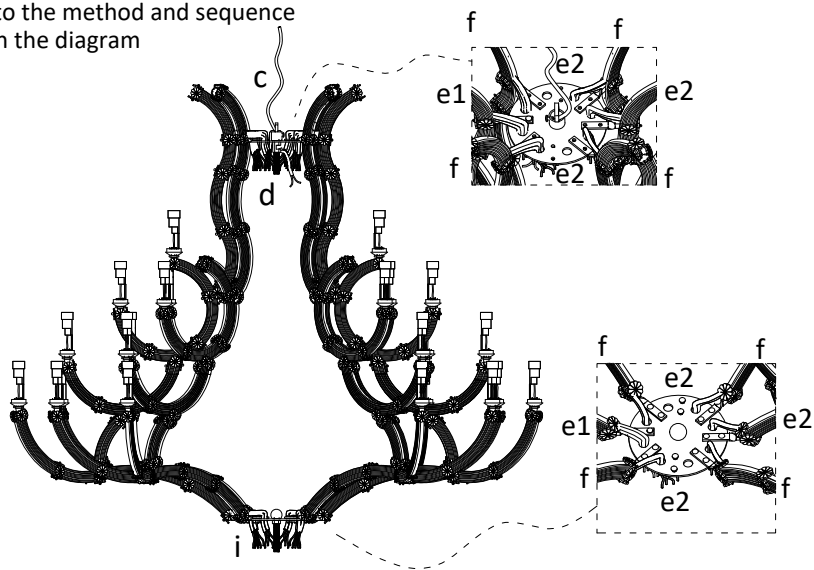


Step IV

Connect the wires of lamp arms as shown. Put on the E12 bulbs and test whether the power is ok.

Note: Each transparent wire contains 2 wires, with any one as the neutral line and the other as the live line. Please carefully separate and avoid short circuits

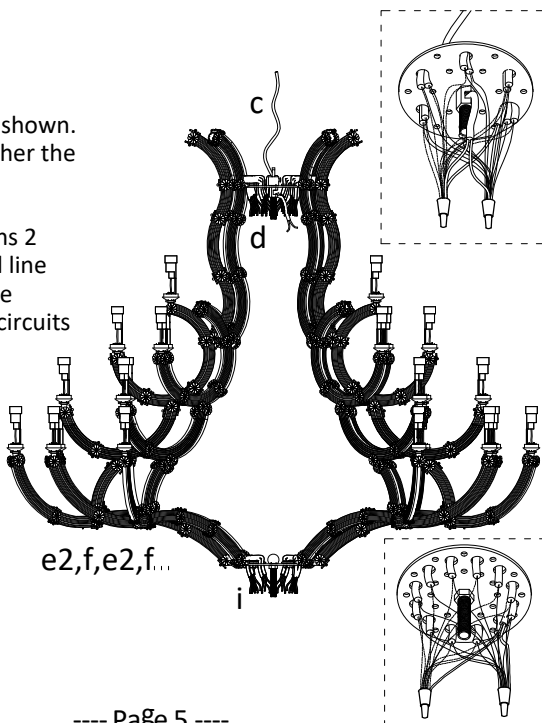

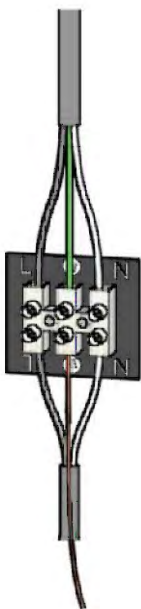

HOUSE WIRES

Black(live wire)

White(neutral wire)


Green(ground wire)

LAMP WIRES

2 Transparent wire

(Live and neutral wire, no
need to distinguish)

Brass wire(ground wire)

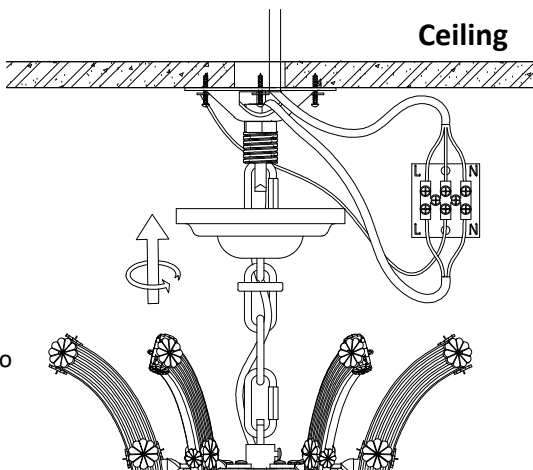

NOTES:

The diagram is only for reference installation method of ceiling plate, please install according to the actual ceiling situation.


If you don't need such a long chain, please cut it appropriately short before hanging it. If you want to increase the length of the hanging chain and wires, please purchase eligible wires and hanging chains that meet the standards and replace and install it by professional electricians.

WARNING: Never connect ground wire to black or white power supply wires.

please make sure shut off the main electrical supply before installation.


Step V

- ① Take off the mounting bracket from ceiling canopy(a).
- ② Hanging the lamp frame on mounting bracket with metal chain.
- ③ Connect wires, and cover the ceiling canopy on mounting bracket as shown.

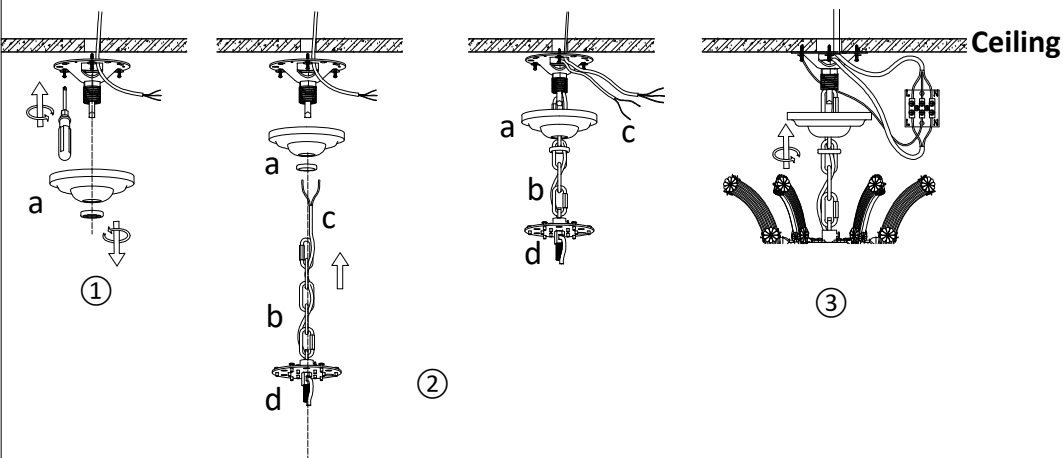


Step VI

Install Glass Dish on Arm Supporter-1(d)
and Supporter-2(i)

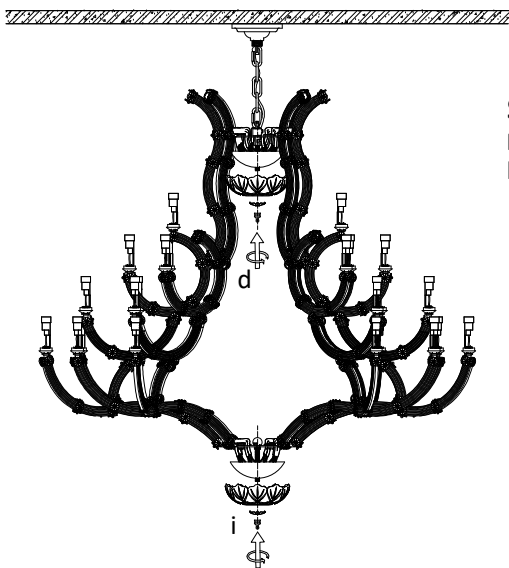

Step VII

Put Candle tube(g) and Glass Dish(h) on
lamp holders.

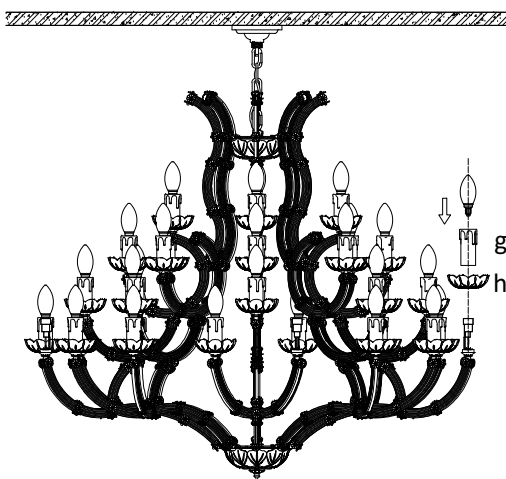

Step VIII

The following is a list of all crystals and their positions on the chandelier. Please strictly follow the diagram to hang the crystals, as hanging them in the wrong position may result in insufficient of crystals

Notes:

- 1) 'A' is 2.5" medium size crystal pendant, others are 3" large size crystal pendant.
- 2) There are spare parts for crystals in package.

C,D1,E1,F1,G1,H1,I1,J are Crystal nets, hanging between two lamp arms, with corresponding hanging points marked as positions

