

NOTICE

*Please make sure that you have all parts indicated and they are in good condition before you begin assembly of this item. Refer to part list and hardware list below for guidance.

*This item should be assembled on a soft surface to prevent scratching the finish during assembly.

*This item may require periodic tightening.

*If you are having difficulty, our friendly Customer Care team is always here to help. Please

PREPARATION

*Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.

*If any part is missing or damaged, do not attempt to assemble the product.


*Estimated Assembly Time: 60 minutes.

*Tools Required for Assembly (included): Allen Key


CARE AND MAINTENANCE

Always use felt pads under all articles to prevent discoloration or softening of the lacquer. Plastic and rubber bases on items can discolor wood. Wipe up spills immediately and avoid common hazards such as hot dishes, harsh solvents and abrasives. Cleaning should be done with a soft lint free cotton cloth dampened with water or furniture polish. On highly used surfaces we recommend applying a quality paste wax which should be used on a regular basis to provide additional protection from scratches and spills. How often you apply the wax depends on how much wear the furniture receives.

Part List

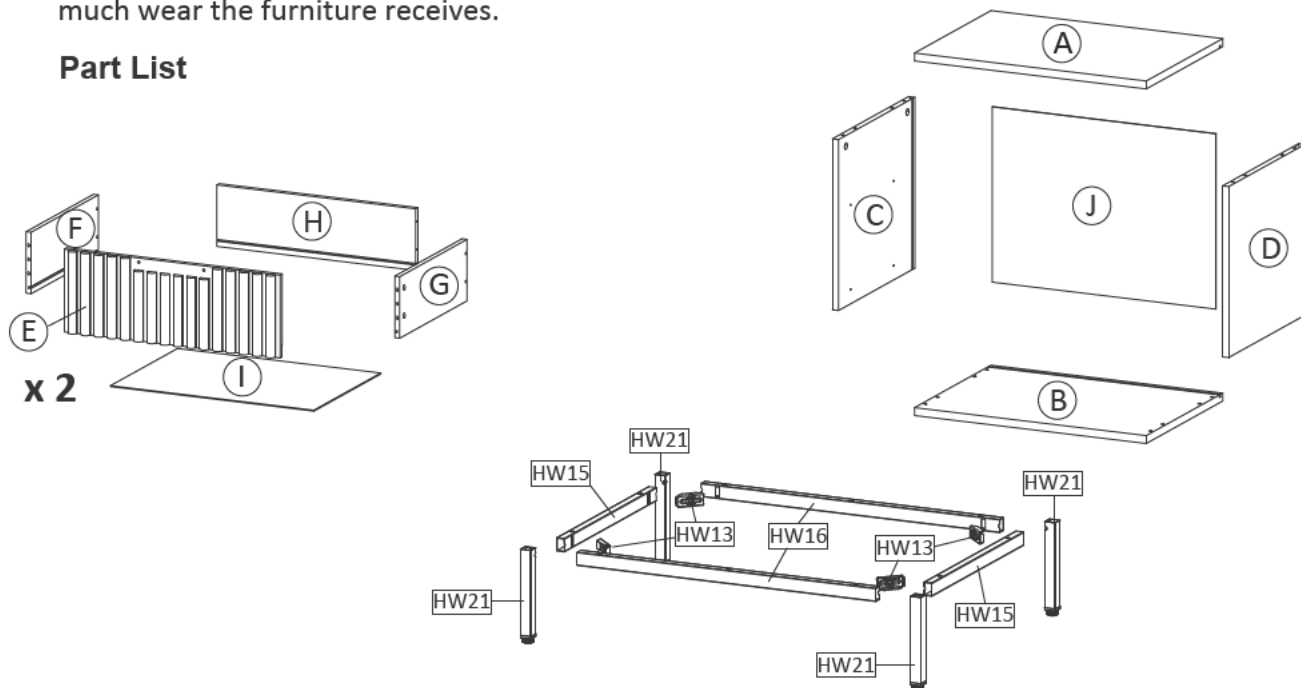

Product Dimensions: 22.13"Wx15.67"Dx22.80"H

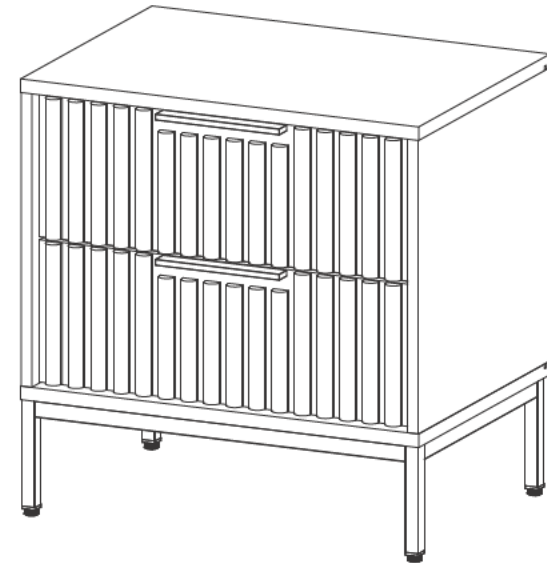

WARNING :























WEIGHT CAPACITY: 26.4 LBS.

DRAWER LOAD CAPACITY 22 LBS

Warning : Do not stand on chest.

Warning : Do not over torque bolts.

Hardware List

HW1x12  $\varnothing 6 \times 35 \text{ mm}$	HW2x4  $\varnothing 15 \text{ mm}$	HW3x8  $\varnothing 8 \times 30 \text{ mm}$	HW4x4  $\varnothing 6 \times 30 \text{ mm}$	HW5x4  $M 7 \times 50 \text{ mm}$	HW6x1  $L 4$
HW7x8  $\varnothing 12 \text{ mm}$	HW8x8  $M 8 \times 39 \text{ mm}$	HW9x8  $M 6 \times 10.5 \text{ mm}$	HW10x12  $M 3.5 \times 13 \text{ mm}$	HW11x2  	HW12x4  $M 4 \times 22 \text{ mm}$
HW13x4  	HW14x4  	HW15x2  	HW16x2  	HW17x4  $M 6 \times 35 \text{ mm}$	HW18x10  $M 6.4 \times 35 \text{ mm}$
HW19x14  	HW20x14  $M 3.5 \times 15.5 \text{ mm}$	HW21x4  	HW RM35Ax2  350 mm		

Part List & HW For Multi-Box Items

Piece	Description	Qty
A	Top Board	1
B	Bottom Board	1
C	Side Board Left	1
D	Side Board Right	1
E	Front Drawer	2
F	Side Drawer Left	2
G	Side Drawer Right	2
H	Back Drawer	2
I	Bottom Drawer	2
J	Back Board	1

Piece	Description	Qty
HW1	Cambolt	12
HW2	CamLock Big	4
HW3	Dowel Big	8
HW4	Dowel Small	4
HW5	Screw M 7 x 50 mm	4
HW6	Allen Key	1
HW7	CamLock Small	8
HW8	Screw M 8 x 39 mm	8
HW9	Screw M 6 x 10.5 mm	8
HW10	Screw M 3.5 x 13 mm	12
HW11	Handle	2
HW12	Screw M 4 x 22 mm	4
HW13	Corner Brace	4
HW14	Support Corner Brace	4
HW15	Support Metal Leg 1	2
HW16	Support Metal Leg 2	2
HW17	Screw M 6 x 35 mm	4
HW18	Screw M 6.4 x 35 mm	10
HW19	Wedge	14
HW20	Screw M 3.5 x 15.5 mm	14
HW21	Metal Square Leg	4
HW RM35A	Rail	2

PREPARATION


*Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.

*If any part is missing or damaged, do not attempt to assemble the product.


*Estimated Assembly Time: 60 minutes.

*Tools Required for Assembly (included): Allen Key


*If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

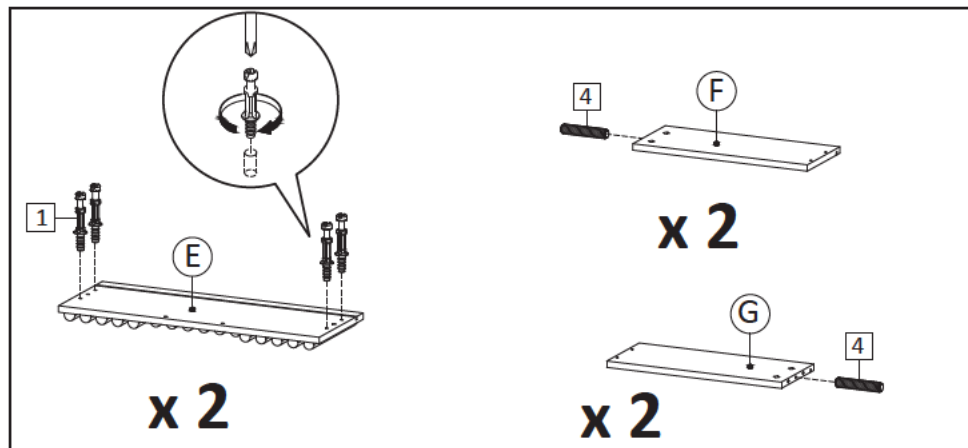


STEP1: Insert Cambolt (HW1) into Front Drawer (E).
Insert Dowel Small (HW4) into Side Drawers (F & G).

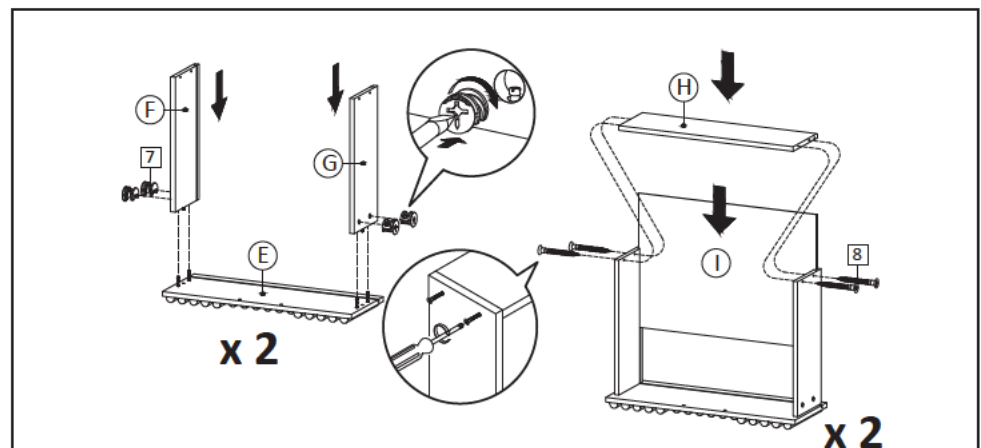


STEP2: Combine Side Drawers (F & G) into Front Drawer (E)
then tighten camlock (HW7) using screwdriver. Insert Bottom Drawer (I)
with laminated face facing upward then put Back Drawer (H)
and secure with Screw M8x39mm (HW8).

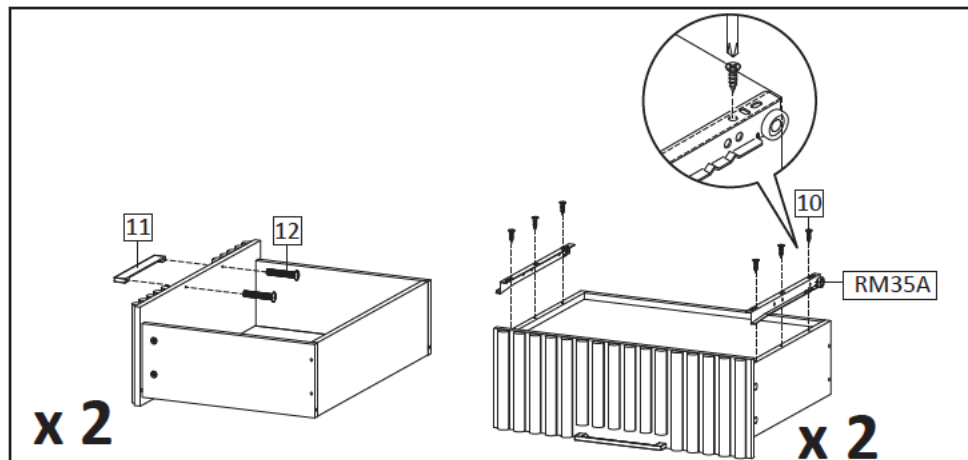


STEP3: Use Screw M4x22mm (HW12) to attach Handle (HW11)
to the Front Drawer.
Install the metal runner (HW RM35A) into position as shown in picture.
Secure with screws M3.5x13mm (HW10)

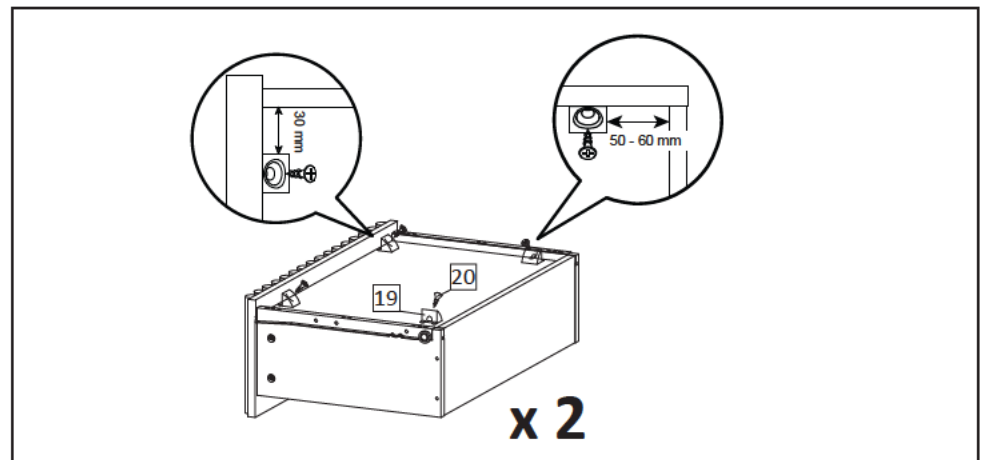


STEP4: Insert the Screw M3.5x15.5mm (HW20) and wedge (HW19)
into the bottom of the drawer according to the picture.

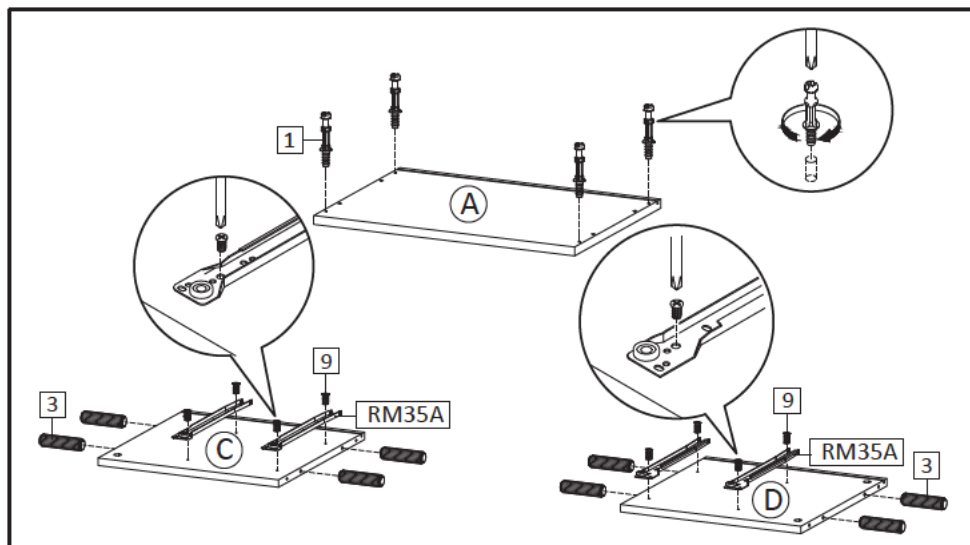


STEP5: Insert Cambolt (HW1) into Top Board, and Insert Dowel Big (HW3) into Side Board Left (C) and Side Board Right (D). Continue with securing part of the metal runner (HW RM35A) into position as the above image, using screw M6x10.5mm (HW9).

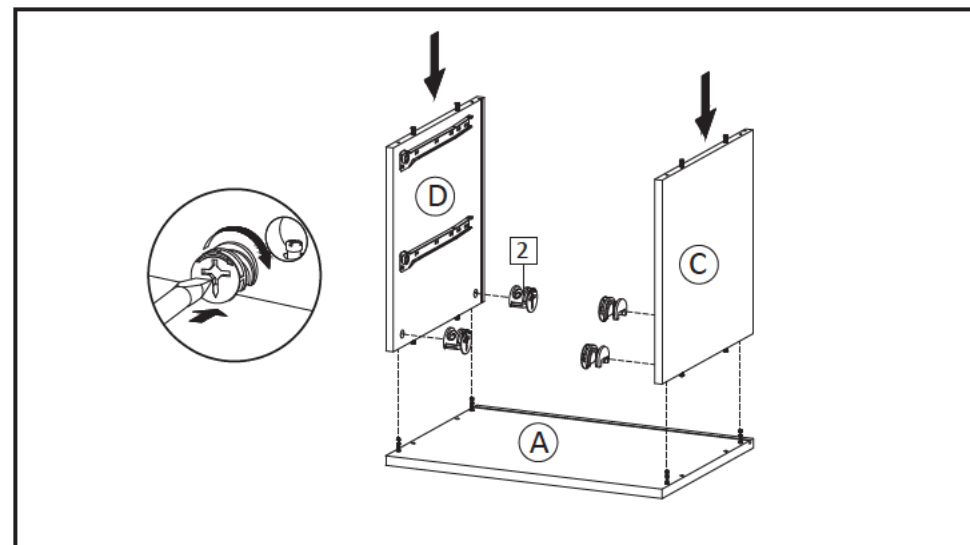


STEP6: Attach Side Board Left (C) and Side Board Right (D) into Top Board (A). Secure with Camlock Big (HW2) and tighten it using screwdriver.

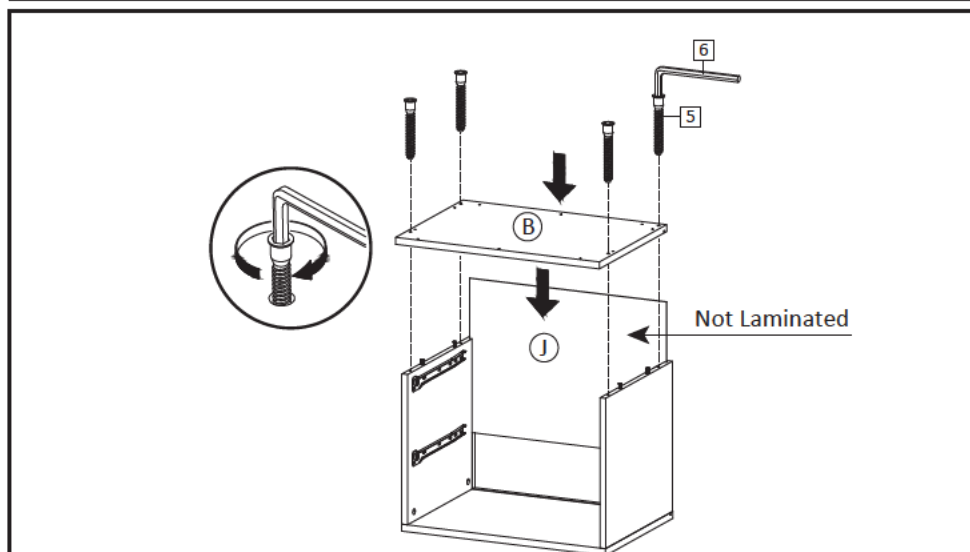


STEP7: Attach Back Board (J) and Insert Bottom Board (B), secure with Screw M7x50mm (HW5), tighten screws using Allen Key (HW6).

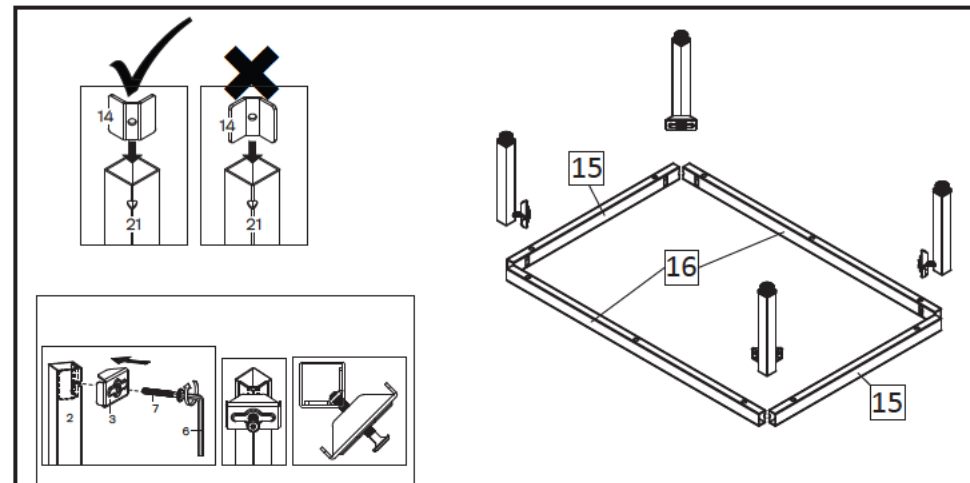


STEP8: Insert Support Corner Brace (HW14) and place it inside Leg (HW21) tube. Insert Screw (H17) into the hole of Corner Brace (HW13). Screw in slightly just enough to grip Leg (HW21) with Support Corner Brace (HW14) inside. Do not tighten. Arrange Support Metal Leg 1 (HW15) & Support Metal Leg 2 (HW16) on the floor as per image.

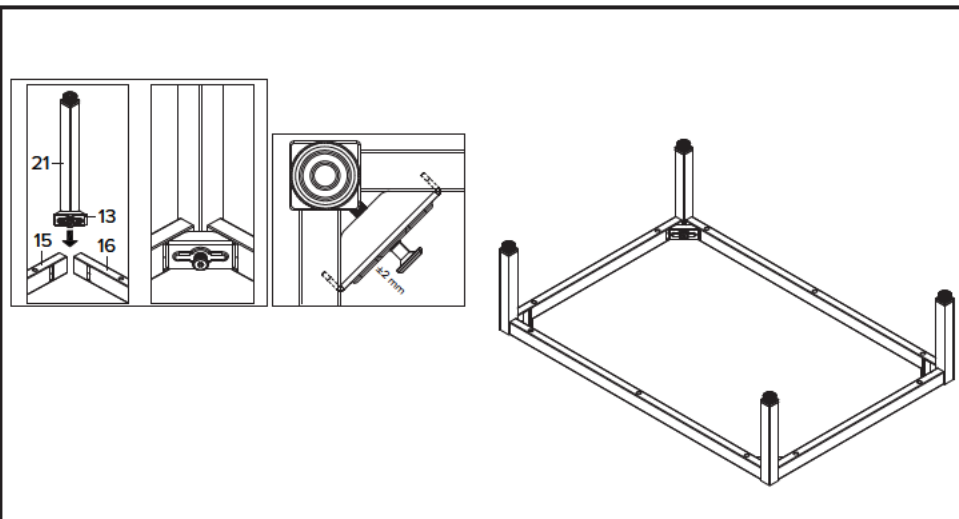


STEP9: Install the prepared Leg (HW21). Ensure the Corner Brace (HW13) hooks onto the hole of Support Metal Leg (HW15) and (HW16). Screw in just enough to grip the support using Allen Key (HW6). Do not fully tighten. Repeat for the other legs

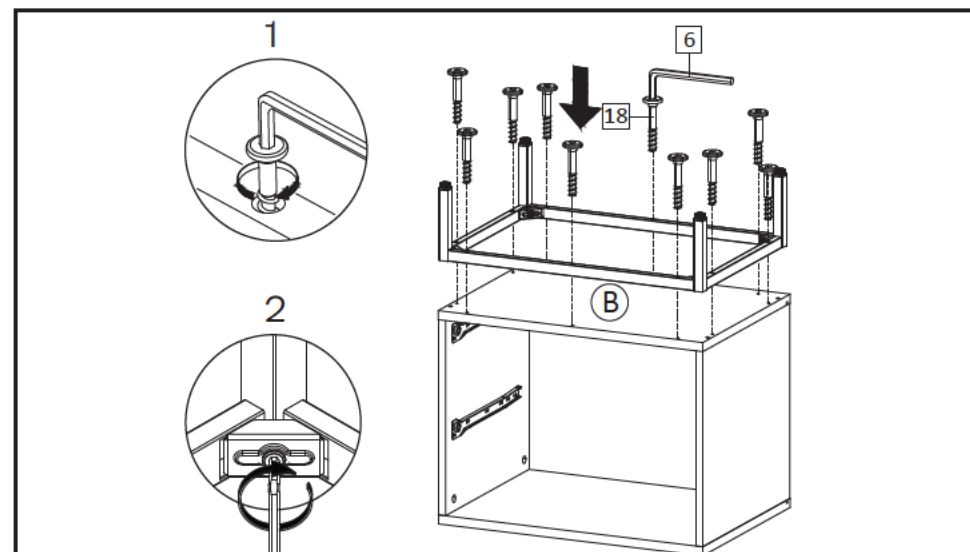


STEP10: Install assembled leg unit from Step 9 onto main assembled unit by inserting Screw (HW18). Tighten with Allen Key (HW6). Then tighten all the Screw on the assembled leg unit.

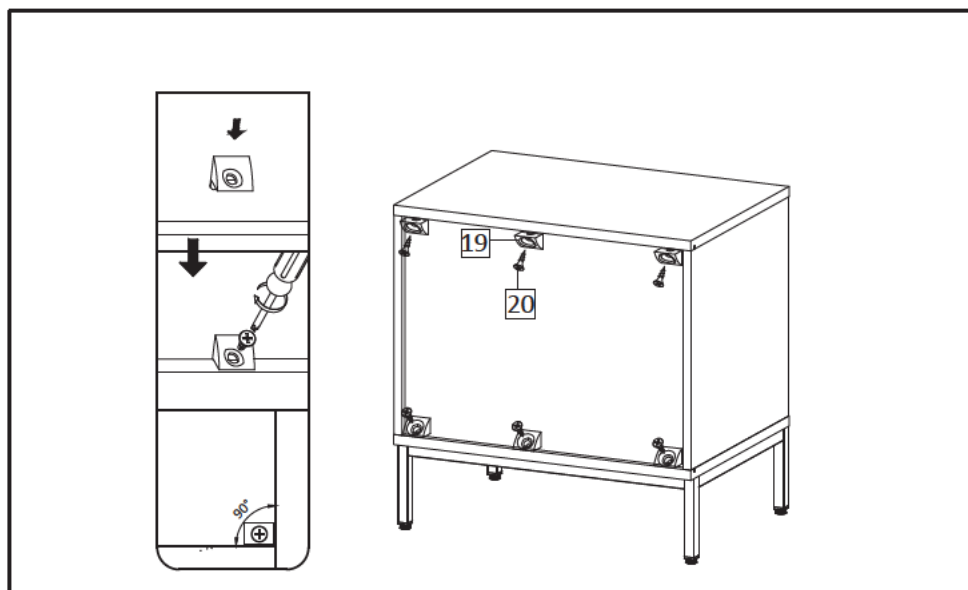

STEP11: Use Wedge (HW19), Screw M 3.5 x15.5 (HW20) to tighten the back of night stand by using screwdriver. Please align the top board and bottom board in 90° position against the side board, before securing the wedges (HW19)

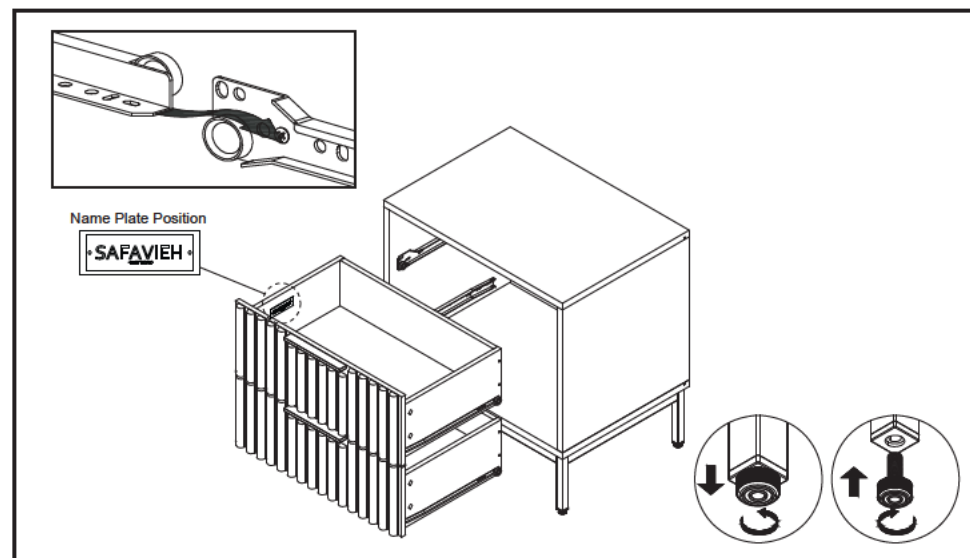

STEP12: Hold the sides of drawer, position the wheel of rail at drawer back and the wheel of rail at side boards, according to the image. Slide in the drawers one by one into the night stand. Place your furniture on level floor. The legs come with adjustable leveller, adjust it as needed until your furniture sit steady on the floor.

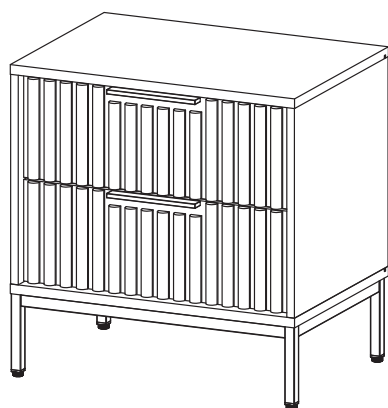

STEP13: Assembly is complete.

TIPPING RESTRAINTS KIT INSTALLATION GUIDANCE

Different wall materials require unique wall fasteners.

The wall plugs (AA2) and screws (AA3) are designed for fixing to concrete walls only.

Please consult your local hardware store to ensure you are using the correct hardware for your wall type.

