

DREAMSIDEA

INSTRUCTION MANUAL



NO:10005




Tel.+1-562-510-9089

E-mail:support@dreamsidea.com


<https://www.dreamsidea.com>

EXPLODED VIEW

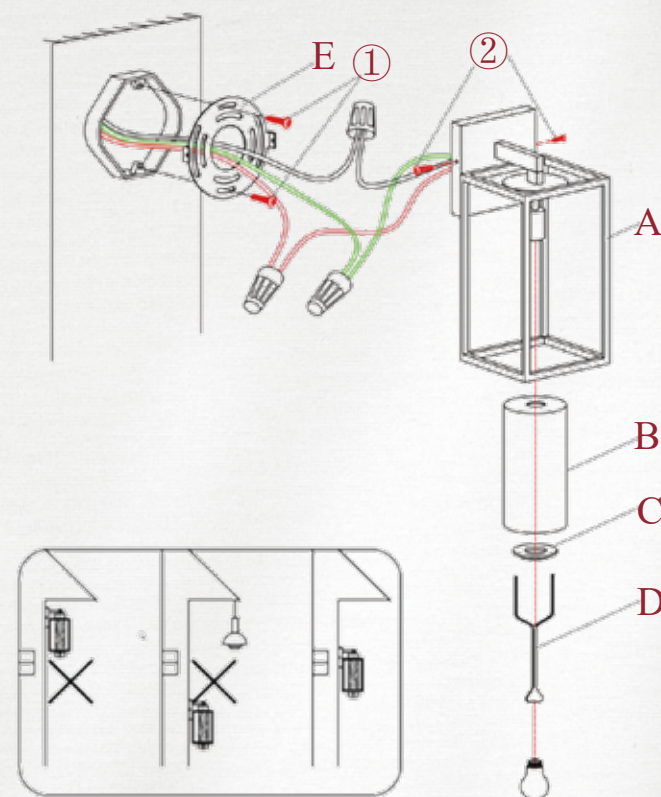

PARTS

A*1




B*1



C*1



D*1



E*1



Fixture

Glass shade

Socket
Spanner
ring

Mounting
unit

HARDWARE TOOL LIST

①*2



Screws

②*2



Fixture screws

③*3



Wire nuts



Ladder



Safety
glasses



Electrical
tap



Phillips
screwdriver



Flat blade
screwdriver



Pliers



Wire
strippers

ATTENTION

Please inspect the wires before installation, if the wires show any cut or abrasion, or has exposed copper wires,

DO NOT use the fixture, it might be caused during transportation or defect product.


Before starting installation of the fixture, please remove the previous fixture (if any). Disconnect the power by turning off the electric break for your property (Please ask for professional help if needed).

MAINTENANCE AND WARNING

- Verify the lamp model suits the environment (indoor/outdoor, IP rating) and check all accessories (body, screws, cord, manual).
- Only use with bulbs of the recommended type and wattage. Exceeding the maximum wattage may cause overheating or fire.
- Do not install the fixture if any part is damaged or missing.
- The fixture may become hot during use. Allow to cool before handling.
- Clean dust accumulation in recessed lamps regularly (to prevent overheating), but only when powered off; never rinse with water.
- If the fixture includes a dimmer switch, ensure it is compatible with the fixture before installation.
- Do not modify the fixture in any way; tampering with electrical components can result in malfunction or risk of fire.


STEP 1

According to the diagram, insert the glass shade through the light socket first, then use the spanner to twist the socket ring inside to fix the shade.

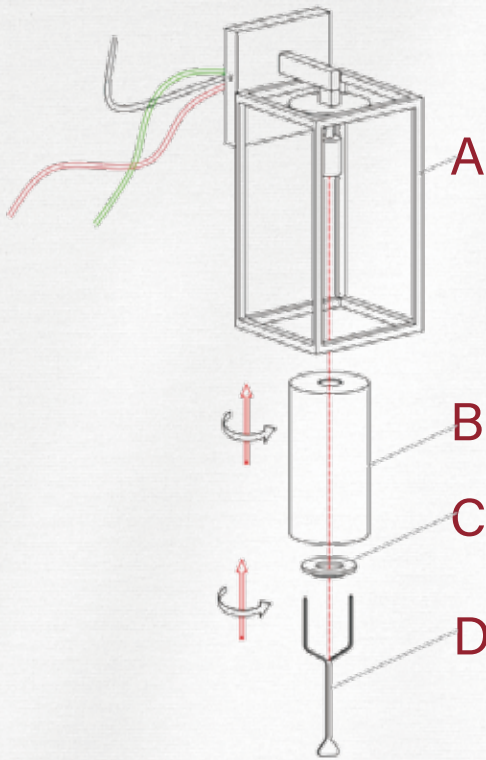


STEP 2

Install the light bulb into the socket as shown. (suggest to use T bulb, not included)

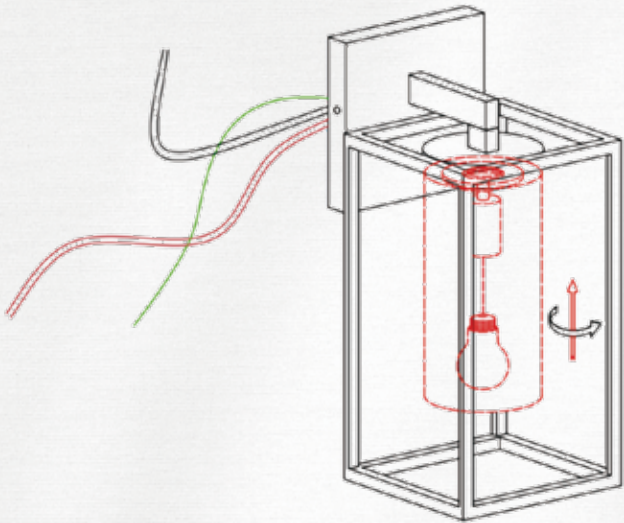



STEP 3

Unscrew the screws from the mounting unit. Use the mounting screws to attach the mounting unit to the junction box.

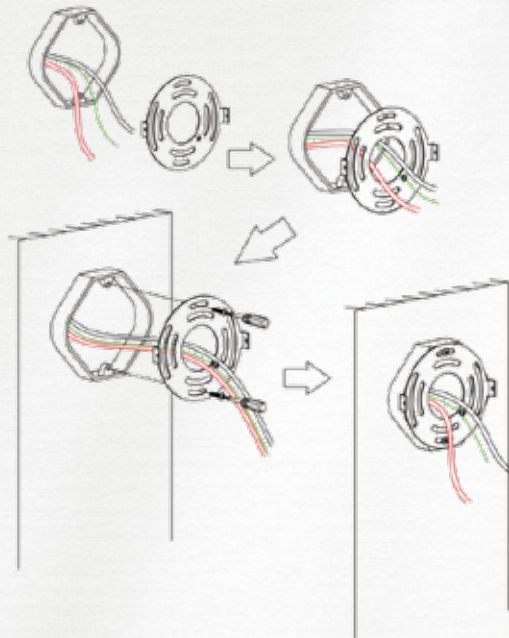

STEP 4

Make the electrical connection from the junction box (not included) to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Next, connect the live wire, neutral wire and ground wires with the supplied wire nuts. Secure with electrical tape.

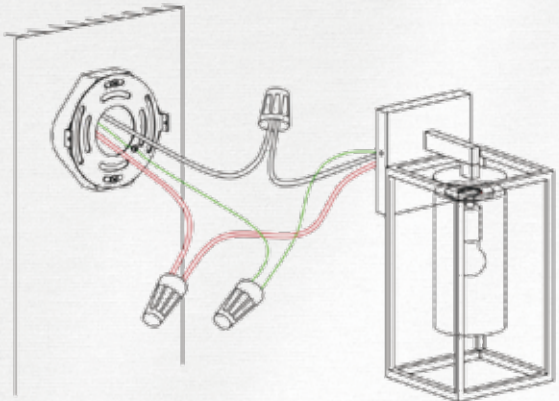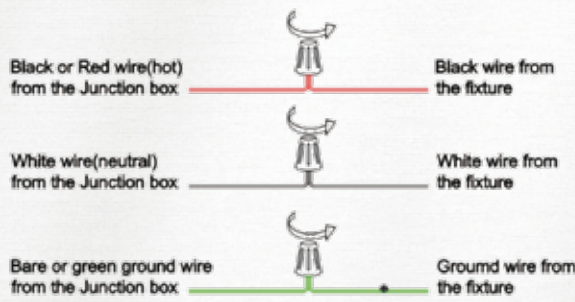

STEP 5

Tighten the screws on the back plate to fix the fixture to the wall.

