


TV Stand

SKU WHIF2714



ASSEMBLY INSTRUCTIONS

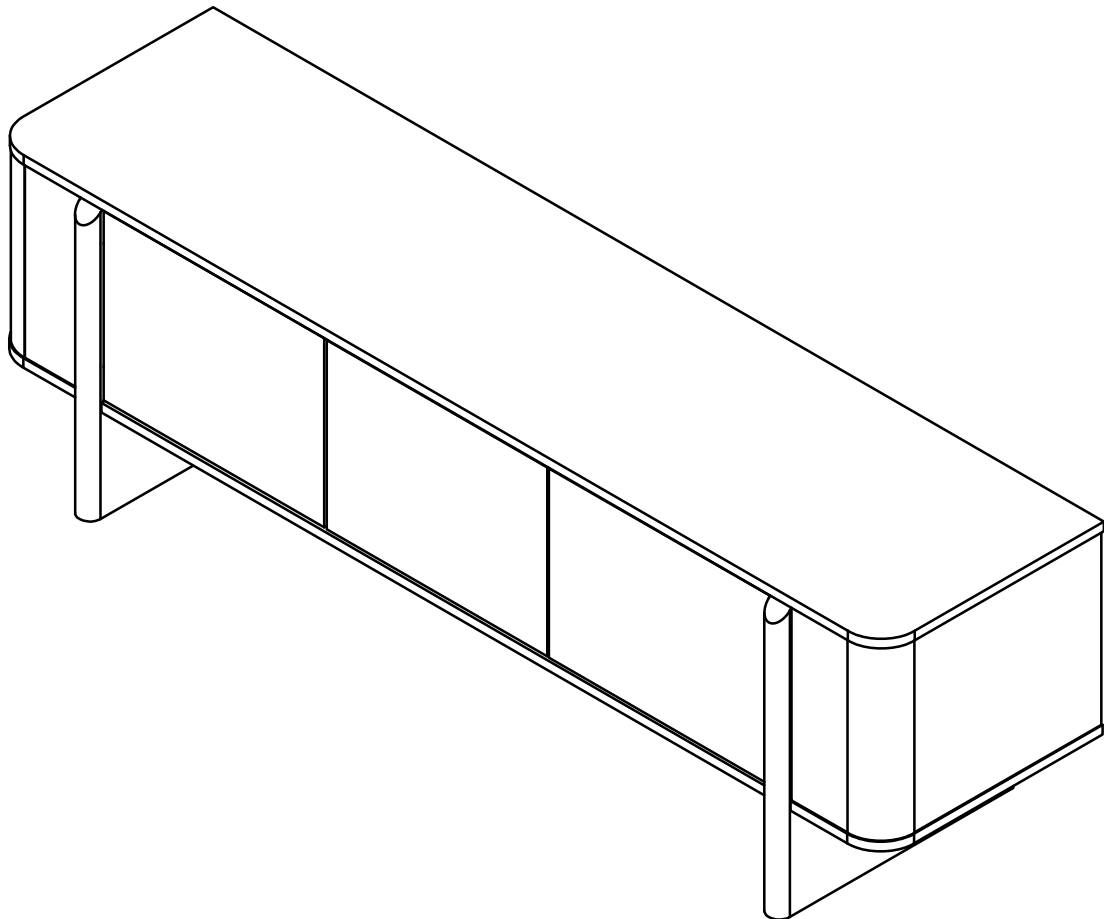

90 min. assembly
2 person

*The estimated assembly time may vary depending on the individual.

Hey, there

Now is assembly time!

Deeeeep breathe.... and again....
Tools ready,
Easy peasy!

Estimated



90 min. assembly
2 person

Tools Required

- Allen Wrench(included)
- Phillips screwdriver(included)
- Power Drill(not included)
- Drill bit(not included)

important: *Cautious when you use power tools*

Need Help?

Call us at +1 909 548 6688
Email customerservice@luxenhome.com
Submit a ticket on www.luxenhome.com/help

Thank you for purchasing this LuxenHome product. This product has been manufactured with the highest standards of safety and quality.

PLEASE READ ALL INSTRUCTIONS CAREFULLY BEFORE ASSEMBLY.

Unpack all parts from the packaging inside the carton to ensure there are no missing or damaged parts. Lay out all the parts on a clean, flat, and soft surface to prevent scratches. Refer to the steps provided as assembling guide.

Do not attempt to assemble or use the product if any parts are missing or damaged.

REMINDERS

SAFE USAGE IS KEY

Your well-being is our top priority when you use our product. Please prioritize your safety by diligently following the assembly guidelines and inspecting the product carefully both when it arrives and before each use.


Please be aware that LuxenHome and Winsome House, Inc. cannot be held liable for any injuries or fatalities that occur due to not adhering to the provided instructions or misuse of the product.

DO NOT MODIFY


Our products undergo rigorous testing to ensure they meet established safety standards before being released for sale. Altering the product in any way can lead to serious safety concerns, for which LuxenHome cannot assume responsibility.

What's in the box


Parts




①x1
Left Leg




②x1
Right Leg




③x1
Top Panel




④x1
Middle Bottom Panel




⑤x1
Left Side Panel




⑥x1
Right Side Panel




⑦x1
Partition Panel




⑧x1
Left Bottom Panel



⑨x1
Right Bottom Panel




⑩x1
Middle Back Panel



⑪x1
Shelf Panel




⑫x2
Back Panel




⑬x2
Front Panel




⑭x2
Curved Vertical Panel




⑮x3
Door Panel



⑯x1
Upper Support Tube



⑰x2
Bottom Support Tube




⑱x1
Middle Support Tube


Hardware & Accessory




Ⓐx16+2
Ø8x30 mm



Ⓑx26+3
Ø6x35 mm



Ⓒx26+3
Ø15x10 mm



Ⓓx1




Ⓔx1




Ⓕx42+4
3.5x14 mm




Ⓖx6
3x16 mm




Ⓗx15+2
7x40 mm



Ⓘx8
7x60 mm




Ⓙx2
4x35 mm



Ⓚx2
4x22 mm



Ⓛx6




Ⓜx3




Ⓝx4




Ⓞx2
M6x12 mm




Ⓟx2
M6x25 mm




Ⓠx6
M6x35 mm




Ⓡx4
M6x60 mm




Ⓢx4
Ø5x15 mm



Ⓣx2



Ⓤx2




Ⓥx6







Ⓦx4

Assembly

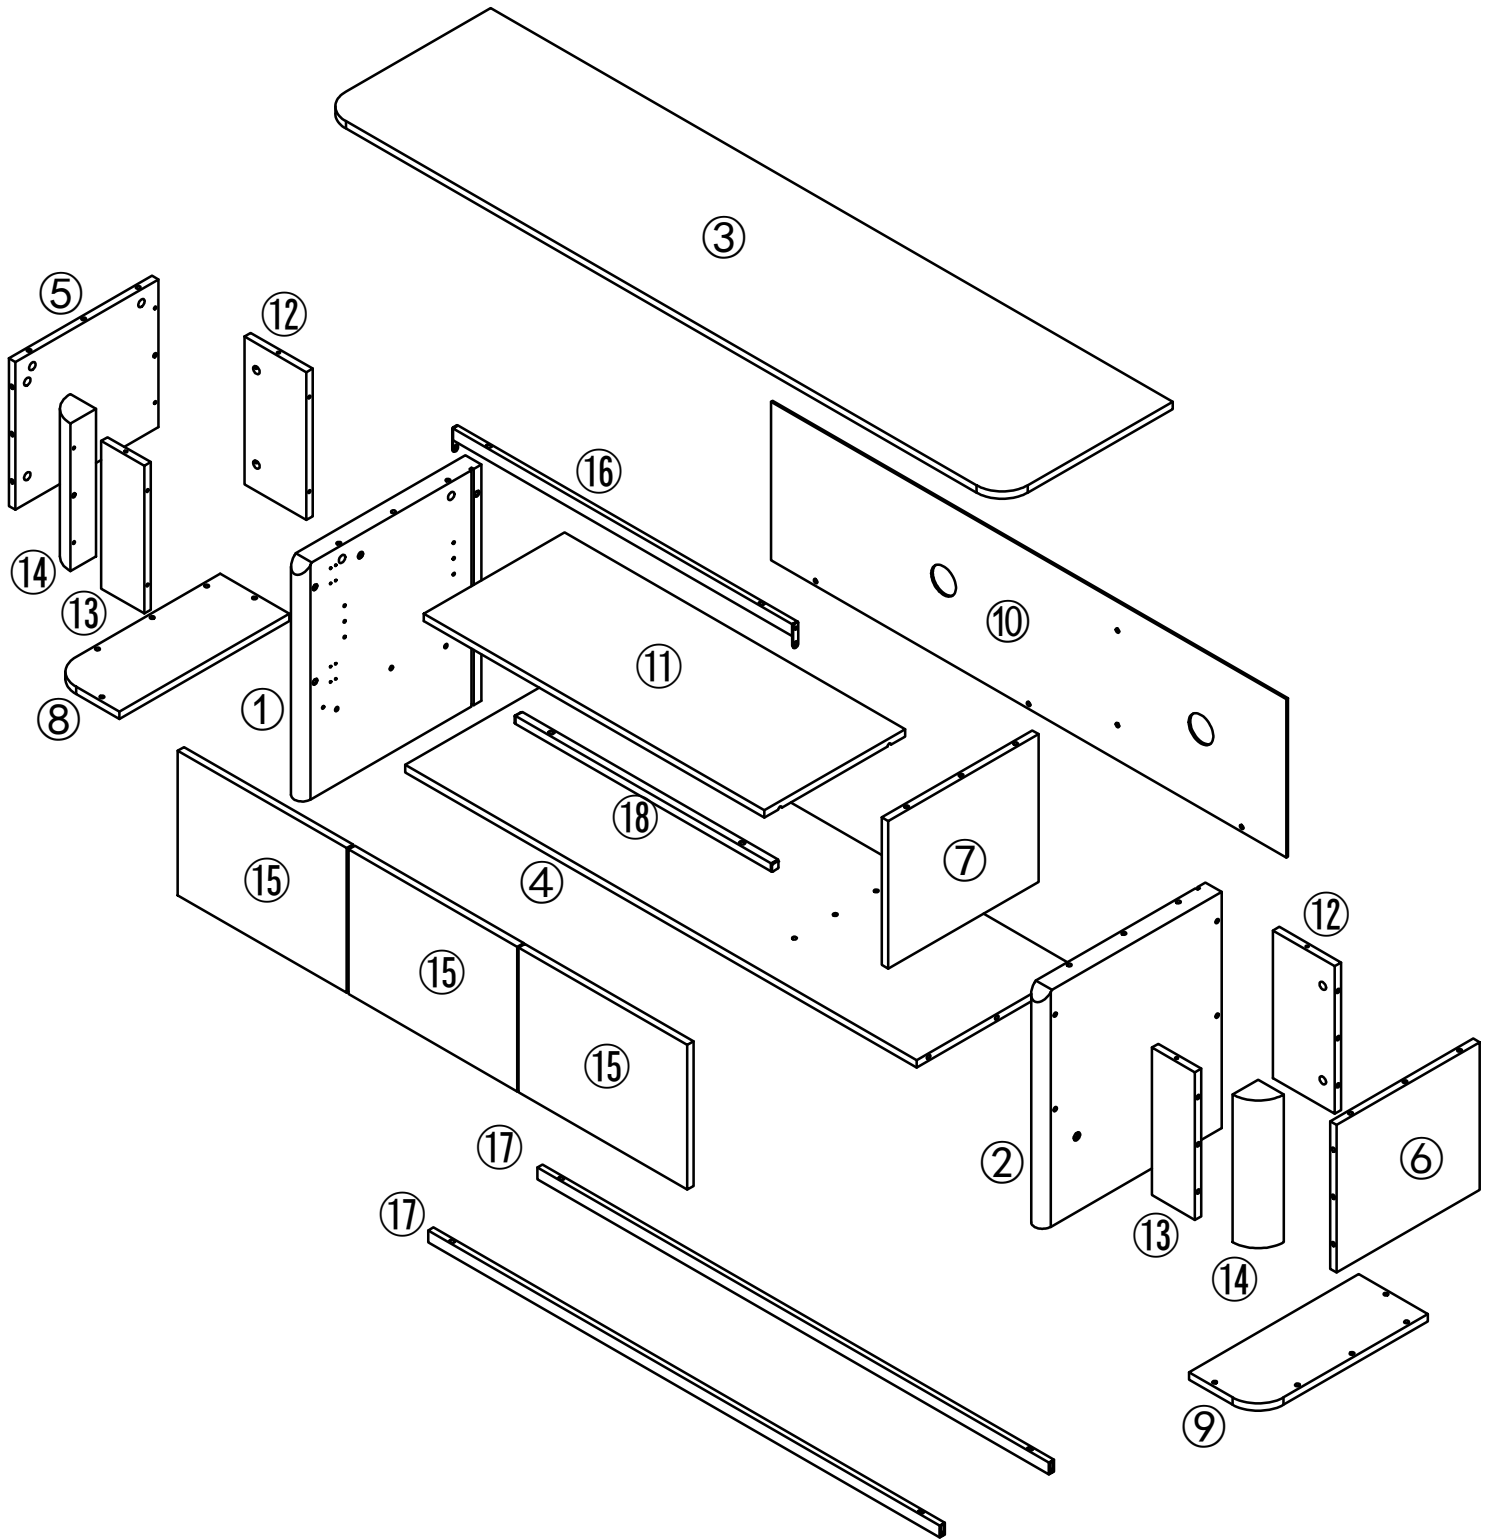

Step 1



Fully tighten 10 pcs cam screw (B) to part (3), fix by using phillips screwdriver (D). Tighten until the shoulder is against the surface of the board.

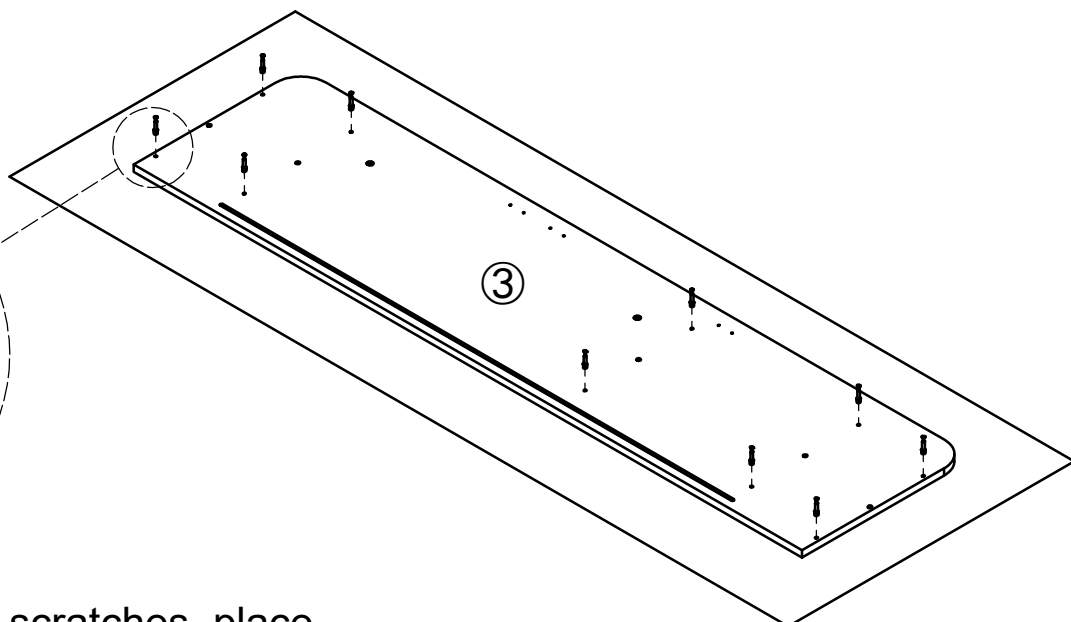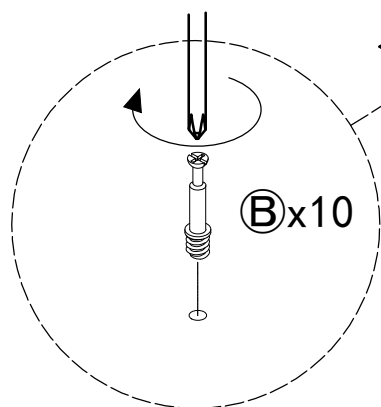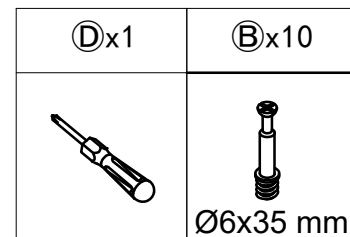

Warning : To avoid scratches, place the panels on a clean and soft surface.




Step 2

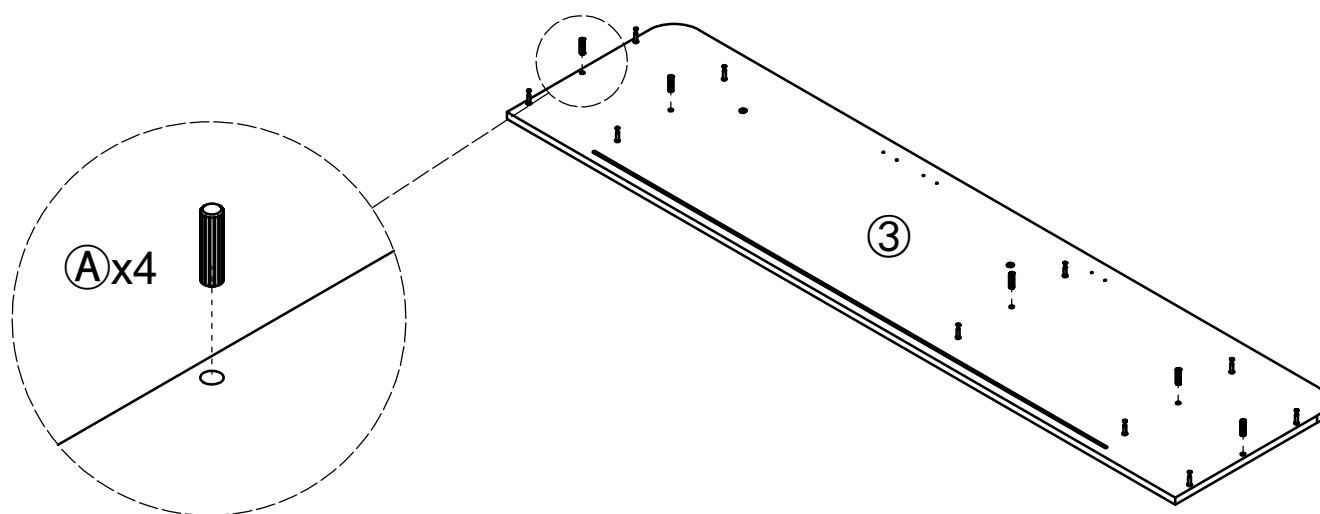
Insert 5 pcs wood dowel (A) to part (3).



Step 3




Attached 3 pcs push latch (M) to the 6 partially pre-drilled holes of part (3), fully tighten by using 6 pcs self tapping screw (F) and phillips screwdriver (D).



(D)x1	(F)x6
	 3.5x14 mm
	(M)x3
	

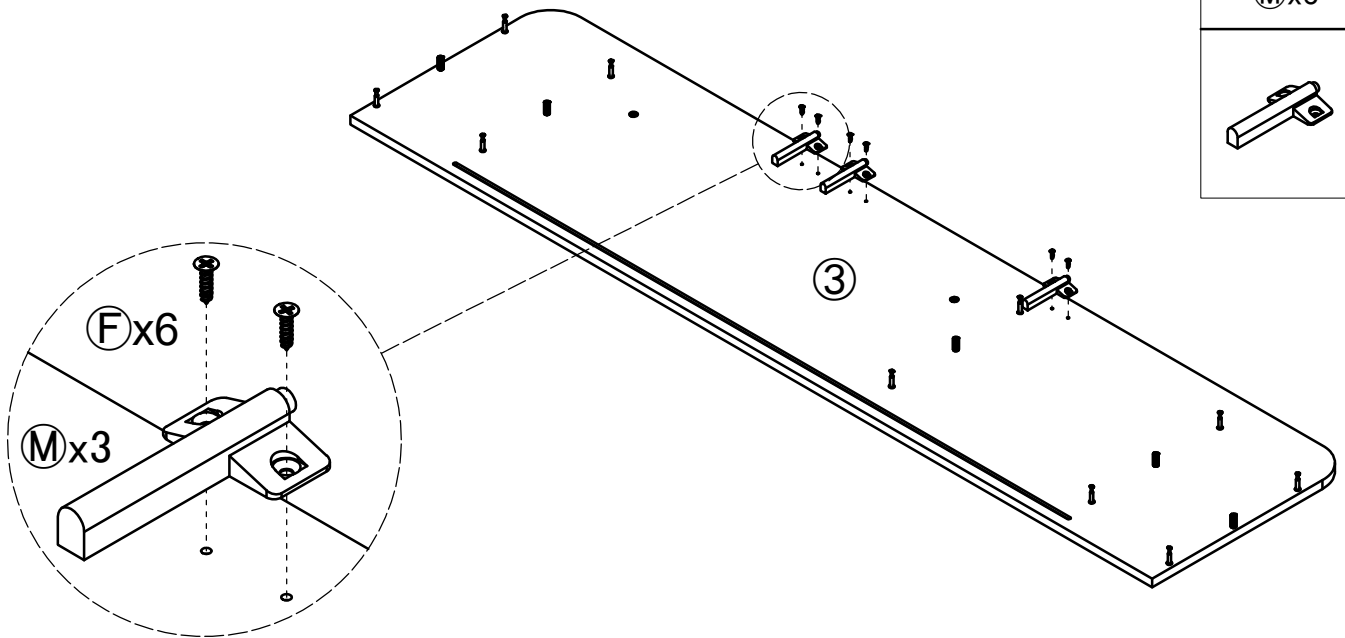

Step 4



Fully tighten 8 pcs cam screw (B) to 2 pcs part (14), fix by using phillips screwdriver (D). Tighten until the shoulder is against the surface of the board. Then insert 4 pcs wood dowel (A) to 2 pcs part (14).

(A)x4	(B)x8
 Ø8x30 mm	 Ø6x35 mm
	(D)x1
	

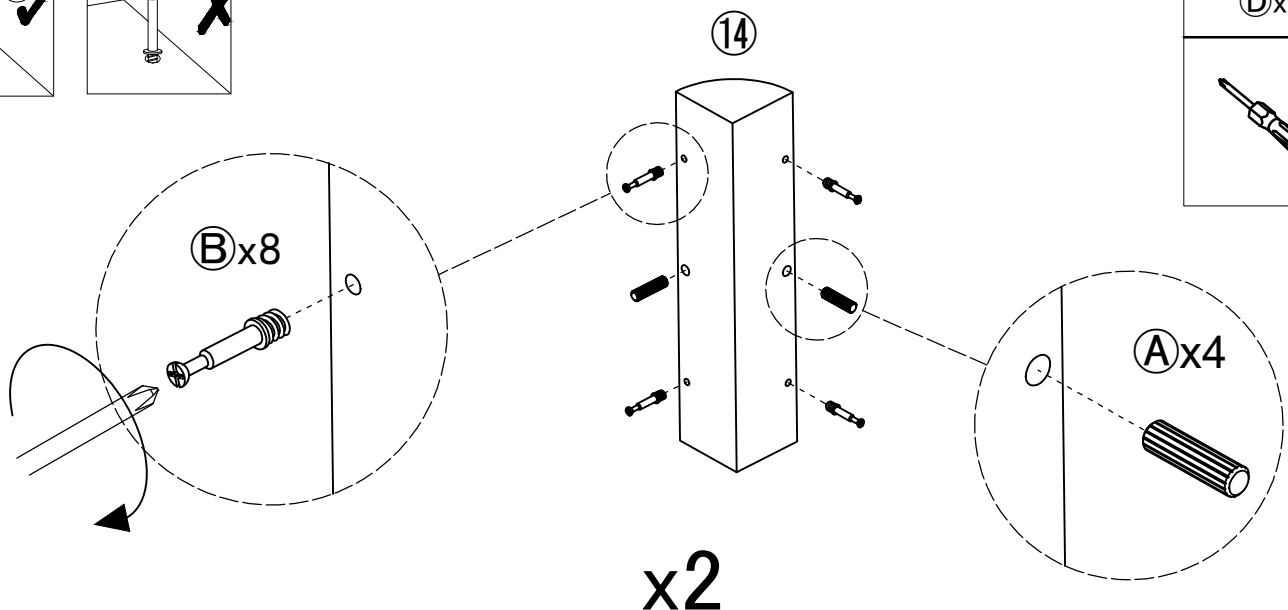


Step 5

Insert 2 pcs part ⑬ into 2 pcs part ⑭. Push 4 pcs hidden cam ① into the part ⑬, the ARROW in the hidden cam ① must point to cam screw ② before inserting to the hidden cam holes. Then tighten hidden cam ① by using phillips screwdriver ④.


①x4	④x1
 Ø15x10 mm	




x2

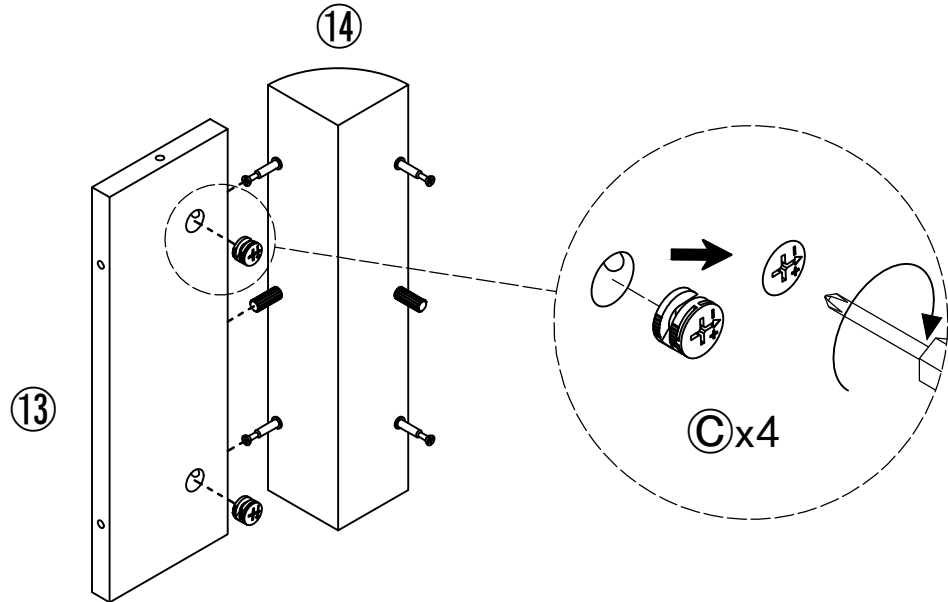


Step 6

Fully tighten 4 pcs cam screw ② to part ⑤ and part ⑥, fix by using phillips screwdriver ④. Tighten until the shoulder is against the surface of the board. Then insert 2 pcs wood dowel ① to part ⑤ and part ⑥.






①x2	②x4
 Ø8x30 mm	 Ø6x35 mm
	④x1
	

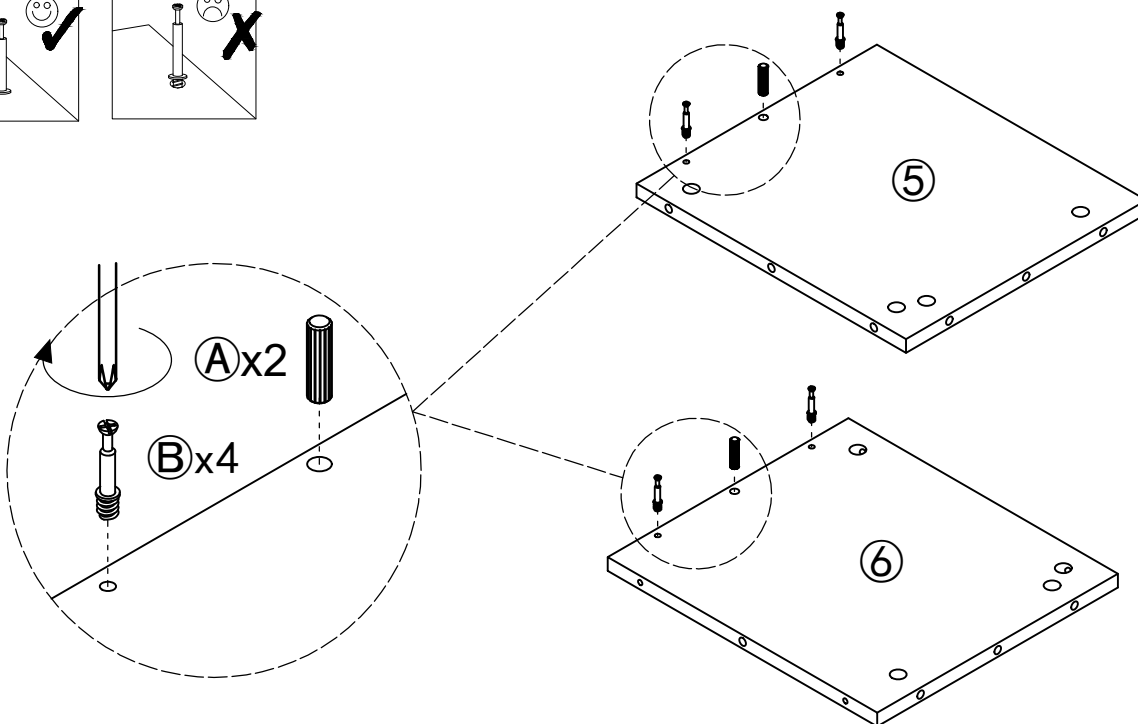

Step 7



Insert 2 pcs part ⑫ into part ⑤ and part ⑥. Push 4 pcs hidden cam ③ into the 2 pcs part ⑫, the ARROW in the hidden cam ③ must point to cam screw ② before inserting to the hidden cam holes. Then tighten hidden cam ③ by using phillips screwdriver ④.


③x4	④x1
 Ø15x10 mm	

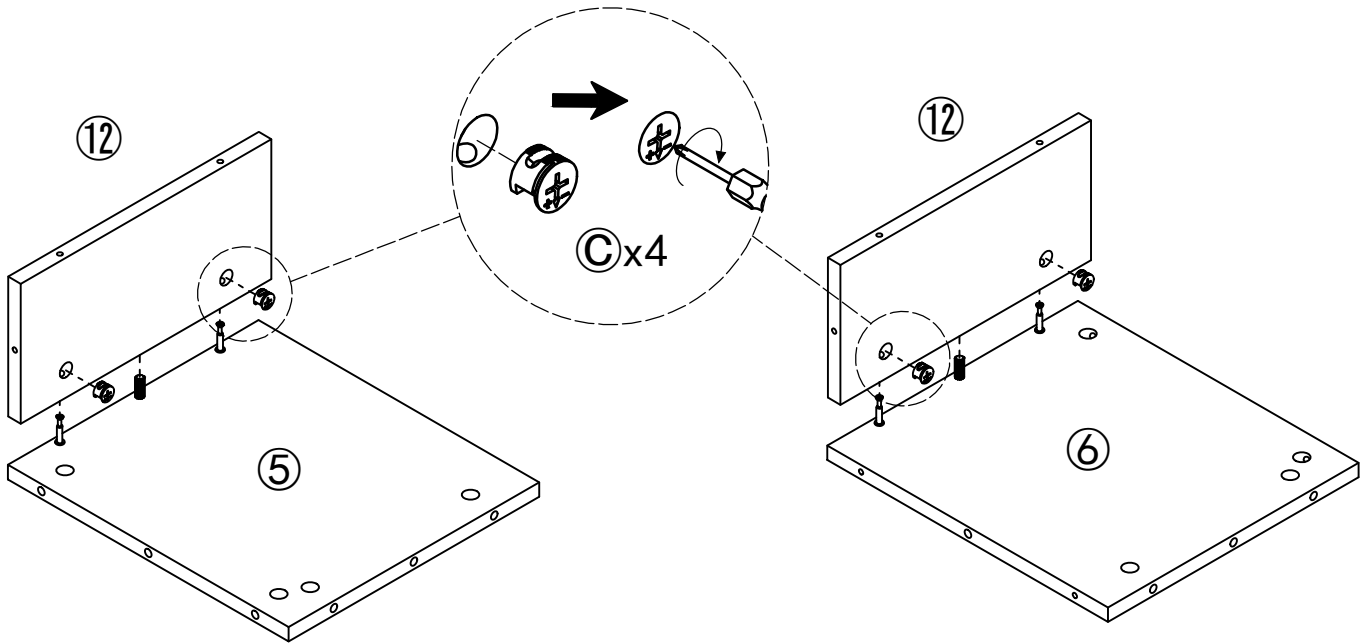

Step 8



Insert part ⑤ and part ⑥ into 2 pcs part ⑭. Push 4 pcs hidden cam ③ into the part ⑤ and part ⑥, the ARROW in the hidden cam ③ must point to cam screw ② before inserting to the hidden cam holes. Then tighten hidden cam ③ by using phillips screwdriver ④.


③x4	④x1
 Ø15x10 mm	

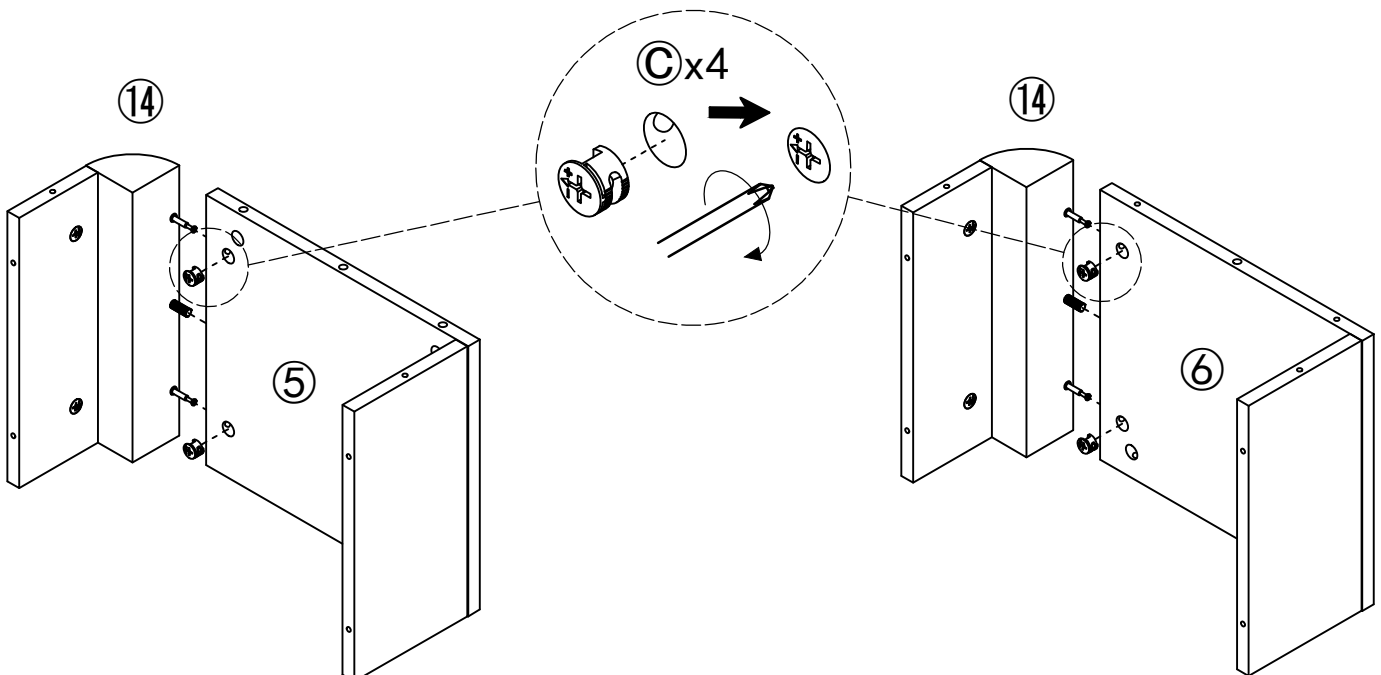

Step 9



Insert part ⑥ into part ③. Push 2 pcs hidden cam ① into the part ⑥, the ARROW in the hidden cam ① must point to cam screw ② before inserting to the hidden cam holes. Then tighten hidden cam ① by using phillips screwdriver ④.


①x2	④x1
 Ø15x10 mm	

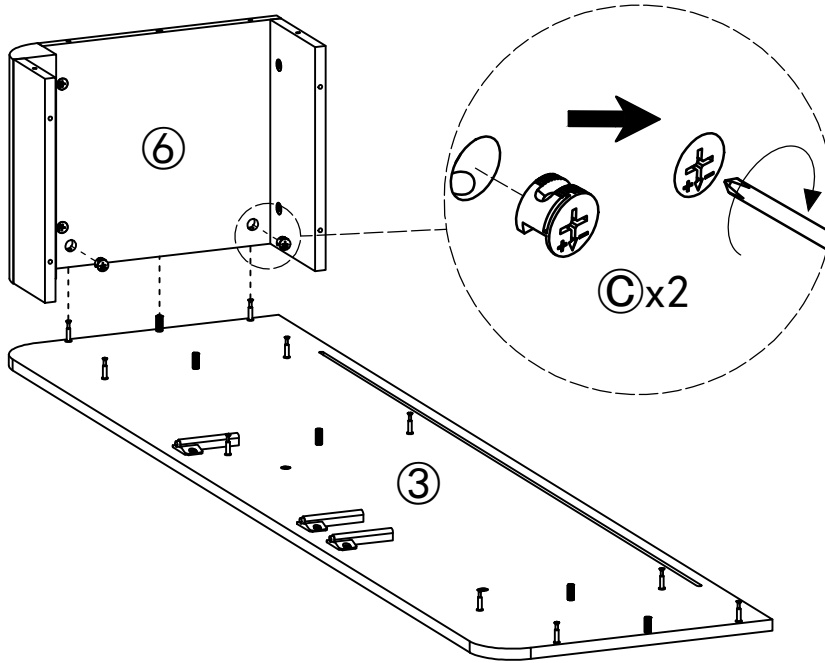

Step 10




Insert part ⑤ into part ③. Push 2 pcs hidden cam ① into the part ⑤, the ARROW in the hidden cam ① must point to cam screw ② before inserting to the hidden cam holes. Then tighten hidden cam ① by using phillips screwdriver ④.


①x2	④x1
 Ø15x10 mm	

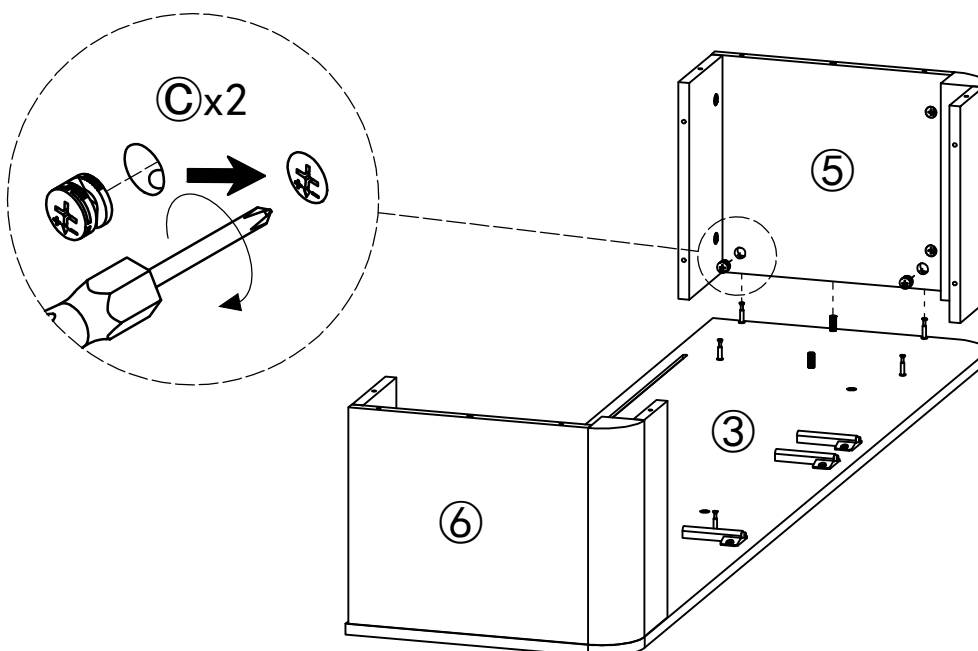

Step 11

Insert 2 pcs wood dowel (A) to part (5) and part (6). Then attached part (8) to part (5), attached part (9) to part (6). Fix part (8&9) to part (5&6) by using 8 pcs hex head self tapping screw (H) and allen key (E). DO NOT TIGHTEN COMPLETELY AT THE BEGINNING. After every screws are in place, then fully tighten all the screws.



(A)x2	(E)x1
 Ø8x30 mm	
	(H)x8
	 7x40 mm

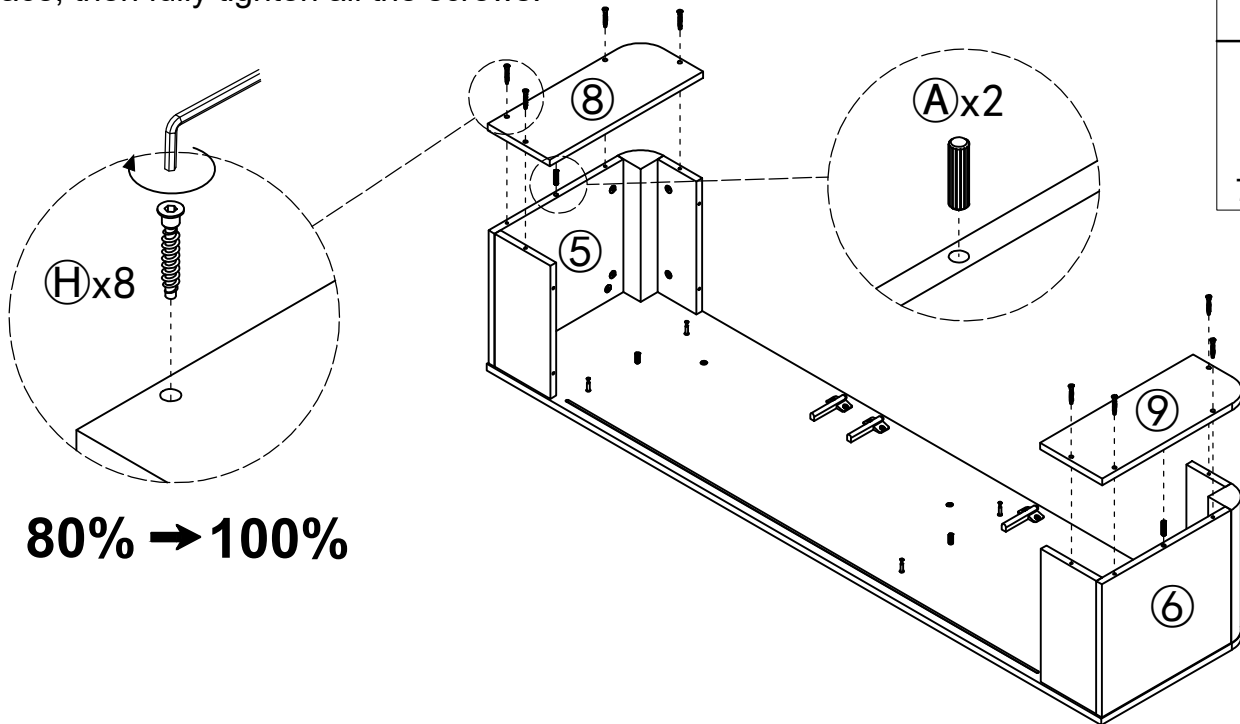


80% → 100%

Step 12



Fix part (16) to part (3) by using 2 pcs allen bolt (Q) and allen key (E). There are four types of bolts with different lengths, and the length of allen bolt (Q) is the second longest, be careful not to use the wrong bolt. DO NOT TIGHTEN COMPLETELY. Stop when you feel you are adding force to tighten the bolt.


(E)x1	(Q)x2
	 M6x35 mm

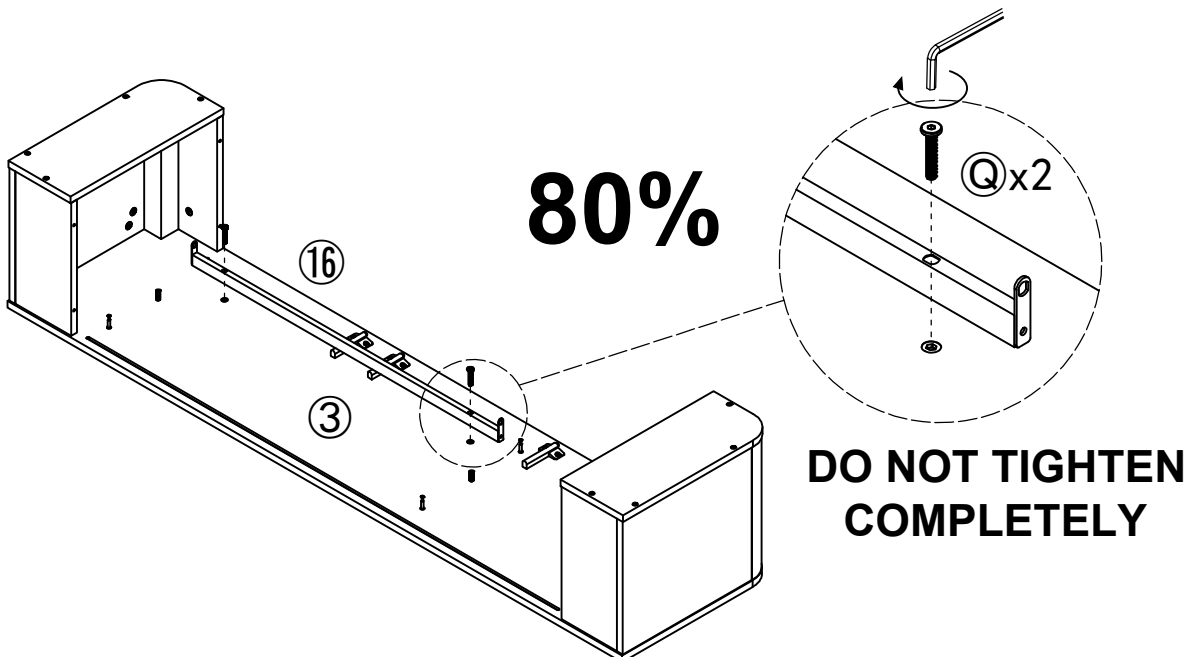

Step 13



Insert part ⑦ into part ③. Push 2 pcs hidden cam ③ into the part ⑦, the ARROW in the hidden cam ③ must point to cam screw ③ before inserting to the hidden cam holes. Then tighten hidden cam ③ by using phillips screwdriver ④.


③x2	④x1
 Ø15x10 mm	

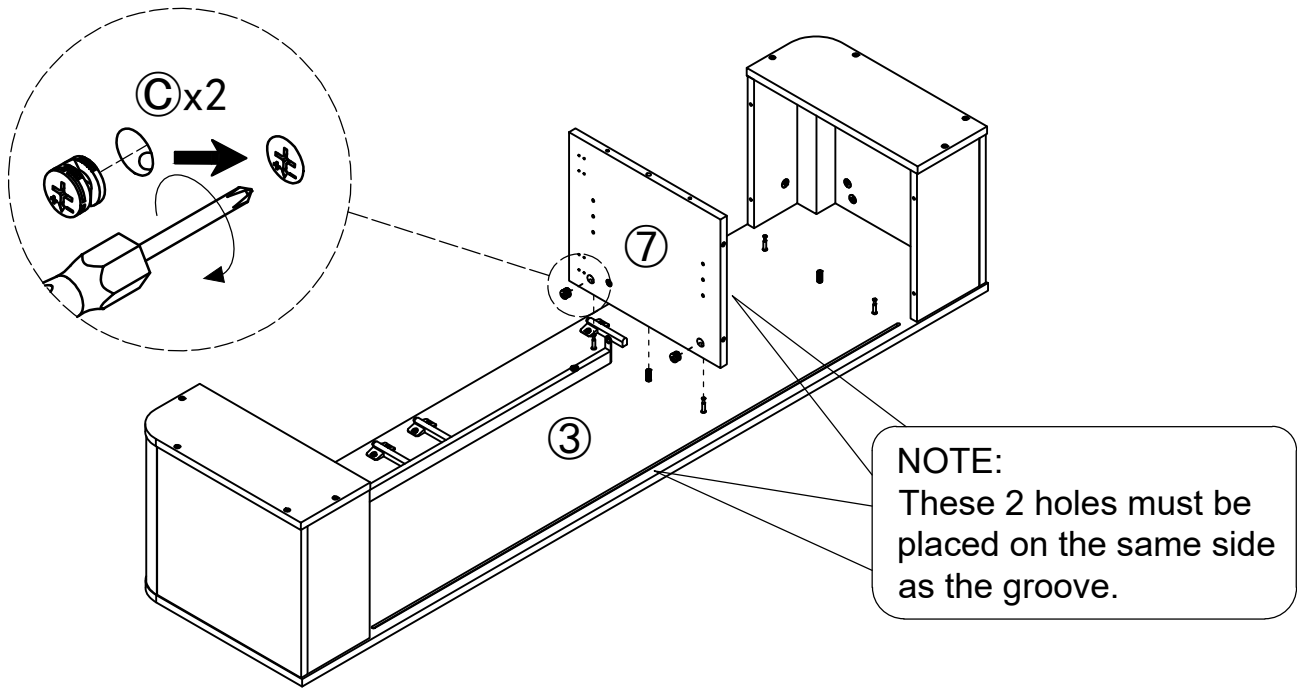

Step 14


Fix 2 pcs part ①⑦ to part ④ by using 4 pcs allen bolt ② and allen key ③. There are four types of bolts with different lengths, and the length of allen bolt ② is the second longest, be careful not to use the wrong bolt. **DO NOT TIGHTEN COMPLETELY.** Stop when you feel you are adding force to tighten the bolt.




③x1	②x4
	 M6x35 mm

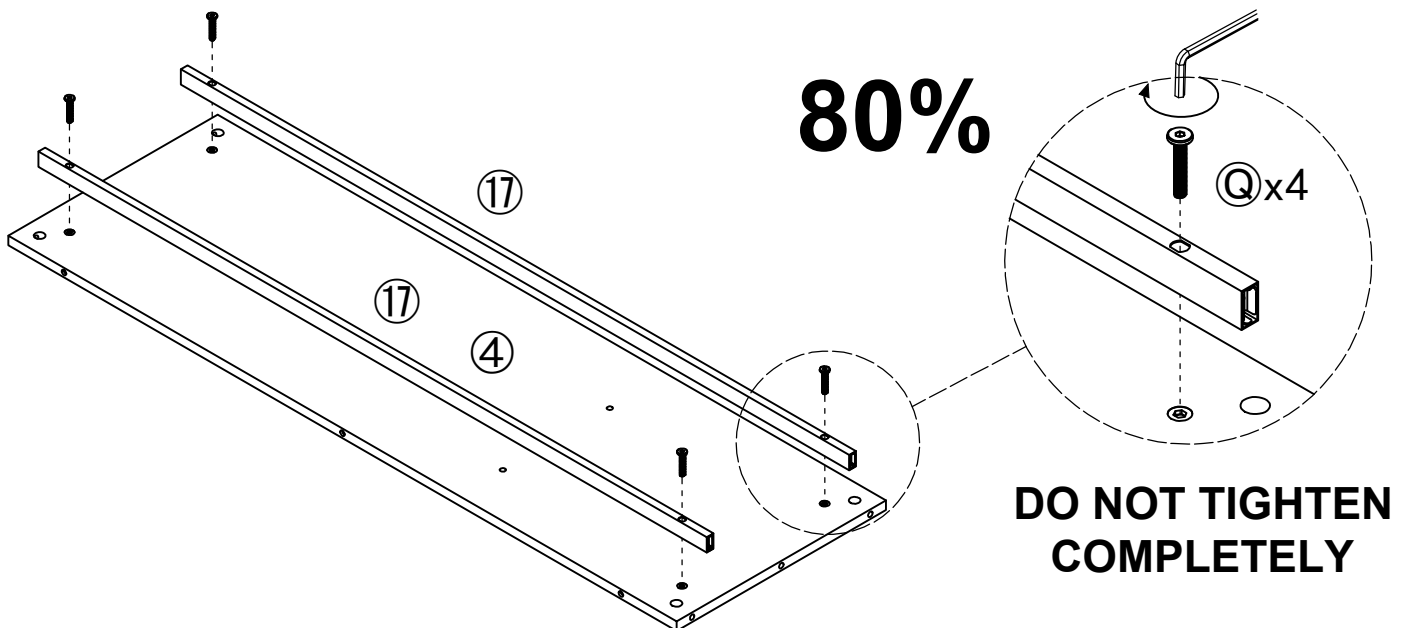


Step 15

Fully tighten 4 pcs cam screw **(B)** to part **(1)** and part **(2)**, fix by using phillips screwdriver **(D)**. Tighten until the shoulder is against the surface of the board. Then insert 2 pcs wood dowel **(A)** to part **(1)** and part **(2)**.






(A)x2	(B)x4
	
Ø8x30 mm	Ø6x35 mm
	(D)x1
	

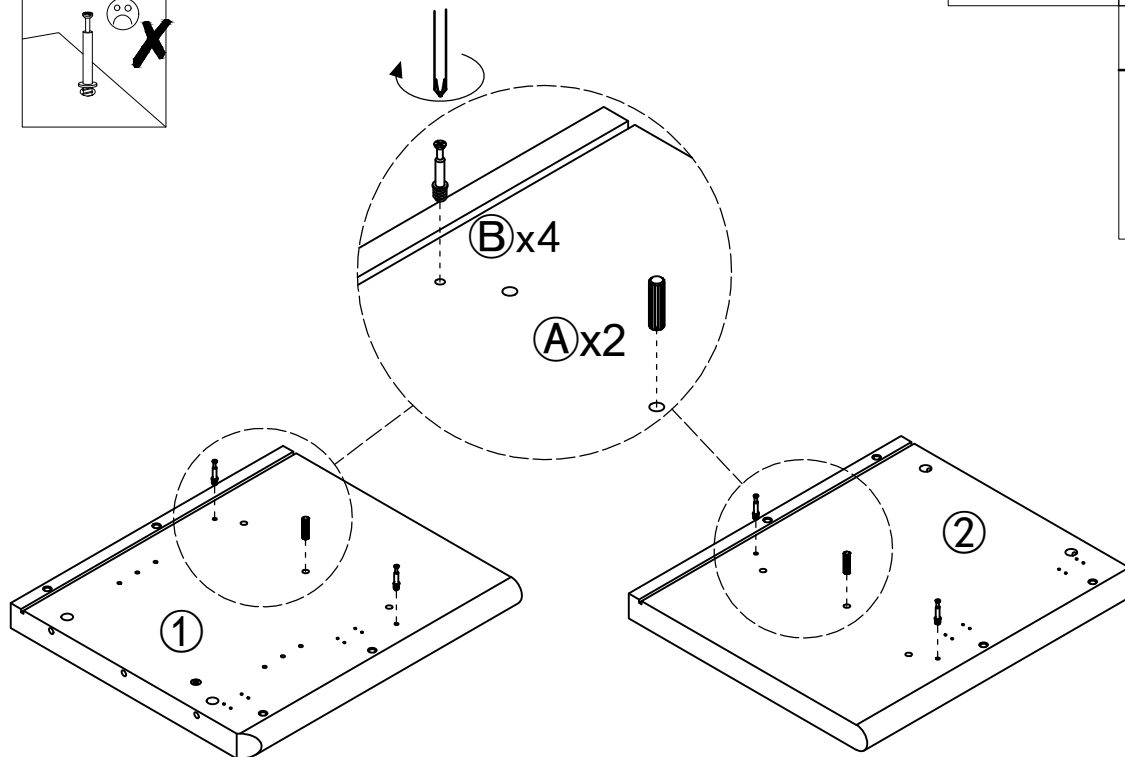

Step 16



Attached part **(1)** and part **(2)** to part **(4)**. Fix part **(1)** and part **(2)** to 2 pcs **(17)** by using 4 pcs allen bolt **(R)** and allen key **(E)**. **DO NOT TIGHTEN COMPLETELY**. Stop when you feel you are adding force to tighten the bolt.

(E)x1	(R)x4
	
	M6x60 mm

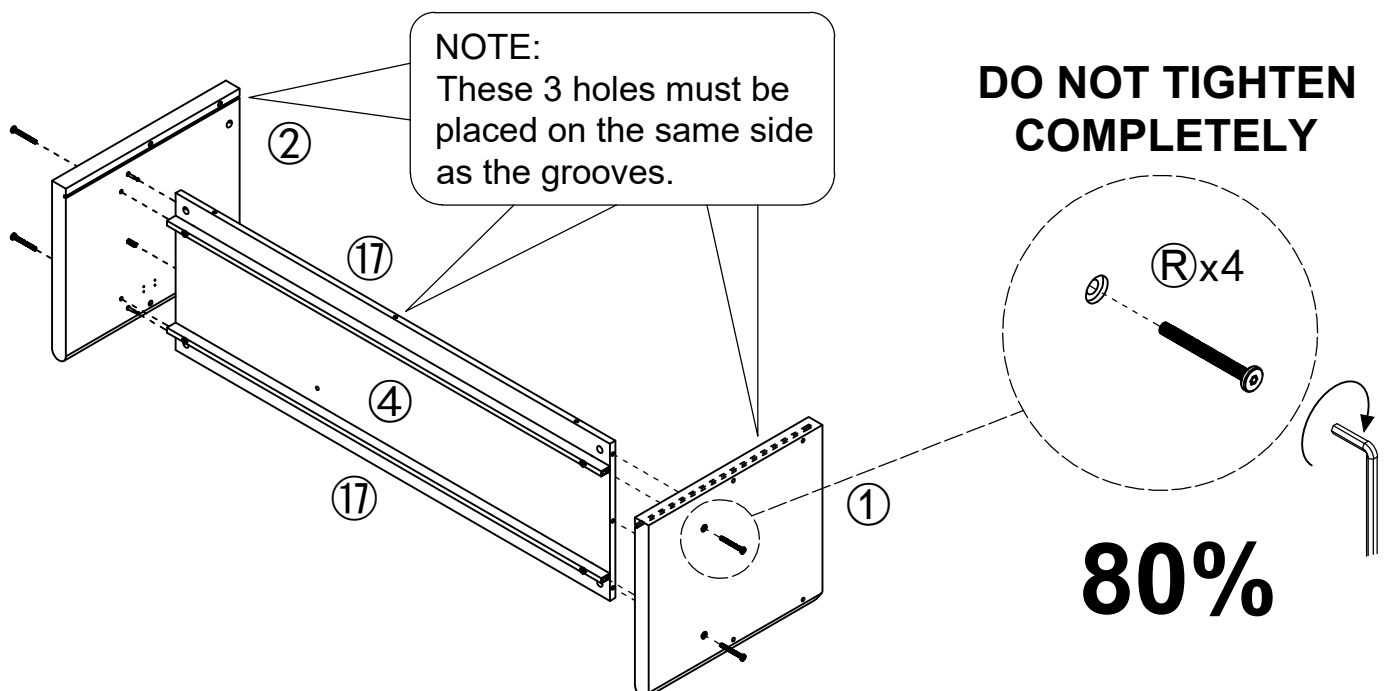


Step 17

Push 4 pcs hidden cam **C** into the part **4**, the ARROW in the hidden cam **C** must point to cam screw **B** before inserting to the hidden cam holes. Then tighten hidden cam **C** by using phillips screwdriver **D**. After every parts are in place, then fully tighten all the bolts **Q**&**R**.

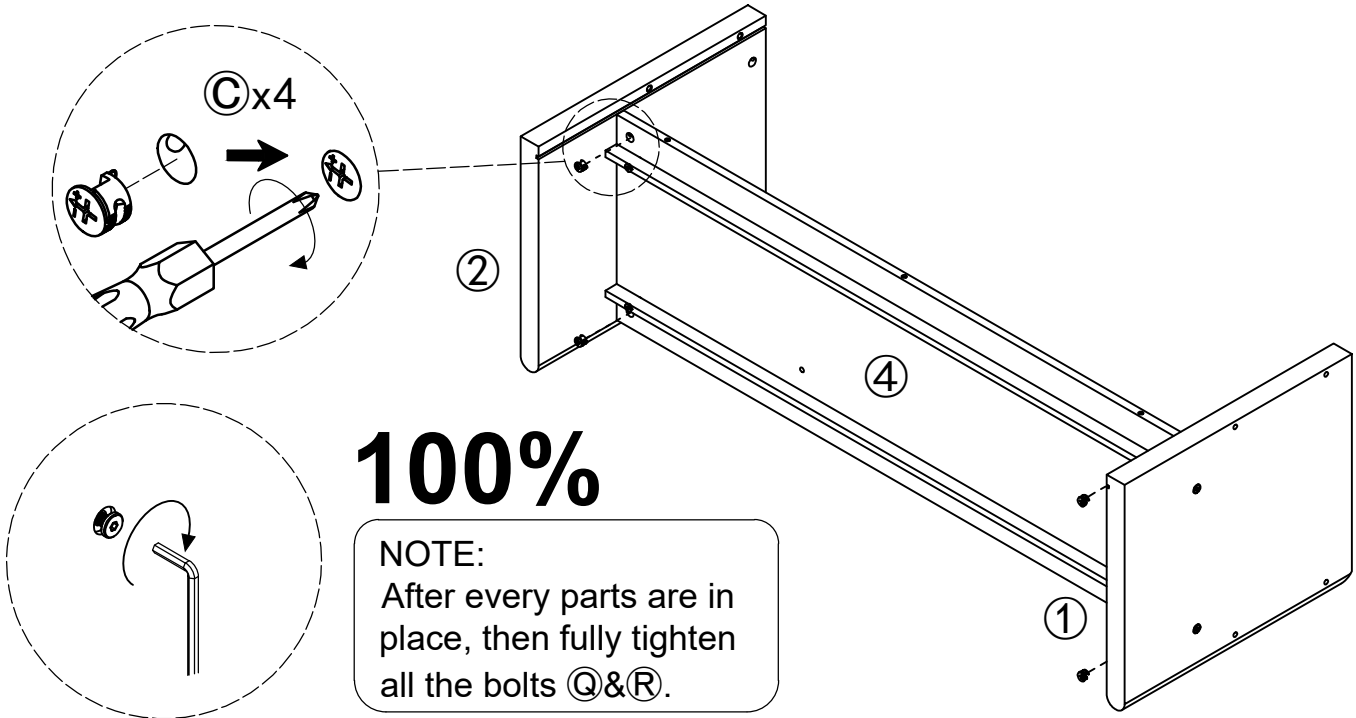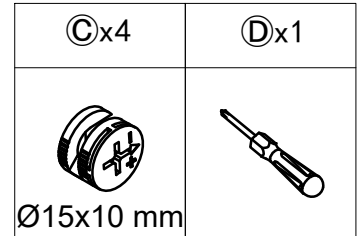


Step 18

Insert 1 pc wood dowel **A** to part **7**. Then insert part **1**&**2**&**4** into part **3**&**7**.



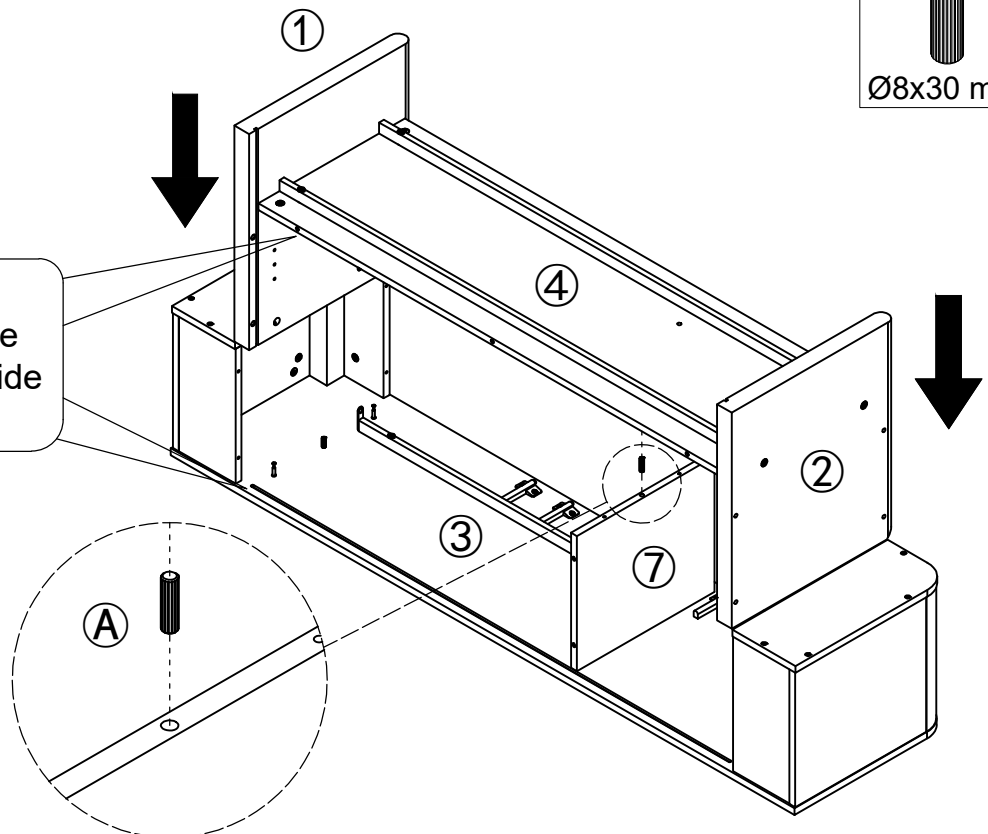


NOTE:
These 3 holes must be placed on the same side as the groove.



Step 19



Fix part ④ to part ⑦ by using 2 pcs hex head self tapping screw ① and allen key ②.

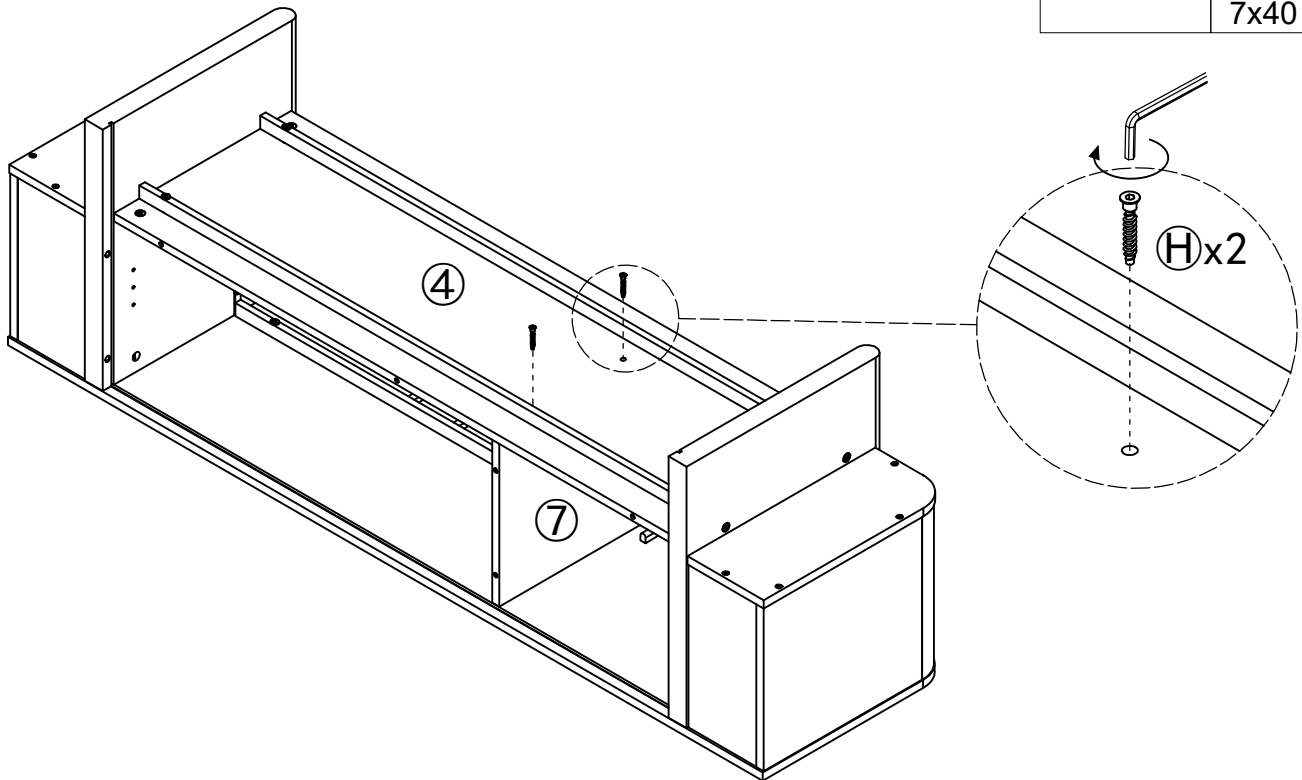②x1	①x2
	
	7x40 mm




Step 20

Fix part ① and part ② to part ⑫&⑬ by using 8 pcs hex head self tapping screw ③ and allen key ②. DO NOT TIGHTEN COMPLETELY AT THE BEGINNING. After every screws are in place, then fully tighten all the screws.



②x1	③x8
	
	7x60 mm


80% → 100%

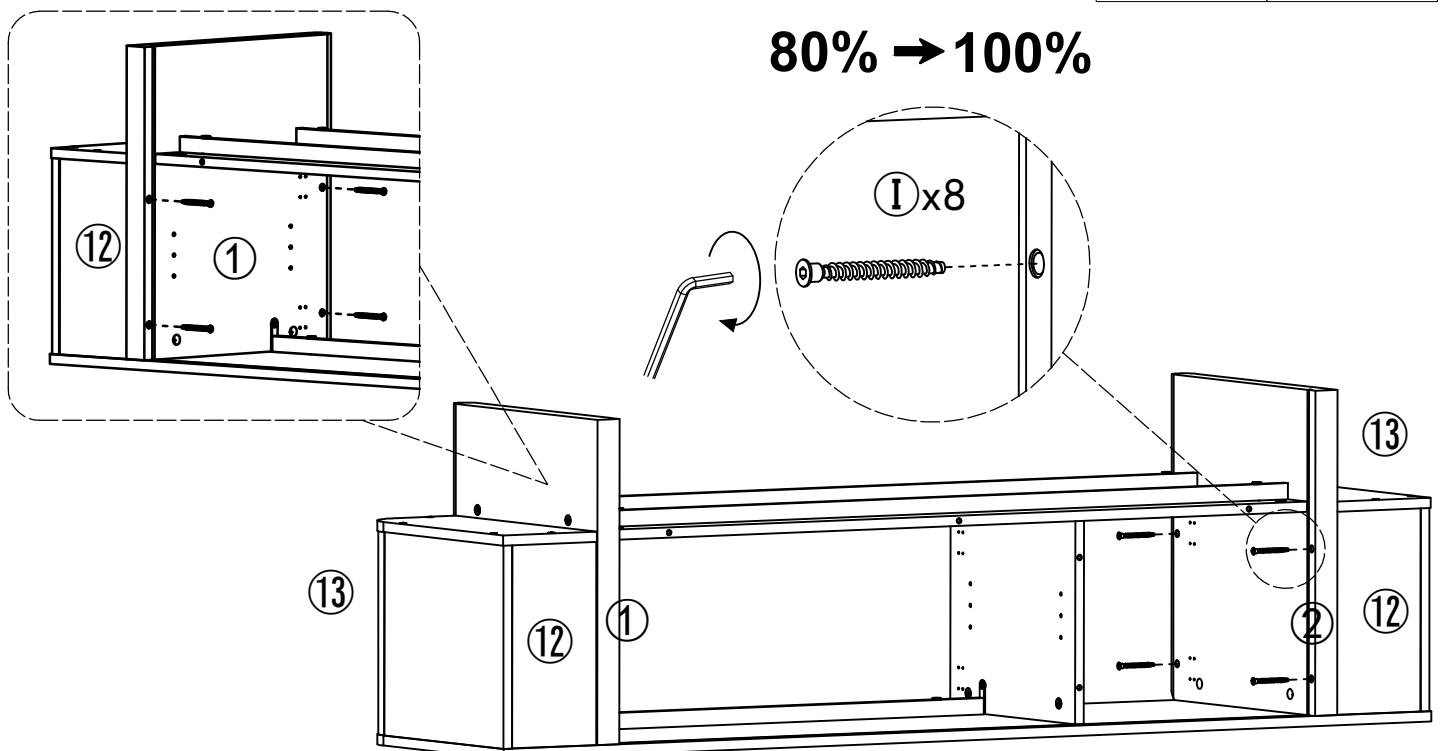

Step 21



Fix part ⑩ to part ① and part ⑦ by using 2 pcs allen bolt ② and allen key (E). There are four types of bolts with different lengths, and the length of allen bolt ② is the shortest, be careful not to use the wrong bolt. After every bolts are in place, then fully tighten all the bolts ②&③.


②x1	③x2
	
	M6x12 mm

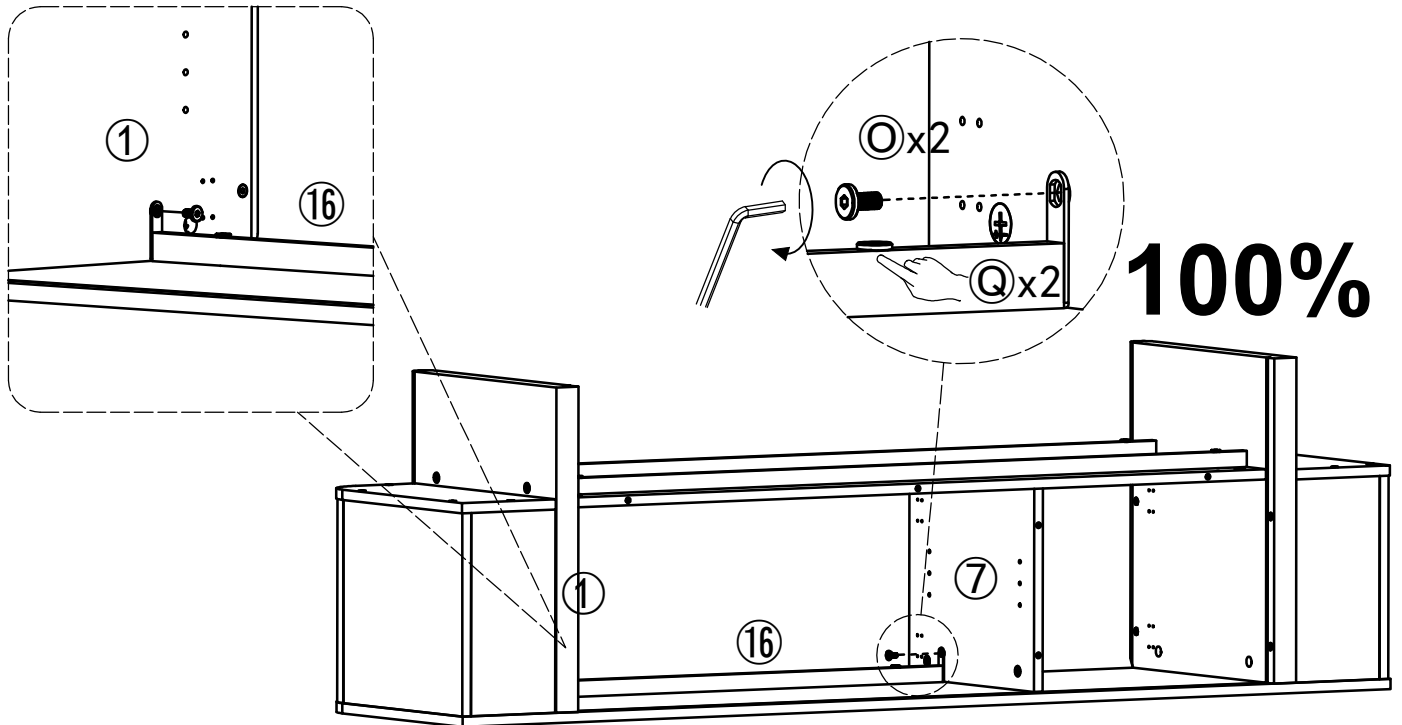

Step 22


Push 4 pcs hidden cam ④ into the part ① and part ②, the ARROW in the hidden cam ④ must point to cam screw ⑤ before inserting to the hidden cam holes. Then tighten hidden cam ④ by using phillips screwdriver ⑥.

④x4	⑥x1
	
Ø15x10 mm	

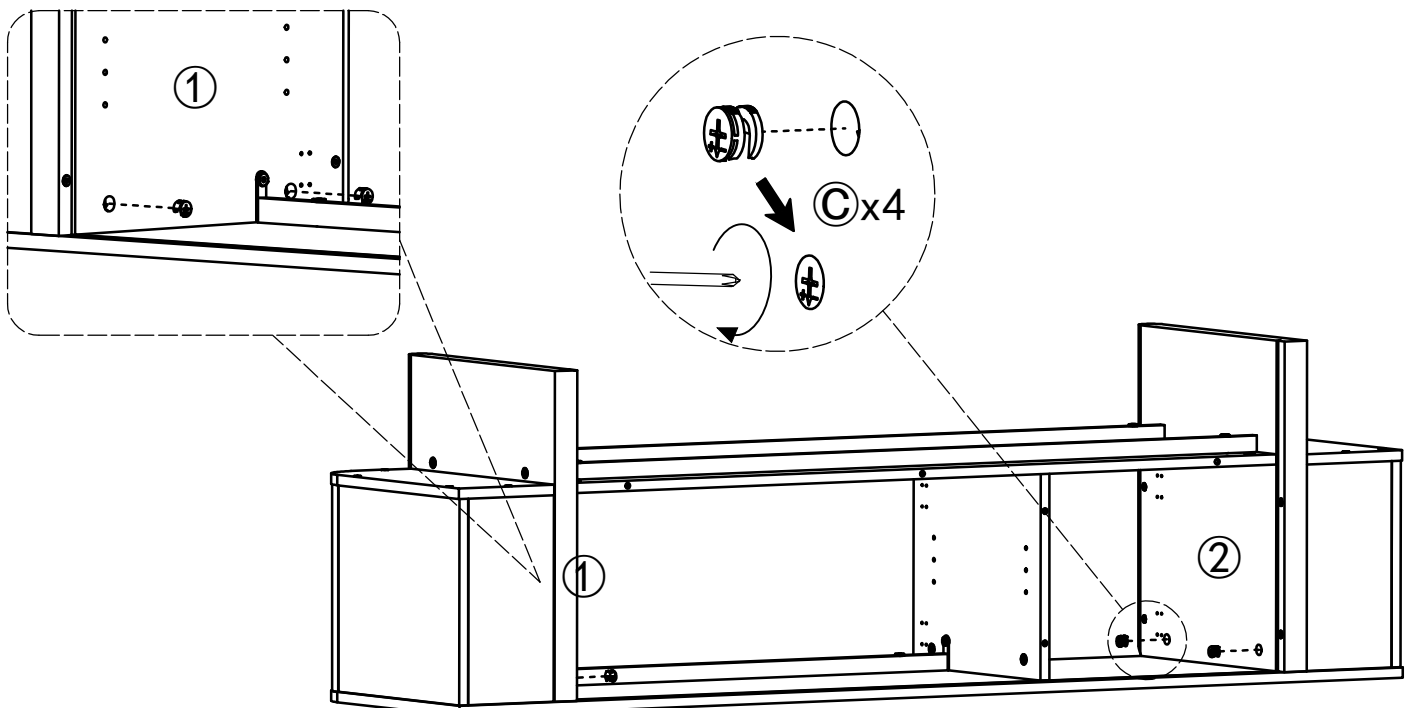

Step 23



Please insert part ⑩ among part ①&② according to the diagram below.

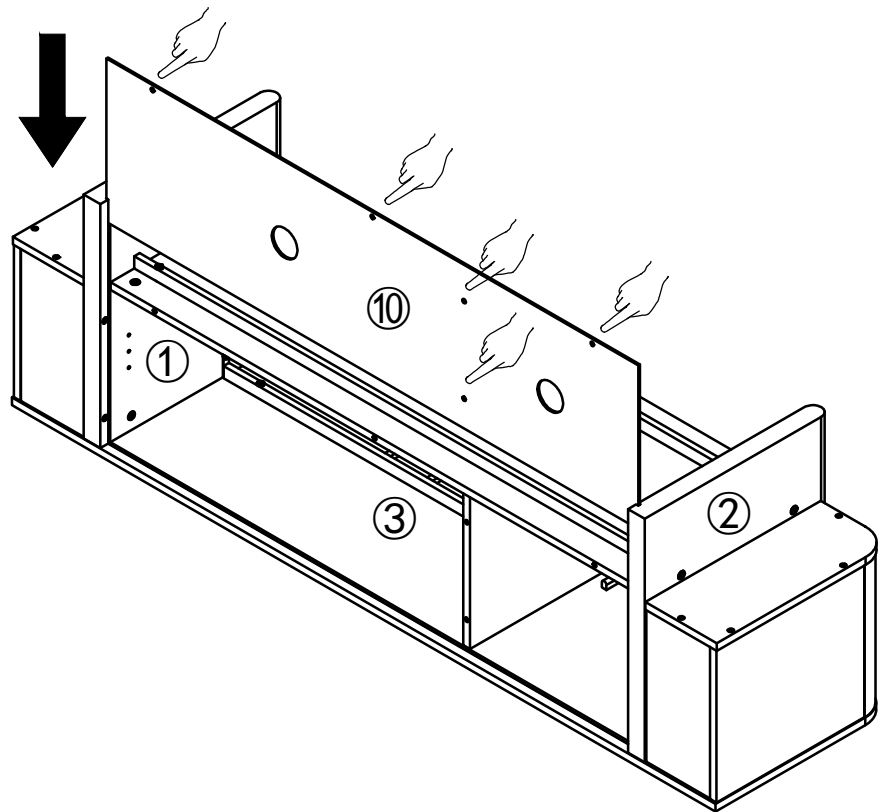

NOTE:
These holes must be placed as shown in the diagram.

Step 24




Fix part ⑩ to part ④ and part ⑦ by using 5 pcs hex head self tapping screw ⑨ and allen key ⑤. DO NOT TIGHTEN COMPLETELY AT THE BEGINNING. After every screws are in place, then fully tighten all the screws.

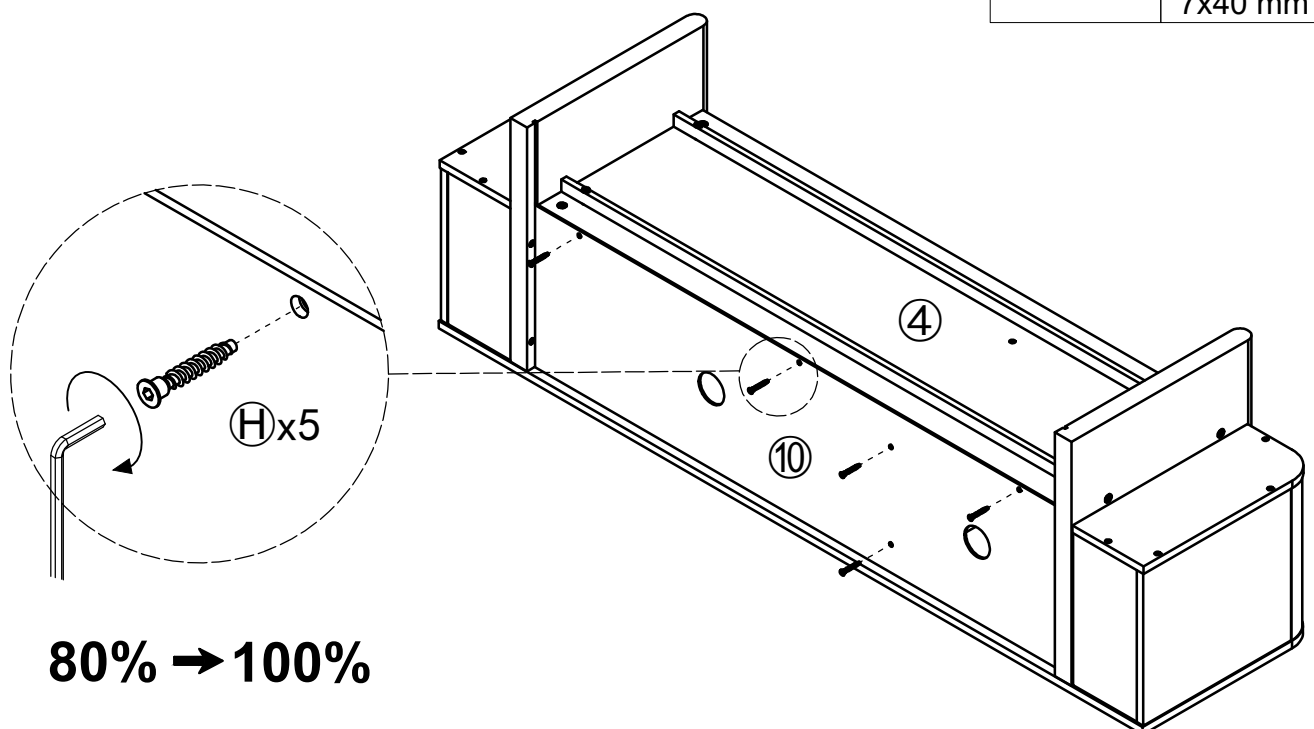
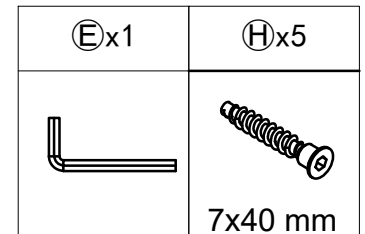


Step 25

ATTENTION PLEASE :Please ensure the structure is straight and level and all panels are at right angles before installing the back buckles, MUST install back buckles to strengthen product stability.




Attached 6 pcs back plate fastener (L) to cabinet, fix by using 6 pcs self tapping screw (G) and phillips screwdriver (D).

(D)x1	(G)x6
	 3x16 mm
	(L)x6
	

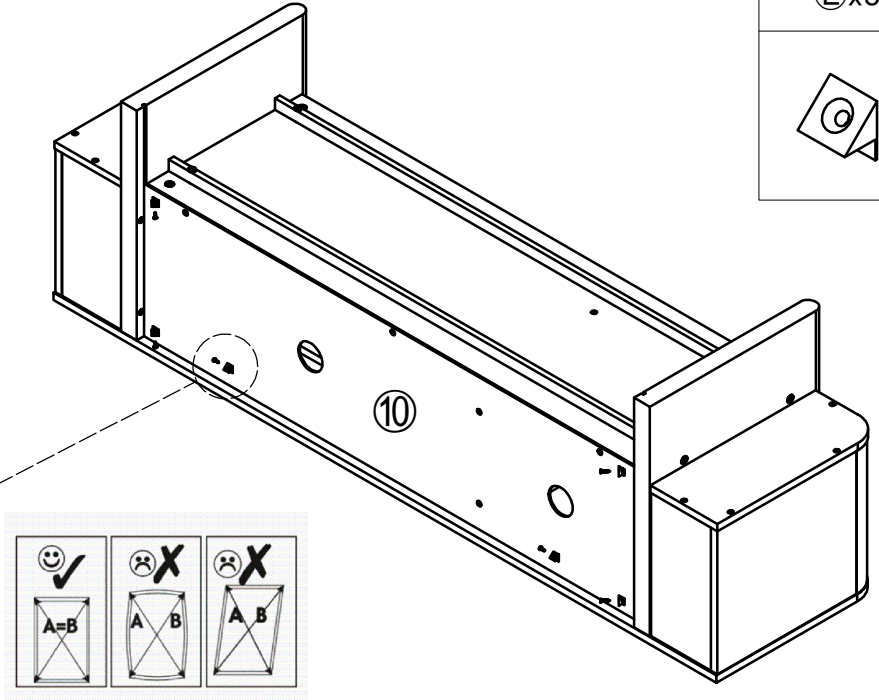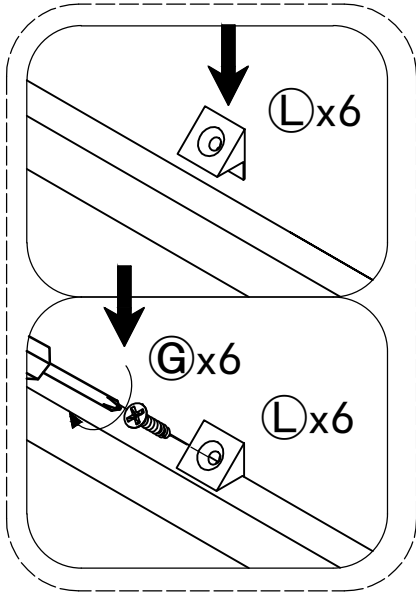


Step 26

Peel off the protective film, Then stick 4 pcs felt pad (W) onto the part ①&②.





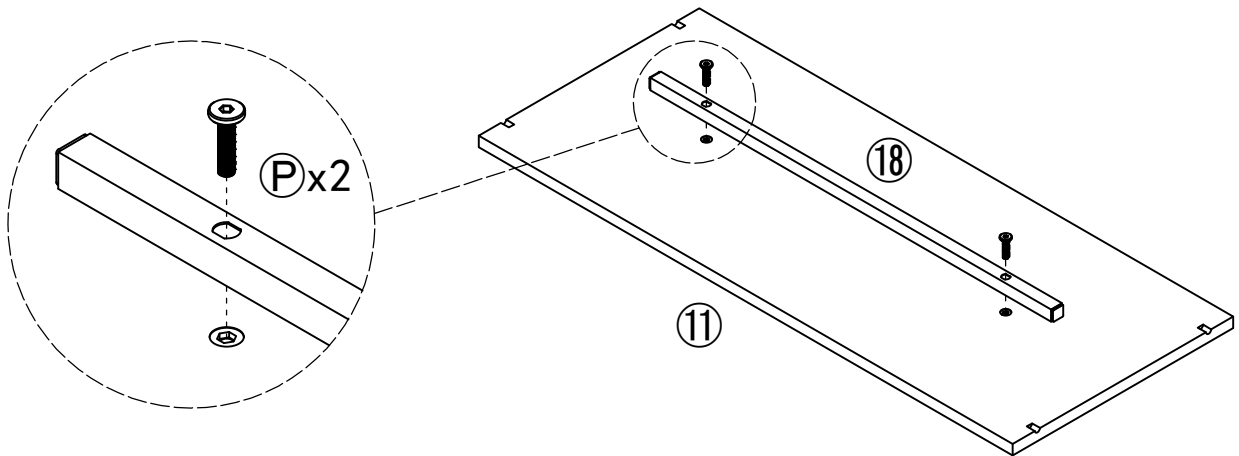
Peel off the protective film.

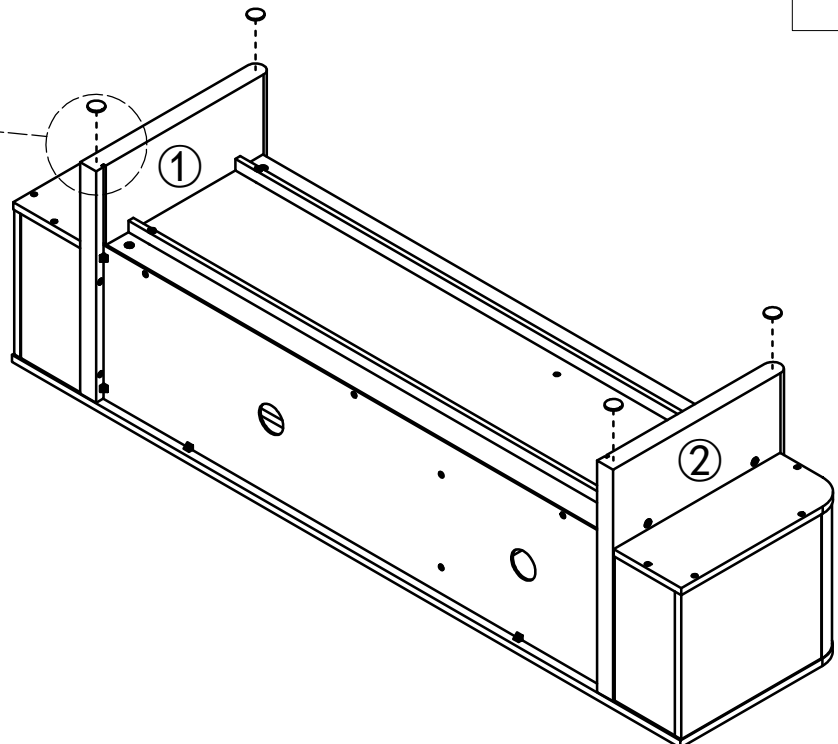

Step 27


Fix part ⑱ to part ⑪ by using 2 pcs allen bolt ⑰ and allen key (E).


Ⓔx1	⑰x2
	
	M6x25 mm



Step 28


Insert 4 pcs shelf pin ⑳ to the part ① and part ⑦.

⑳x4

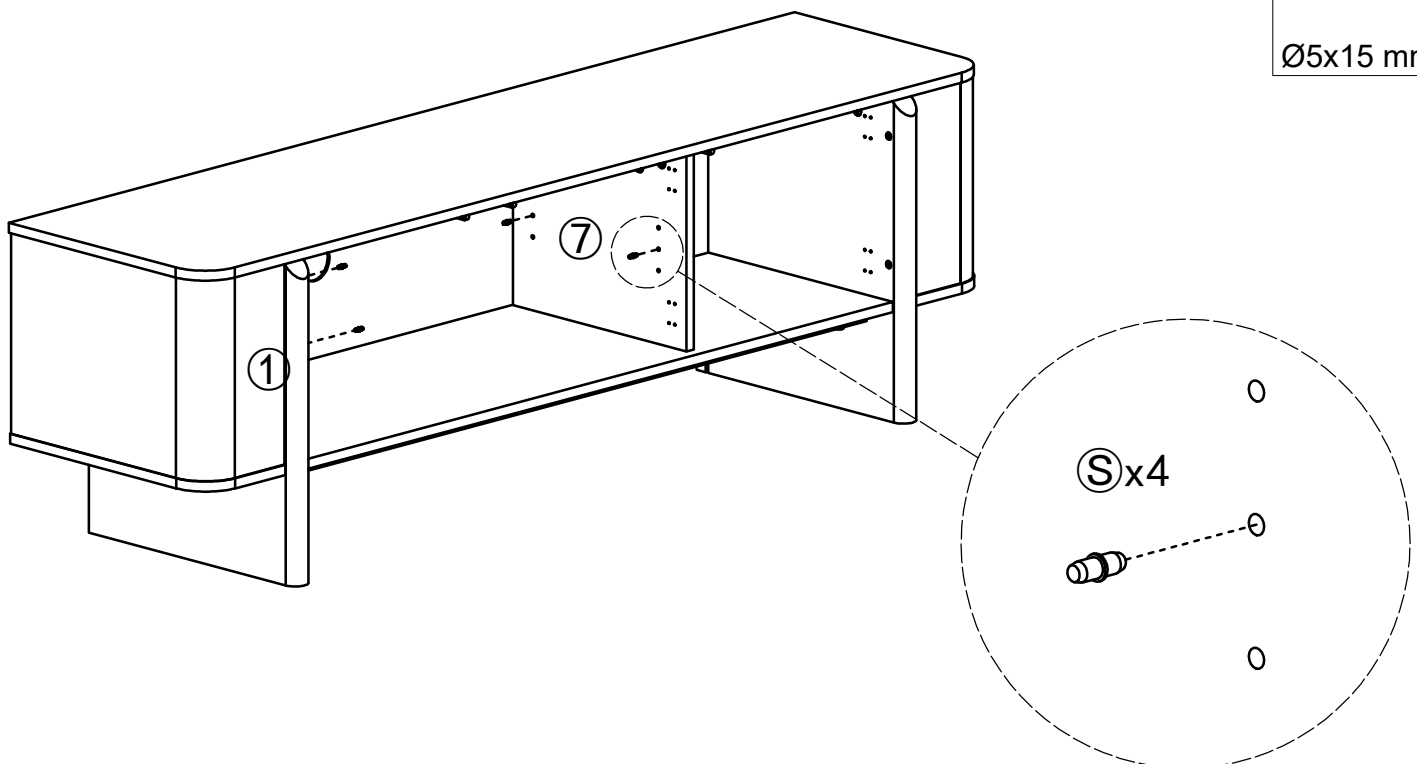Ø5x15 mm




Step 29

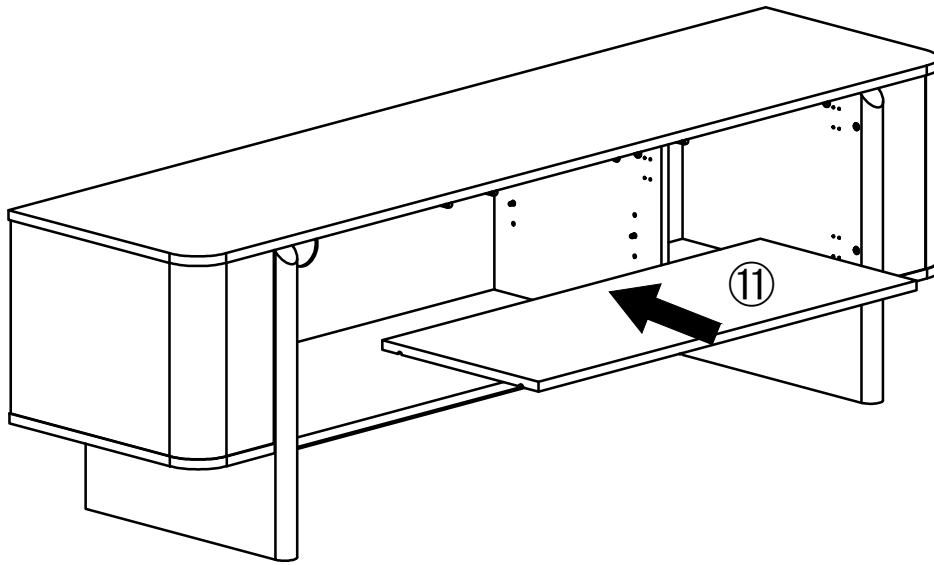


Insert part ⑪ to the assembled frame.



Step 30

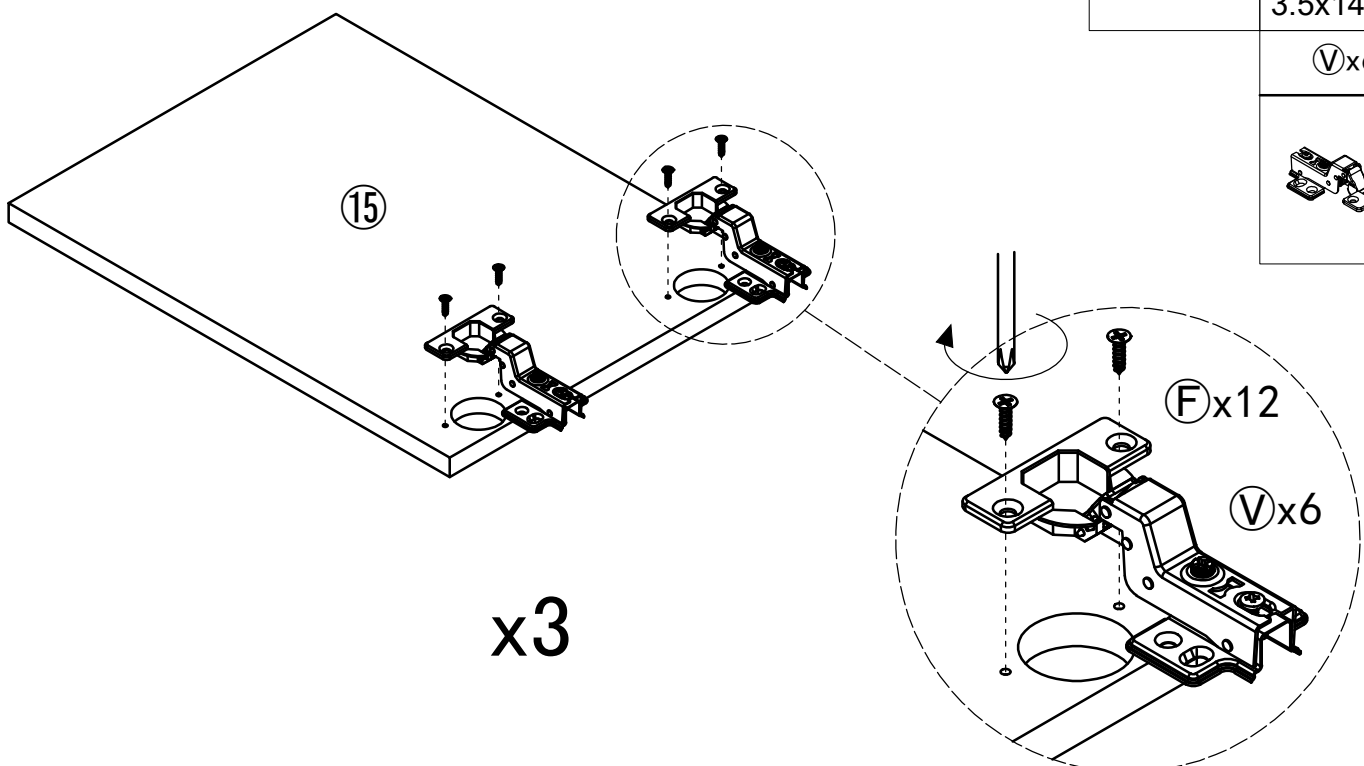

Fully tighten 6 pcs hinge ⑤ to 3 pcs part ⑮, fix by using 12 pcs self tapping screw ⑥ and phillips screwdriver (D).







④x1	⑥x12
	 3.5x14 mm
	⑤x6
	

Step 31


Attached 3 pcs part ⑮ to part ①&②&⑦, fix by using 24 pcs self tapping screw ⑆ and phillips screwdriver (D). DO NOT TIGHTEN COMPLETELY AT THE BEGINNING. ensuring that the gaps between the top and bottom are approximately the same, then FULLY TIGHTEN all self tapping screws ⑆.

①x1	⑆x24
	 3.5x14 mm

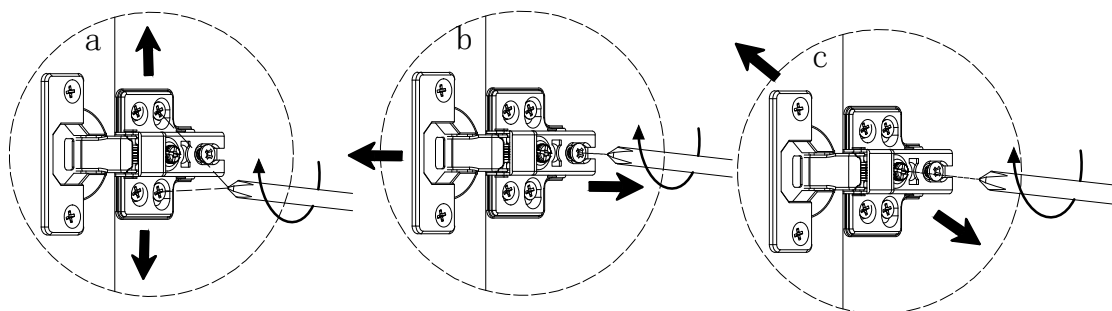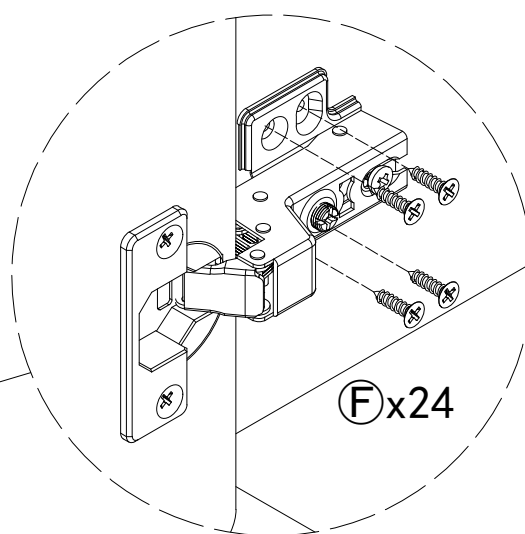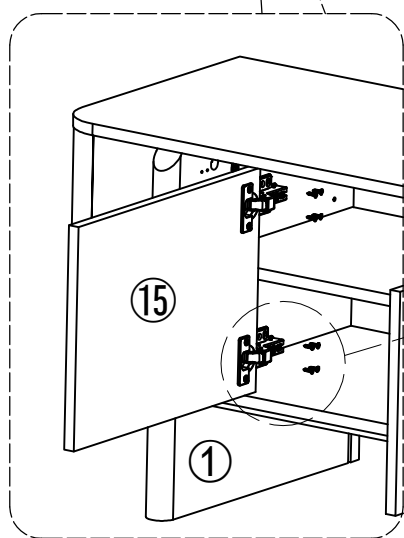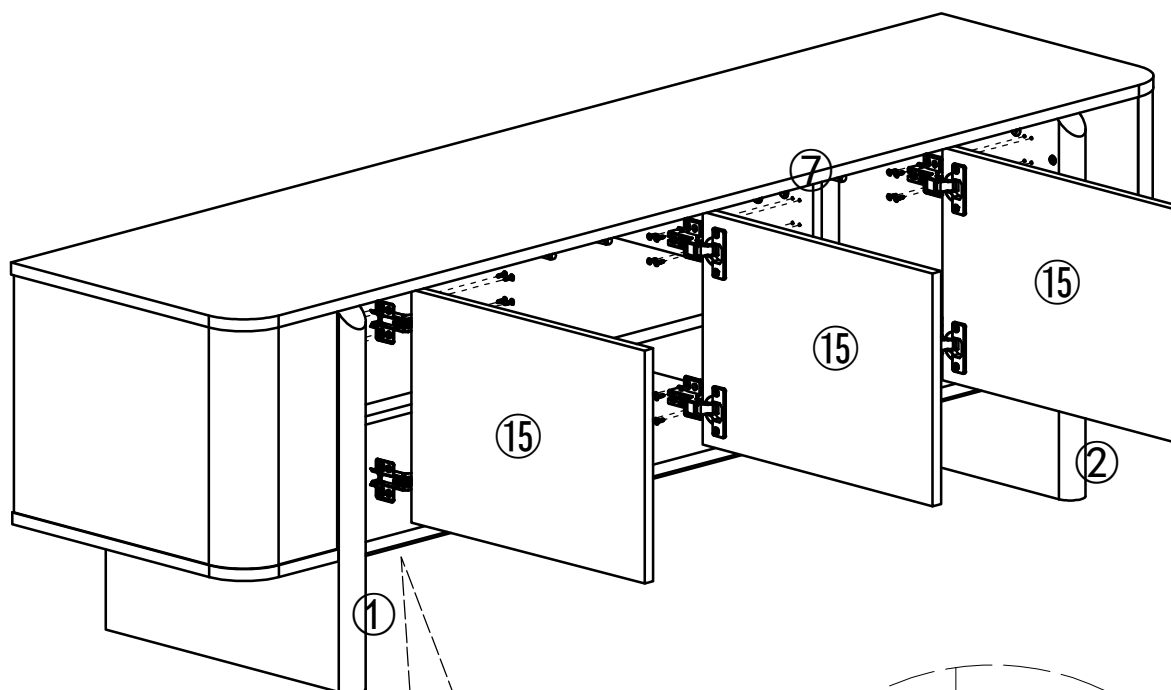

Step 32

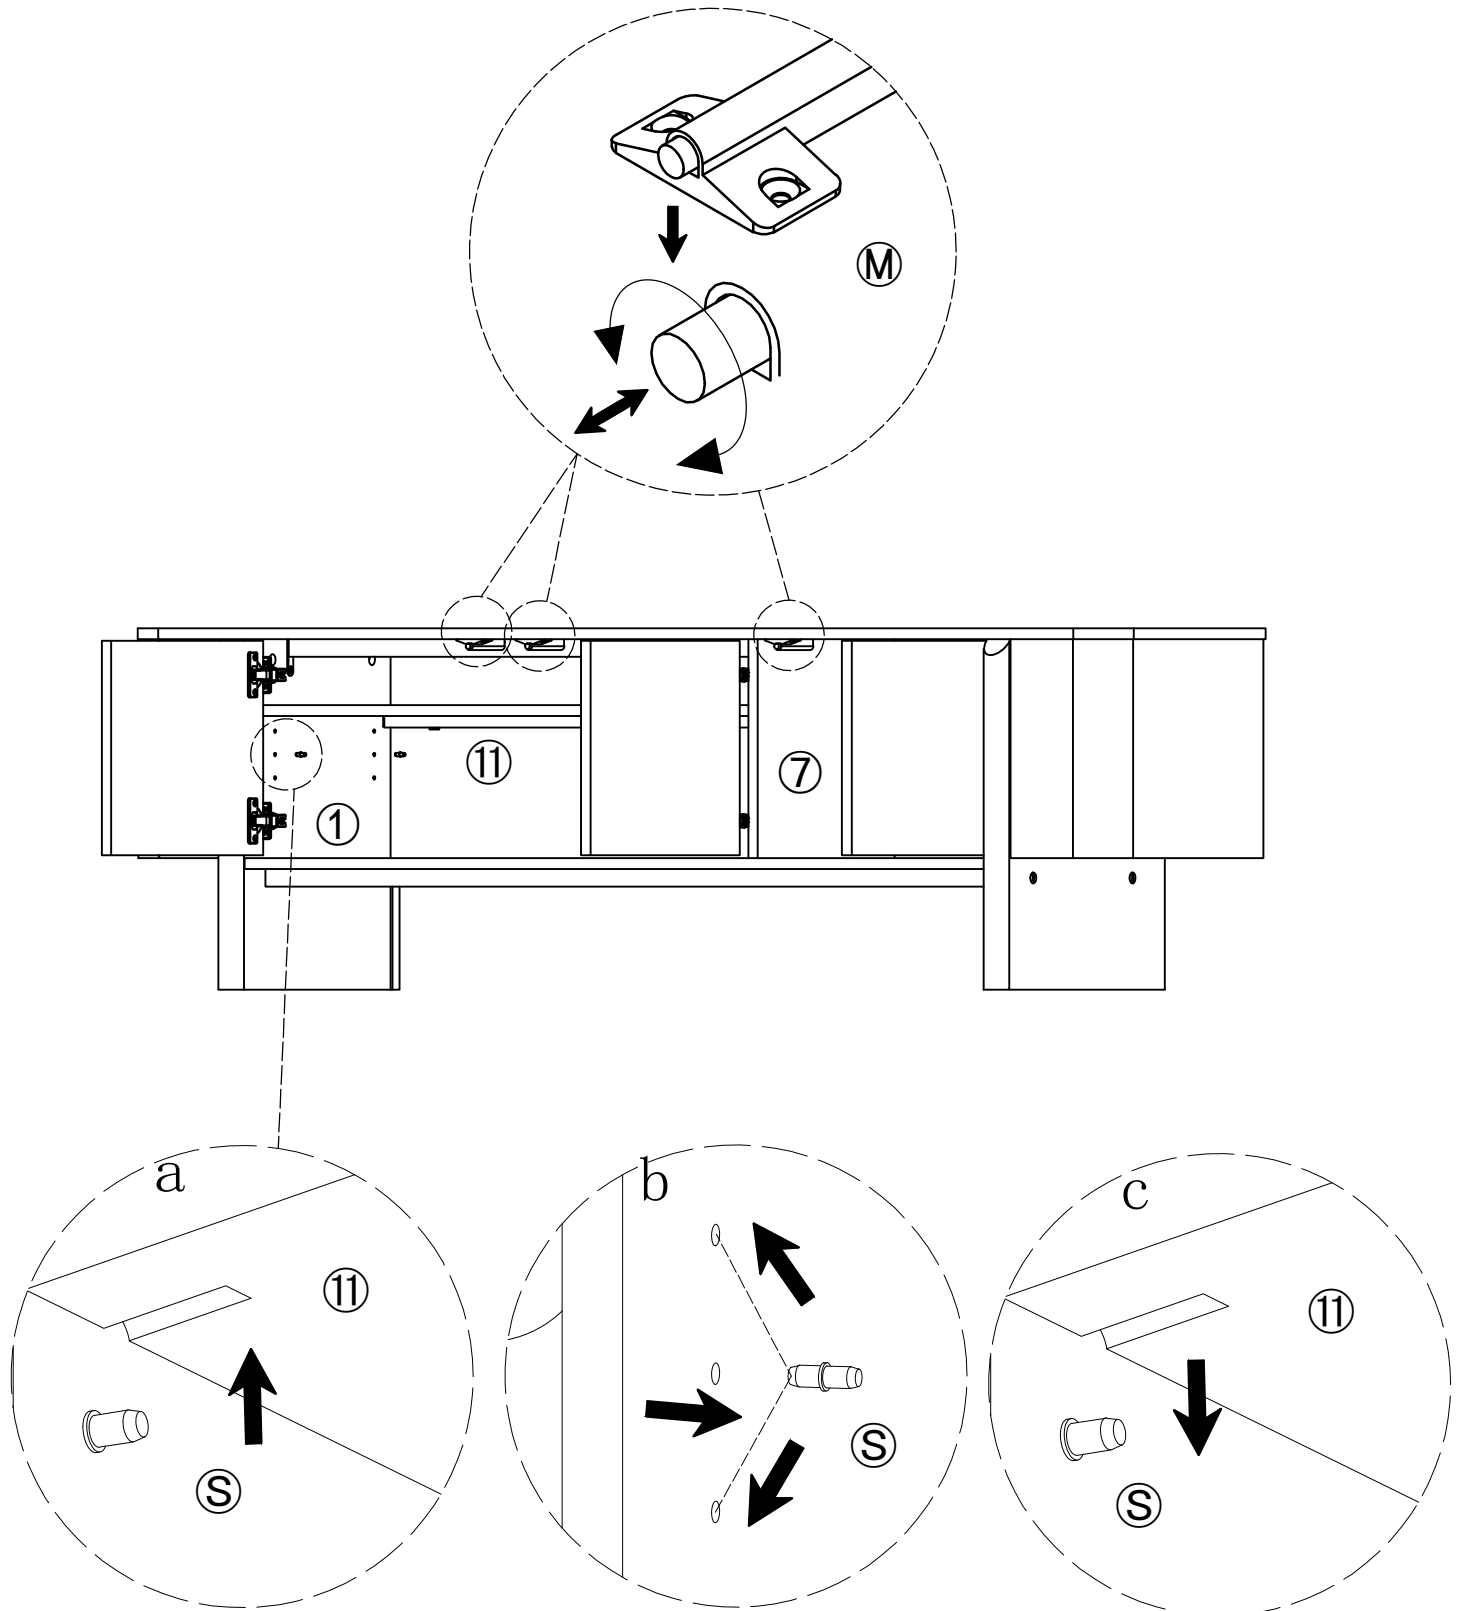



The front part of the push latch (M) can be rotated adjusted as needed. There are holes at 3 different height positions on part ①&⑦. You can move shelf pin (S) up and down to adjust the height of the shelf as needed.




Step 33

Fix the furniture to the wall with the enclosed safety bracket to prevent it from tipping over.





Attached 2 pcs anti-tip strap **U** to part **12**, fix by using 2 pcs self tapping screw **K**, metal gasket **N** and phillips screwdriver **D**.





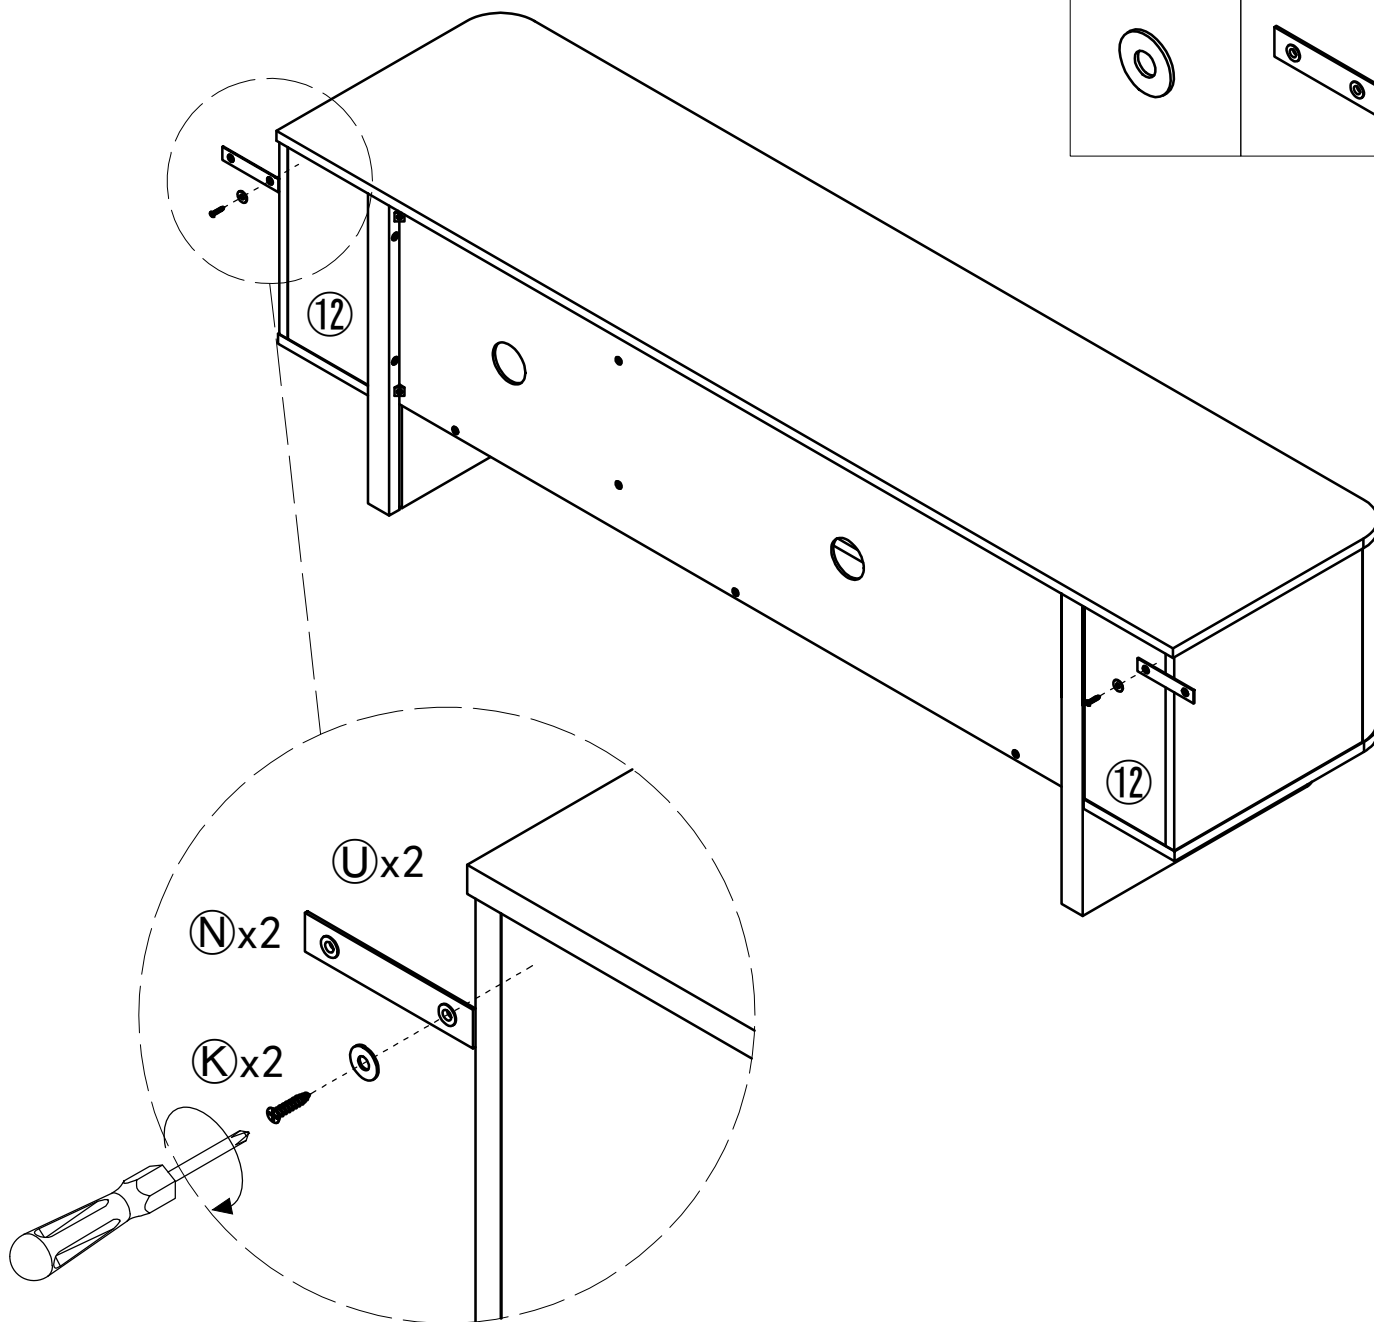
D x1	K x2
	 4x22mm
N x2	U x2
	



Step 34


Drill holes at marked spot with a drill bit. Carefully hammer in the plastic anchors (T). Attached the anti-tip strap (U) to plastic anchors (T), fix by using 2 pcs self tapping screws (J), metal gasket (N) and phillips screwdriver (D).

(D)x1	(N)x2
	
(J)x2	(T)x2
 4x35mm	

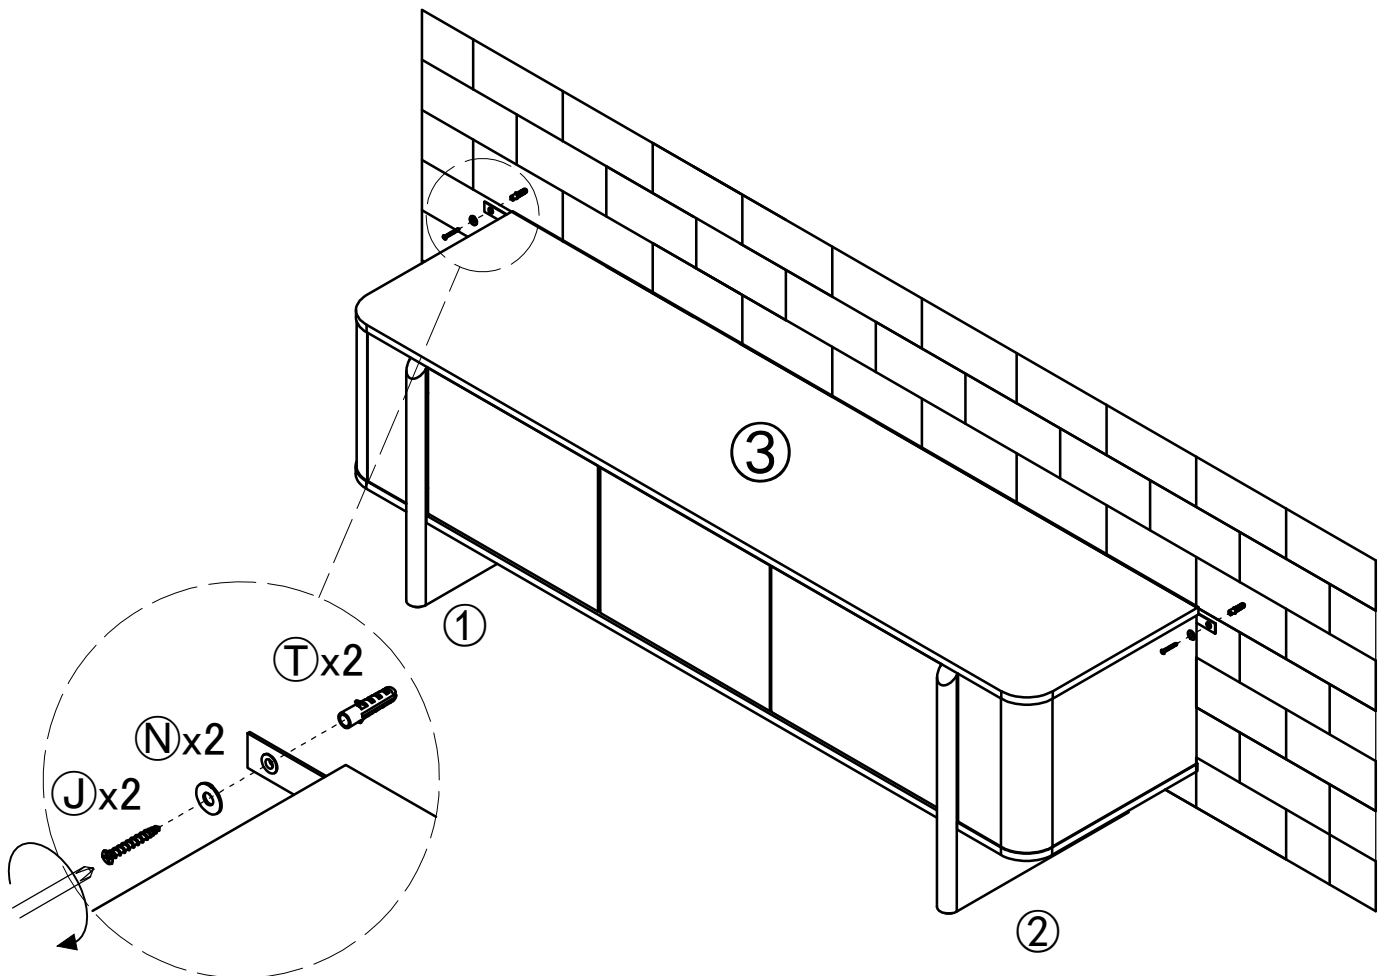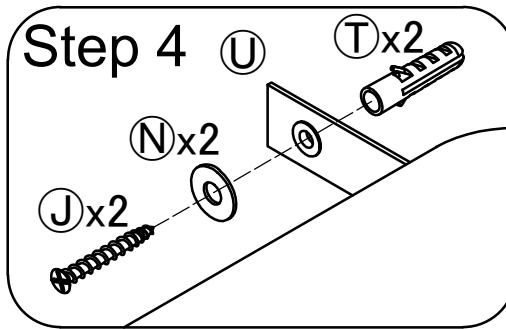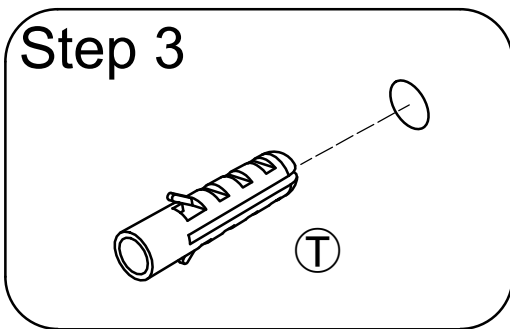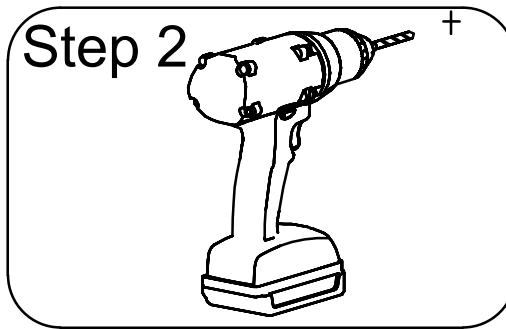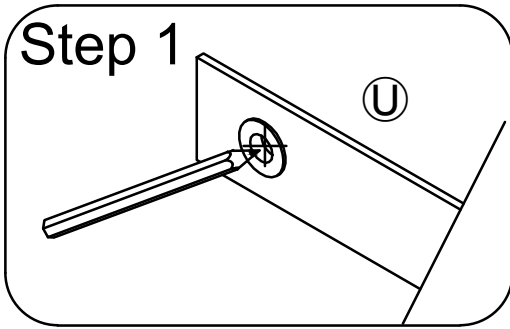

VOILA!

Now enjoy.

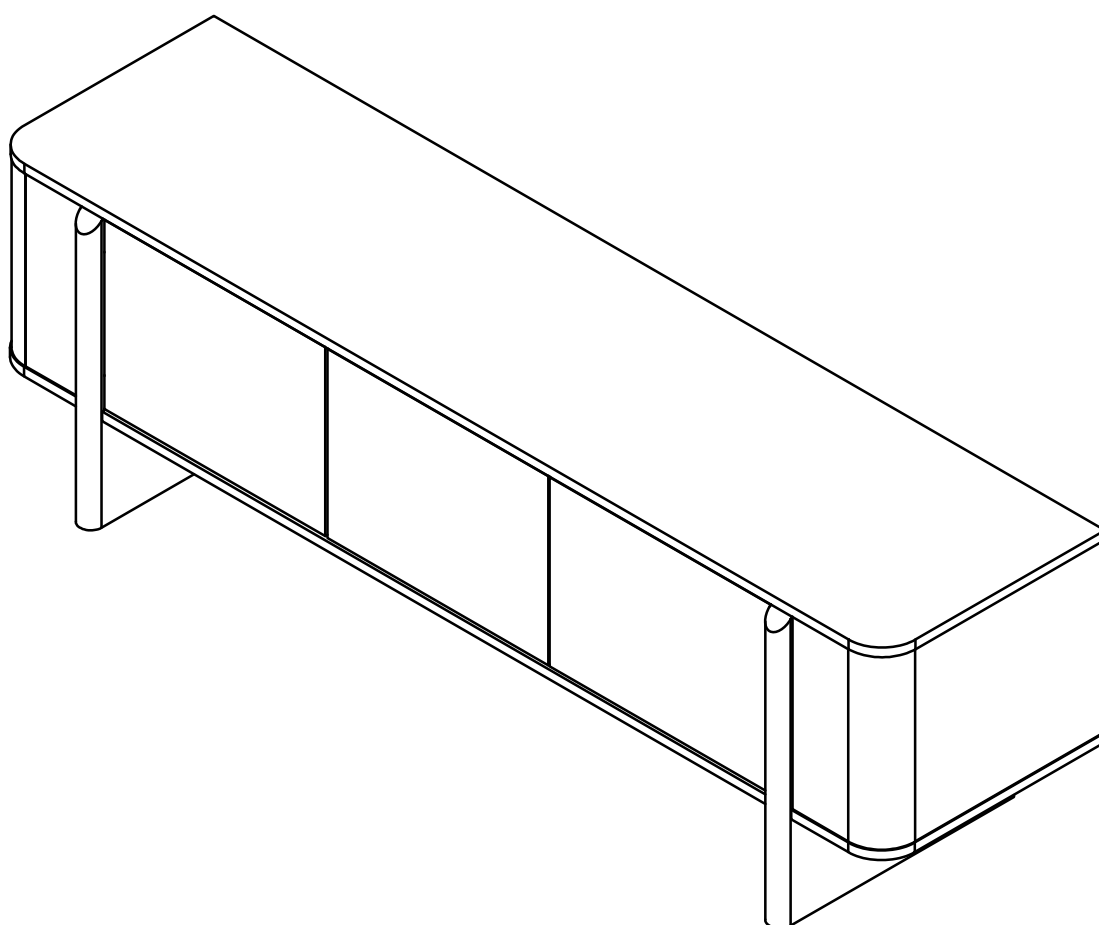

Warning

DO NOT climb, sit, or stand on the TV Stand as this may damage the product and cause serious bodily injury.

Something not right?

We are always here to help.

We make mistakes like every human does.

Though we always strive to provide the best possible products at competitive prices and the best service in the industry, it's not possible to completely eliminate mistakes. If you experience any dissatisfaction, feel free to contact us immediately. Our in-house customer care team will respond ASAP.



customerservice@luxenhome.com
Get response within 24 hrs



909.548.6688
Mon-Fri 9am-5pm PST/PDT



www.luxenhome.com/help
Submit a ticket on our website

Things to do to expedite the process

- Have your order# ready
- Take photos/videos to help us better identify the issues
- DO NOT throw away the packaging

Happy with our product?

Leave us a review

It really help us as a small business

- Find the product you purchased on our website (tip: search by SKU) and leave us a review.
- Alternatively, you can always return to the marketplace where you purchased it and leave a review there.

Share with others

Our customers look for REAL stuff



- Follow us on IG @luxen.home
- Share your #liveluxen moments



**Please save this manual
for future reference.**