



ASSEMBLY GUIDE

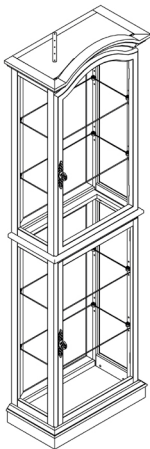

Note: This instruction booklet contains important safety information, please read and keep for future reference.

PARTS IDENTIFICATION

- Ensure that all parts and components are located before beginning assembly. Parts are labeled to help distinguish similar parts from each other. Use this PARTS IDENTIFICATION to help identify similar parts.
- Assemble on a soft surface to prevent damage to the product finish.
- Two people are needed for assembly.
- Estimated assembly time is approximately 2.5 hour.

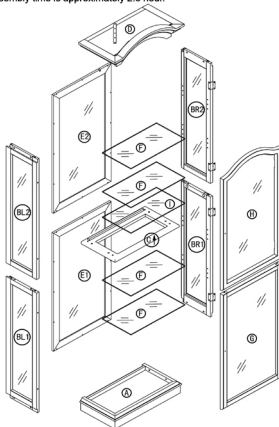

(A)BASE UNIT-1PC
(BR1)RIGHT PANEL-1PC
(D)COVER BOARD-1PC
(F)SHELF-4PCS
(I)SHELF-1PC

(BL1)LEFT PANEL-1PC
(BR2)TOP RIGHT PANEL-1PC
(E1)BACK PANEL-1PC
(G)DOOR-1PC

(BL2)TOP LEFT PANEL-1PC
(C)SHELF BOARD-1PC
(E2)TOP BACK PANEL-1PC
(H)TOP DOOR-1PC

HARDWARE IDENTIFICATION



TOOL REQUIRED



PHILLIPS HEAD
SCREWDRIVER



SHORT FLAT
SCREWDRIVER

(R1) LIGHT-1PC



(R3) FLAT HEAD SCREW
ST3X14-8PCS



(R5) CAM BOLT-4PCS



(R7) FLAT HEAD SCREW
ST2.9X12-2PCS



(R9) FLAT HEAD SCREW
M6X25-8PCS



(R11) PLASTIC PLUG-1PC



(R2) DOOR KNOB-2PCS



(R4) ADJUSTABLE FOOT-4PCS



(R6) CAM LOCK-4PCS




(R8) FLAT HEAD SCREW
ST2.9X20-24PCS



(R10) SHELF SUPPORT
STUD-16PCS



CAM LOCK SYSTEM



(1)

CORRECT



(2)

WRONG

Ensure starting position is correct, adjust cam bolt by pushing or pulling during assembly. Turn clockwise until secure.

R1

R2

R4

R5

R7

(R1)LIGHT:1PC

(R2)DOOR KNOB:2PCS

(R4)ADJUSTABLE
FOOT:4PCS

(R5)CAM BOLT:4PCS

(R7)FLAT HEAD SCREW
ST2.9X12:2PCS

R4=4

A

R2=2

H

B

R7=2

R1=1

BR2

BL2

R5=4

R5



1. a) Fasten 4 adjustable foot R4 to base unit A.
- b) Fasten 1 light R1 to cover board D, using 2 flat head screw R7(ST2.9X12).
- c) Fasten 2 door knob R2 to door G and top door H.
- d) Fasten 4 cam bolt R5 to top left and right panel BL2&BR2.



(R9)FLAT HEAD SCREW
M6X25.4PCS




(R10)SHELF SUPPORT
STUD-8PCS





2.a)Fasten 8 shelf support stud R10
to left and right panel BL1 & BR1.

b)Fasten left and right panel BL1 &
BR1 to base unit A,using 4 flat
head screw R9(M6X25).



3. a) Attach shelf board C to left and right panel BL1&BR1.

Note: the arrow direction should face up.

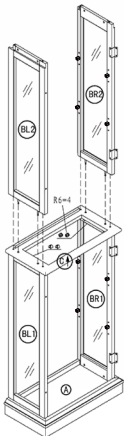

(R6)CAM LOCK:4PCS




(R10)SHELF SUPPORT
STUD-8PCS



4.a)Fasten 8 shelf support stud R10
to top left and right panel BL2
& BR2.

b)Fasten top left and right panel
BL2 & BR2 to left and right panel
BL1 & BR1,using 4 cam lock R6.

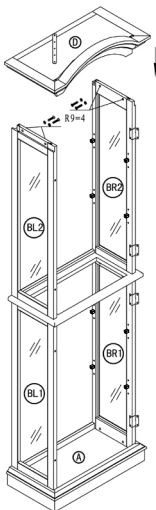

R9



(R9)FLAT HEAD SCREW
M6X25.4PCS




5. a) Fasten cover board D to top left and right panel BL2&BR2, using 4 flat head screw R9 (M6x25).

R8





(R8)FLAT HEAD SCREW
ST2.9X20:24PCS

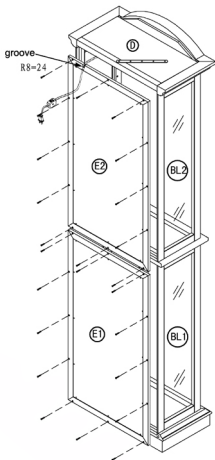

6. a) Fasten back panel E1 to left and right panel BL1&BR1, shelf board C, base unit A, using 12 flat head screw R8(ST2.9X20).
b) Fasten top back panel E2 to top left and right panel BL2 &BR2, shelf board C, cover board D, using 12 flat head screw R8(ST2.9X20).

Note: the electronic wire must go through groove on top back panel E2 first.

R3




(R3)FLAT HEAD SCREW
ST3X14-8PCS



7.a)Fasten door G to right panel
BR1 using 4 flat head screw
R3 (ST3X14).

b)Fasten door H to top right
panel BR2 using 4 flat head
screw R3 (ST3X14).

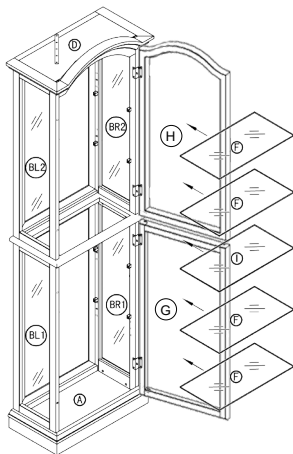


8.a) Attach 4 shelf F onto shelf support stud.

b) Attach 1 shelf I on shelf board C.

Note: Weight on glass shelves should not exceed 5 kgs.



(R11) PLASTIC PLUG: 1PC

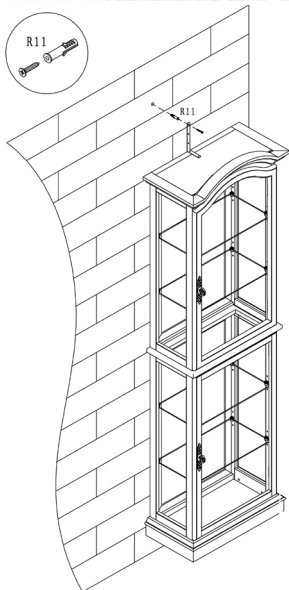

9). In order to ensure that the cabinet is stable adjust the adjustable foot under the cabinet. As an added safety feature a support strap on cover board D has been provided, it must be attached to the wall, using plastic plug R11.

Care and Maintenance of your Furniture

- 1.Ensure metal plated hinges are kept dry to avoid rusting.
- 2.Please periodically check all fittings and re-tighten as necessary.
- 3.Wipe occasionally with a soft cloth slightly dampened with water.Then buff with a dry clean soft cloth.
- 4.Never allow any kind of liquid to remain on your furniture. Absorption can cause wood to warp or finishes to de-laminate.
- 5.Please do not use glass as a chopping surface. Do not strike the glass with hard or point items.
- 6.When cleaning glass panels use a damp cloth with washing up liquid or soft soap if neccesary. Do not use washing powders or any other substances scratch glass panel.