



Assembly Manual

5-Tier Bookcase

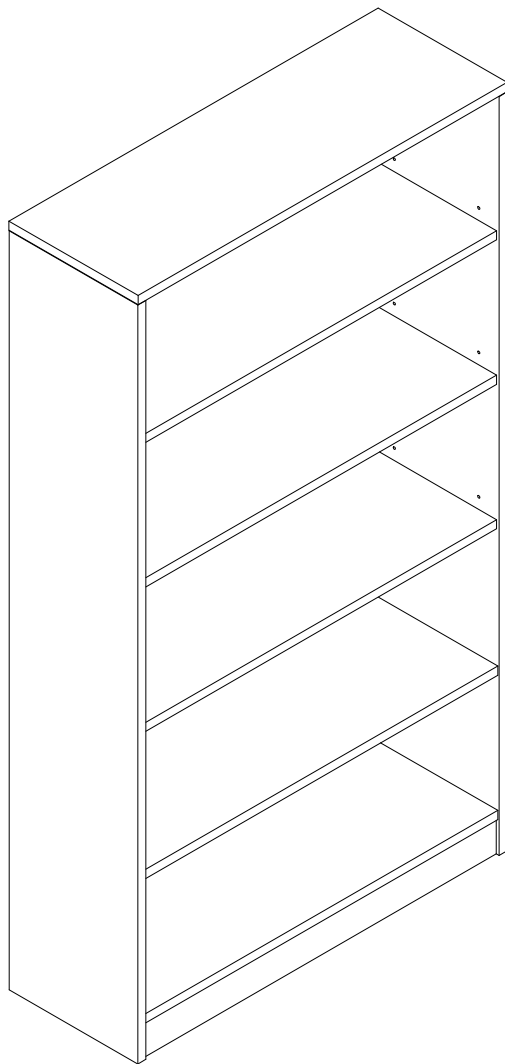

Please read this manual carefully before any operation and keep it properly for future use.

Installation Notes

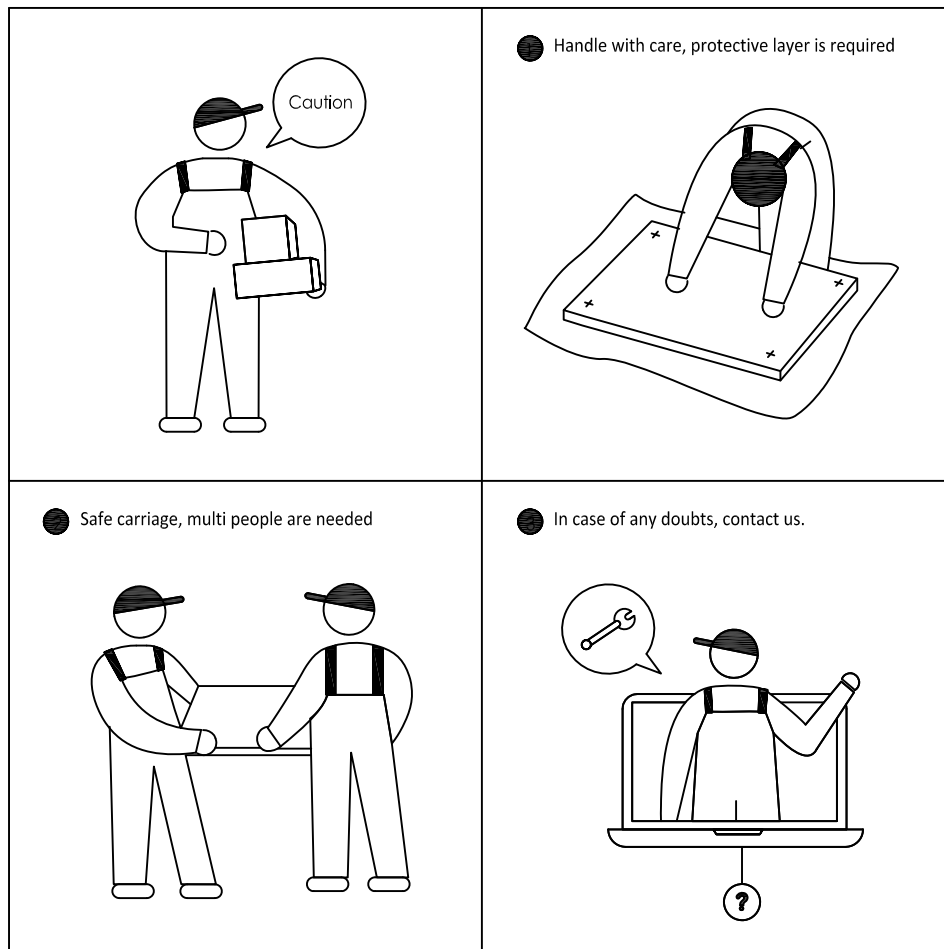


Attention: A Phillips screwdriver is needed. Please prepare in advance as it is NOT included in the package. Don't tighten all the screws until all the pieces are fitted.

CONTACT US

If you have any problems or concerns about your purchase, please get in touch with our customer service as soon as possible and we will do everything we can to help.

You will be highly appreciated if you can put your order number in the email title so that we can deal with it efficiently.











Exploded View

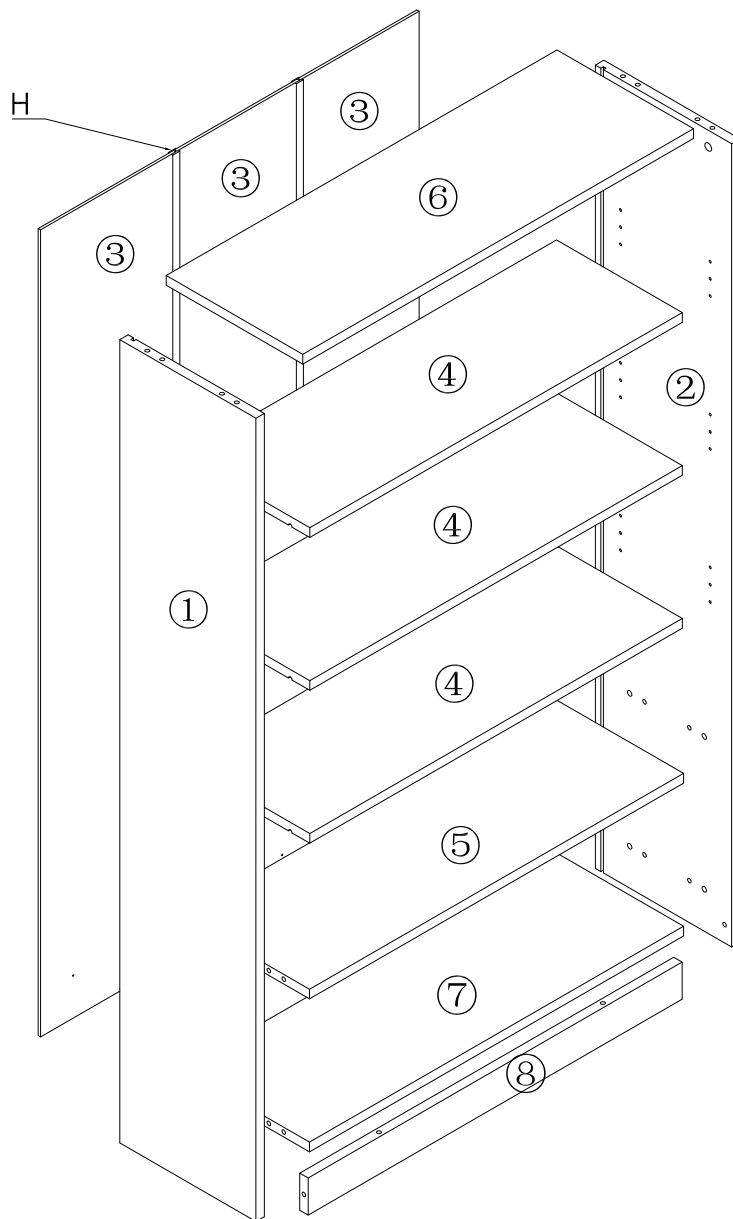

No.	Component	PCS
1	Left panel	1
2	Right panel	1
3	Back panel	3
4	Movable panel	3
5	Fixed Panel	1

No.	Component	PCS
6	Top panel	1
7	Bottom panel	1
8	Skirt panel	1
H	Back Bar	2


Components list

A			B			C		
								
Cam Lock Pin	M6x40	14+2	Wooden Dowel	Φ8x40	15+2	Self-tapping Screw	ST3*16	13+2
D			E			F		
								
Fast-install fixed panel support	21*20.8*9	12+2	Adjustable Leg	M6*18	4+1	Cover for Klix Cam	Φ20x0.2	14+2
G			H			I		
								
Back Panel Stabilizer	15*14*10	6+2	Back Bar	1188*16*10	2	Anti-Toppling Device	2	
J								
								
Klix Cam	Φ15x12	14+2						

Assembly Instruction

STEP 1


Assemble the left and right panels with cam lock pins
Place the dowels into the corresponding holes of left and right panels as below.

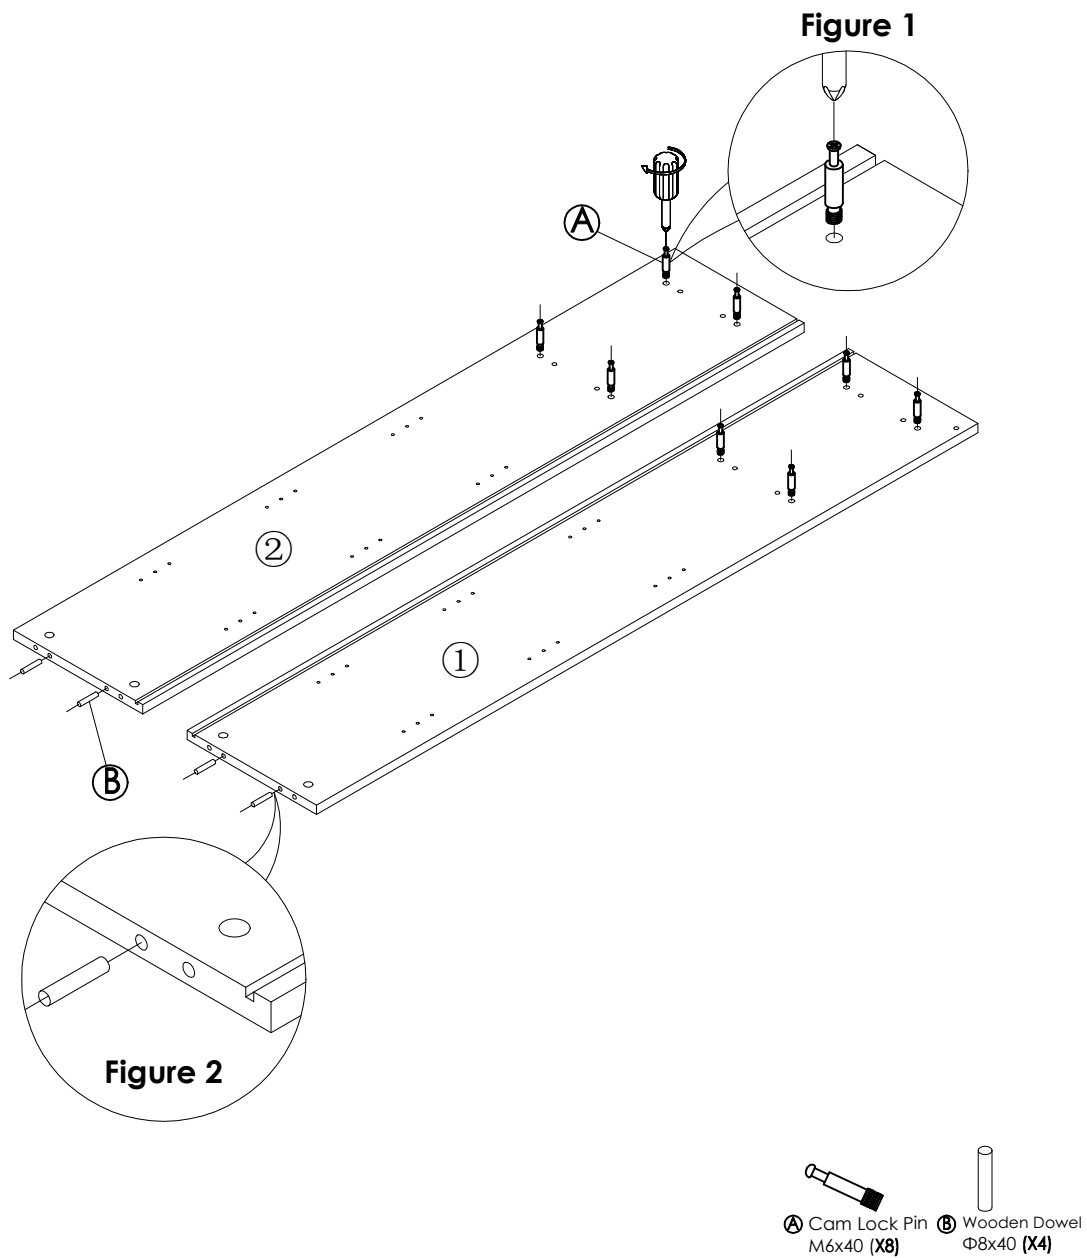

Assembly Instruction

STEP 2

Assemble the top and bottom panels with cam lock pins.
Place the dowels into the corresponding holes.

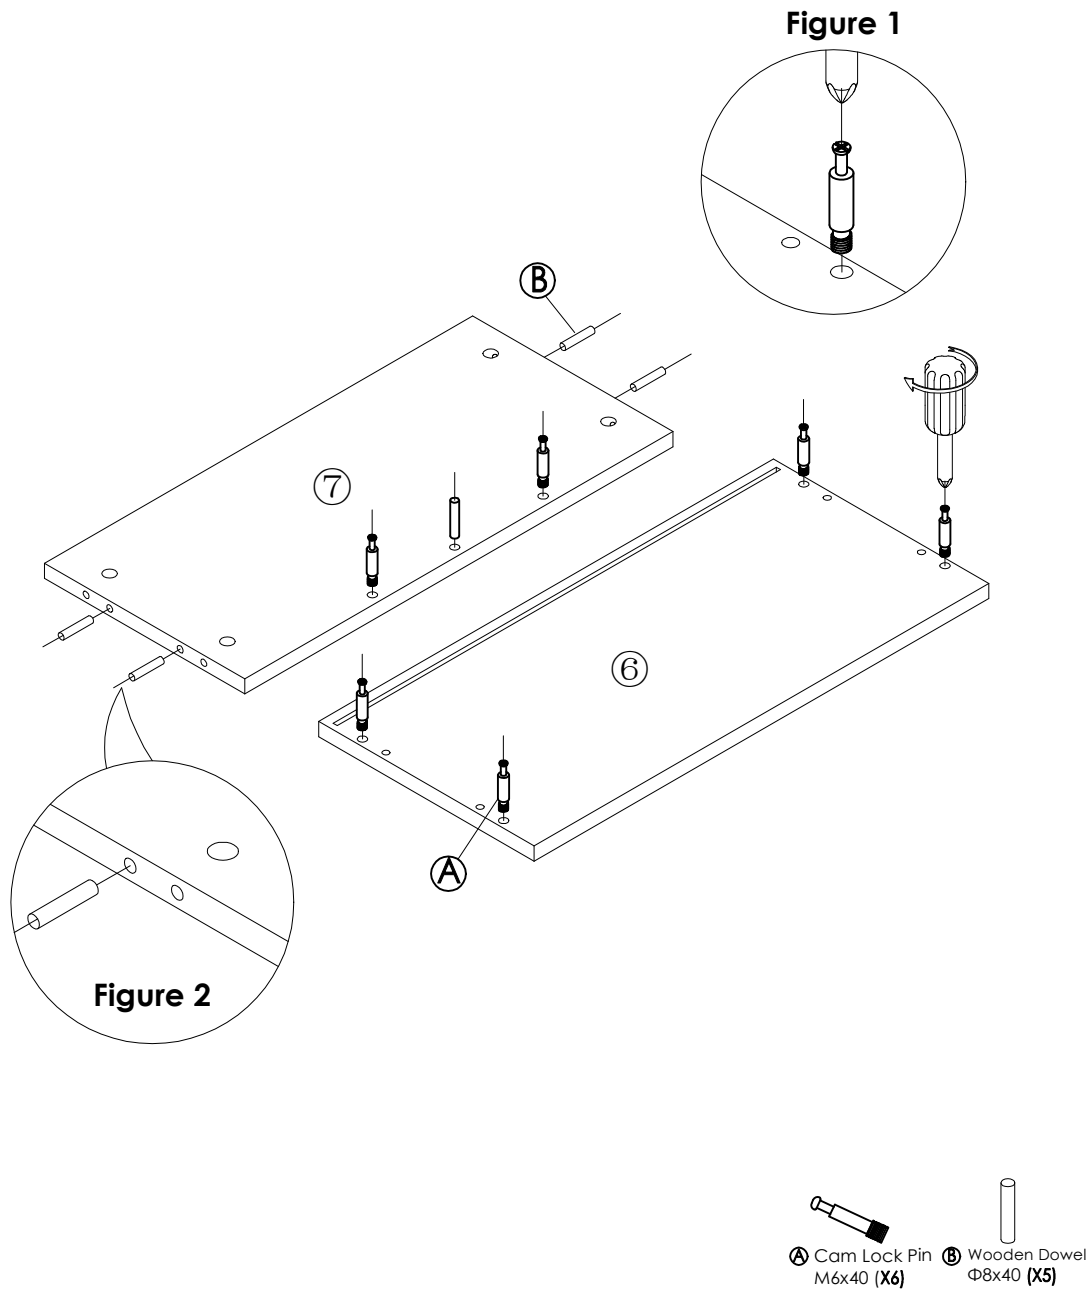


Assembly Instruction

STEP 3

Attach the skirt panel to the bottom panel and lock the klix cams (as shown in Figure 1 below).

Figure 1

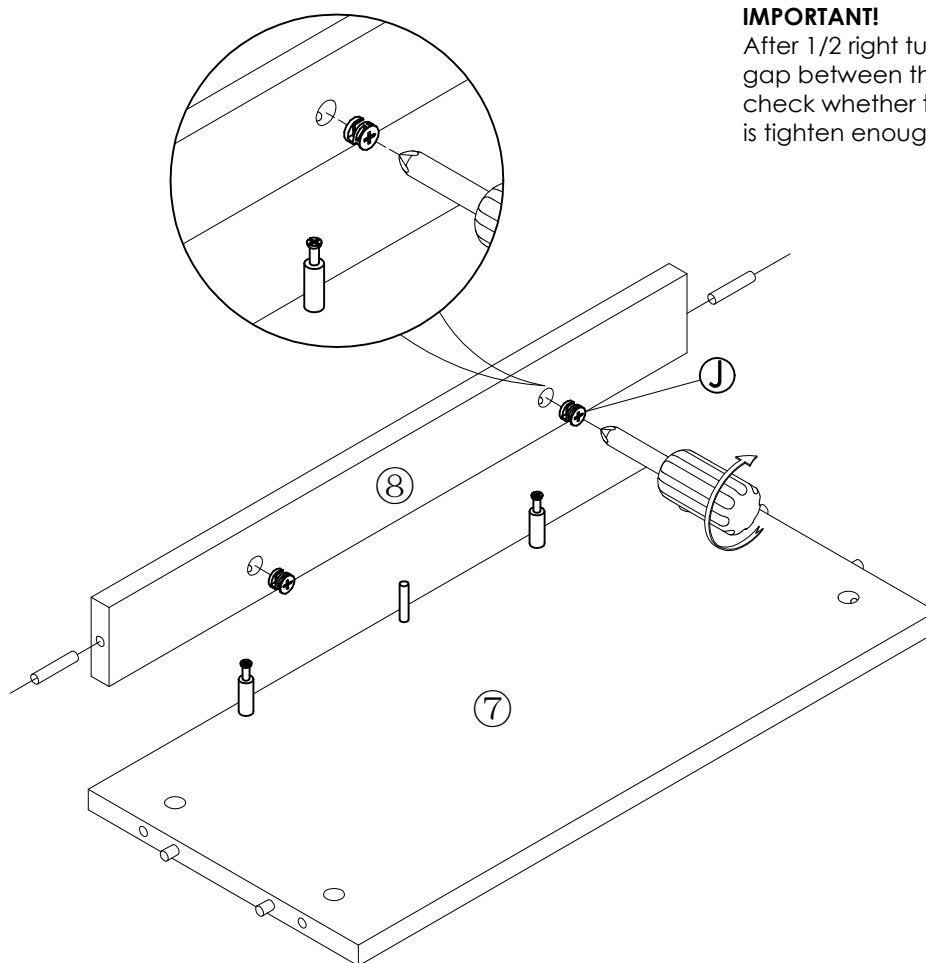

FUNCTION OF KLIX CAM



1/2 RIGHT
TURN FOR
LOCKING

MAKE SURE THE ARROW OVER AGAINST THE
TOPSIDE OF CAM LOCK PIN BEFORE
INSERTING INTO THE PANEL'S HOLE

IMPORTANT!

After 1/2 right turn, if there is a gap between the panels, please check whether the cam lock pin is tighten enough.

- ⑧ Wooden Dowel
Φ8x40 (X2)
- ⑨ Klix Cam
Φ15x12 (X2)

Assembly Instruction

STEP 4

Connect the left and right panels to the bottom panel & fixed panel and lock the klix cams.

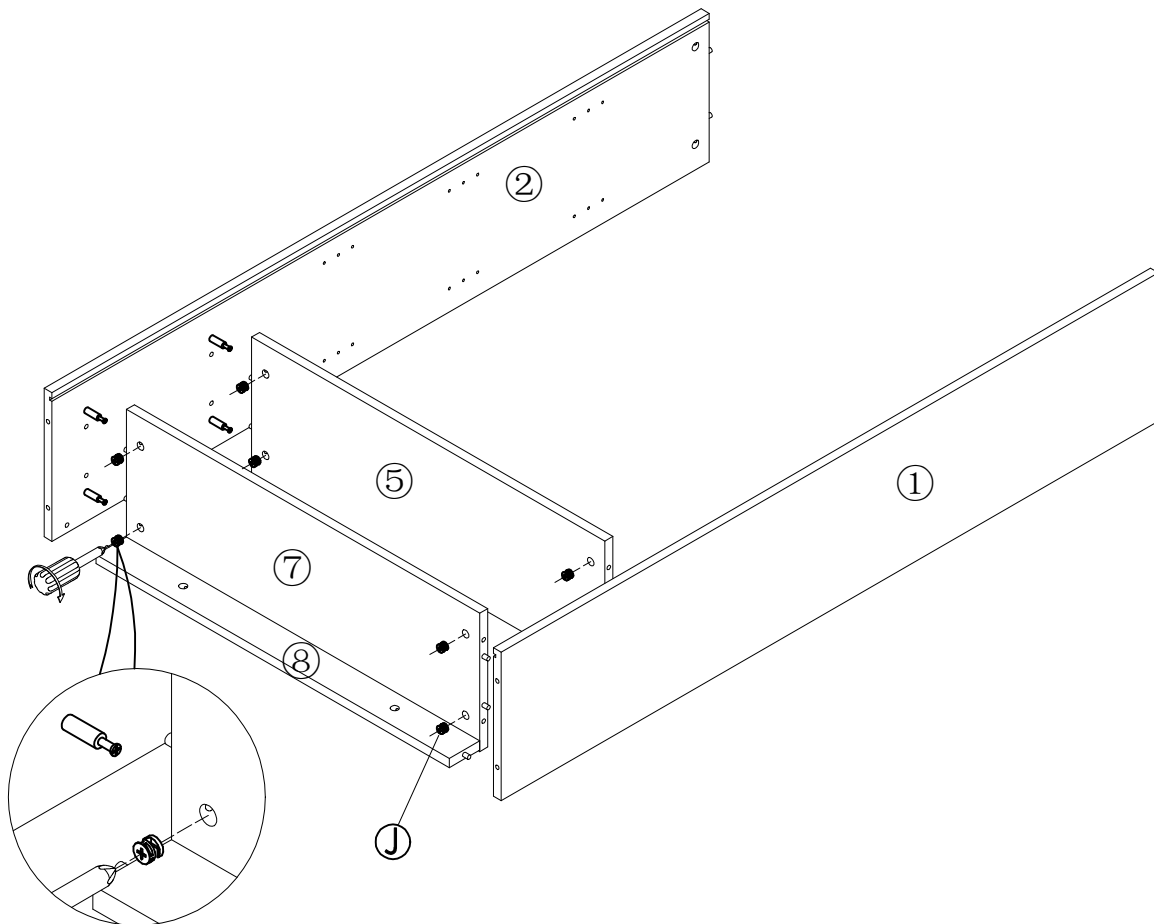



Figure 1



① Klix Cam
Φ15x12 (X8)

Assembly Instruction

STEP 5

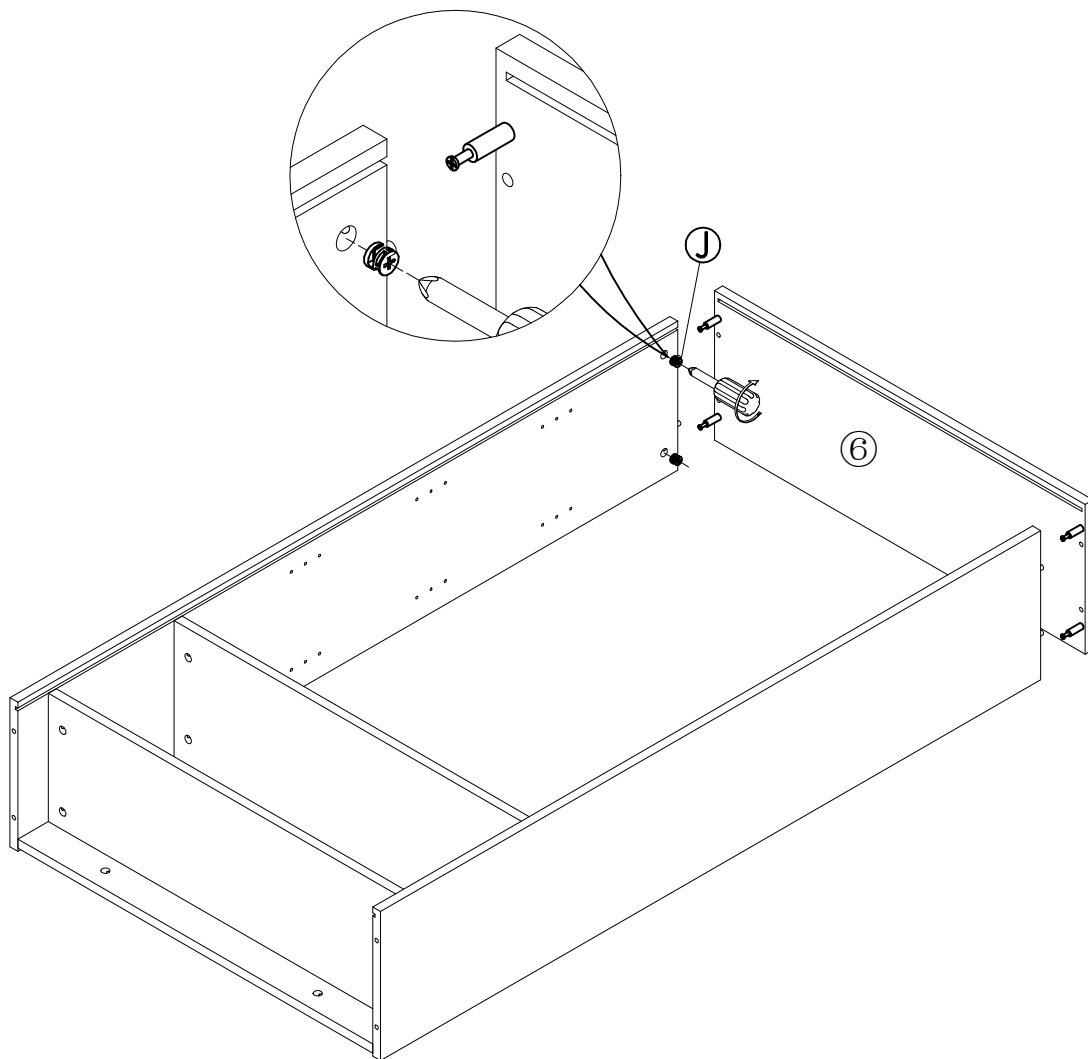Connect the assembled frame to the top panel and lock the klix cams





① Klix Cam
Φ15x12 (X4)

Assembly Instruction

STEP 6

Connect the back panels with the back bar, then insert the back panels into the slot (as shown in the figure below).

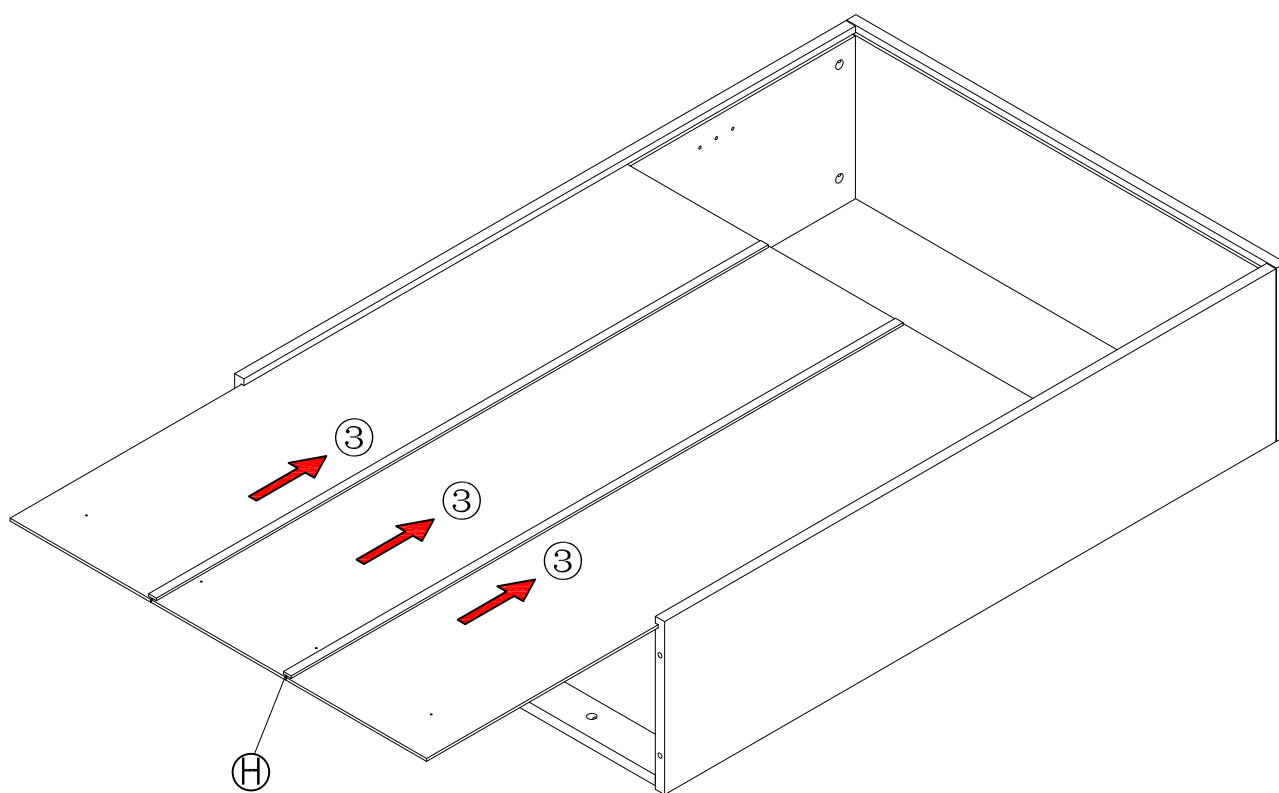


H Back bar
1188*16*10 (X2)

Assembly Instruction

STEP 7

Fix the back panels with ST3*16 self-tapping screws as shown in Figure 1. Screw the adjustable legs into the corresponding holes at the bottom of the left and right panels, and adjust the height to make them even if necessary.

Figure 1


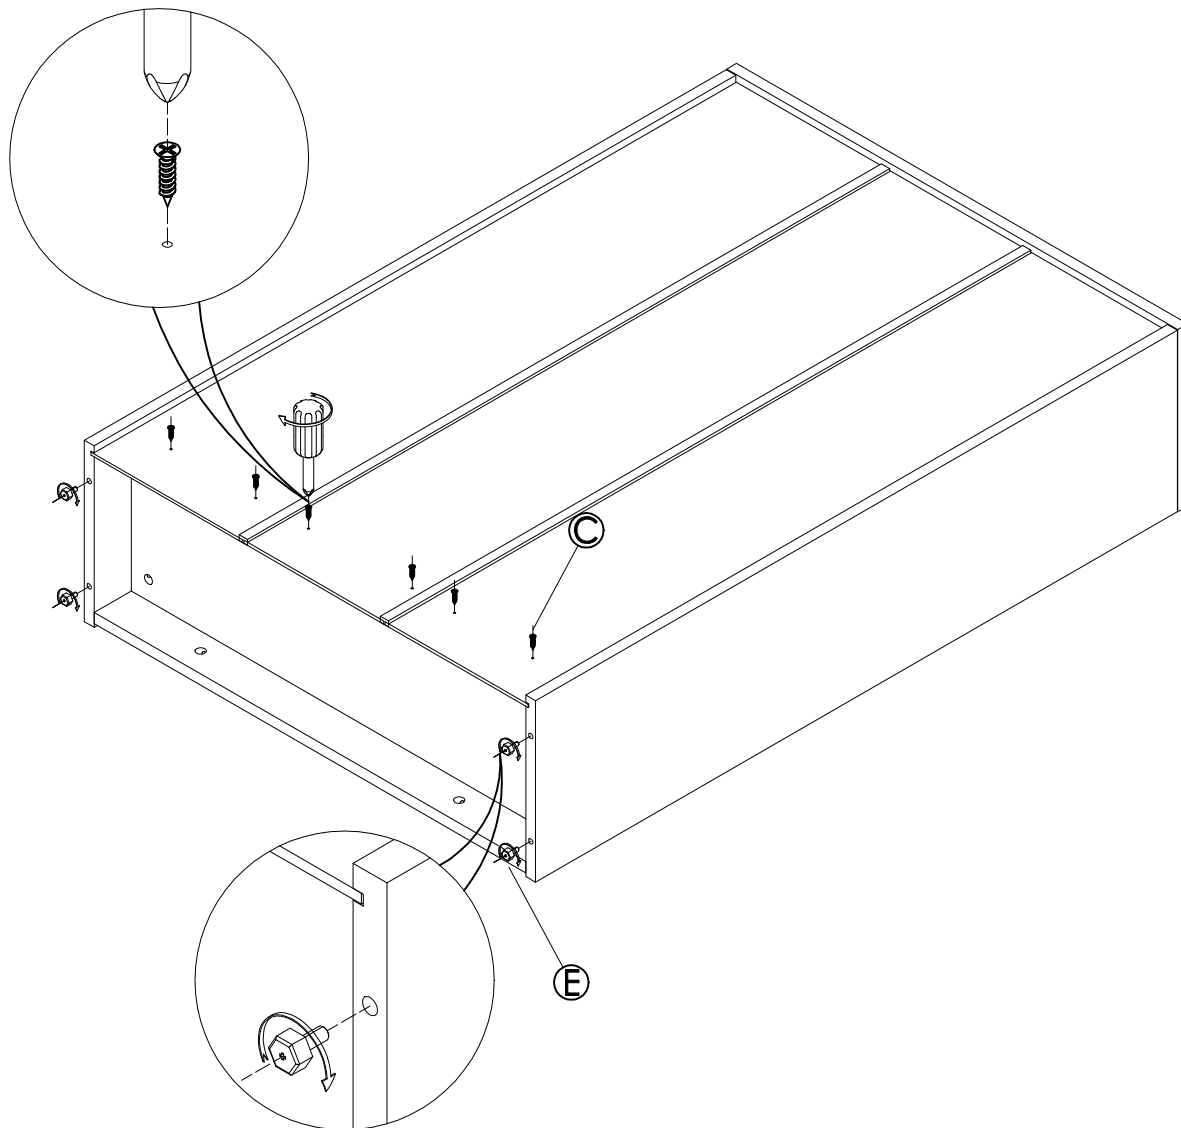



Figure 2




Assembly Instruction

STEP 8

Press the back panel stabilizers into the gaps at the back of the back panel. Then fix the back panel stabilizers with self-tapping screws (ST3 * 16).

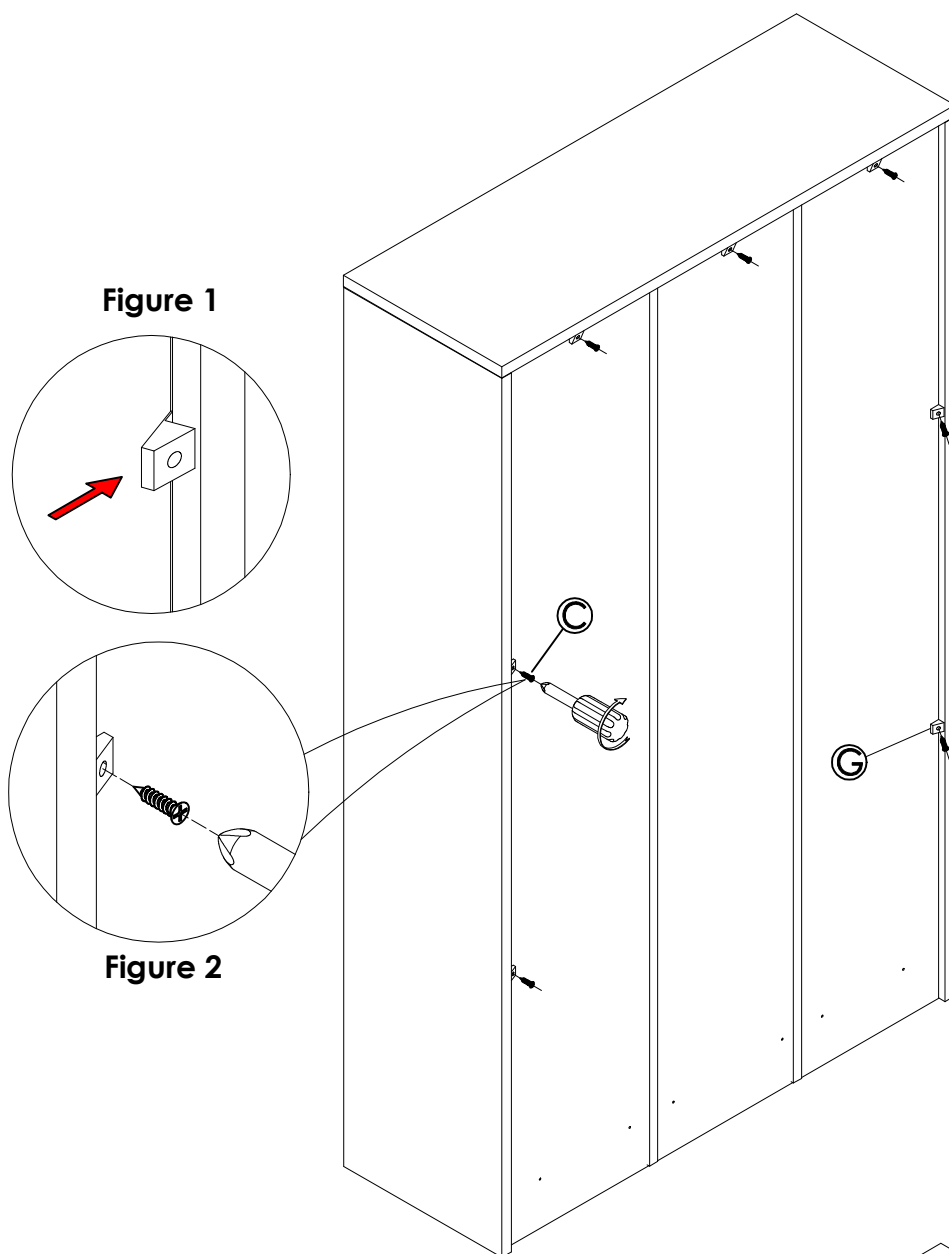


 Back Panel Stabilizer
15x14x10 (x7)

 Self-tapping Screw
ST3x16 (x7)

Assembly Instruction

STEP 9

Put the shelf supports ($\Phi 5 \times 15.5$) in place to have different space as you want.

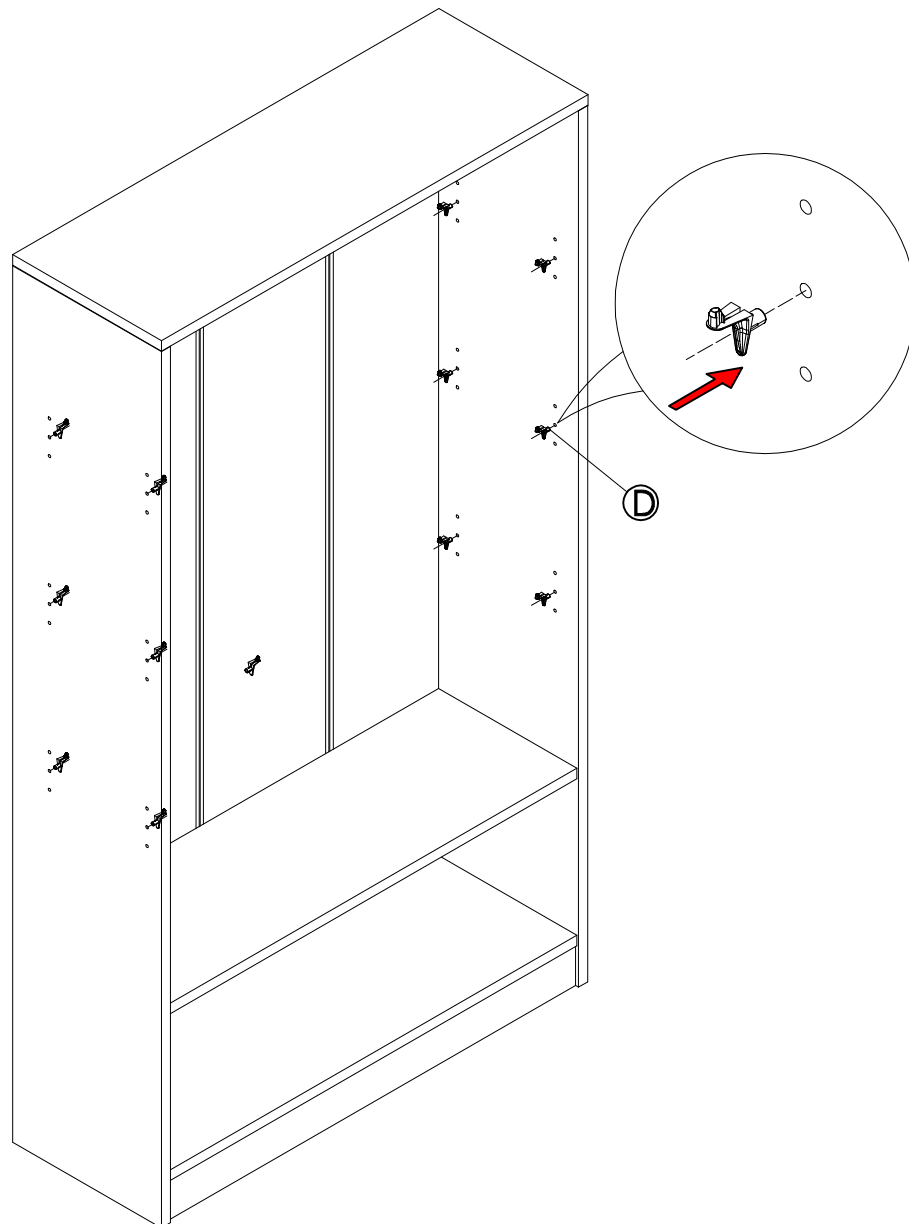


① Shelf Support
21*20.8*9 (X12)

Assembly Instruction

STEP 10


Place the movable panels accordingly. Make sure the panels are just right on the shelf supports.

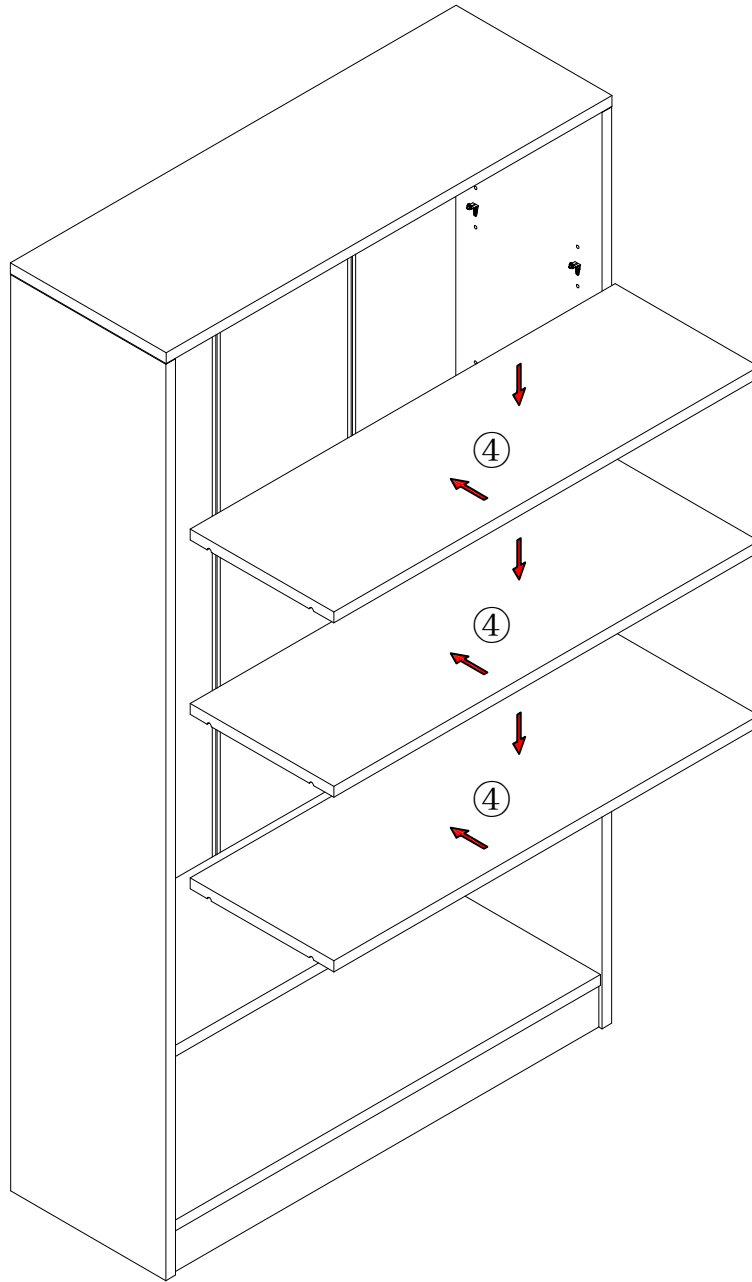

Assembly Instruction

STEP 11

Place covers for klix cam if you want.

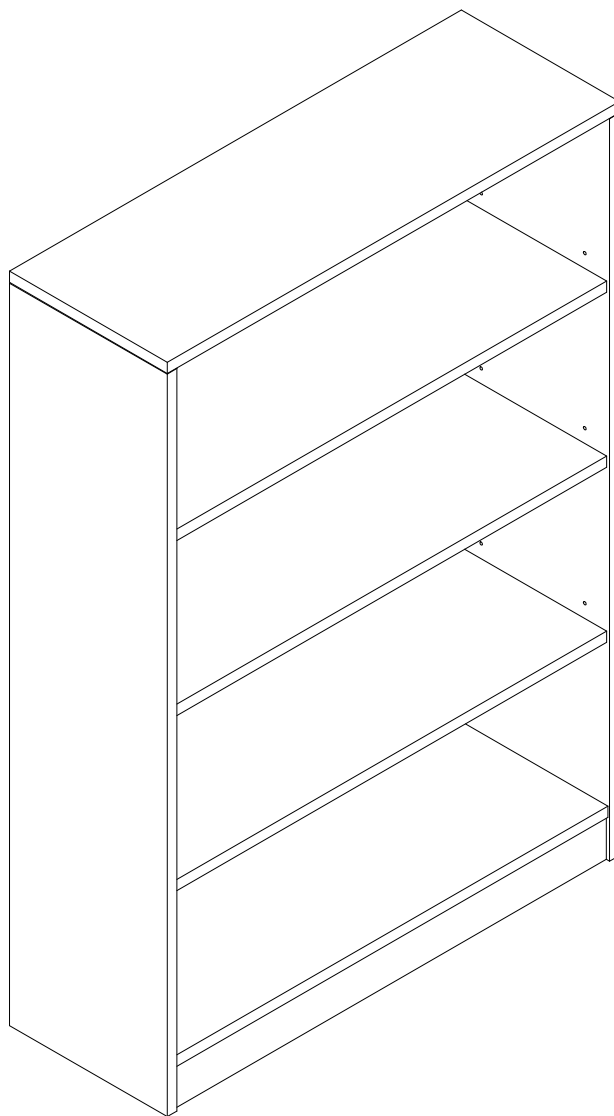

Ⓢ Cover for
Klix Cam
Φ20x0.2 (X9)

Assembly Instruction

STEP 12

Measure the distance between the two pilot holes on the topboard. Then, on the wall, use an electric drill (NOT include in the carton, please prepare your own in advance) to create pre-drilled holes at this distance. Next, insert the anchor sleeves. Use L-shaped brackets and screws to secure the bookcase to the wall, preventing it from tipping forward and causing unnecessary damage.

ø6MM*2

Step1

Step2

