
ASSEMBLY INSTRUCTION

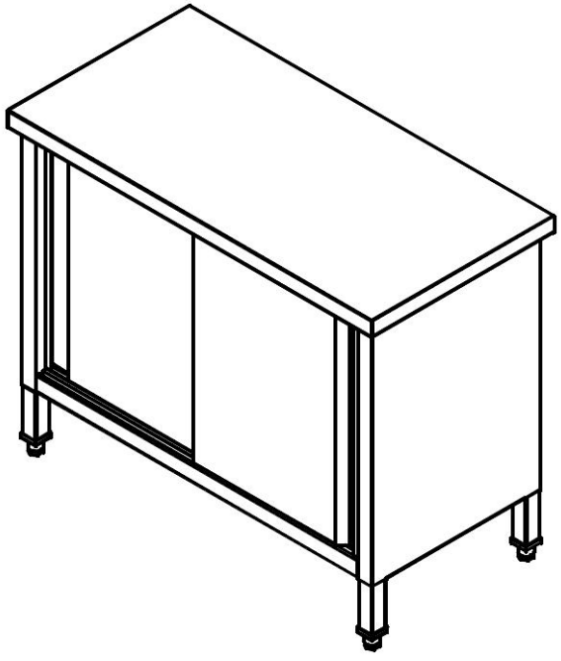


If you have any problem, please feel free to contact us via email.We will solve the problem for you as soon as possible after confirmation.

⚠ IMPORTANT


THISE INSTRUCTION BOOKLET CONTACTS IMPORTANT SAFATY INFORMATION.
PLEASE READ AND KEEP FOR FUTURE REFERENCE

COMPONETS


A Upper Back Panel	1PC




B Lower Back Panel	1PC




C Shelf Panel	1PC




D Slide Rail	1PC




E Bottom Panel	1PC




F Top Panel	1PC




G Right Back Panel	1PC




H Left Back Panel	1PC




I Right Door Panel	1PC




J Left Door Panel	1PC



K Fixed Bracket	1PC



L Metal Shelf Bracket	4PC



M Hexagonal Cross Wrench	1PC




N M6*10 Screws	14PC






P M6*35 Screws	5PC




Q M4*10 Screws	3PC






Step 1

A	B	N	M
			
Upper Back Panel	Lower Back Panel	M6*10 Screws	Hexagonal Cross Wrench

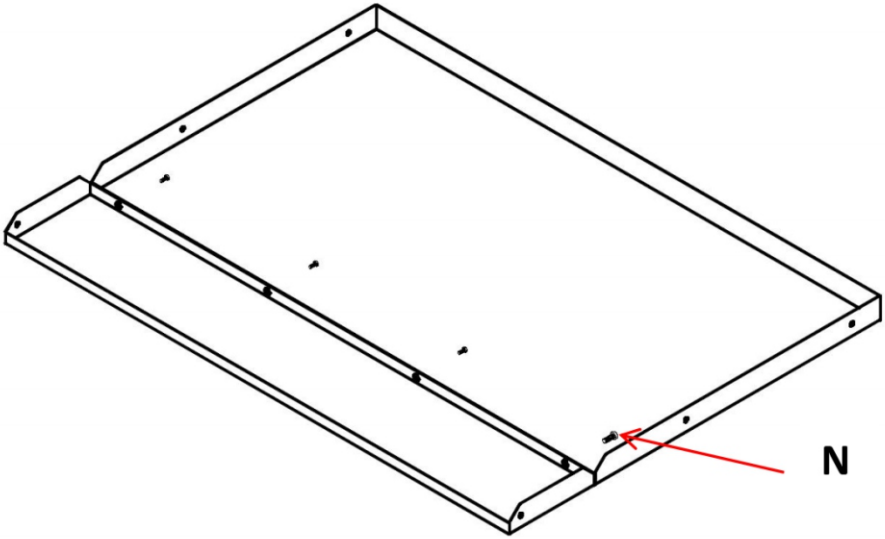


Align the holes of the upper back panel A with the hole of lower back panel B, and fix them with N screws

Step 2

E	H	N	M
			
Bottom Panel	Left Back Panel	M6*10 Screws	Hexagonal Cross Wrench



P


M6*35 Screws ＊2

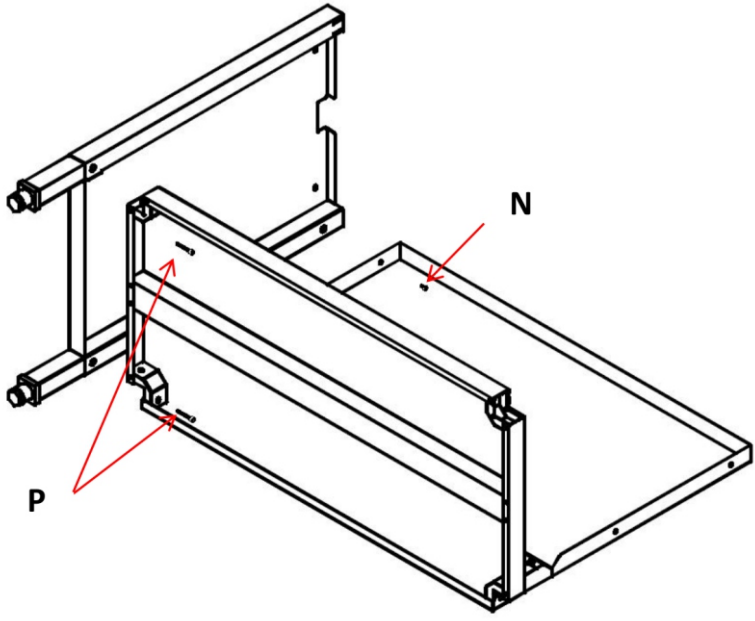

Bottom panel E is placed on the back panel.
Left side panel H near the bottom panel E, align the hole and fix them with screws P.
Align the hole of the back panel with the hole of left side panel H and fix them with screws N.


Step 3


I	P	N	M
			
Right Door Panel	M6*35 Screws	M6*10 Screws	Hexagonal Cross Wrench

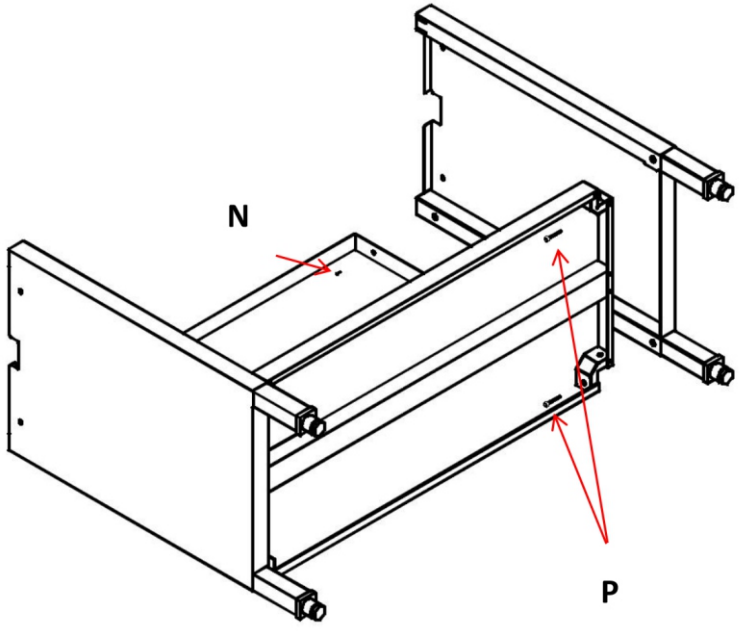



The right side panel G near the bottom plate E , align the hole and then fix them with screws P
Align the hole of the back panel and the hole of right side panel G and fix them with screws N.

Step 4

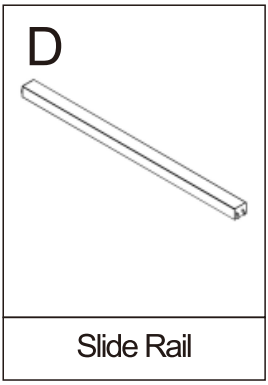





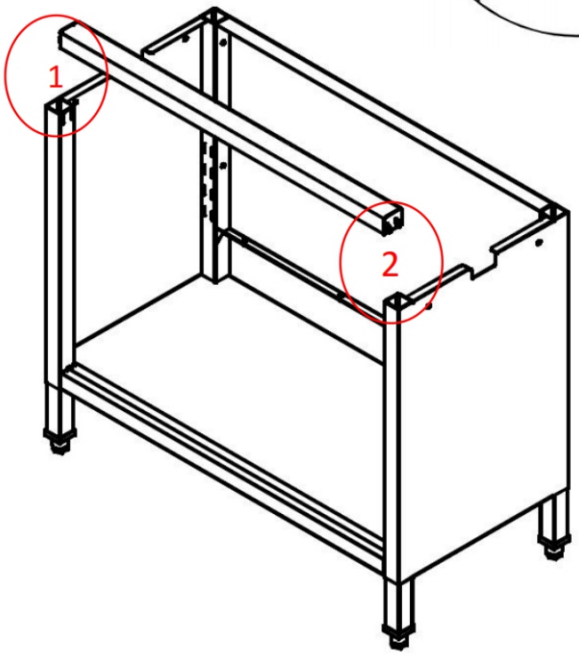


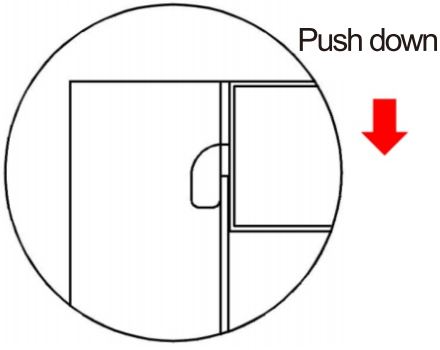

Align the buckle of the slide rail D with the hole on side 1 and press it down to fix it.
Align the buckle of the slide rail D with the holes on side 2 and press it down tofix it.

Step 5


F	N	M
		
Top Panel	M6*10 Screws	Hexagonal Cross Wrench

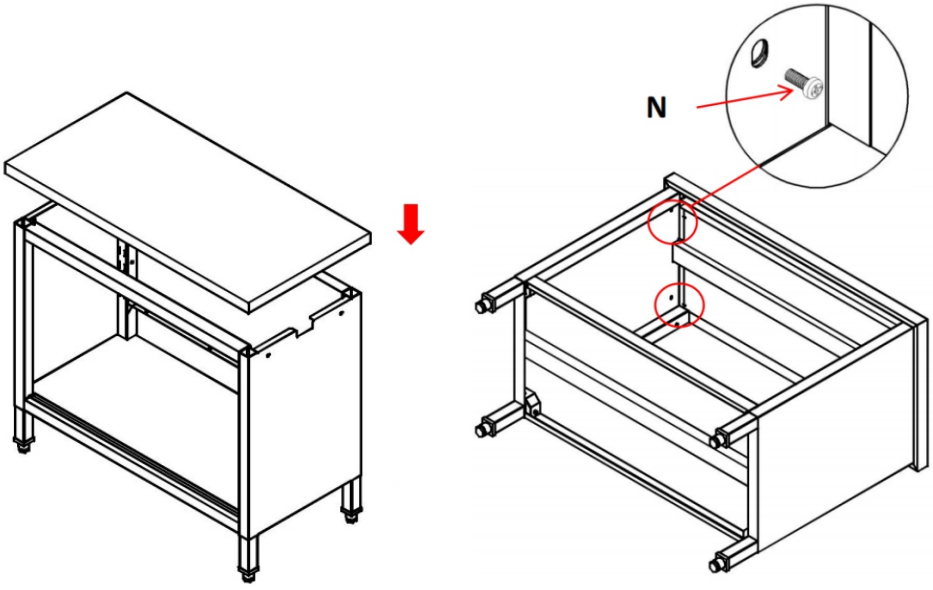


Put the top panel F on the cabinet and align the holes on the inside, and then fix it with screw N

Step 6

L




Metal Shelf Bracket 4PC

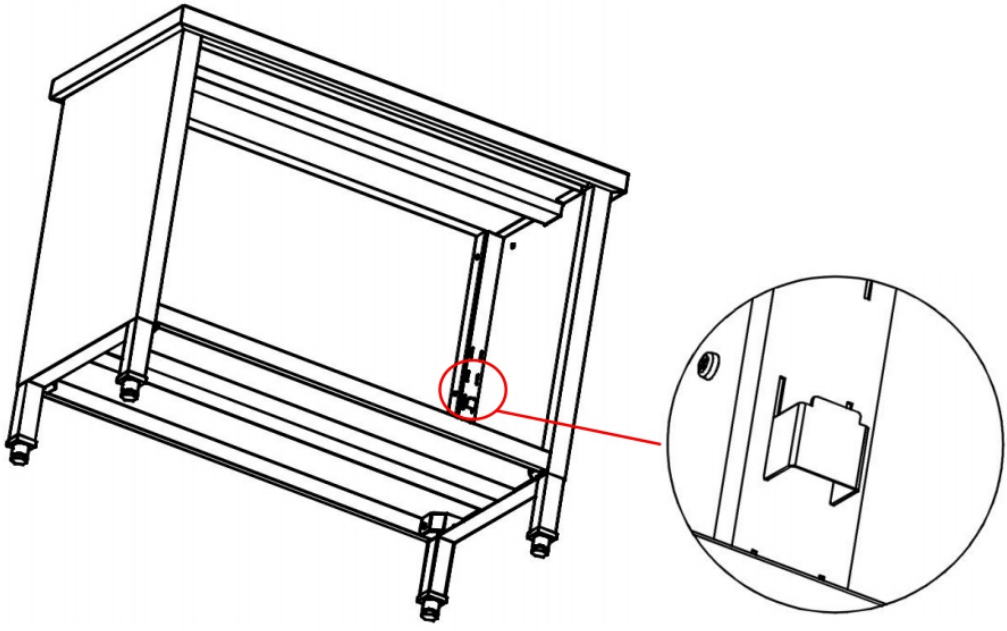


Put the 4 metal shelf bracket L on the tube hole of corresponding height.


Step 7

C




Shelf Panel

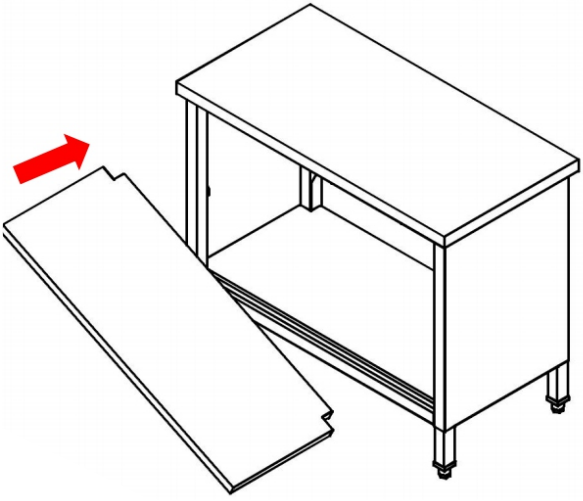

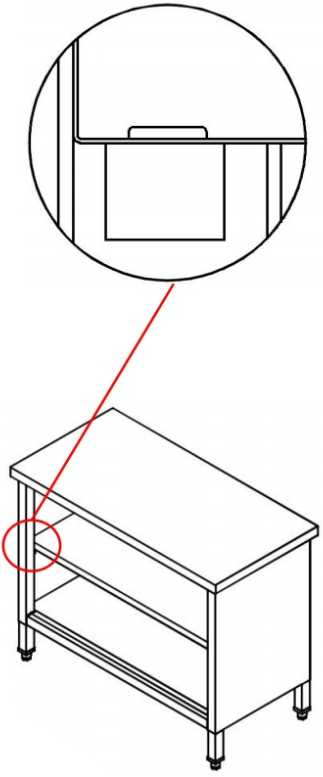



Place shelf panel C diagonally into the cabinet, and then straighten the Shelf Panel C.
Insert the hole of the shelf panel C into metal shelf bracket L.

Step 8

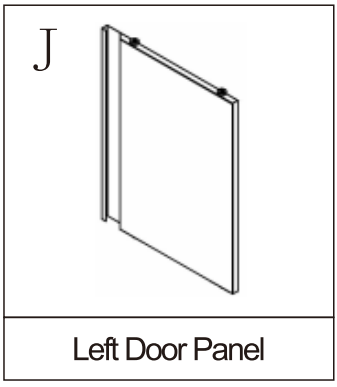



Left Door Panel

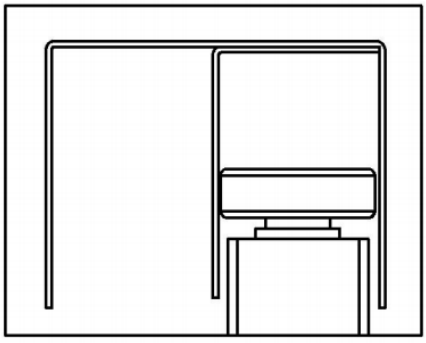


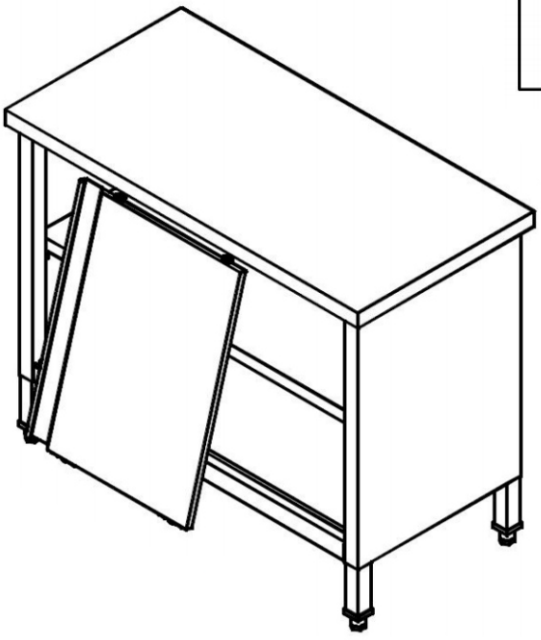

Place the left door panel J diagonally onto the second slide rail ,
and then straighten left door panel J, corresponding to the second slide rail .

Step 9


I	K	Q	M
			
Right Door Panel	Fixed Bracket	M4*10 Screws	Hexagonal Cross Wrench

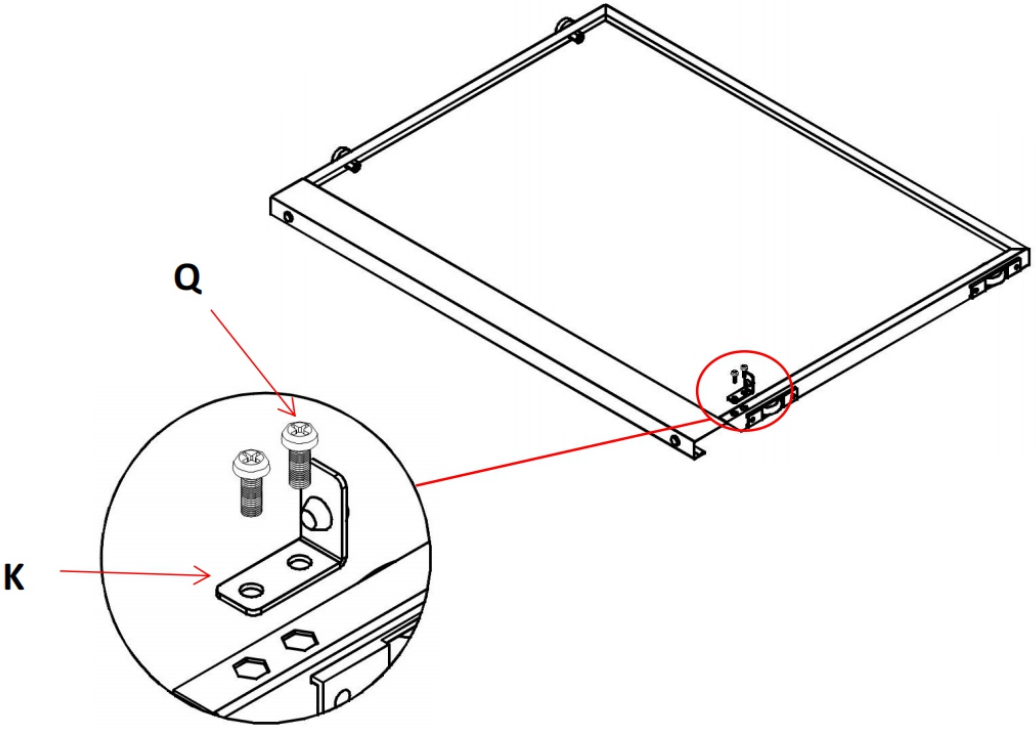


Fix the fixed bracket K to the corresponding hole of the right door panel I with screw Q


Step 10

I



Right Door Panel

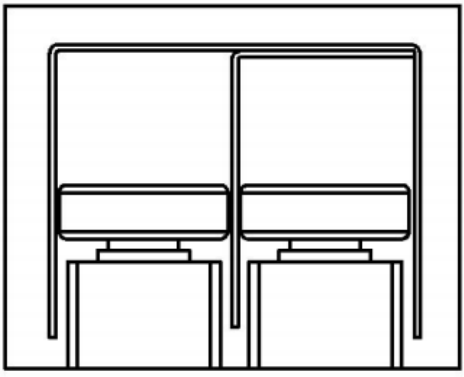

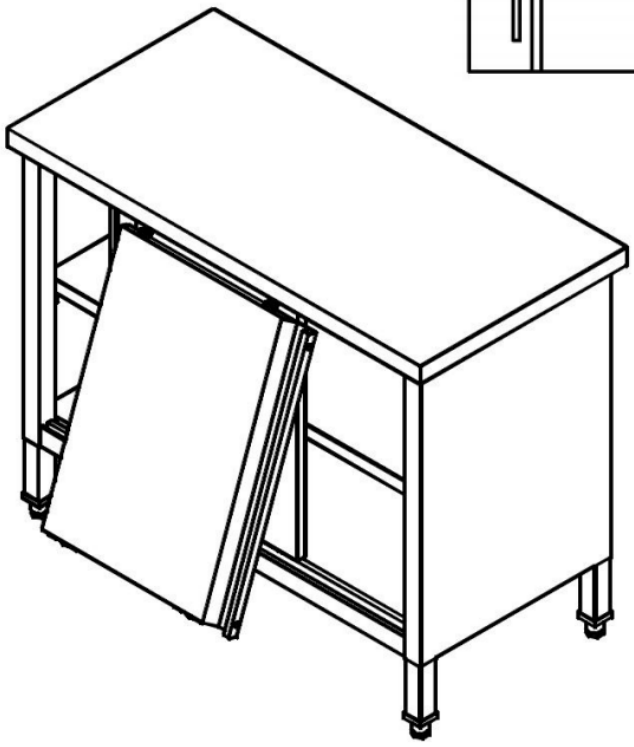

Place the right door panel I diagonally onto the first slide rail ,
and then straighten right door panel I, corresponding to the first slide rail