


ASSEMBLY INSTRUCTIONS

MONTY 6 DRAWER DRESSER

ASSEMBLY REQUIREMENTS	2 – Person Assembly	2.5 Hour Assembly Time (Approximate)	Tool Required (Not Provided)	
--------------------------	------------------------	--	---------------------------------	---

Thank you for purchasing our product!

Please refer to the enclosed Part List and Hardware List to ensure you have all the parts and hardware required for assembly. If you are missing any parts or hardware, please contact our customer service for assistance.



We appreciate your business!

ASSEMBLY PREPARATION:

1. Remove all packaging materials ,staples and packing straps from the carton.
2. Refer to Part List and Hardware List and ensure parts and hardware are correct before assembly.
Contact customer service for missing parts.
3. Place all wooden parts on clean, flat and soft surface (e.g .carpet or rug) to prevent scratch and damage to parts.

SAFETY PRECAUTION:

1. Keep ALL HARDWARE PART OUT OF REACH OF CHILDREN.
2. DISPOSE PLASTIC PACKAGING MATERIAL IMMEDIATELY TO AVOID ANY RISK OF SUFFOCATION TO CHILDREN AND ANIMALS

TIPS FOR ASSEMBLY:


1. Allow ample room for assembly and in close proximity to where product will be placed.
2. Assemble the product on a surface that does not scratch or damage the exterior glass and finish of the furniture.
3. Identify all the parts, hardware and quantities required for each step.
4. During assembly, do not over-tighten any fittings as this may cause damage.
5. DO NOT USE POWER TOOLS TO ASSEMBLE THIS PRODUCT.
6. Always place the product on a flat, level surface.
7. Do not sit or stand on the partially assembled product ;only use the product for which it is intended.

CARE AND MAINTENANCE:

- Use a slightly damp cloth to clean the product. Do not use bleach or abrasive cleaning material.
- Check all the fittings periodically and re-tighten as necessary. Do not use the product if any of the parts is damaged or broken.
- Never allow any kind of liquids to remain on your furniture. Absorption can cause wood to warp or delaminate.
- Do not place hot items (e.g hot drinks)directly onto the wood surface.
- Do not drag and pull your furniture.

This product is for indoor and household use only –not for commercial or industrial use.

INSTRUCTION FOR CAM-BOLT & CAM-LOCK

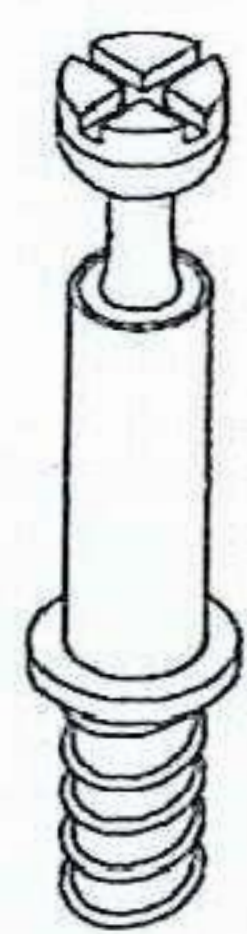


CAM-BOLT




CAM-LOCK


Tools Required

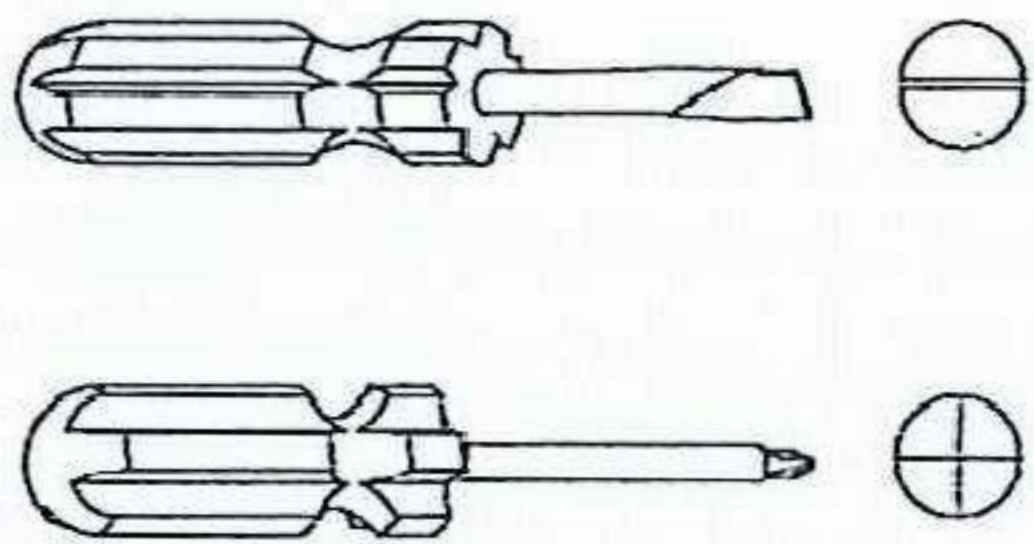


INSERTING AND TIGHTENING CAM-BOLT

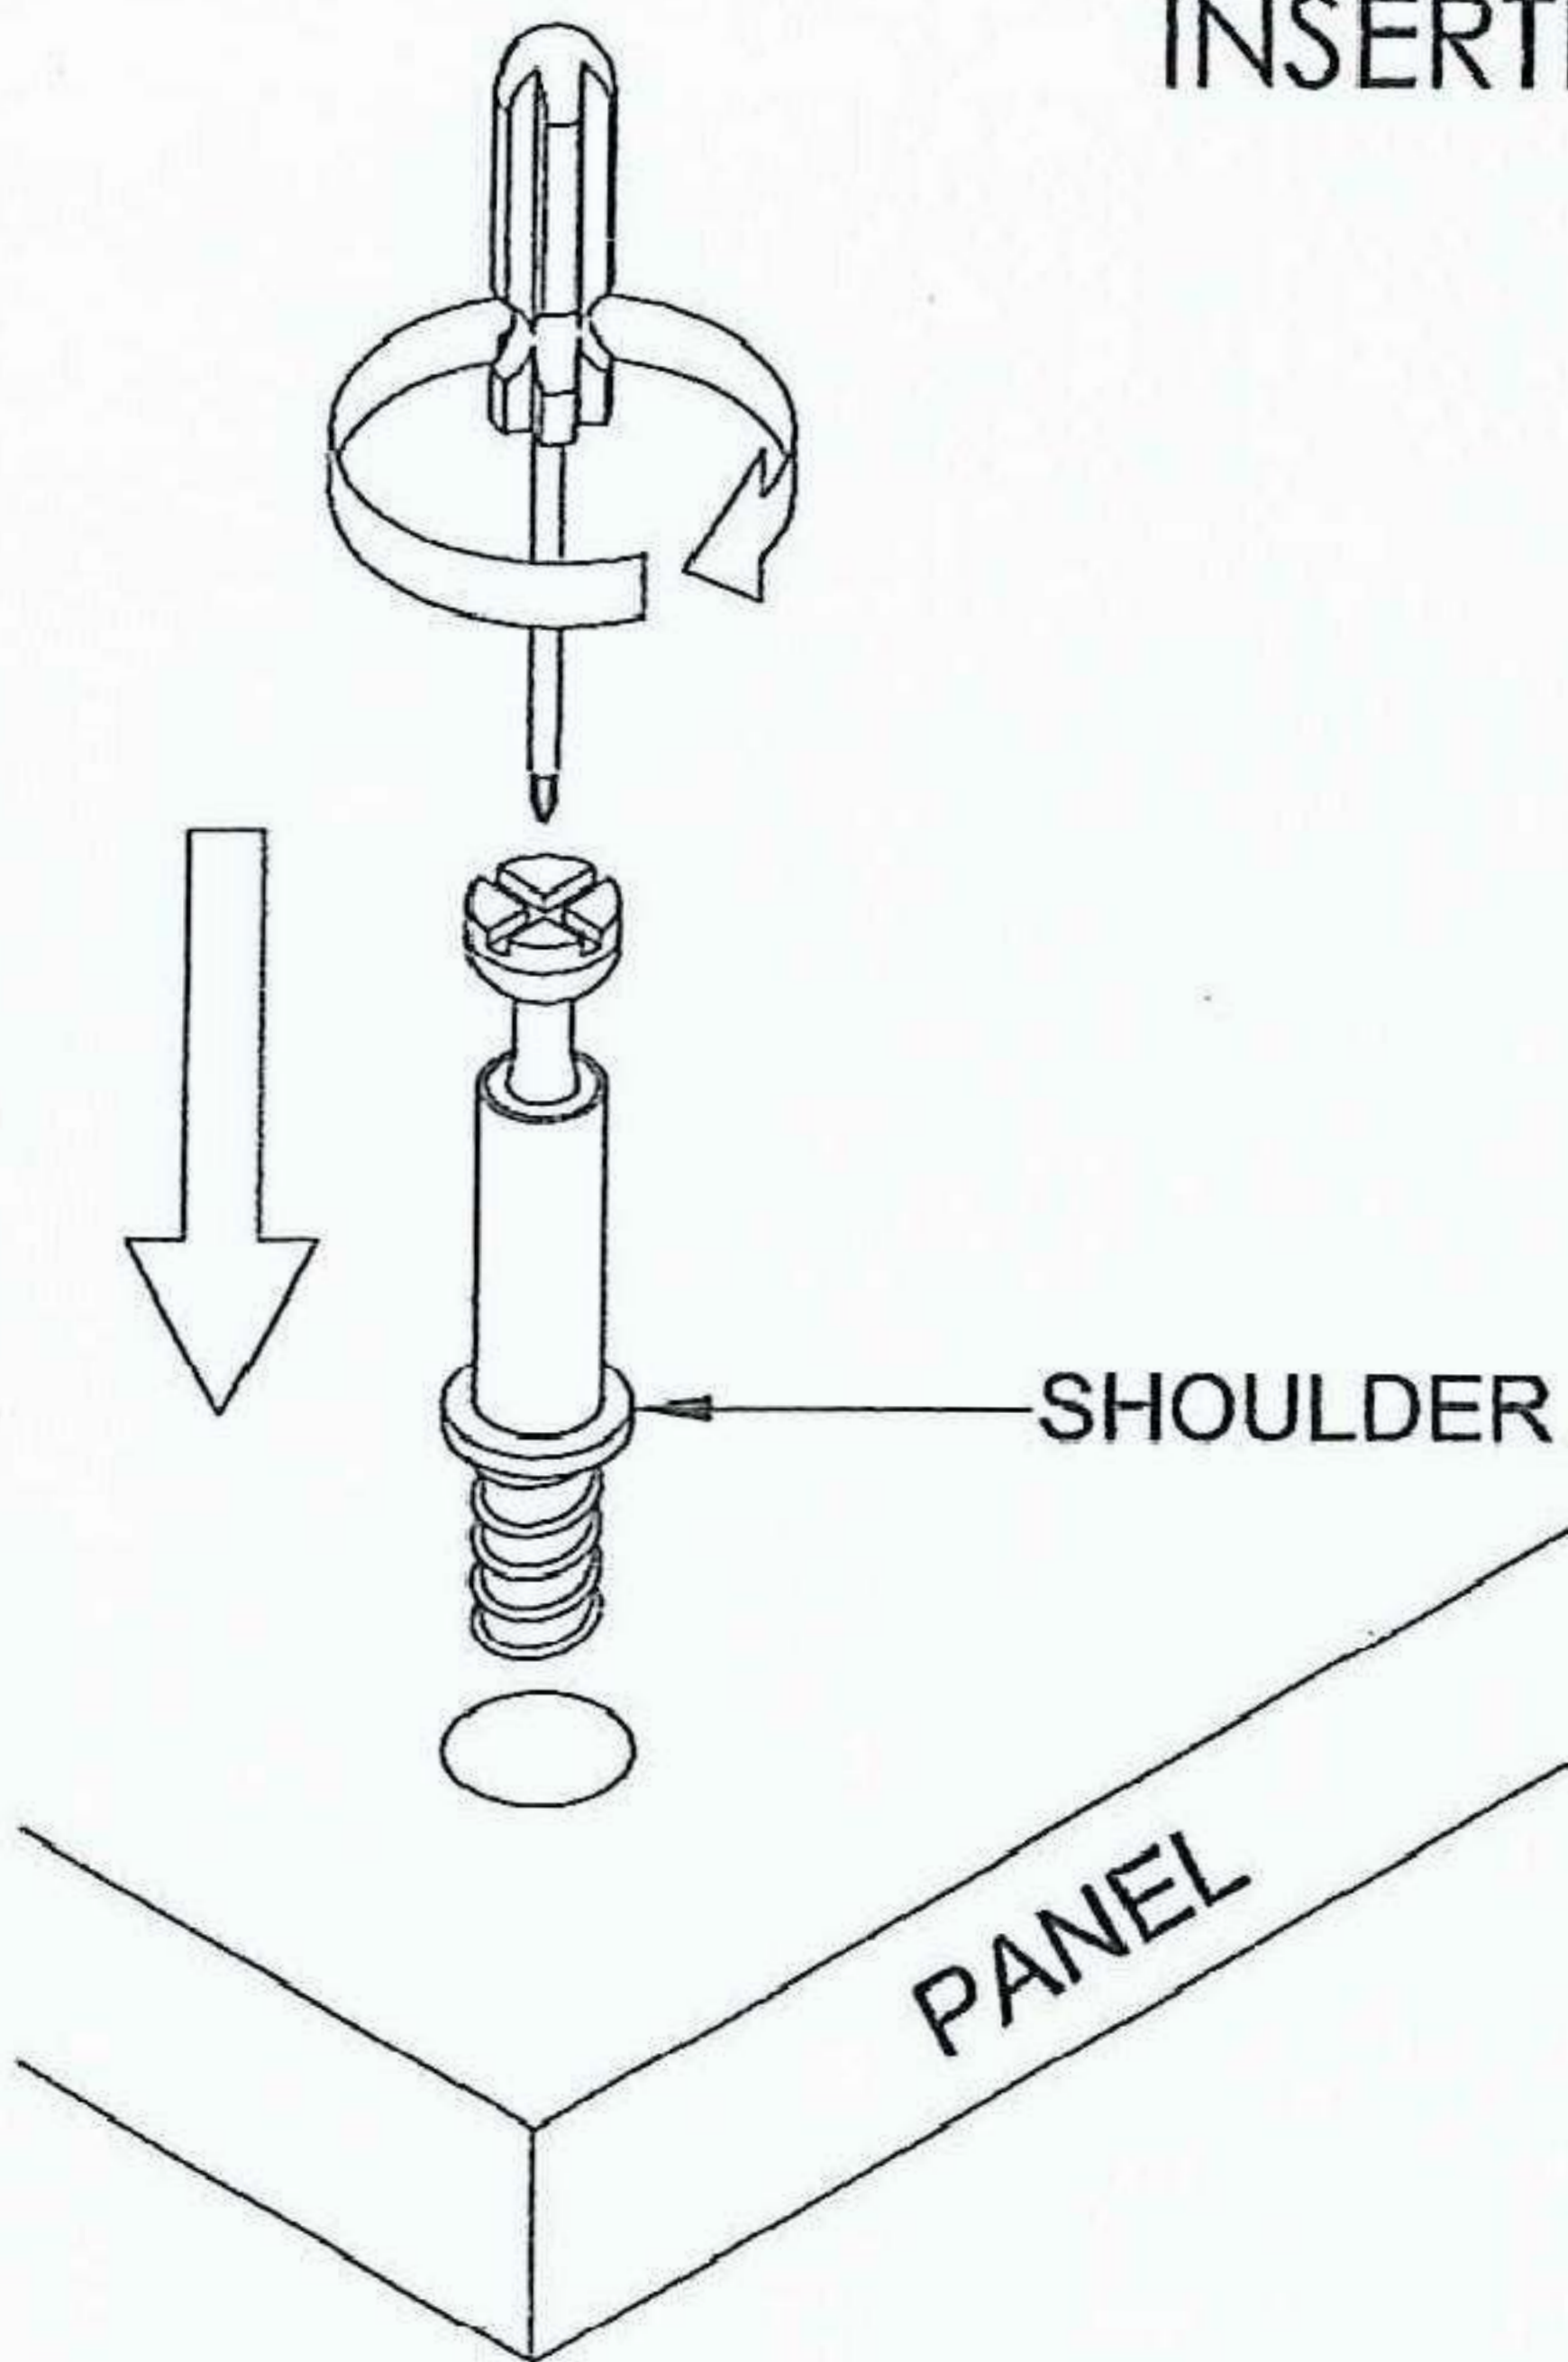

Place Cam-bolt on pre-drilled hole and screw in vertically

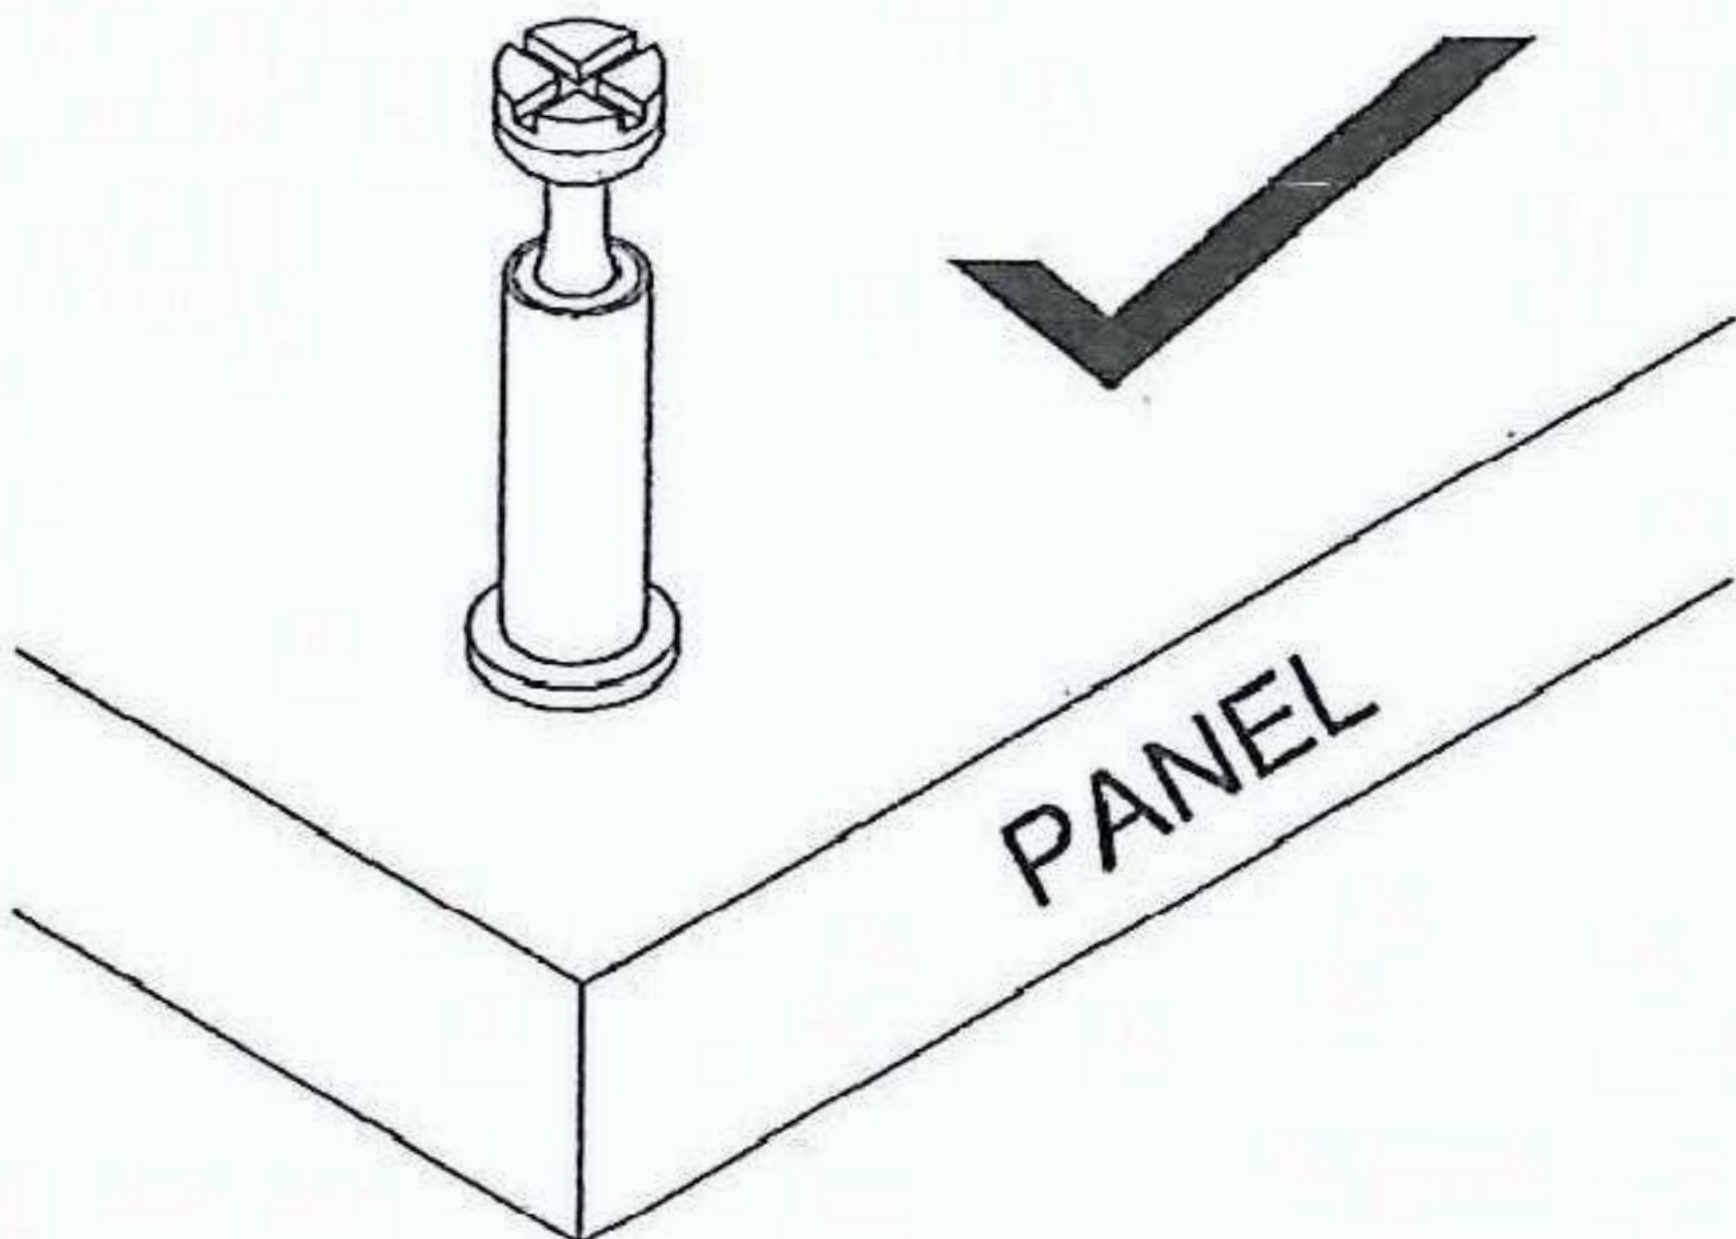


Shoulder is flushed (on the same level) with the panel.

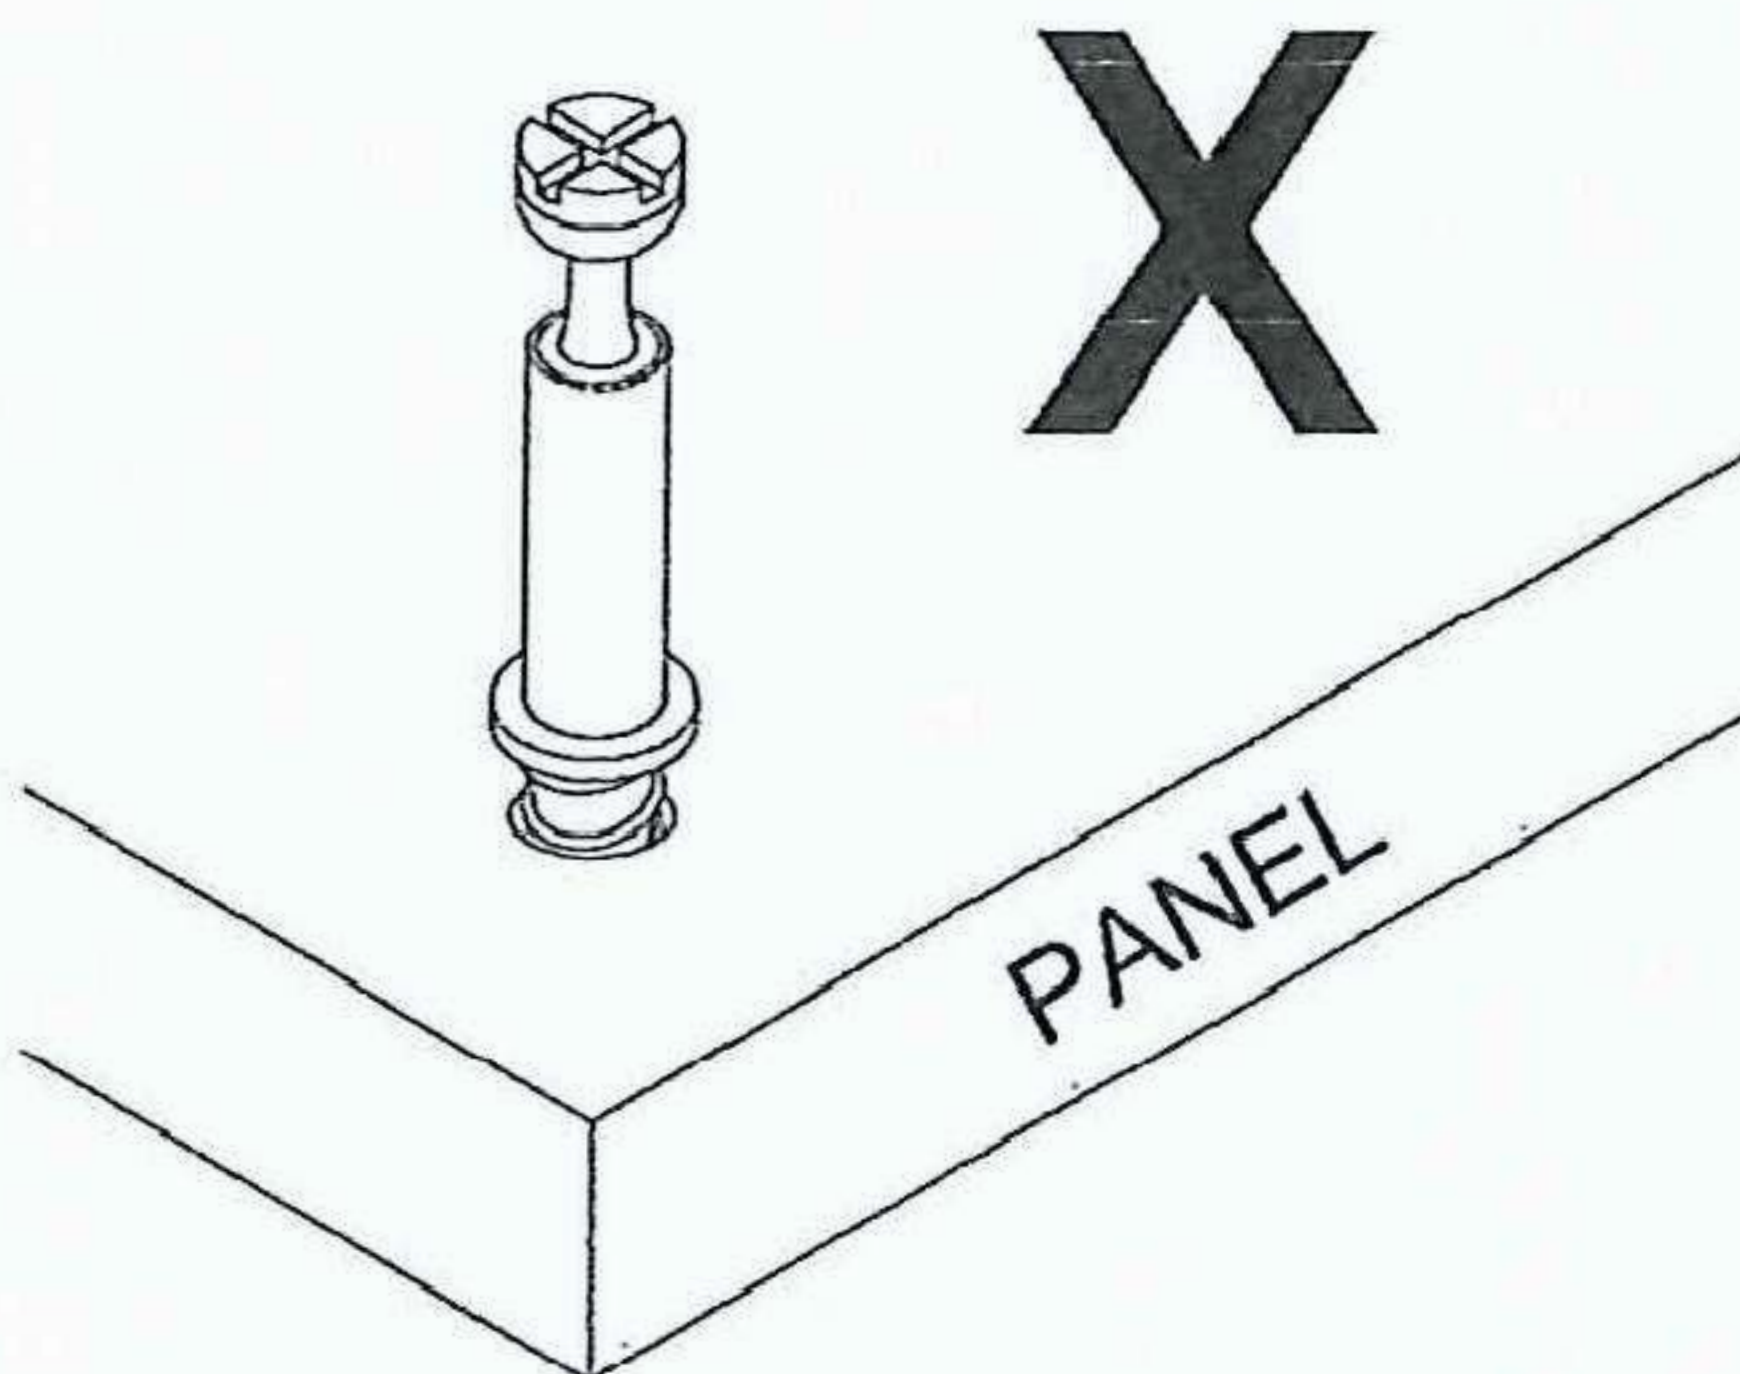


Shoulder is above the panel.

Place Cam-bolt on the designated pre-drilled holes on the panel. Use a Phillips Screwdriver to screw-in Cam-bolt vertically until shoulder is flushed (on the same level) with panel.

INSERTING CAM-LOCK

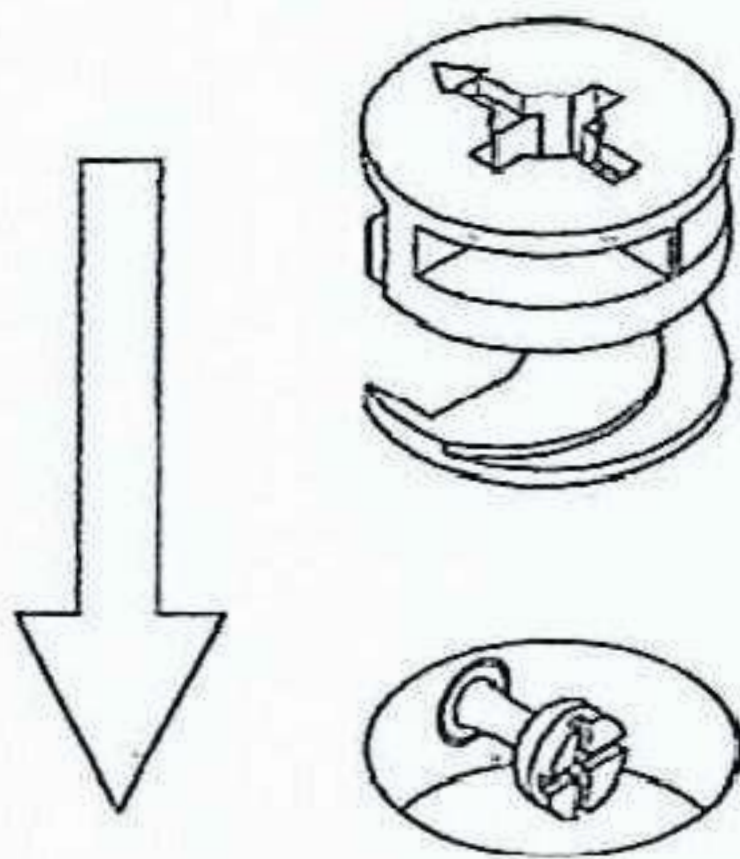


Insert Cam-lock with arrow align to Cam-bolt head

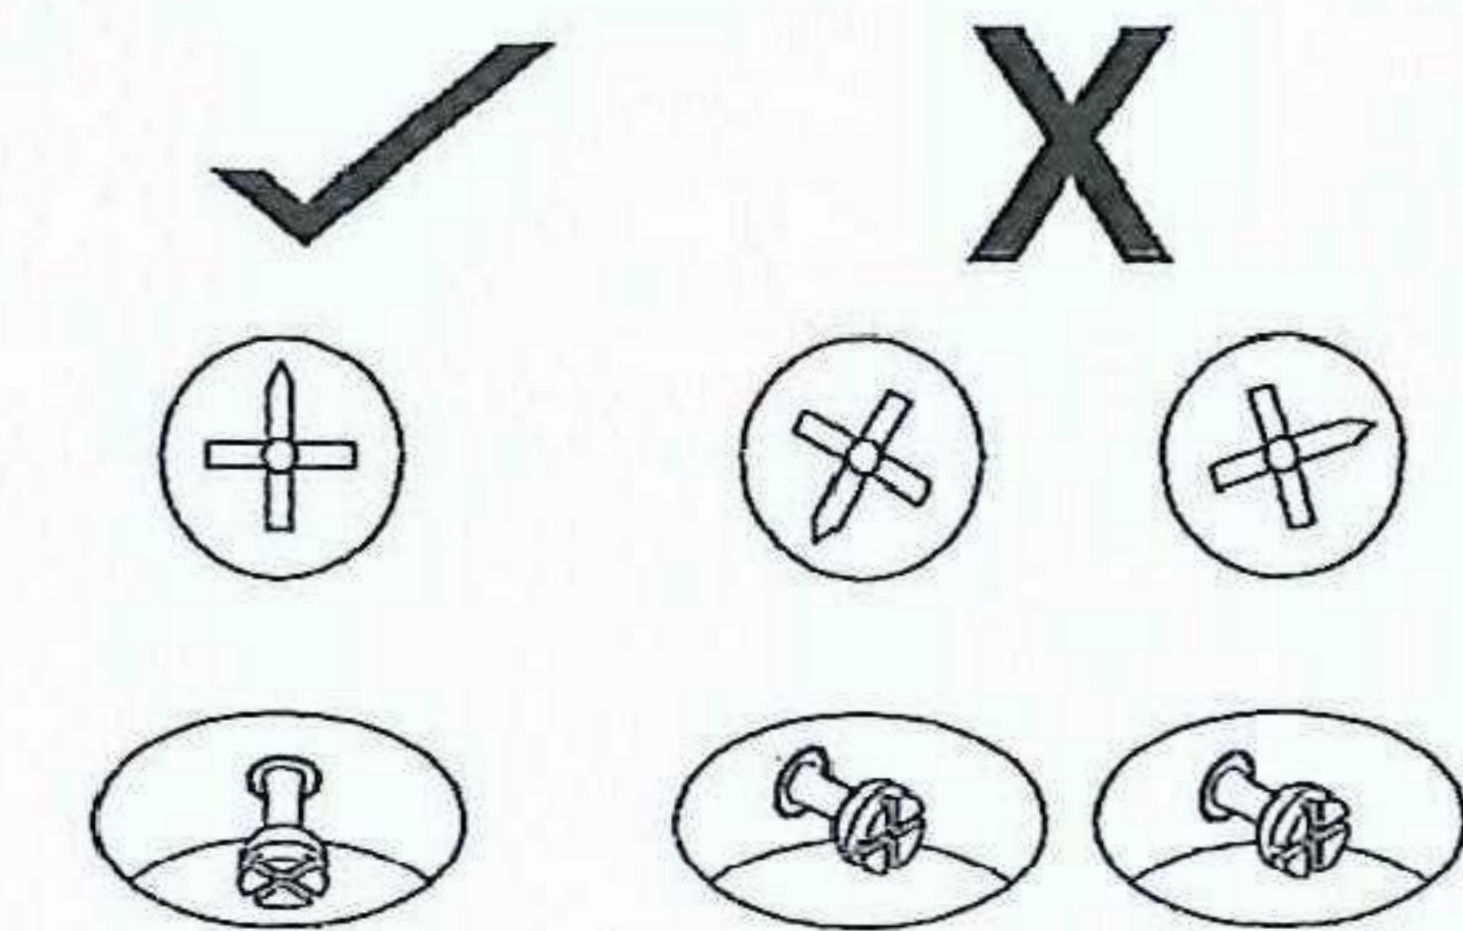

CORRECT


WRONG

TIGHTENING CAM-LOCK

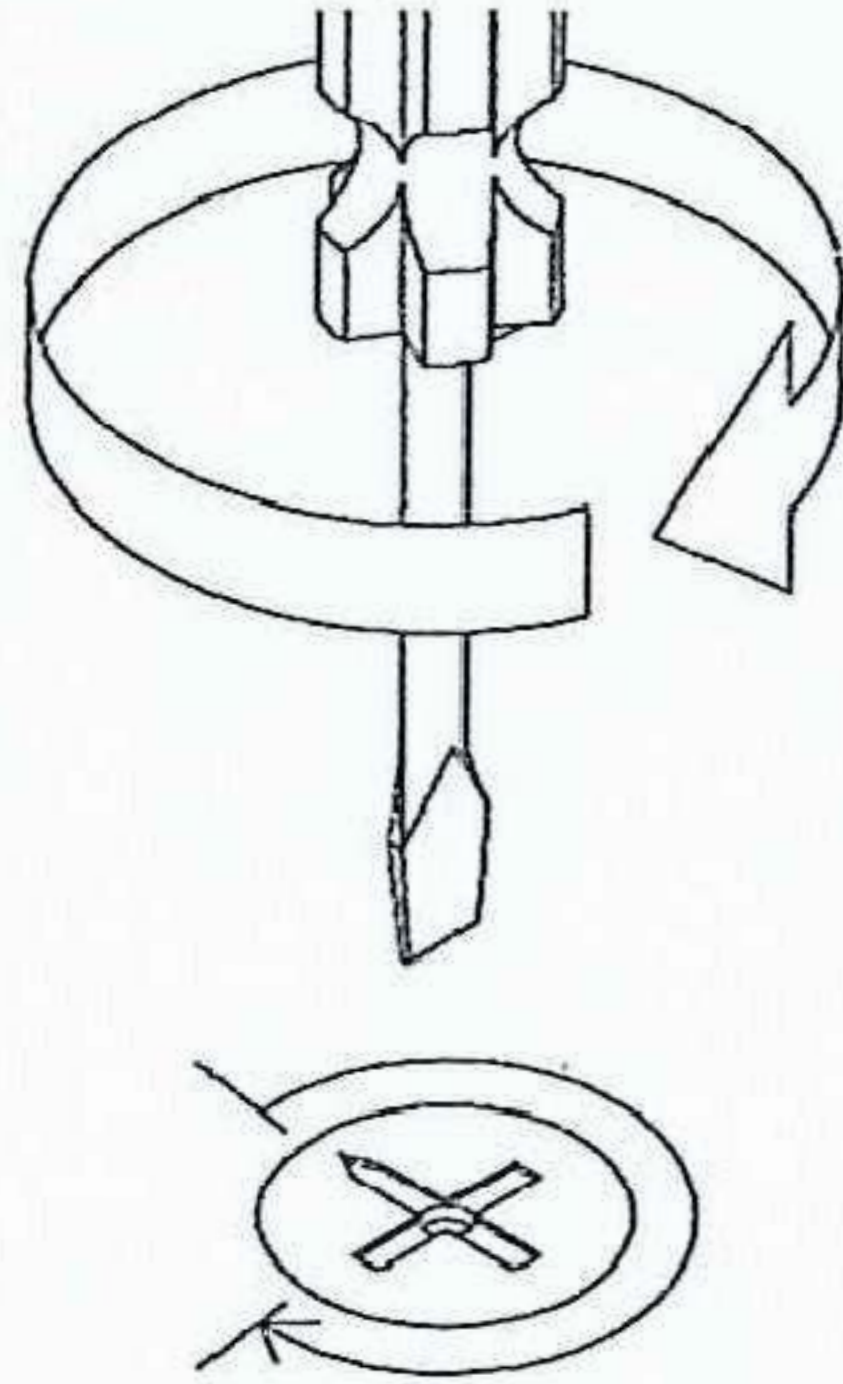


CAM-LOCK
Align the arrow on the Cam-lock to the Cam-bolt head and insert the Cam-lock. Ensure Cam-lock is fully inserted.


Use a Flat-head Screwdriver to turn Cam-lock clockwise so it locks onto the head of the Cam-bolt. Turn until it is snug (about 3/4ths of a turn) -- over-tightening could damage Cam-lock or/and Cam-bolt.

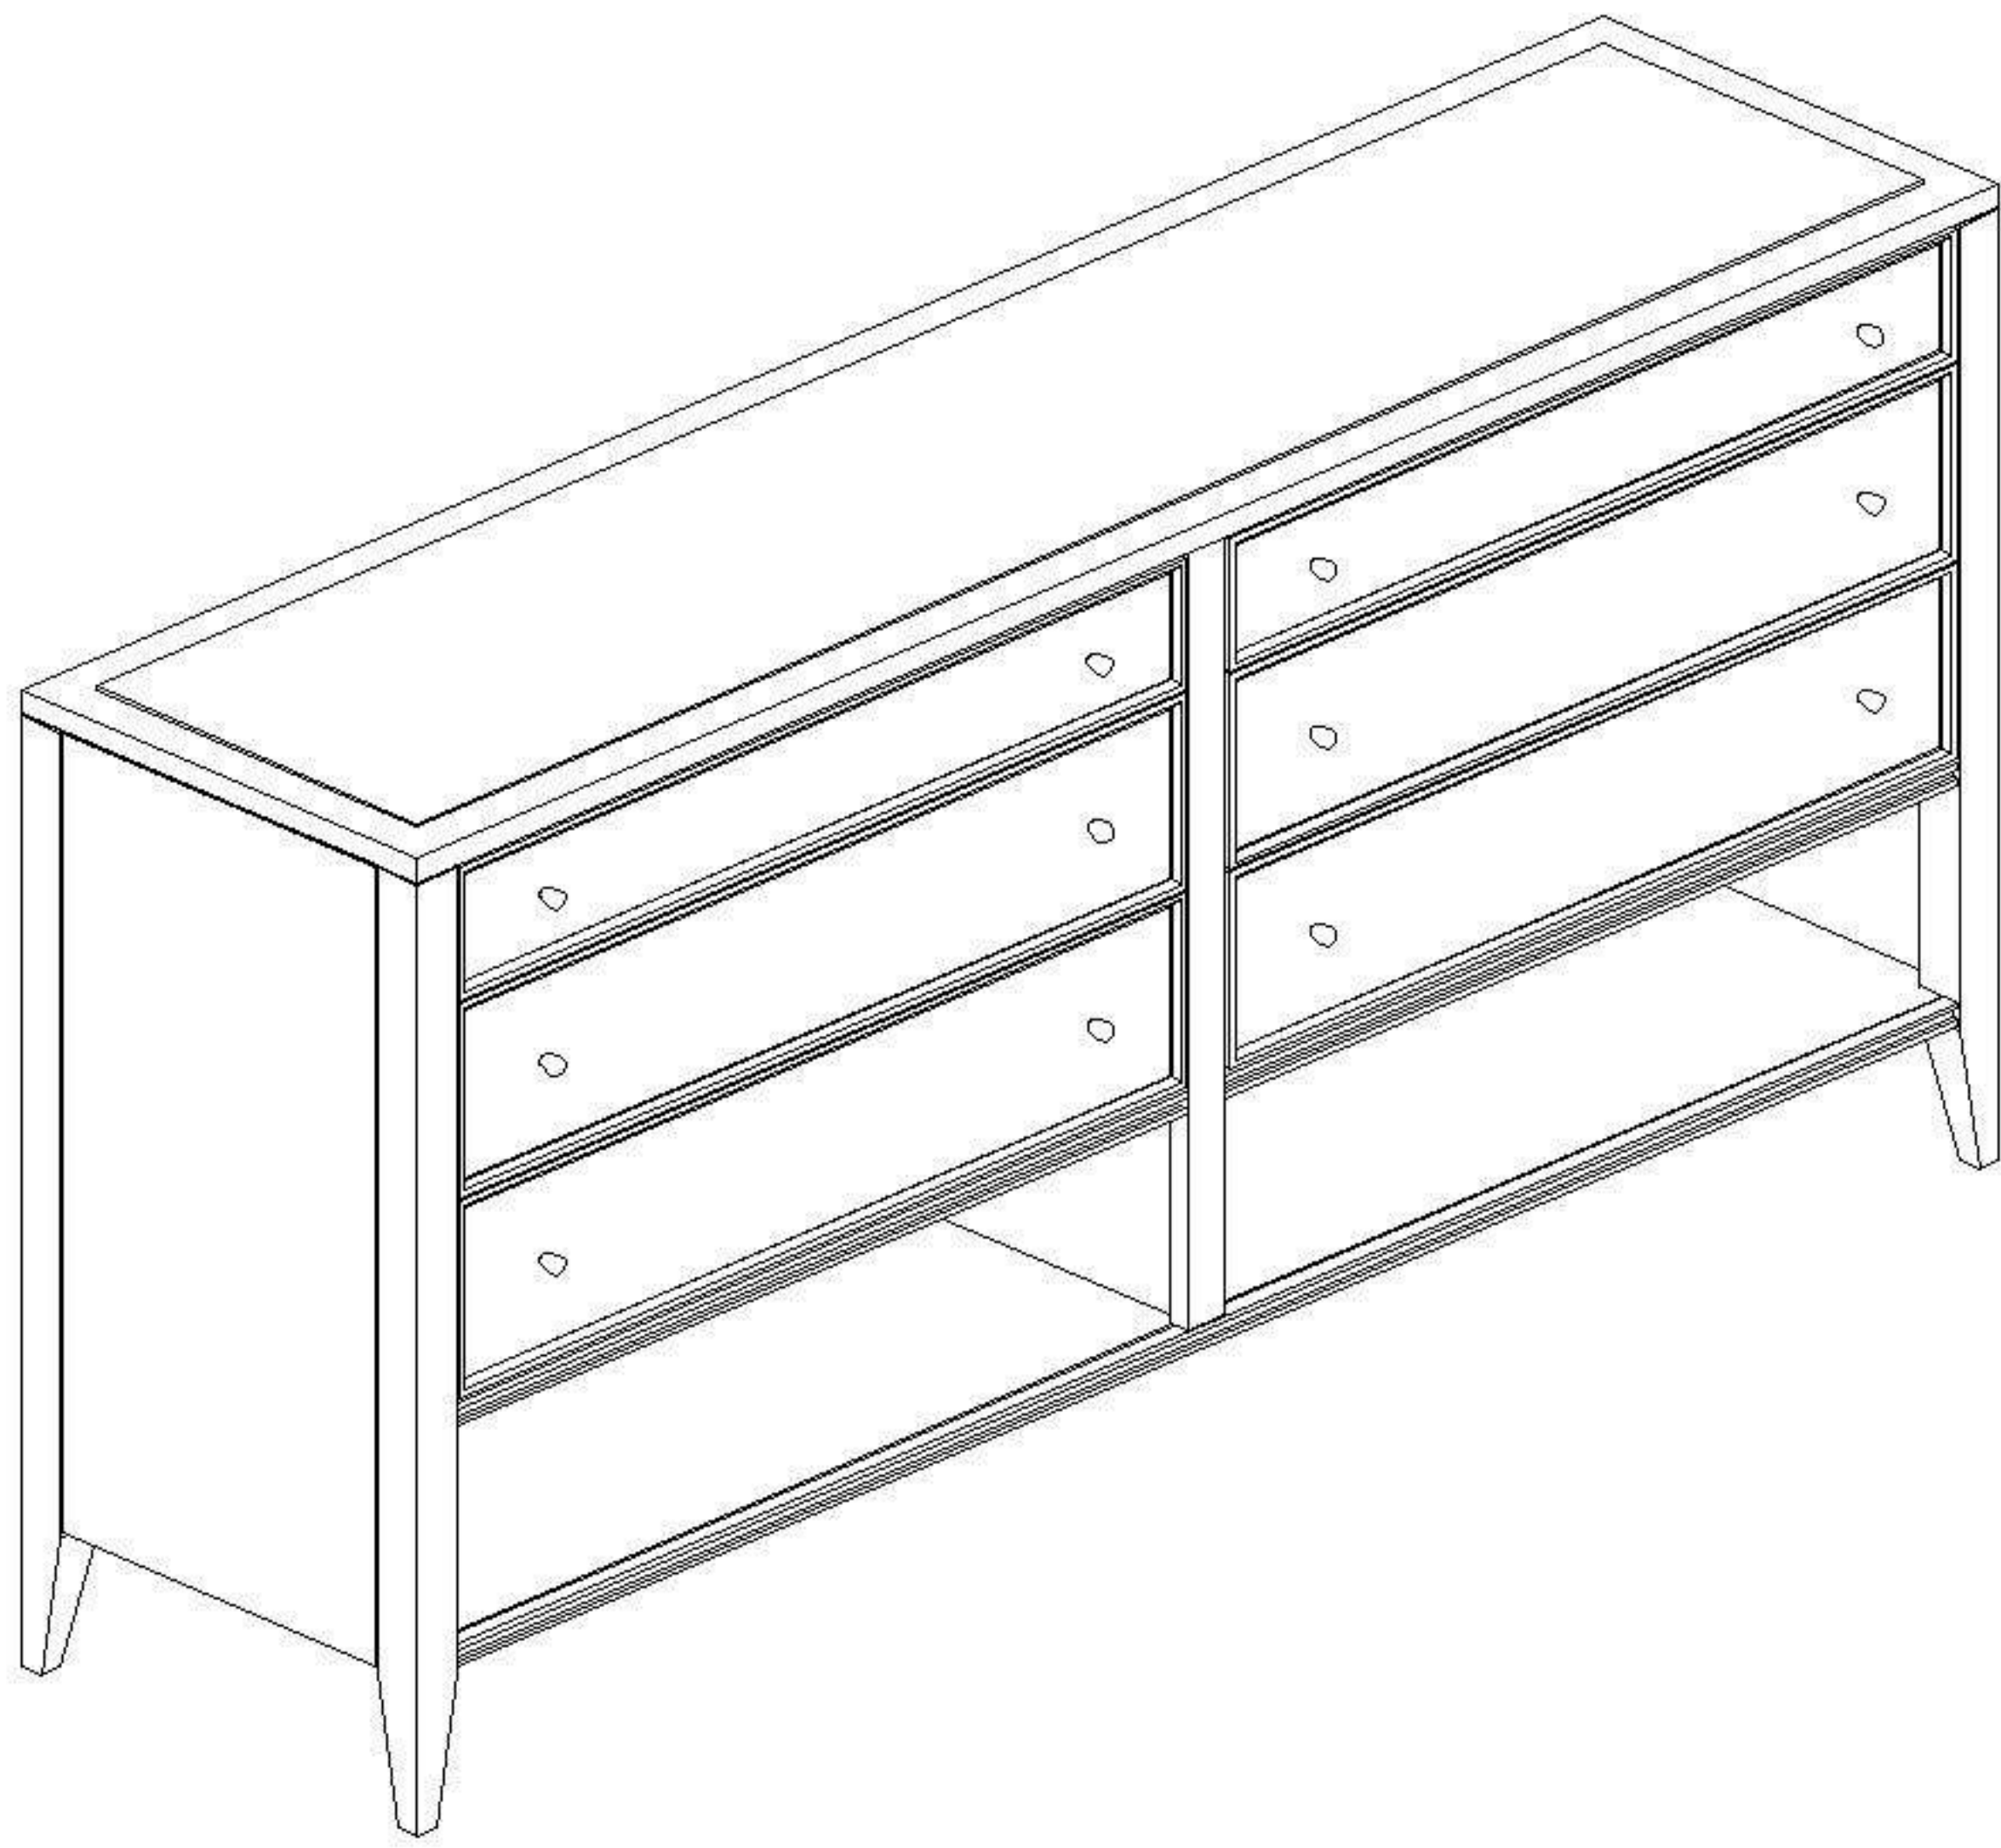


PARTS LIST

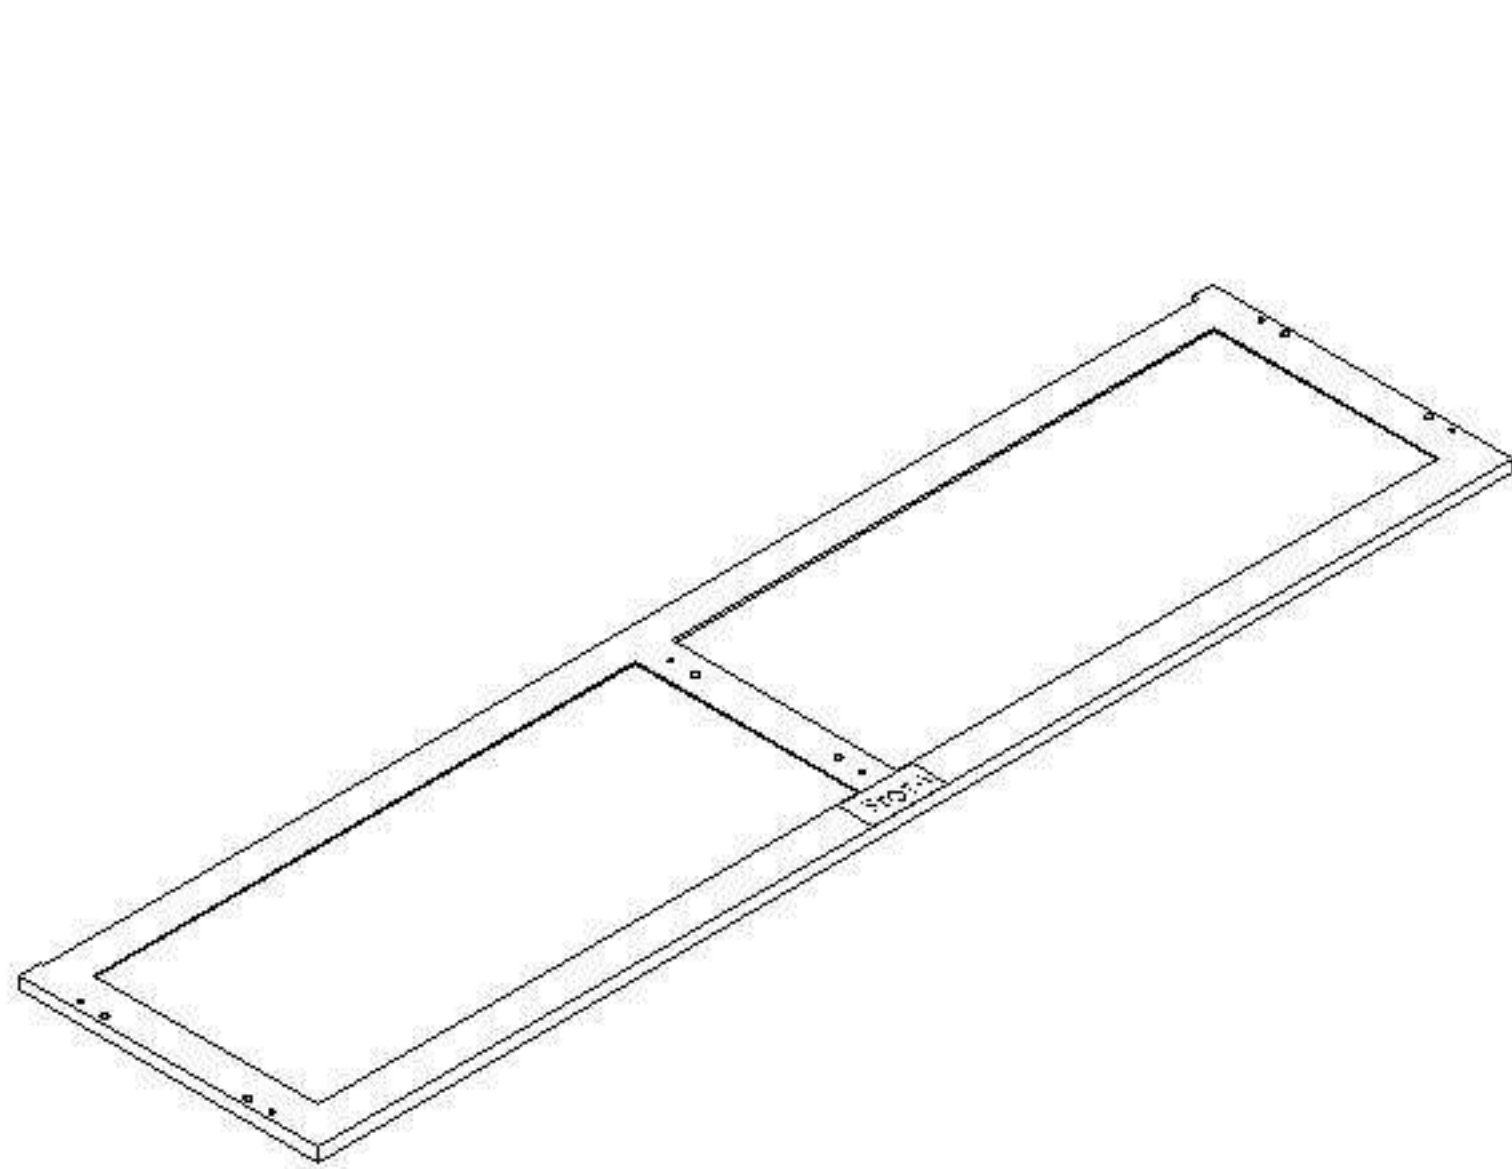


NAME: TOP PANEL
CODE: 1
QTY: 1Pc

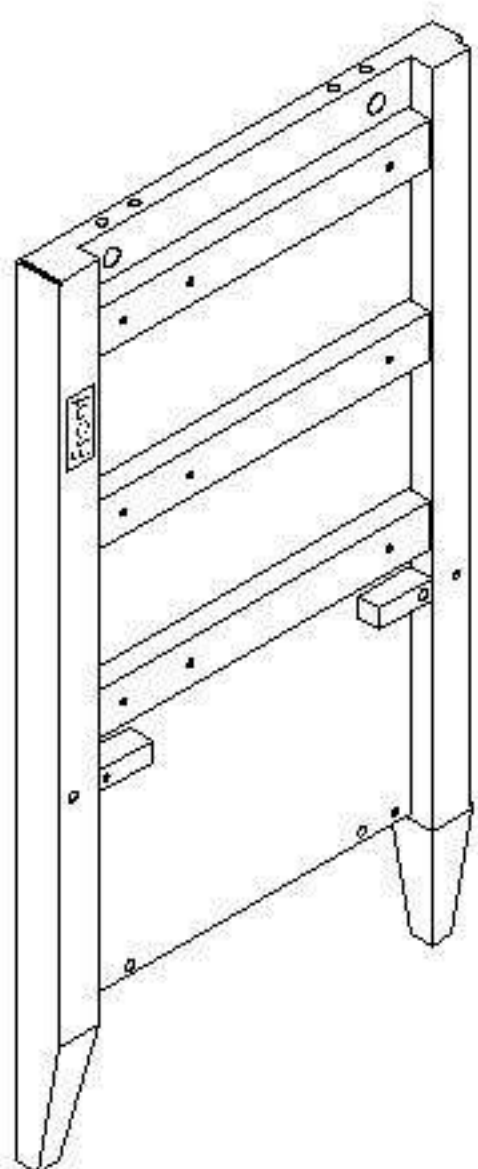


NAME: SIDE PANEL(LEFT)
CODE: 2
QTY: 1Pc

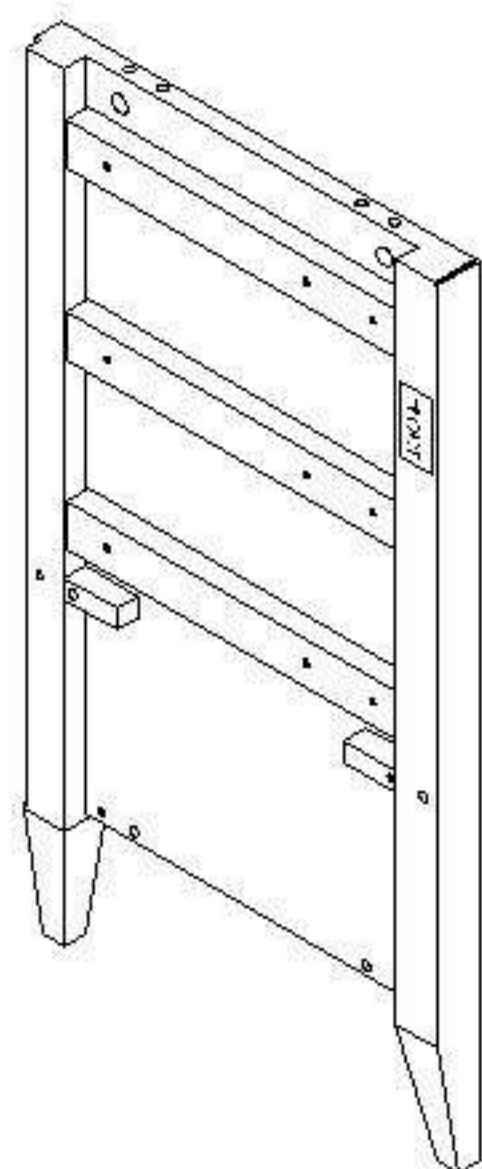


NAME: SIDE PANEL(RIGHT)
CODE: 3
QTY: 1Pc

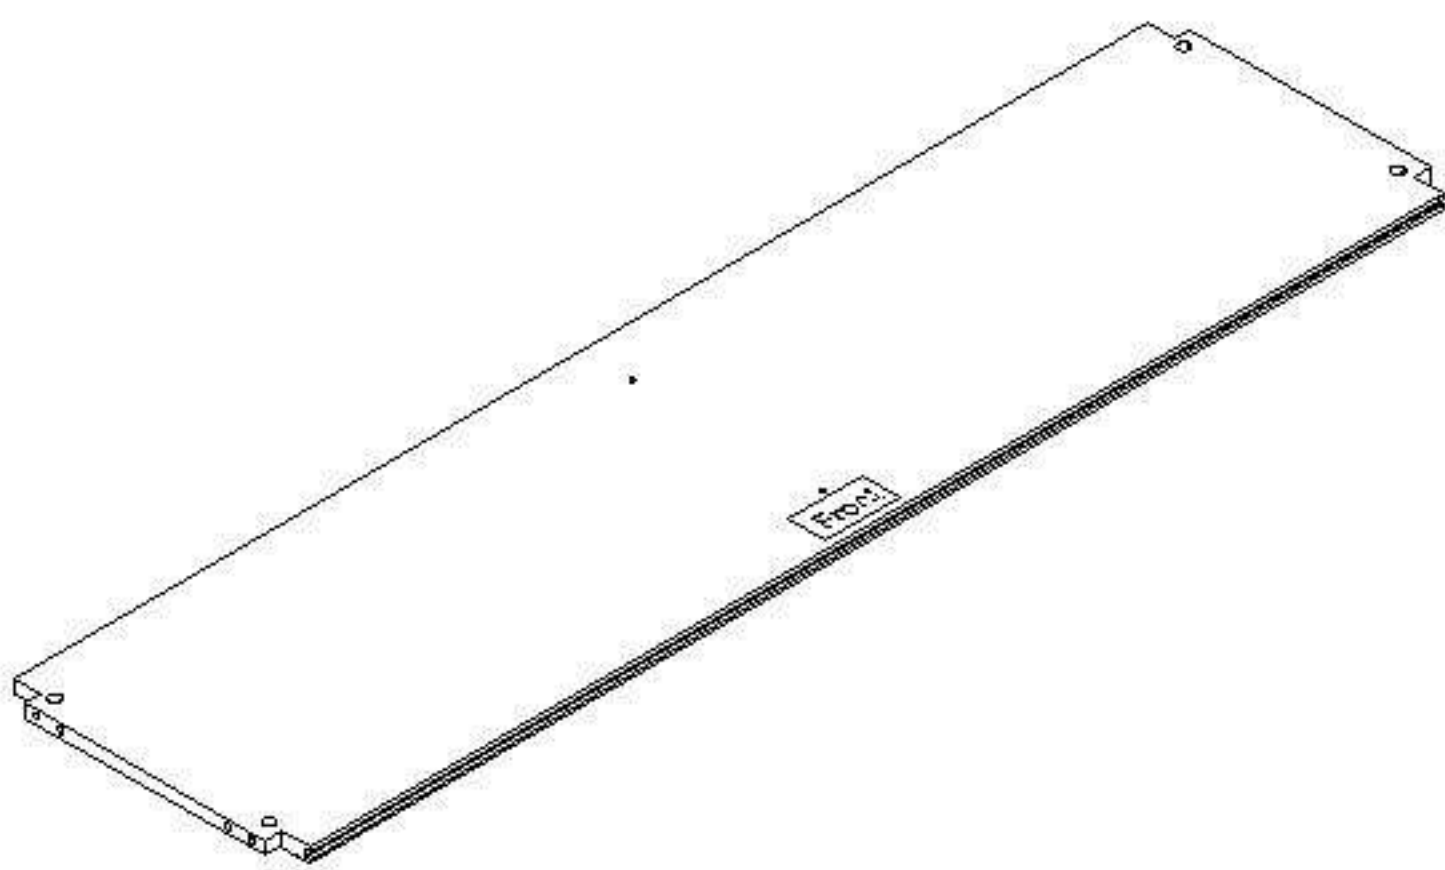


NAME: BOTTOM PANEL
CODE: 4
QTY: 1Pc

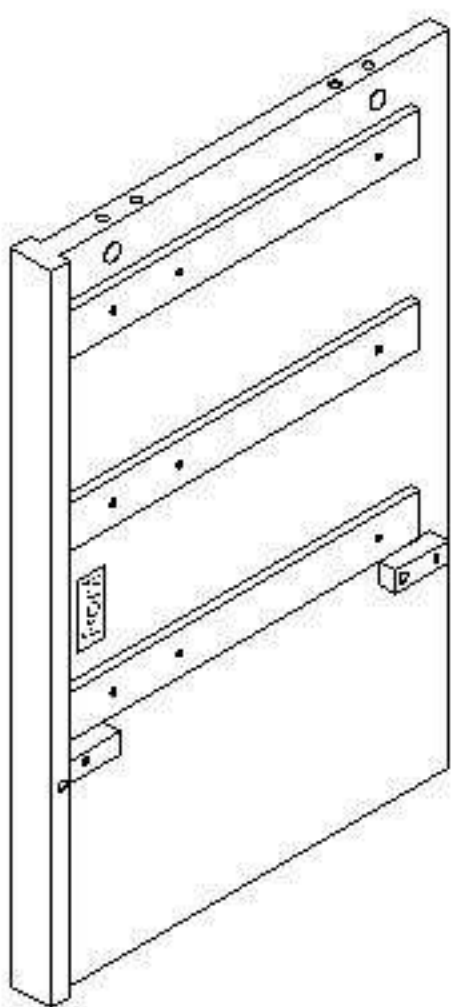


NAME: PARTITION
CODE: 5
QTY: 1Pc

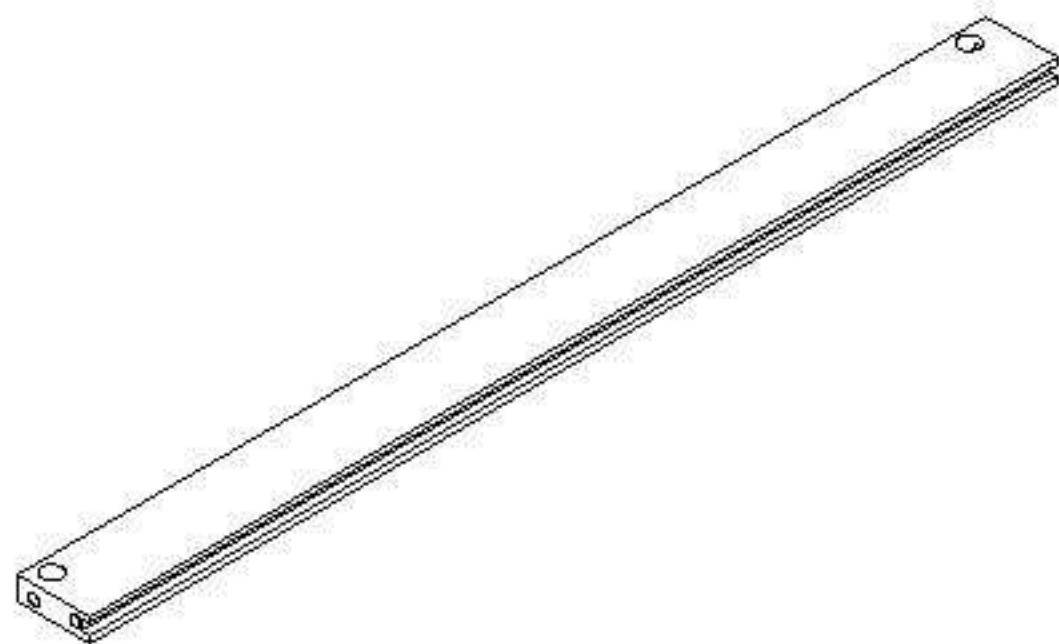


NAME: FRONT BAR
CODE: 6
QTY: 2Pcs

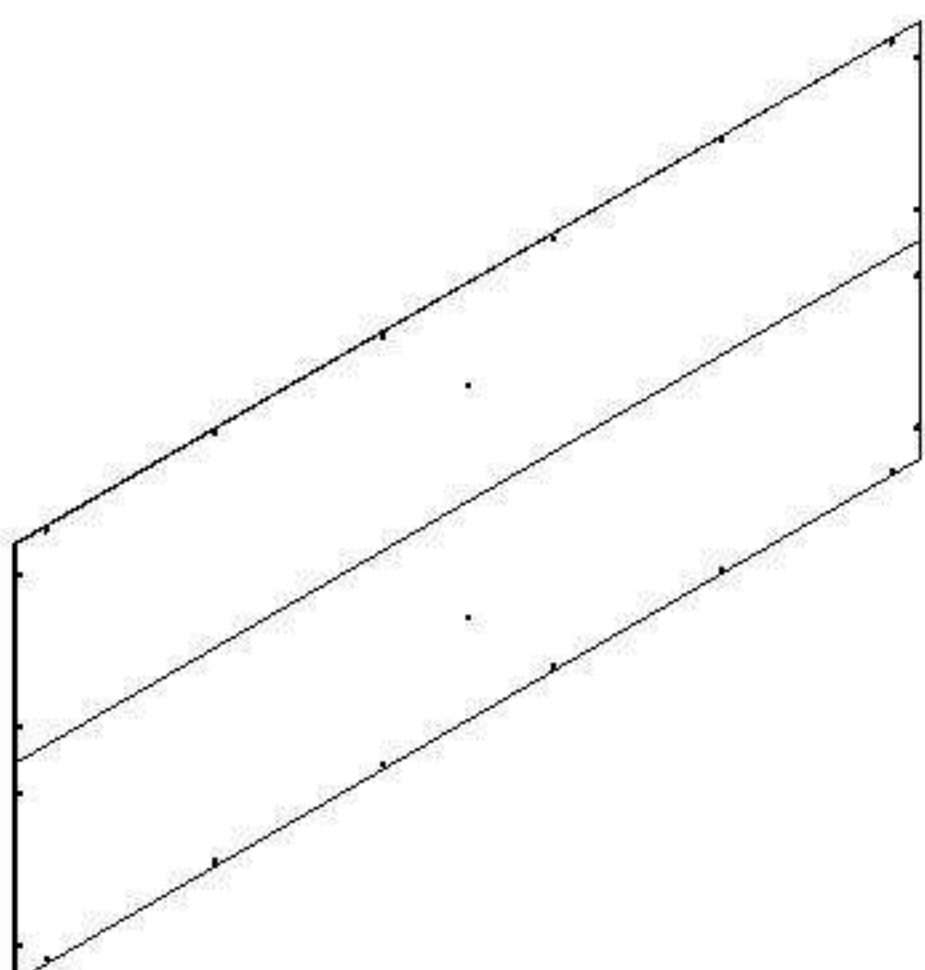


NAME: BACK PLY
CODE: 7
QTY: 1Pc

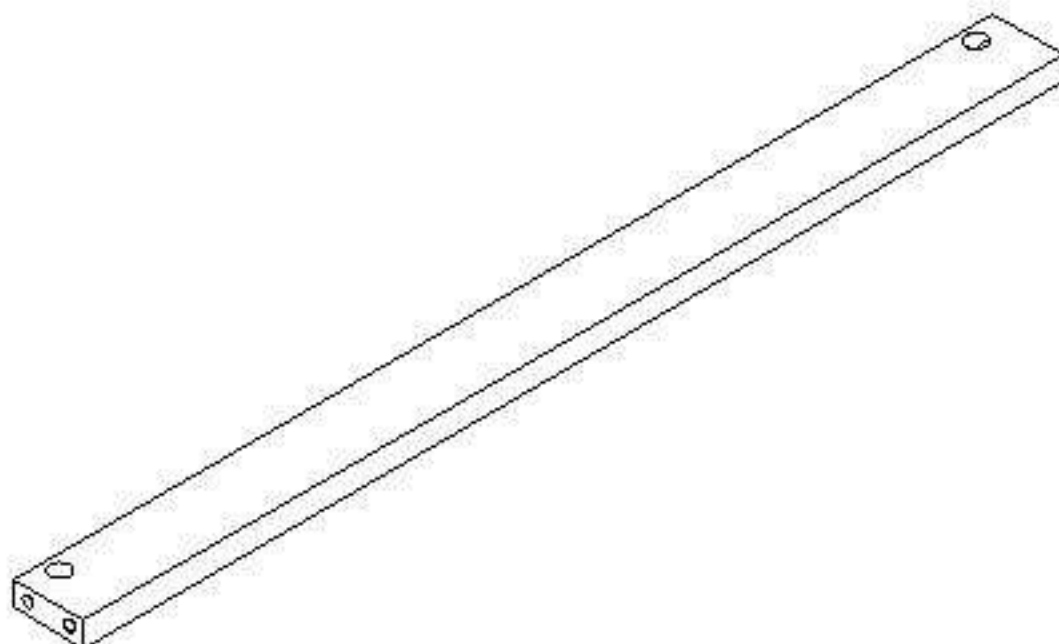


NAME: BACK BAR
CODE: 8
QTY: 2Pcs

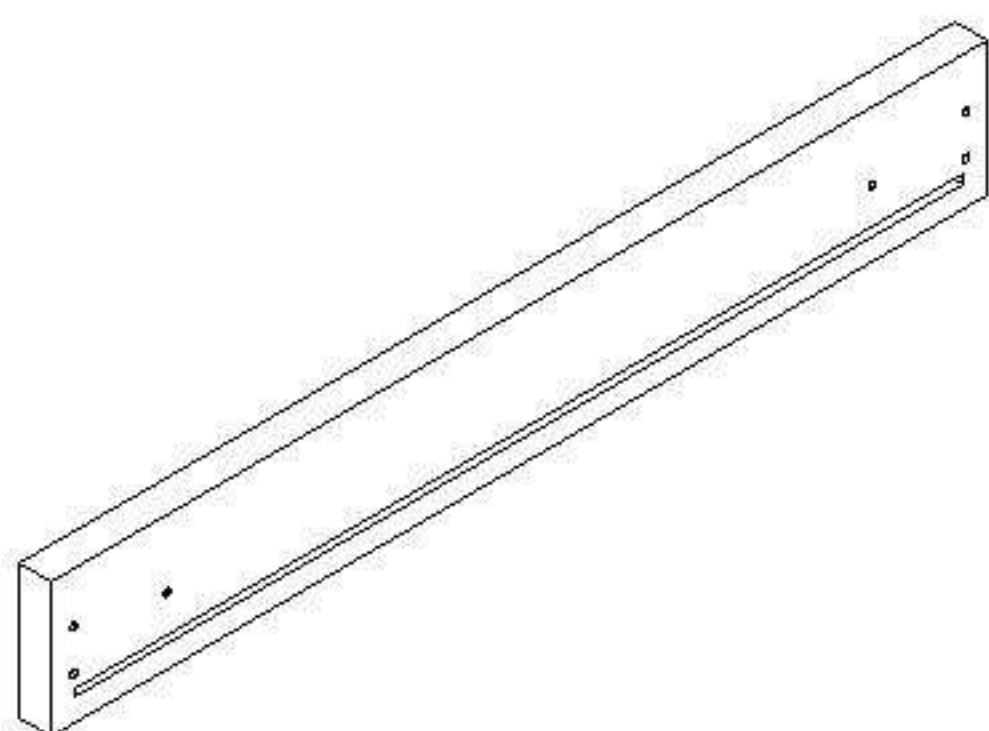


NAME: SMALL DRAWER FRONT
CODE: 101
QTY: 2Pcs

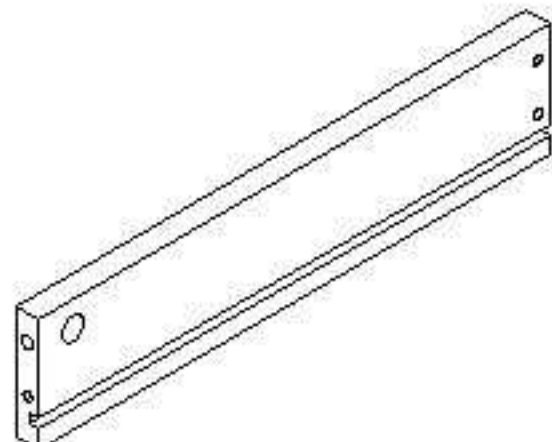


NAME: SMALL DRAWER SIDE (LEFT)
CODE: 102
QTY: 2Pcs

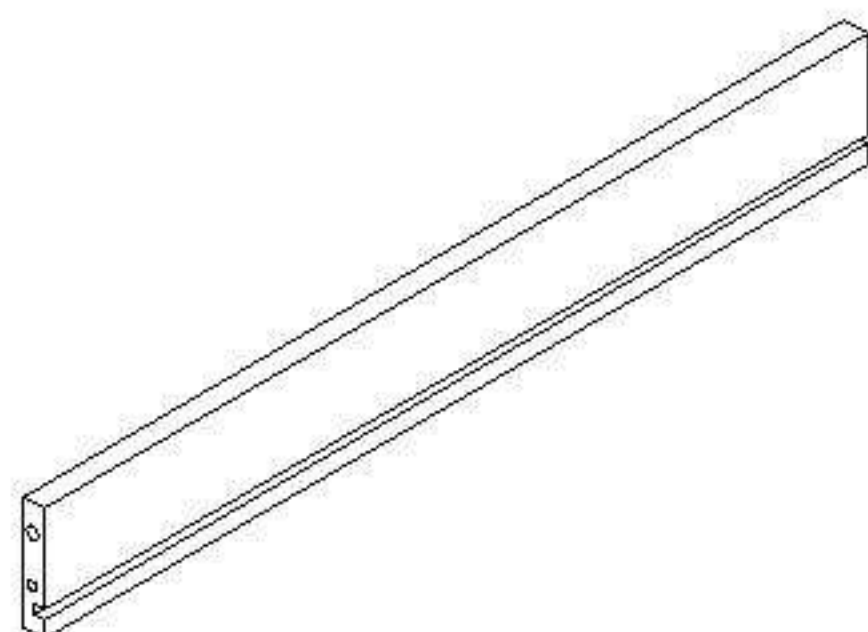


NAME: SMALL DRAWER BACK
CODE: 103
QTY: 2Pcs

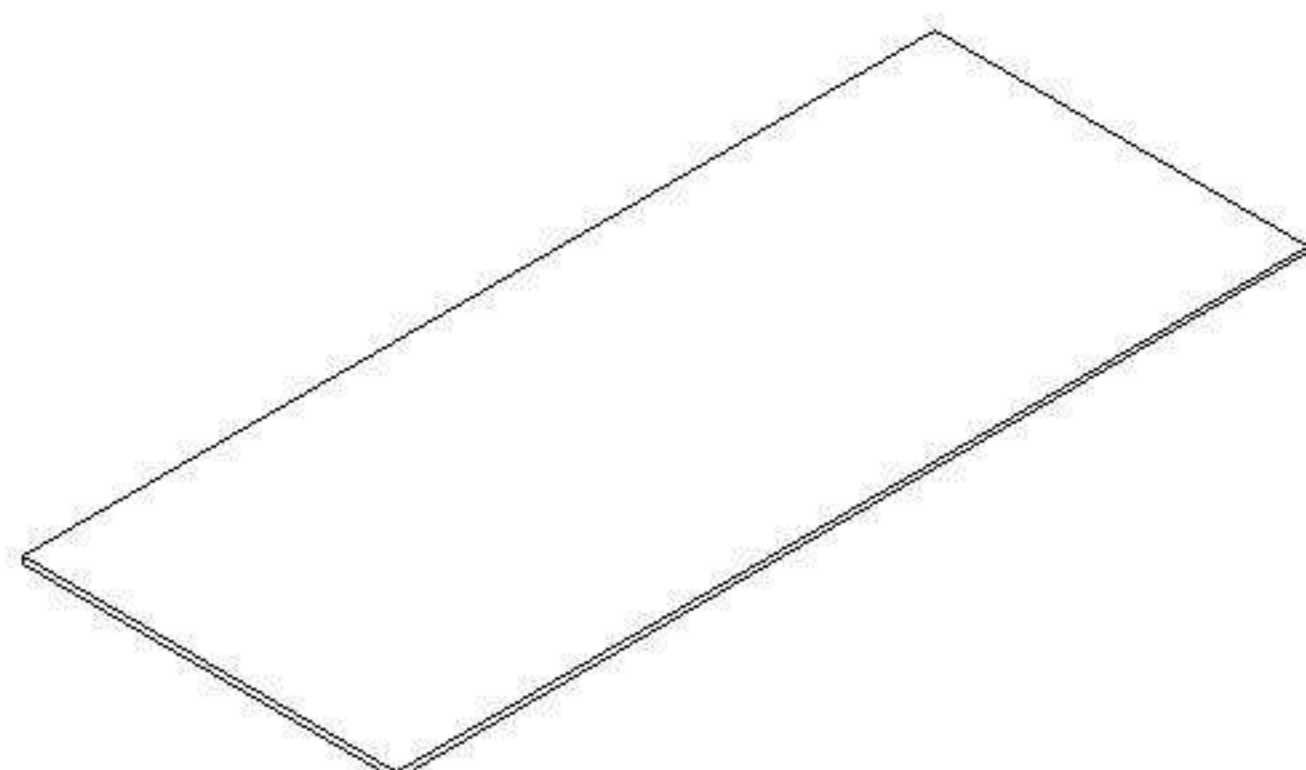


NAME: DRAWER BASE
CODE: 104
QTY: 6Pcs

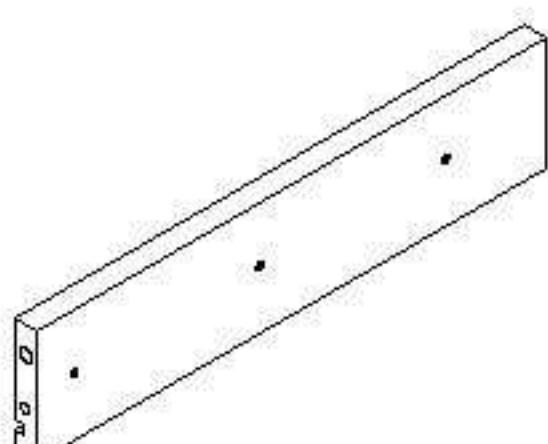


NAME: SMALL DRAWER SIDE (RIGHT)
CODE: 105
QTY: 2Pcs

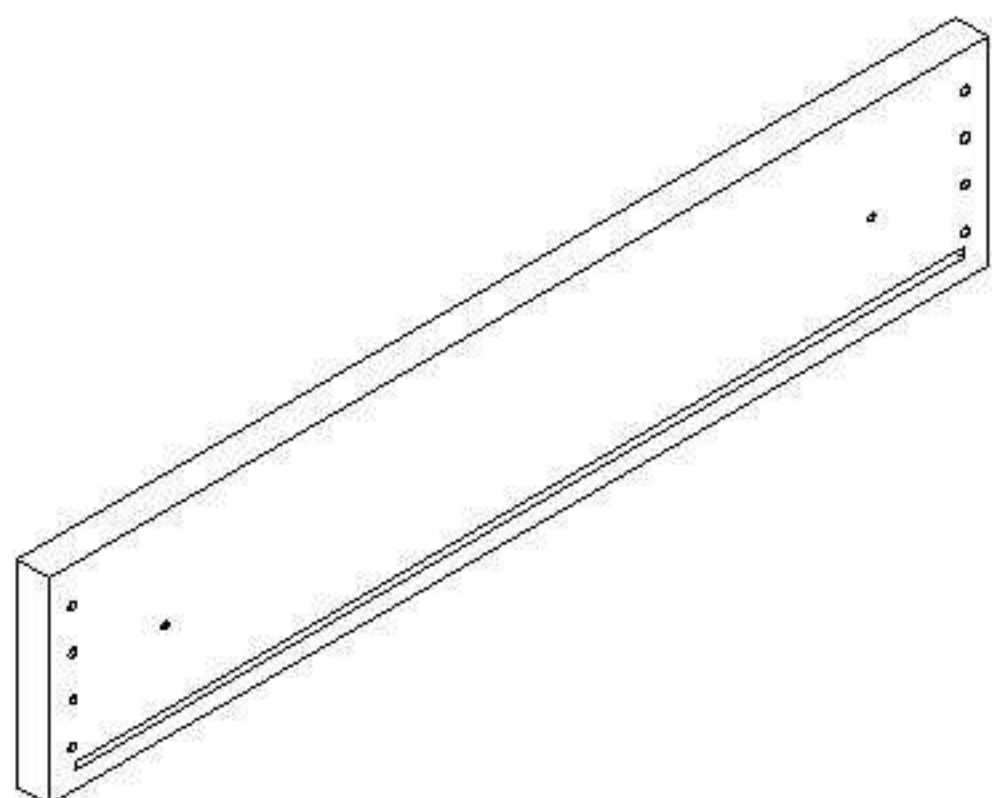


NAME: BIG DRAWER FRONT
CODE: 106
QTY: 4Pcs

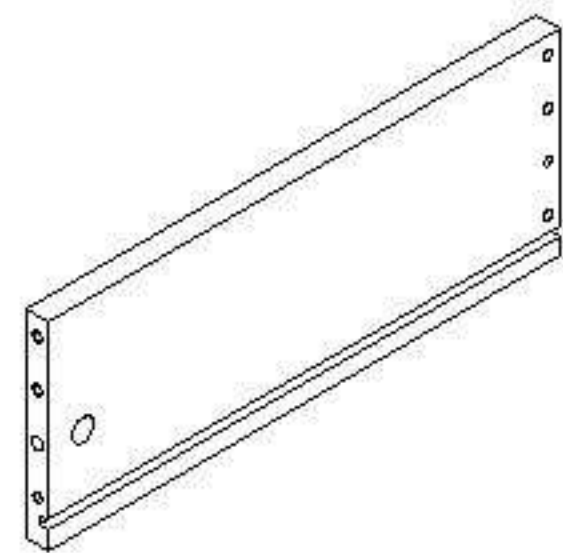

NAME: BIG DRAWER SIDE (LEFT)
CODE: 107
QTY: 4Pcs

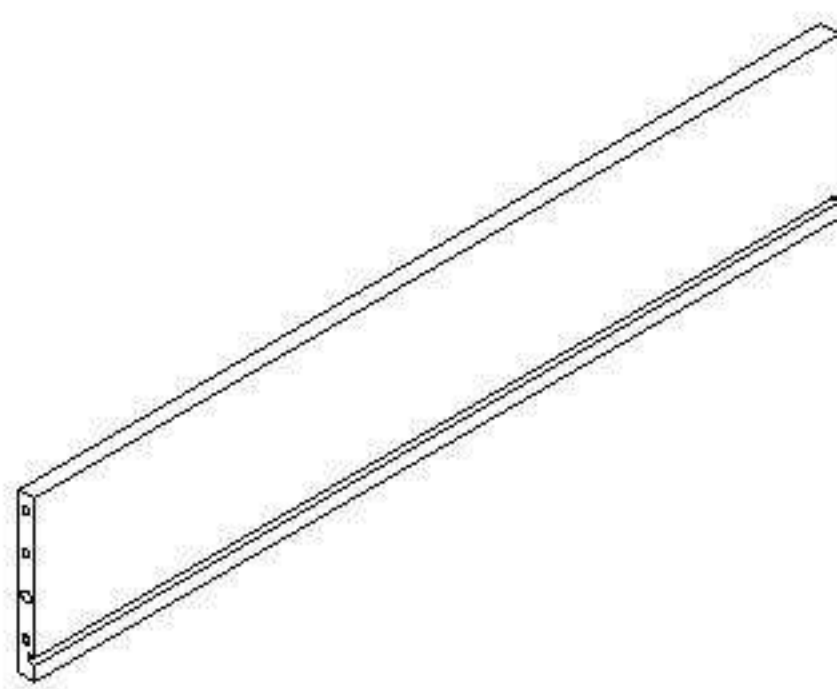

NAME: BIG DRAWER BACK
CODE: 108
QTY: 4Pcs

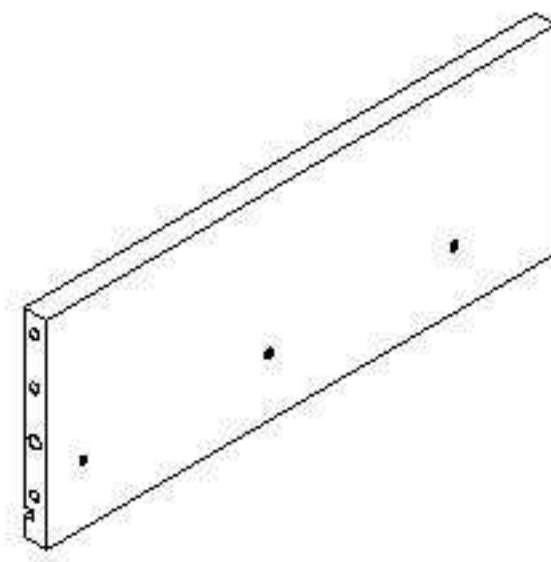

NAME: BIG DRAWER SIDE(RIGHT)
CODE: 109
QTY: 4Pcs

PARTS IN BOX 1

NAME: SIDE PANEL(LEFT)	QTY: 1Pc	CODE: 2
NAME: SIDE PANEL(RIGHT)	QTY: 1Pc	CODE: 3
NAME: PARTITION	QTY: 1Pc	CODE: 5
NAME: SMALL DRAWER SIDE(LEFT)	QTY: 2Pcs	CODE: 102
NAME: SMALL DRAWER SIDE(RIGHT)	QTY: 2Pcs	CODE: 105
NAME: BIG DRAWER SIDE(LEFT)	QTY: 4Pcs	CODE: 107
NAME: BIG DRAWER SIDE(RIGHT)	QTY: 4Pcs	CODE: 109
NAME: EXTENSION RUNNER	QTY: 1Pack	
NAME: HARDWARE + AI	QTY: 1Pack	


PARTS IN BOX 2

NAME: TOP PANEL	QTY: 1Pc	CODE: 1
NAME: BOTTOM PANEL	QTY: 1Pc	CODE: 4
NAME: BACK PLY	QTY: 1Pc	CODE: 7


PARTS IN BOX 3

NAME: FRONT BAR	QTY: 2Pcs	CODE: 6
NAME: BACK BAR	QTY: 2Pcs	CODE: 8
NAME: SMALL DRAWER FRONT	QTY: 2Pcs	CODE: 101
NAME: SMALL DRAWER BACK	QTY: 2Pcs	CODE: 103
NAME: DRAWER BASE	QTY: 6Pcs	CODE: 104
NAME: BIG DRAWER FRONT	QTY: 4Pcs	CODE: 106
NAME: BIG DRAWER BACK	QTY: 4Pcs	CODE: 108


HARDWARE LIST

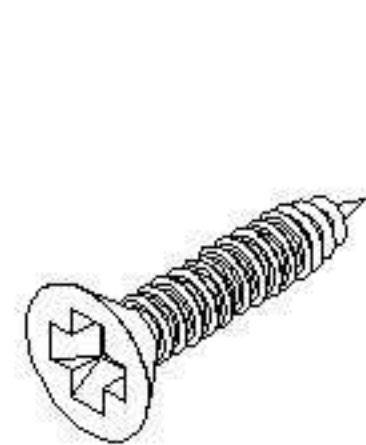


NAME: CHIPBOARD SCREW M3X16mm
CODE: A
QTY: 72Pcs

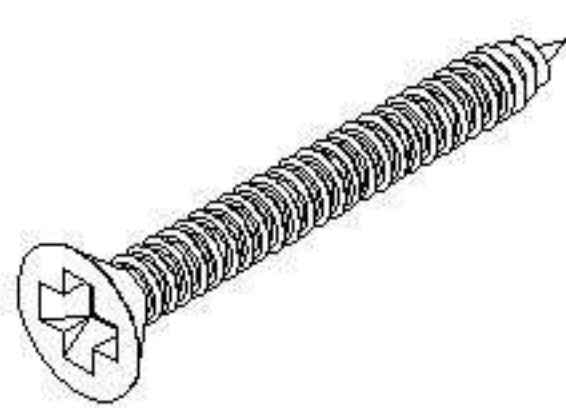


NAME: CHIPBOARD SCREW M4X38mm
CODE: B
QTY: 2Pcs

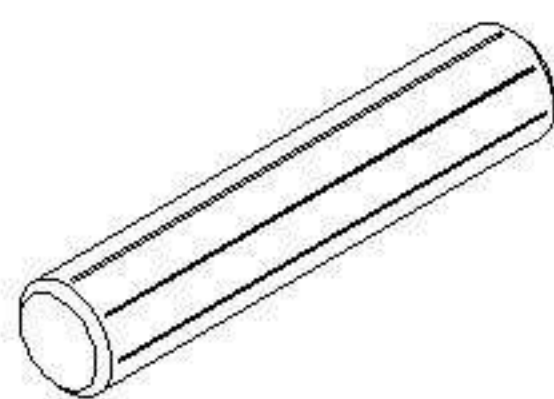


NAME: WOOD DOWEL M8X35mm
CODE: C
QTY: 20Pcs

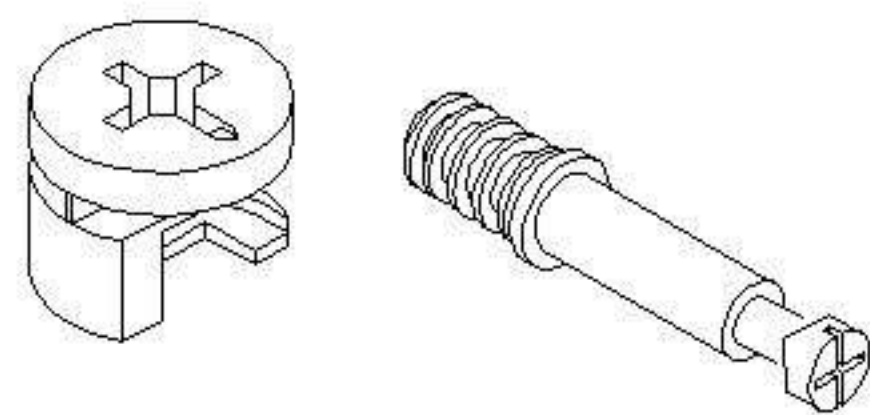


NAME: CAM LOCK & CAM BOLT
CODE: D
QTY: 42Sets

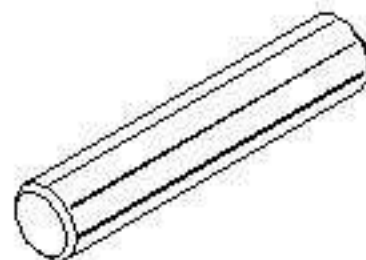


NAME: WOOD DOWEL M6X30mm
CODE: E
QTY: 56Pcs

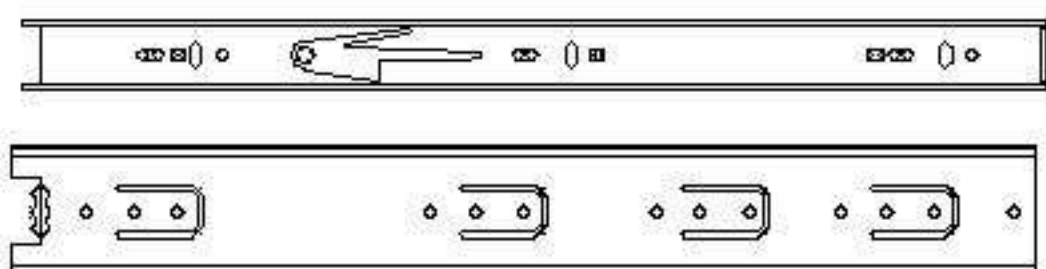


NAME: EXTENSION RUNNER 350mm
CODE: F
QTY: 6Sets

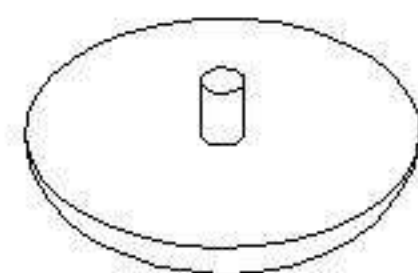


NAME: CAM LOCK COVER
CODE: G
QTY: 42Pcs

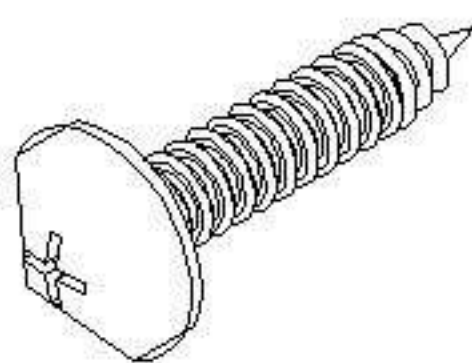


NAME: PANHEAD CHIPBOARD SCREW M4X16mm(BLACK)
CODE: H
QTY: 22Pcs

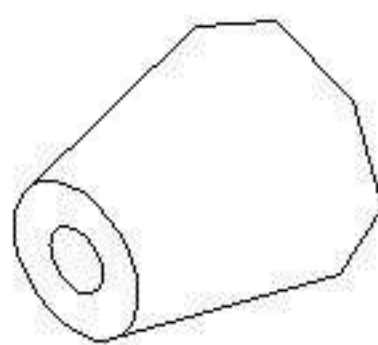


NAME: HANDLE
CODE: I
QTY: 12Pcs

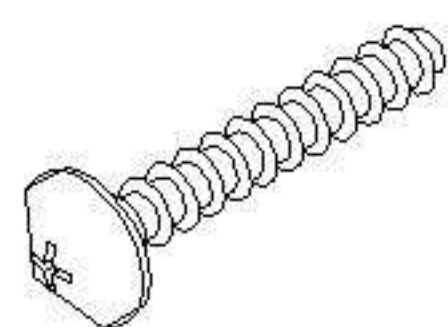


NAME: PANHEAD SCREW M4X22mm
CODE: J
QTY: 12Pcs

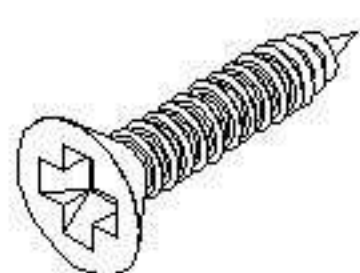


NAME: CHIPBOARD SCREW M4X25mm
CODE: W
QTY: 4Pcs



NAME: FLAT WASHER M4
CODE: X
QTY: 2Pcs

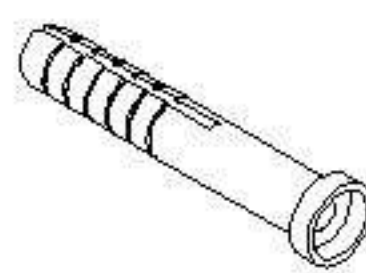


NAME: SCREW PLUG
CODE: Y
QTY: 2Pcs

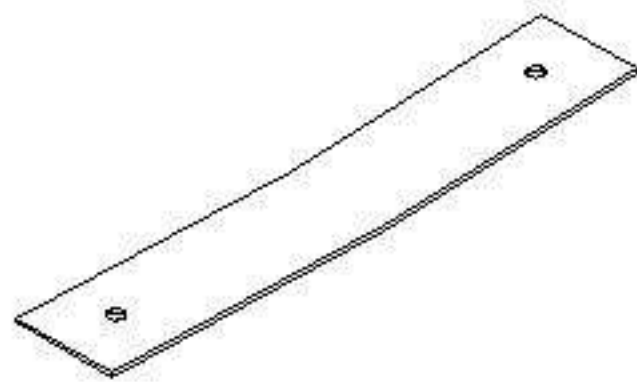

NAME: SAFETY BELT (150mm)
CODE: Z
QTY: 2Pcs

STEP 1


- A) Insert & secure Cam Bolt(D) to Top Panel(1)

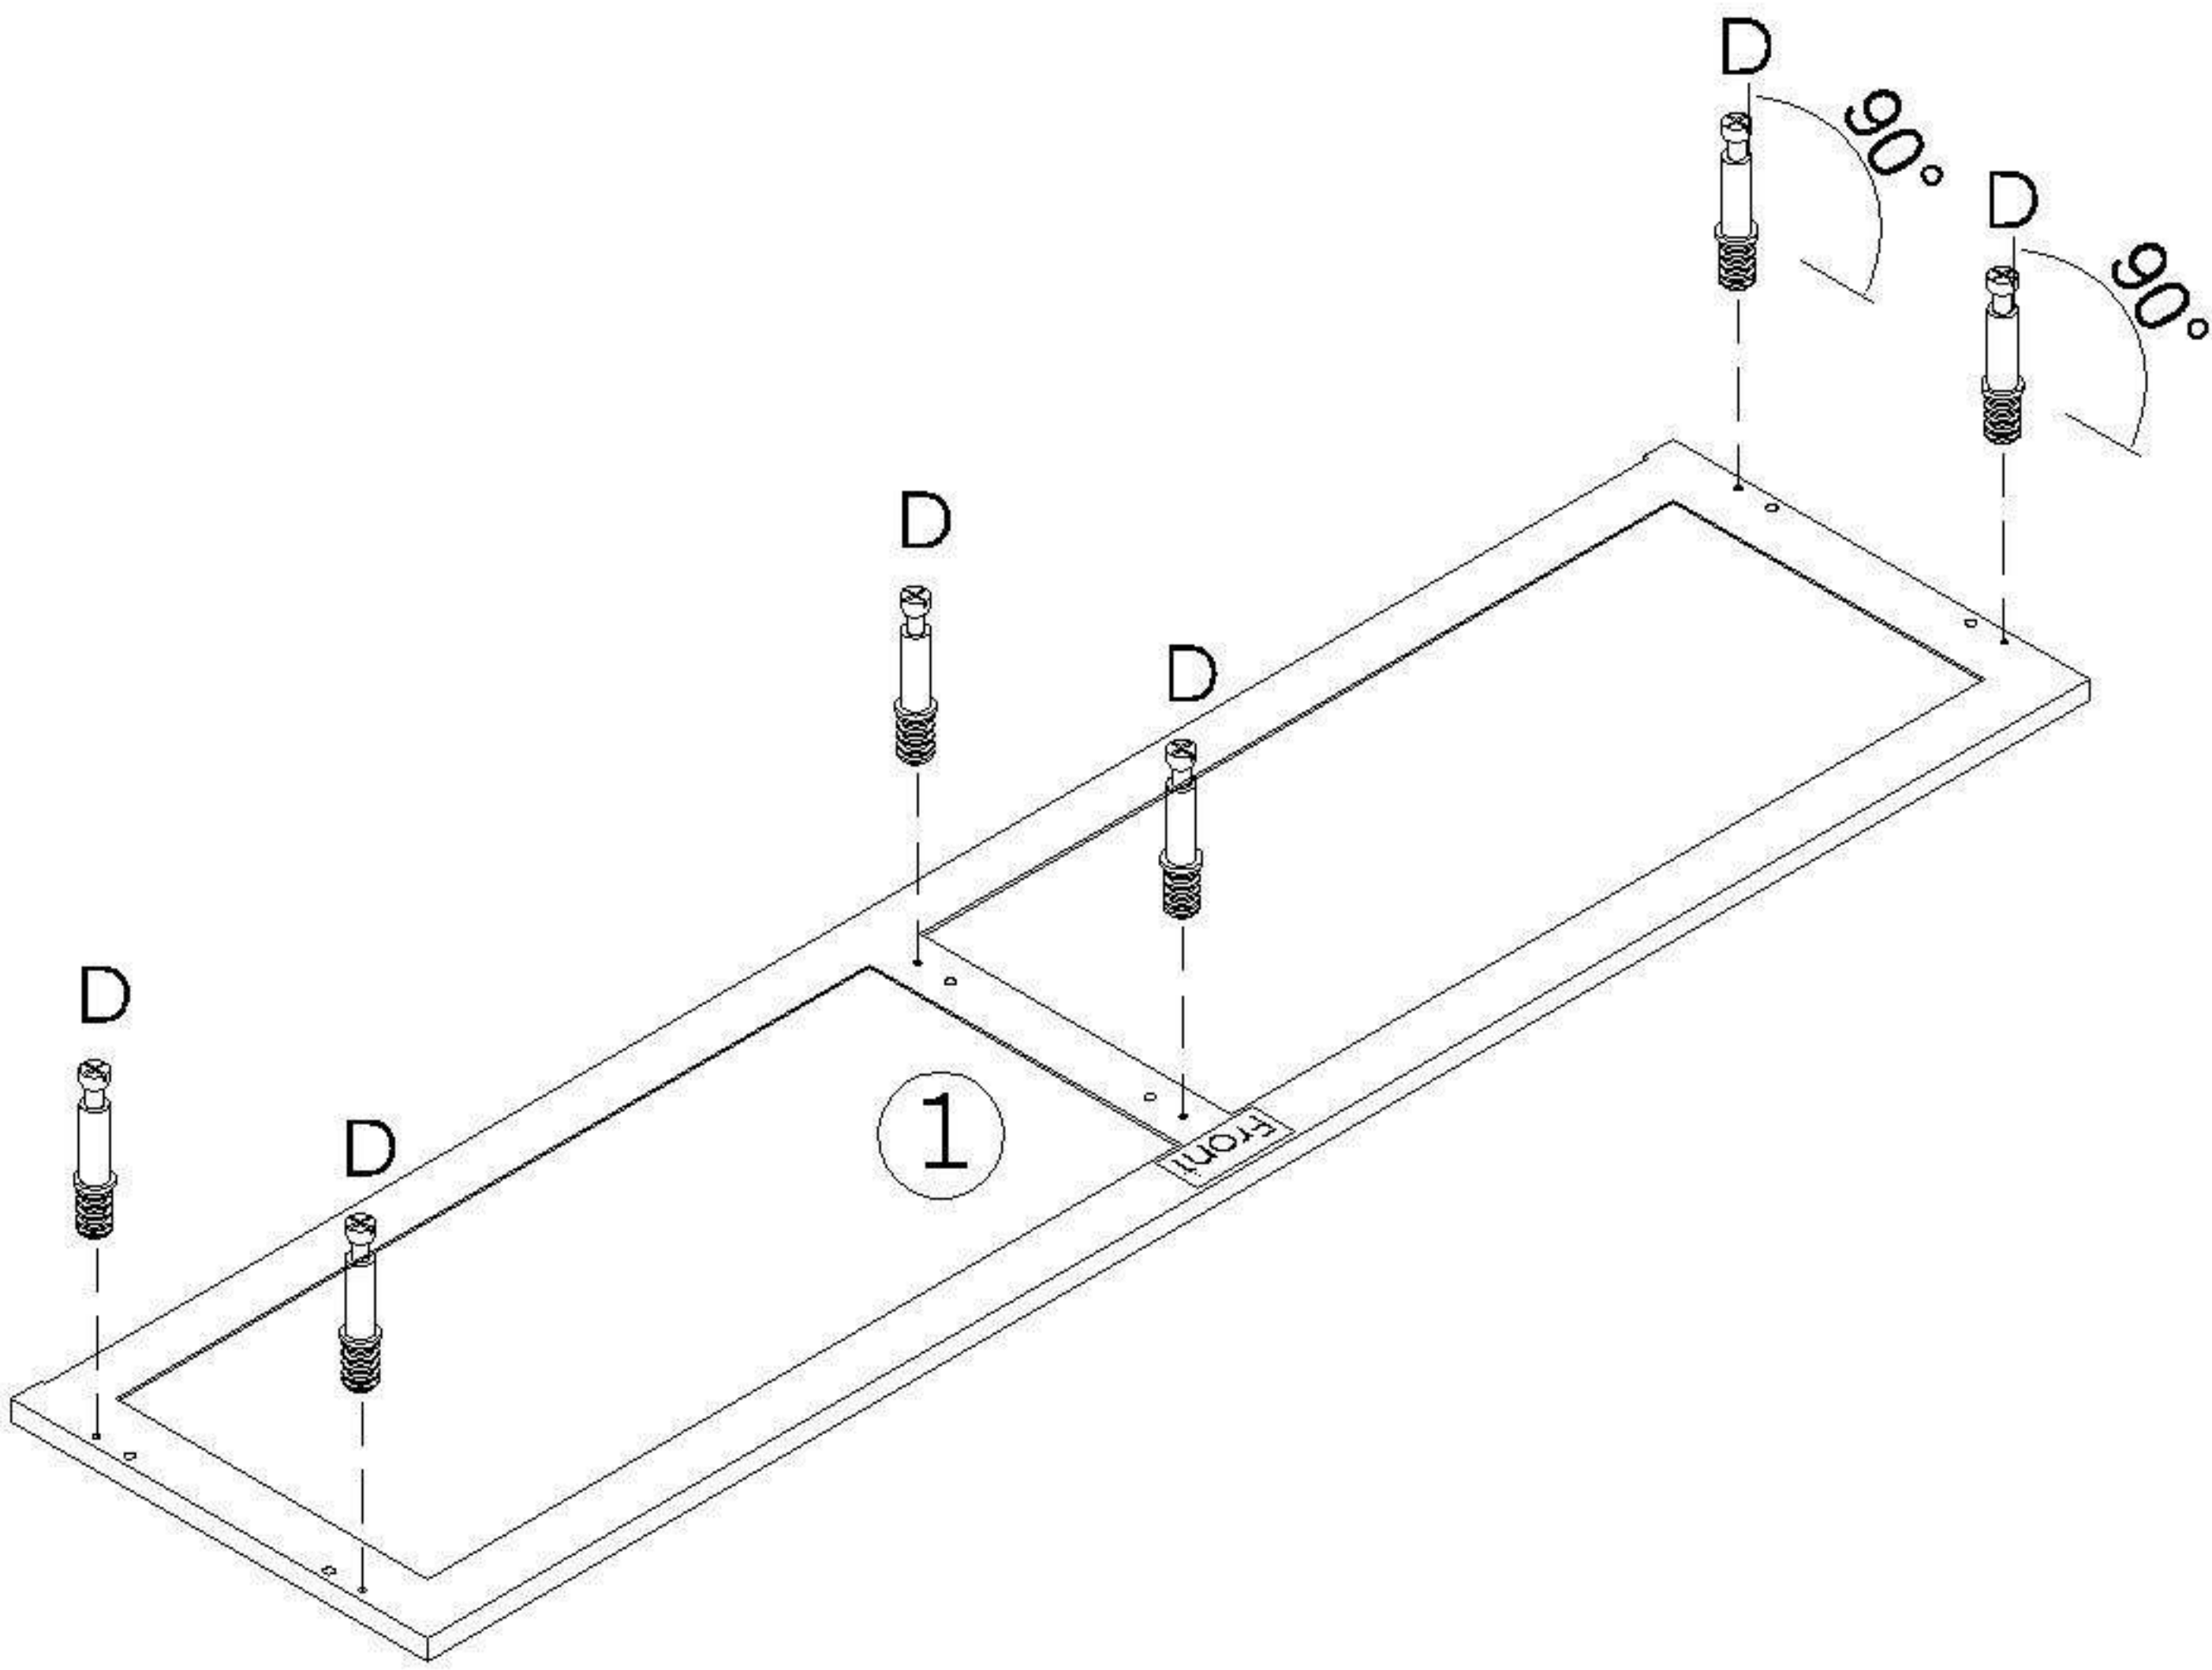

STEP 2

- A) Insert Wood Dowel(C) to Left,Right Side Panel(2,3)
- B) Attach Cam Lock(D) to Left,Right Side Panel(2,3)
- C) Attach Cam Bolt(D) to Left,Right Side Panel(2,3)

NOTE : Make sure arrows on each Cam Lock points towards nearest edge with holes


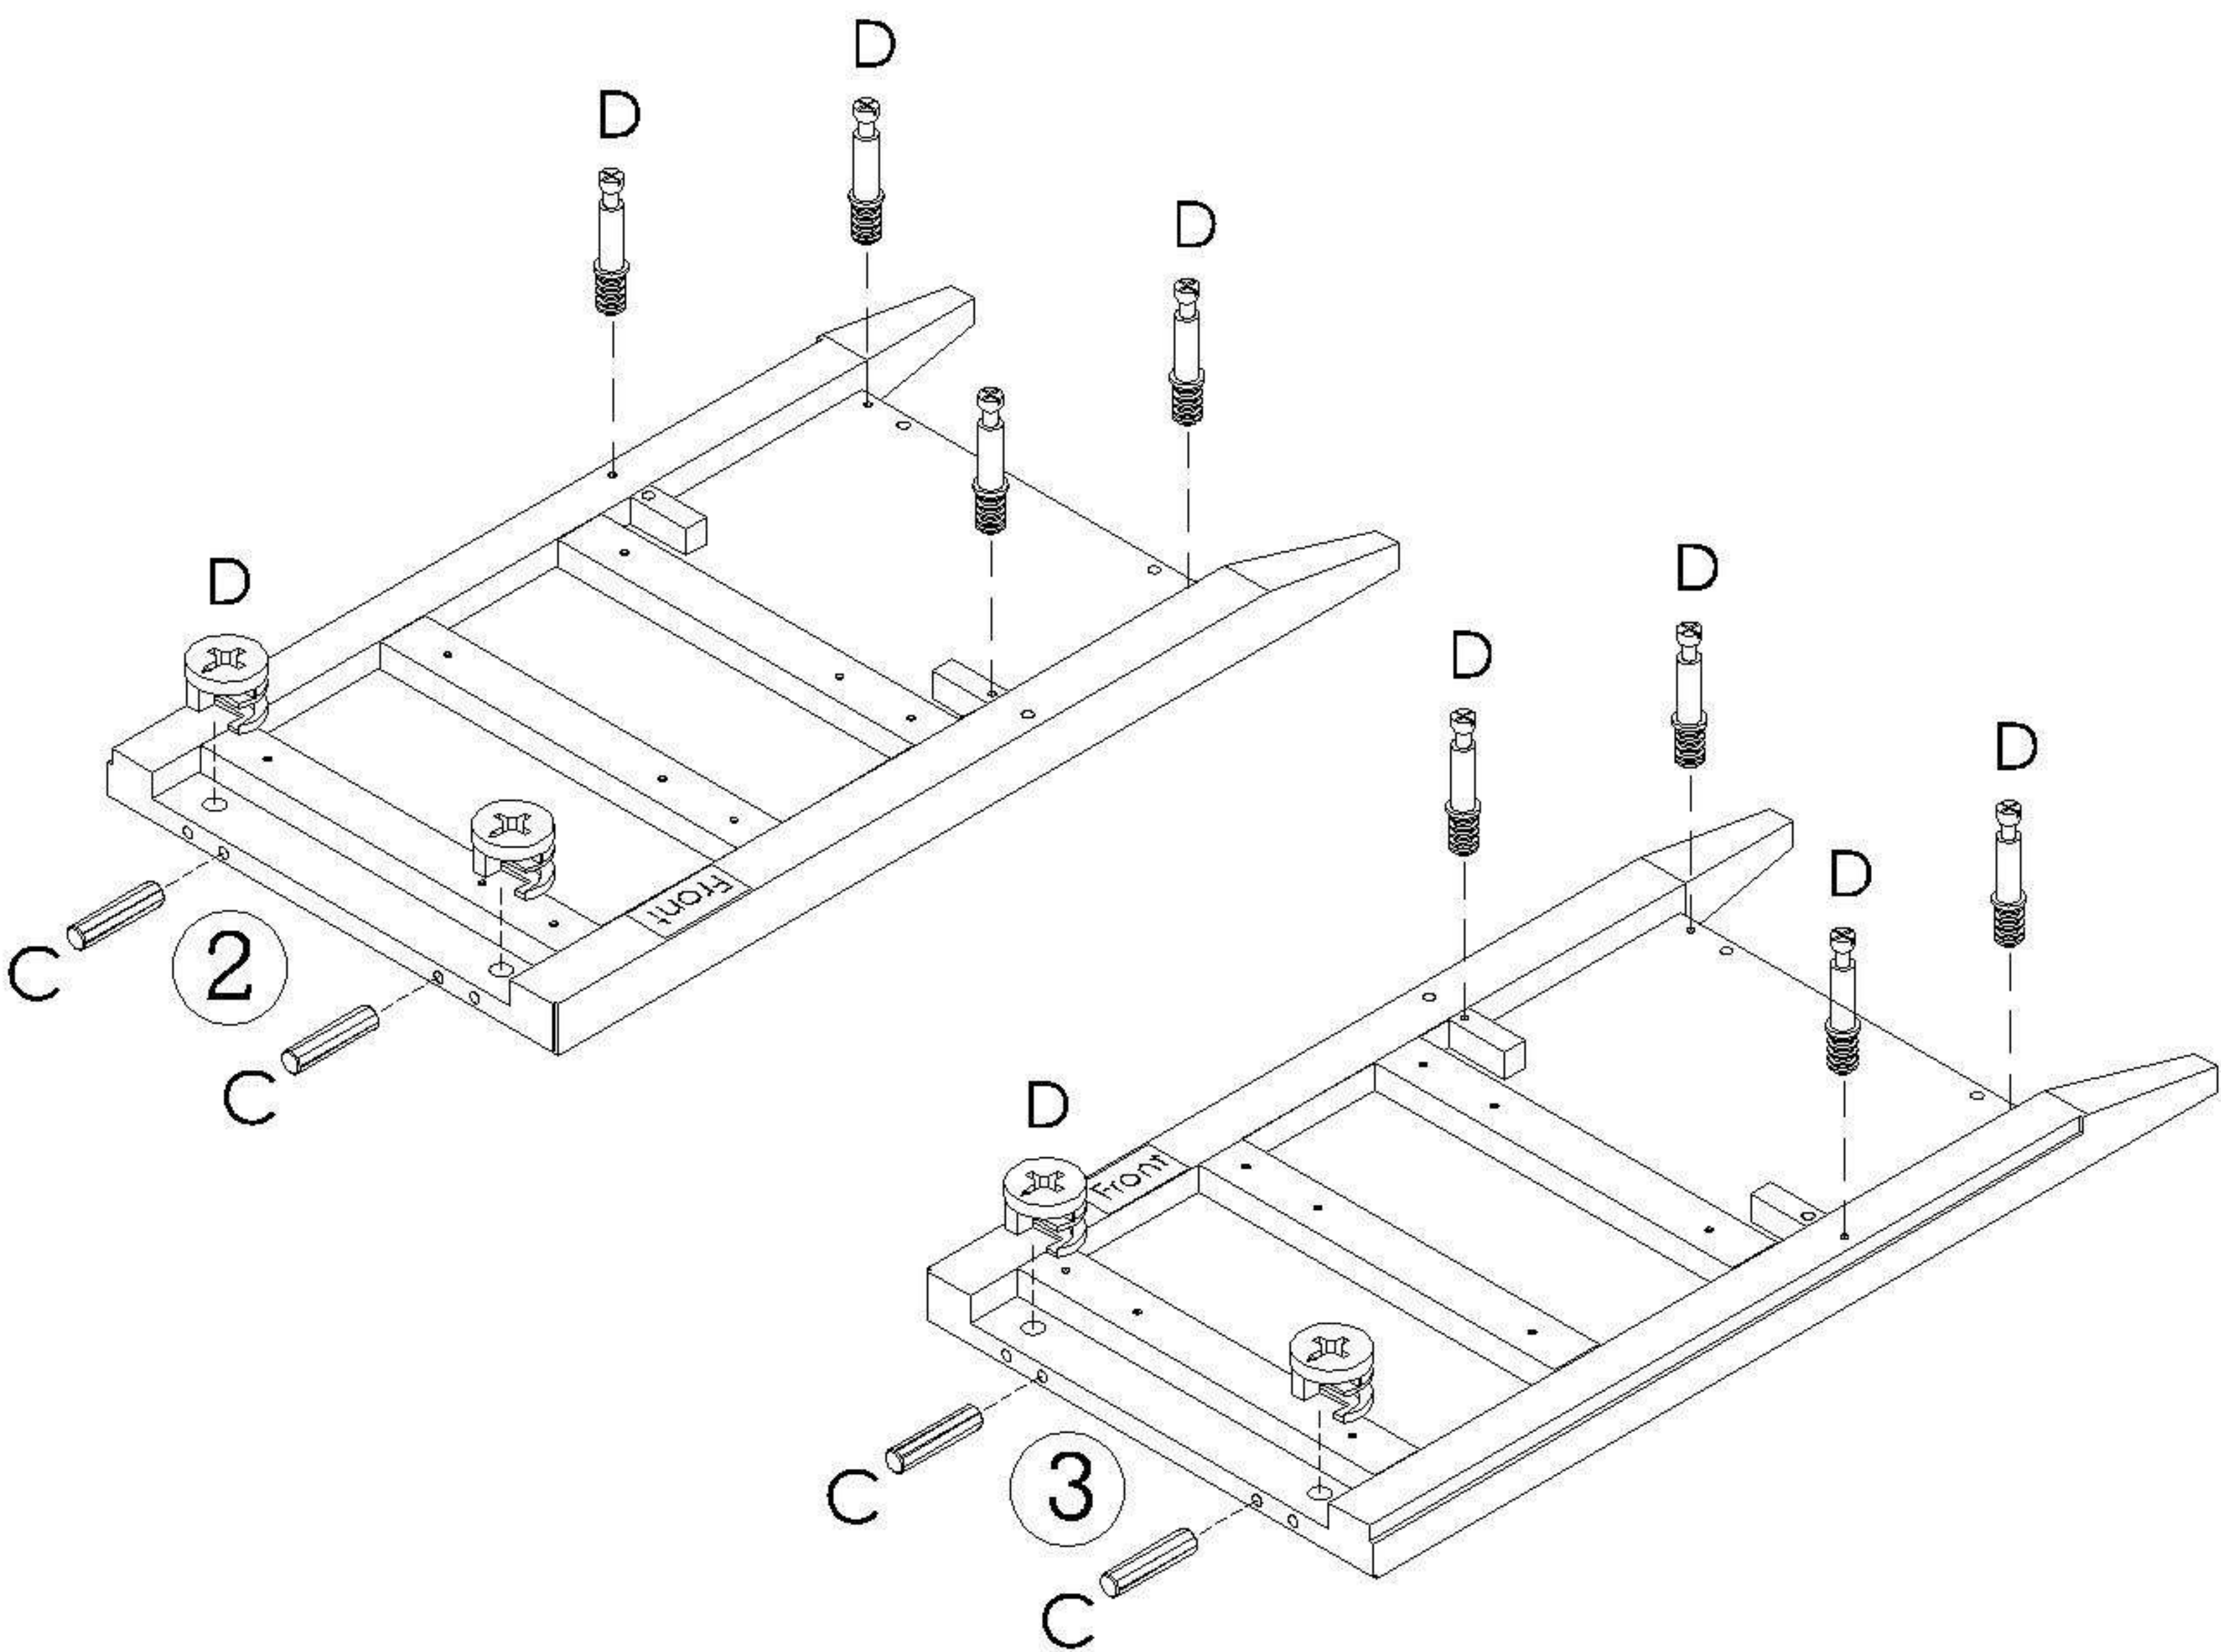


STEP 3


- A) Attach Extension Runner(F) to Left,Right Side Panel(2,3) using Chipboard Screw(A) to secure

NOTE : Chipboard Screw(A) should be assembled from the front of the runner. Start from A1, A2 then A3

NOTE : Make sure the screws are installed vertically without slant to ensure screw sits properly in the hole

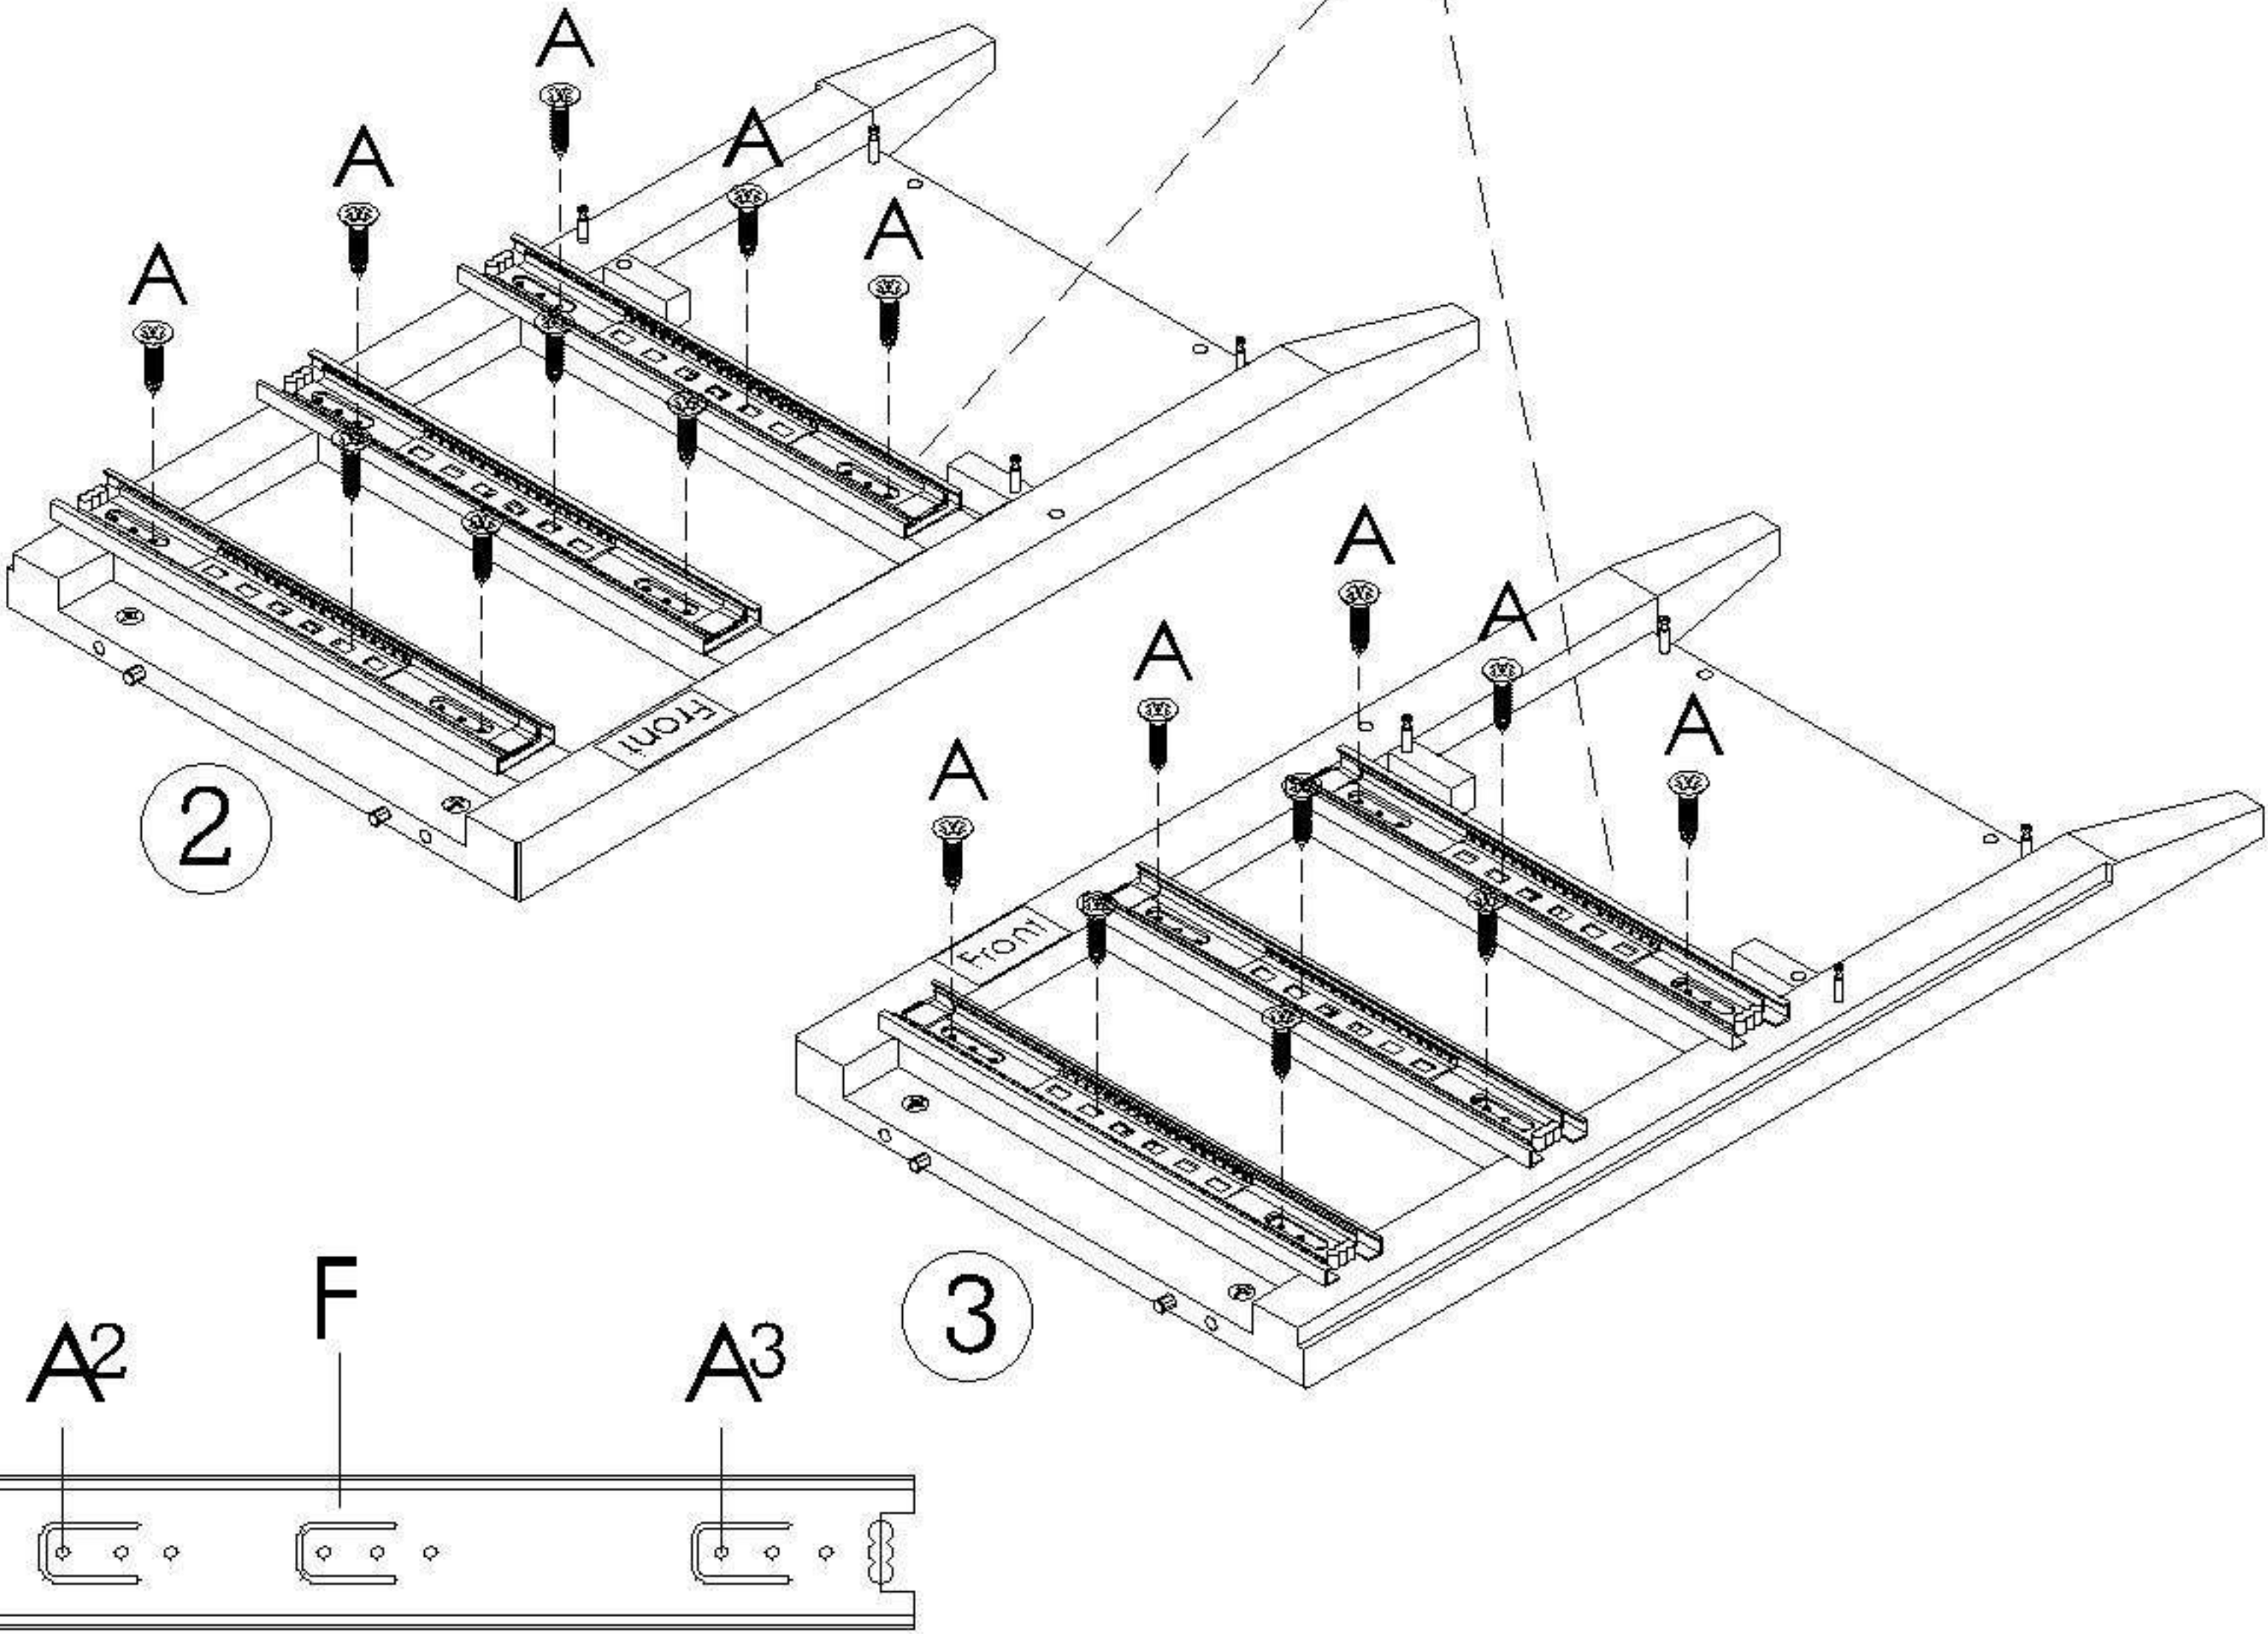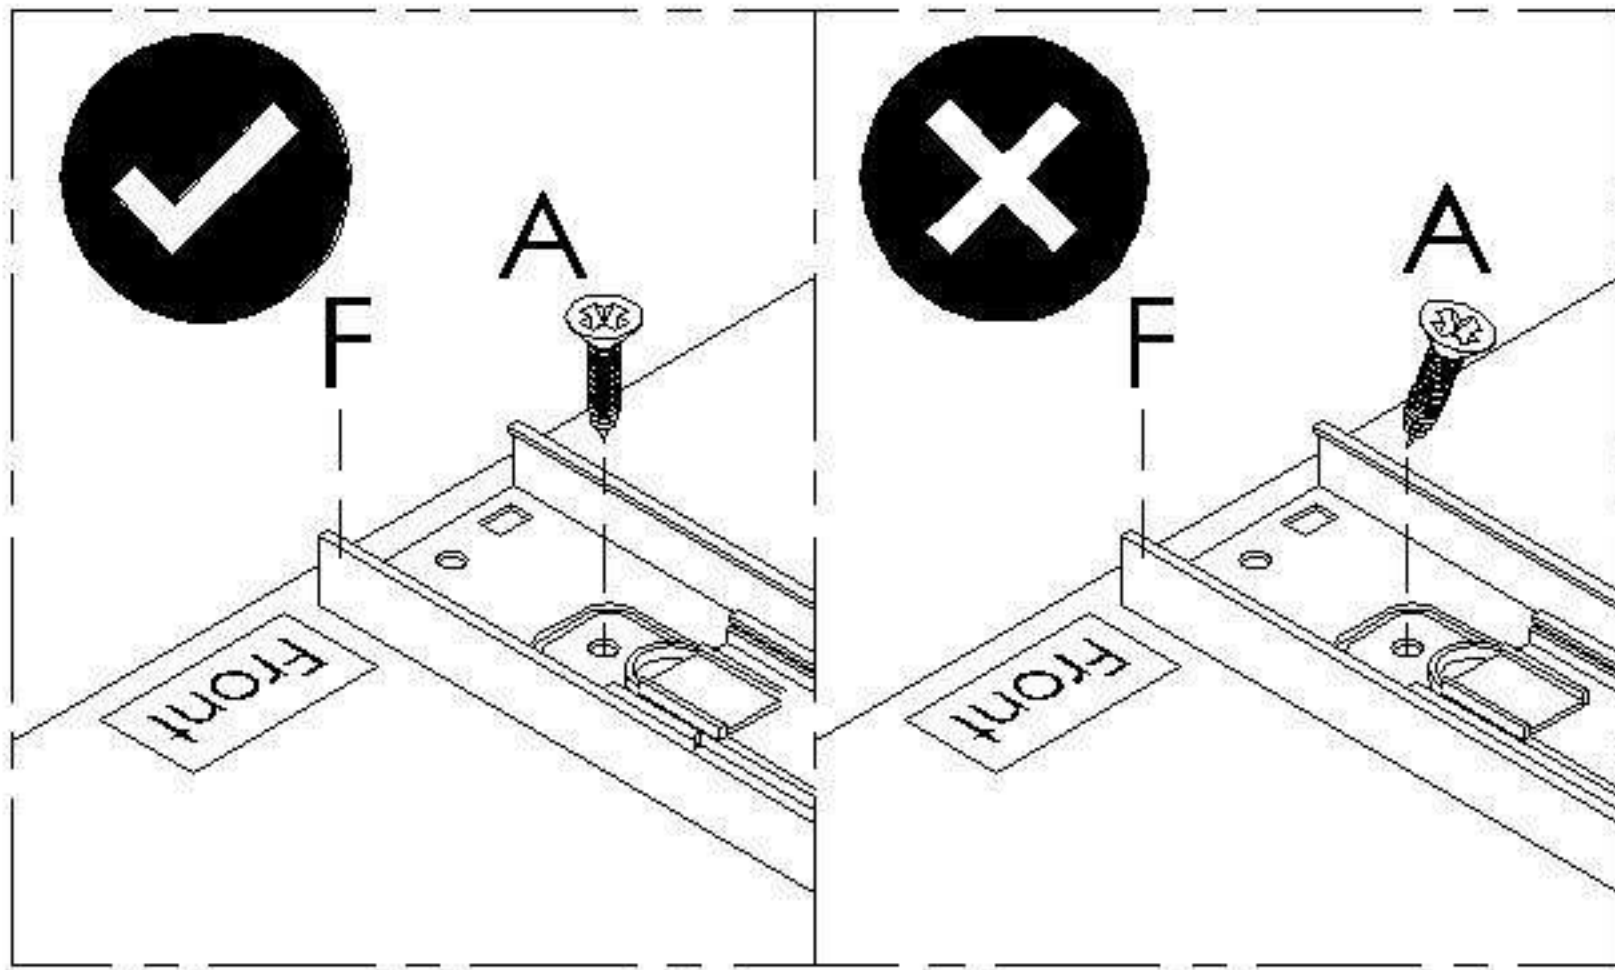


EXTENSION RUNNER DISASSEMBLE STEPS:

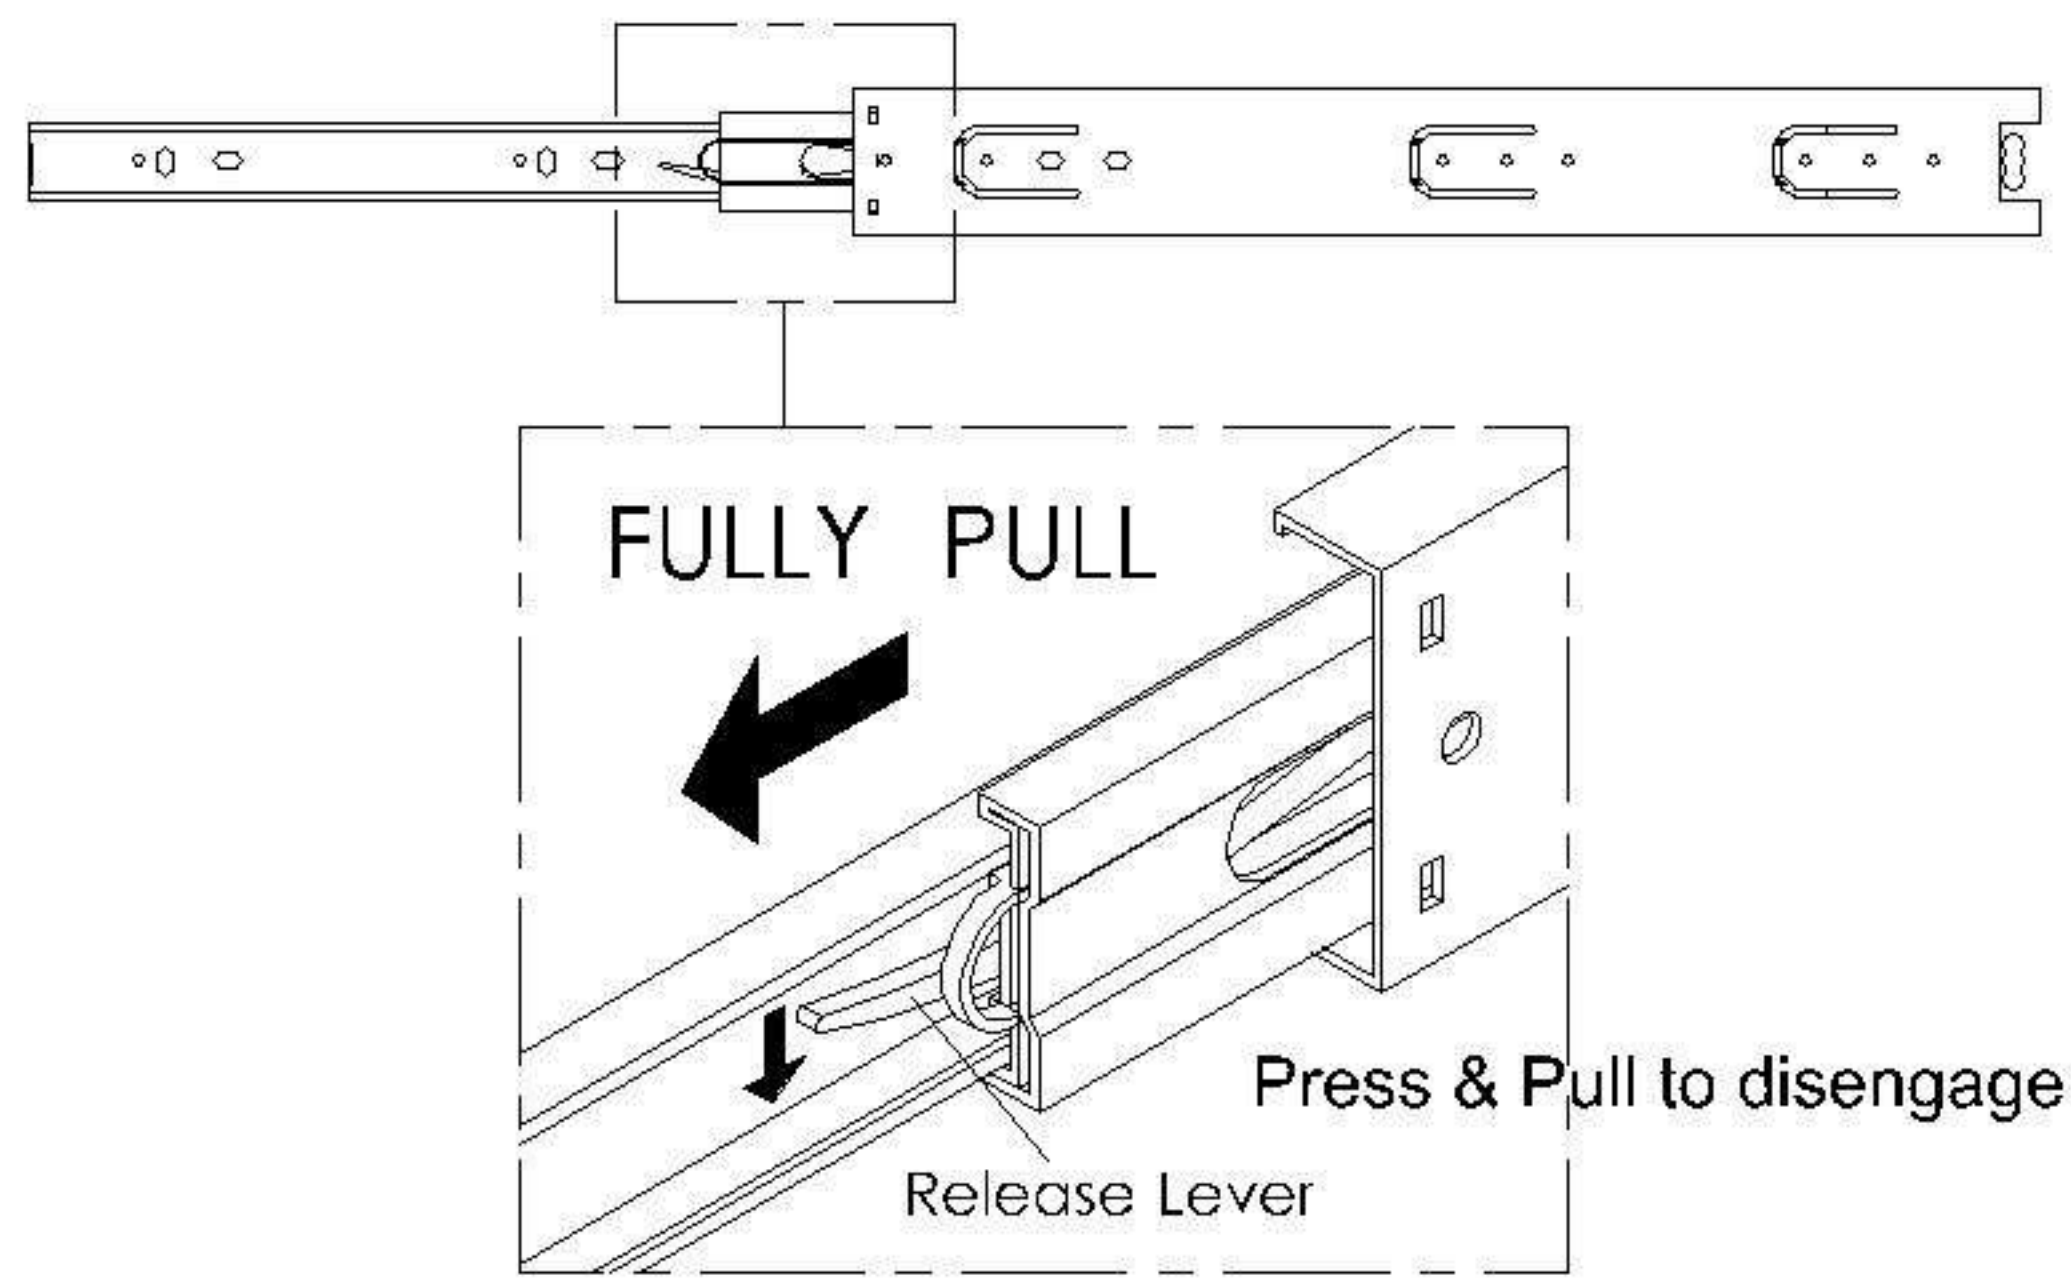

STEP 4

- A) Insert Wood Dowel(C) to Bottom Panel(4)
- B) Attach Cam Lock(D) to Bottom Panel(4)


NOTE : Make sure arrows on each Cam Lock points towards nearest edge with holes

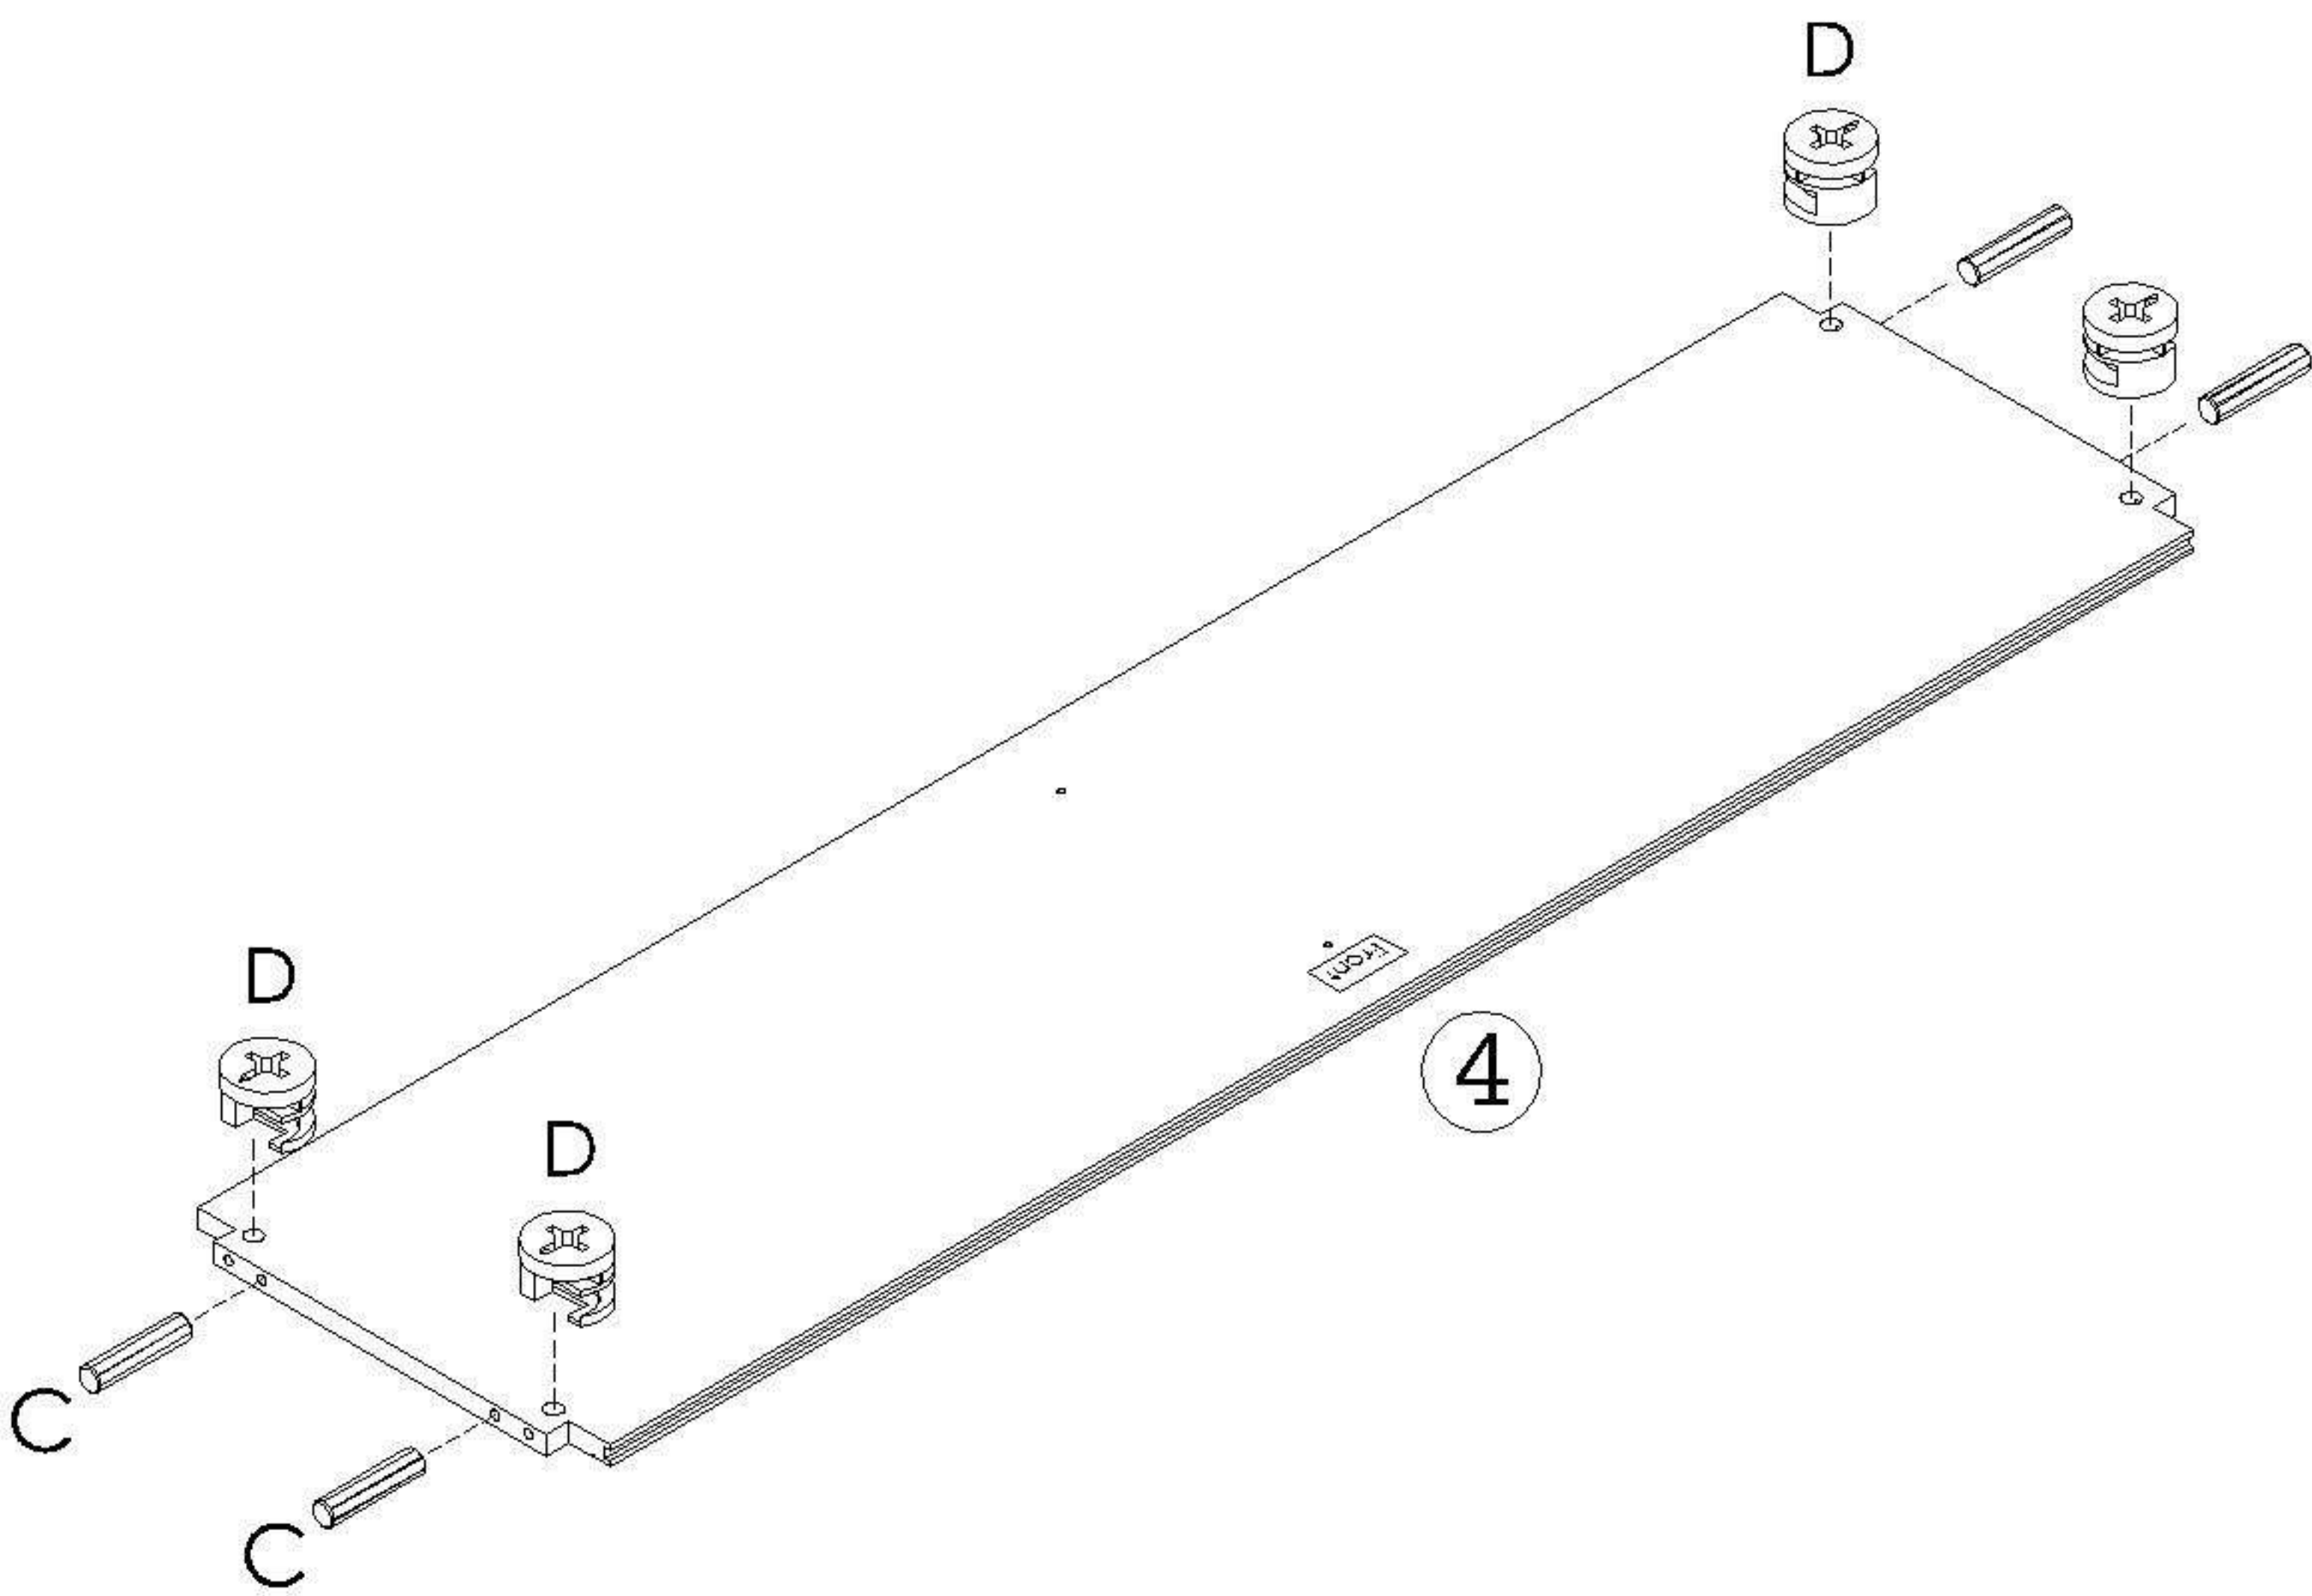

STEP 5

- A) Insert Wood Dowel(C) to Partition(5)
- B) Attach Cam Lock(D) to Partition(5)
- C) Attach Cam Bolt(D) to Partition(5)

NOTE : Make sure arrows on each Cam Lock points towards nearest edge with holes


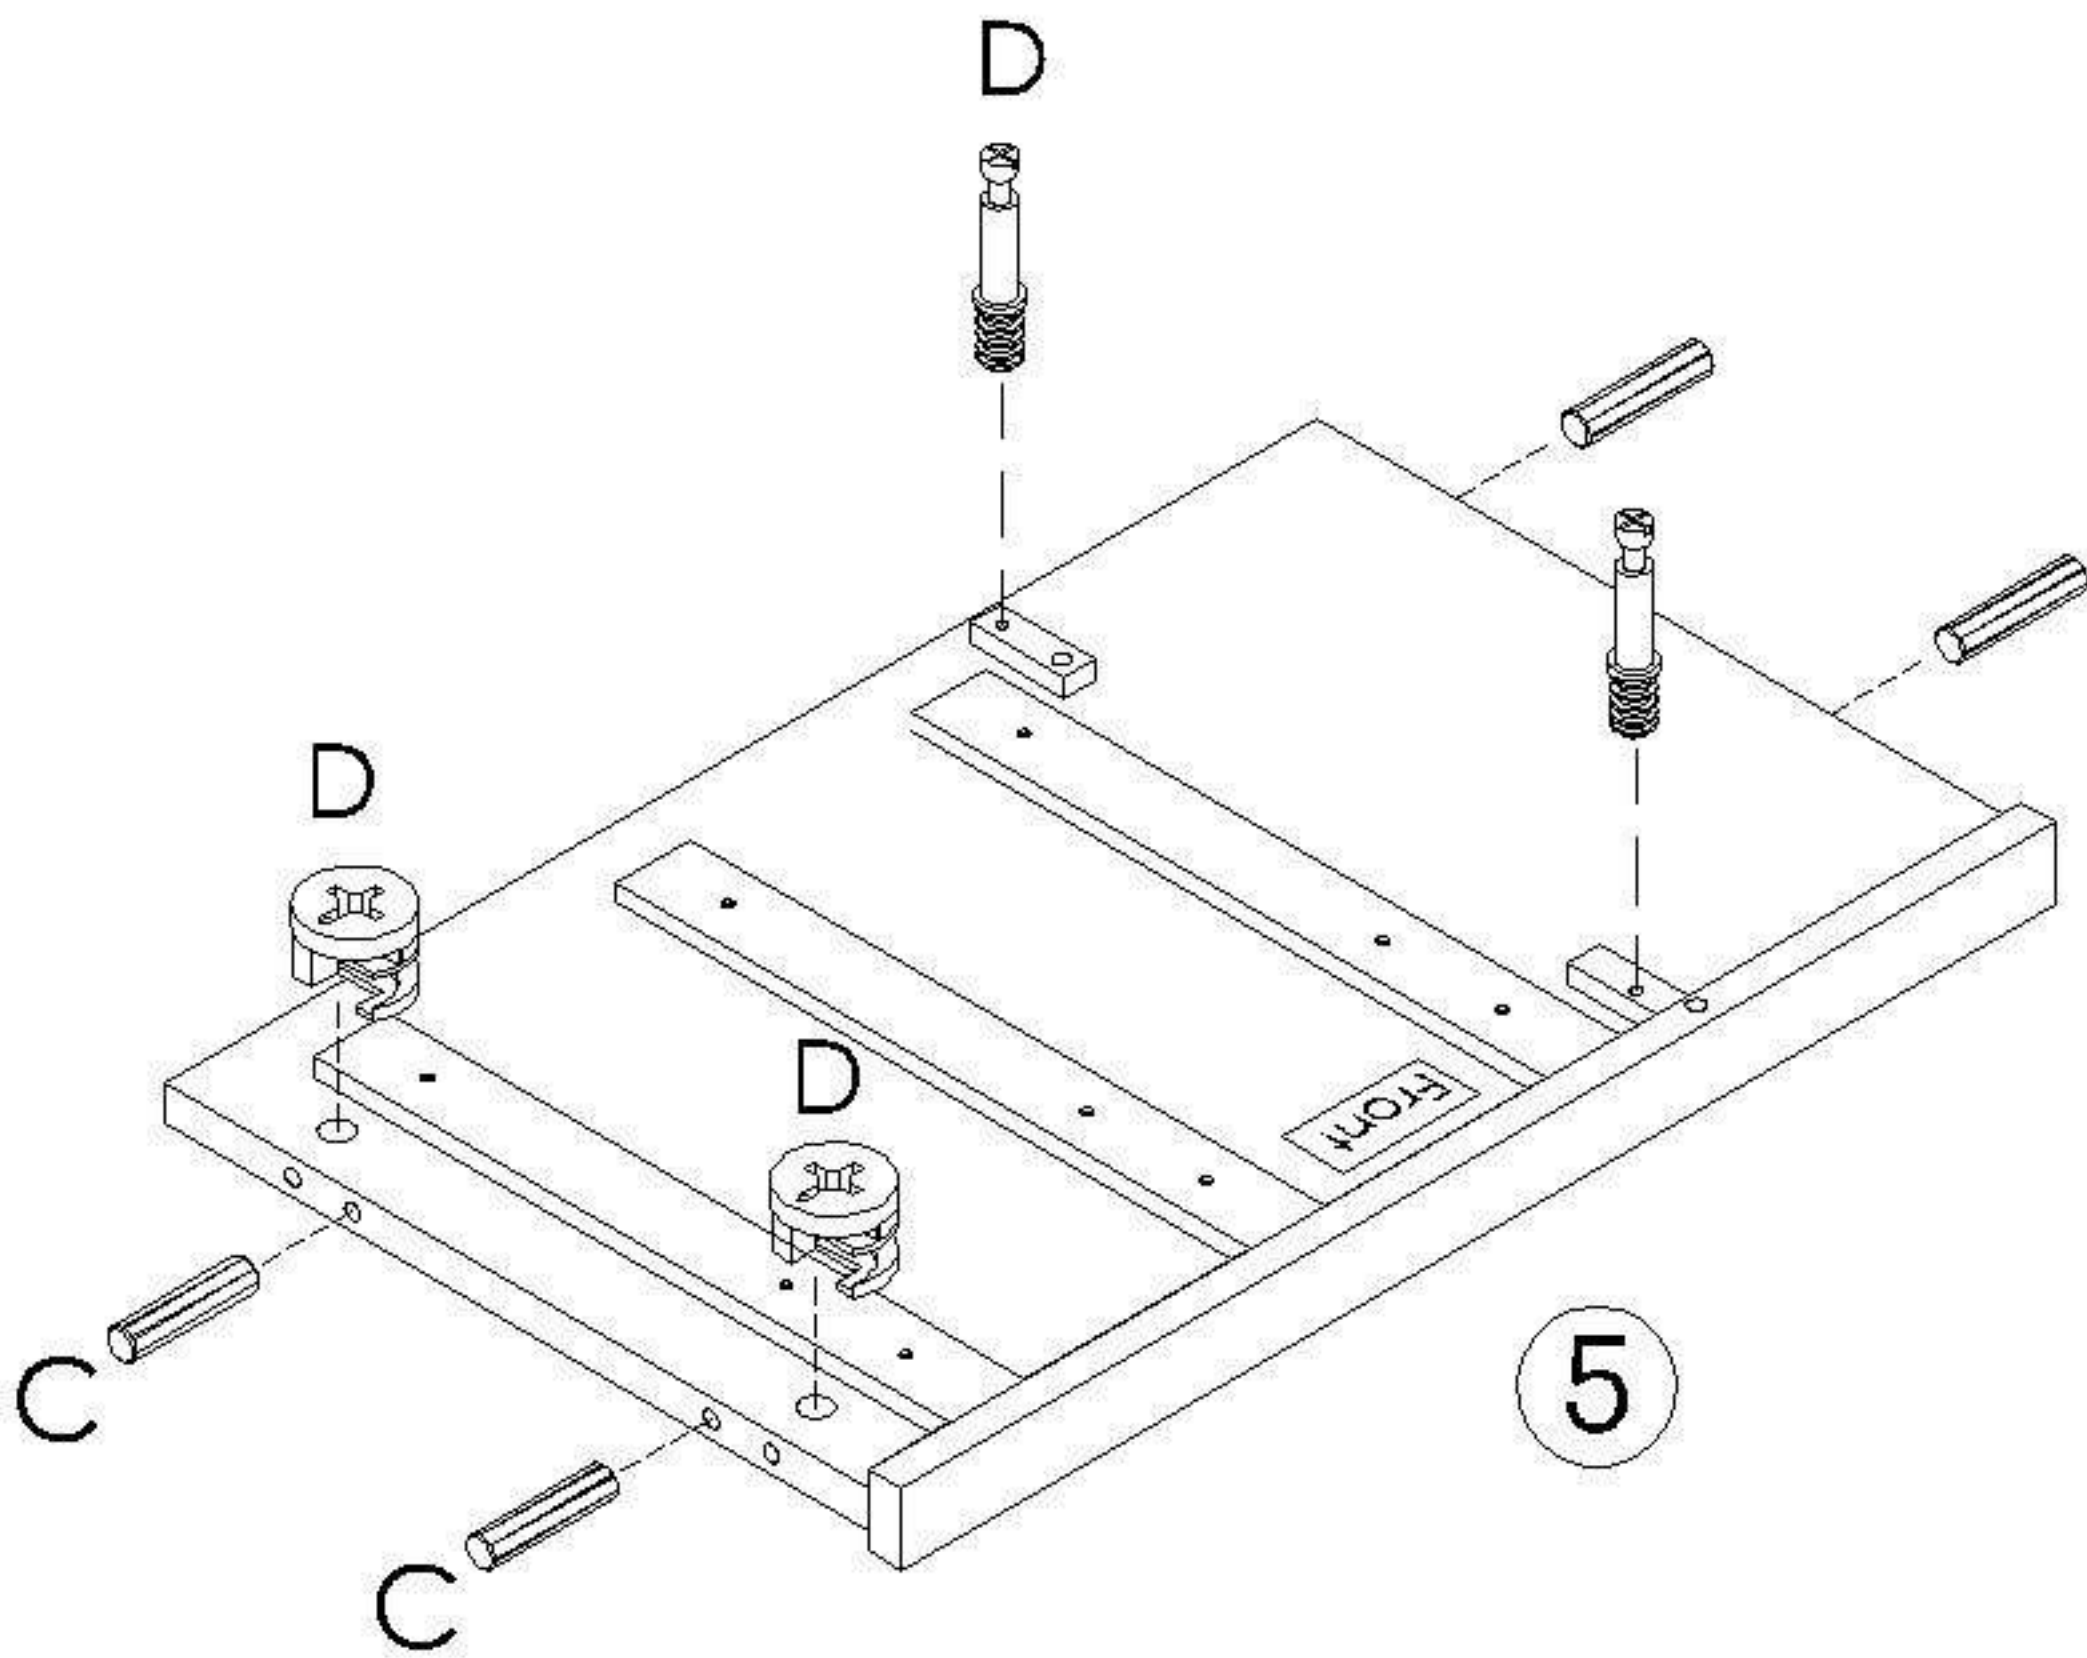


STEP 6



- A) Attach Extension Runner(F) to both sides of Partition(5) using Chipboard Screw(A) to secure
- B) Insert & secure Cam Bolt(D) to Partition(5)

NOTE : Chipboard Screw(A) should be assembled from the front of the runner. Start from A¹, A² then A³

NOTE : Make sure the screws are installed vertically without slant to ensure screw sits properly in the hole

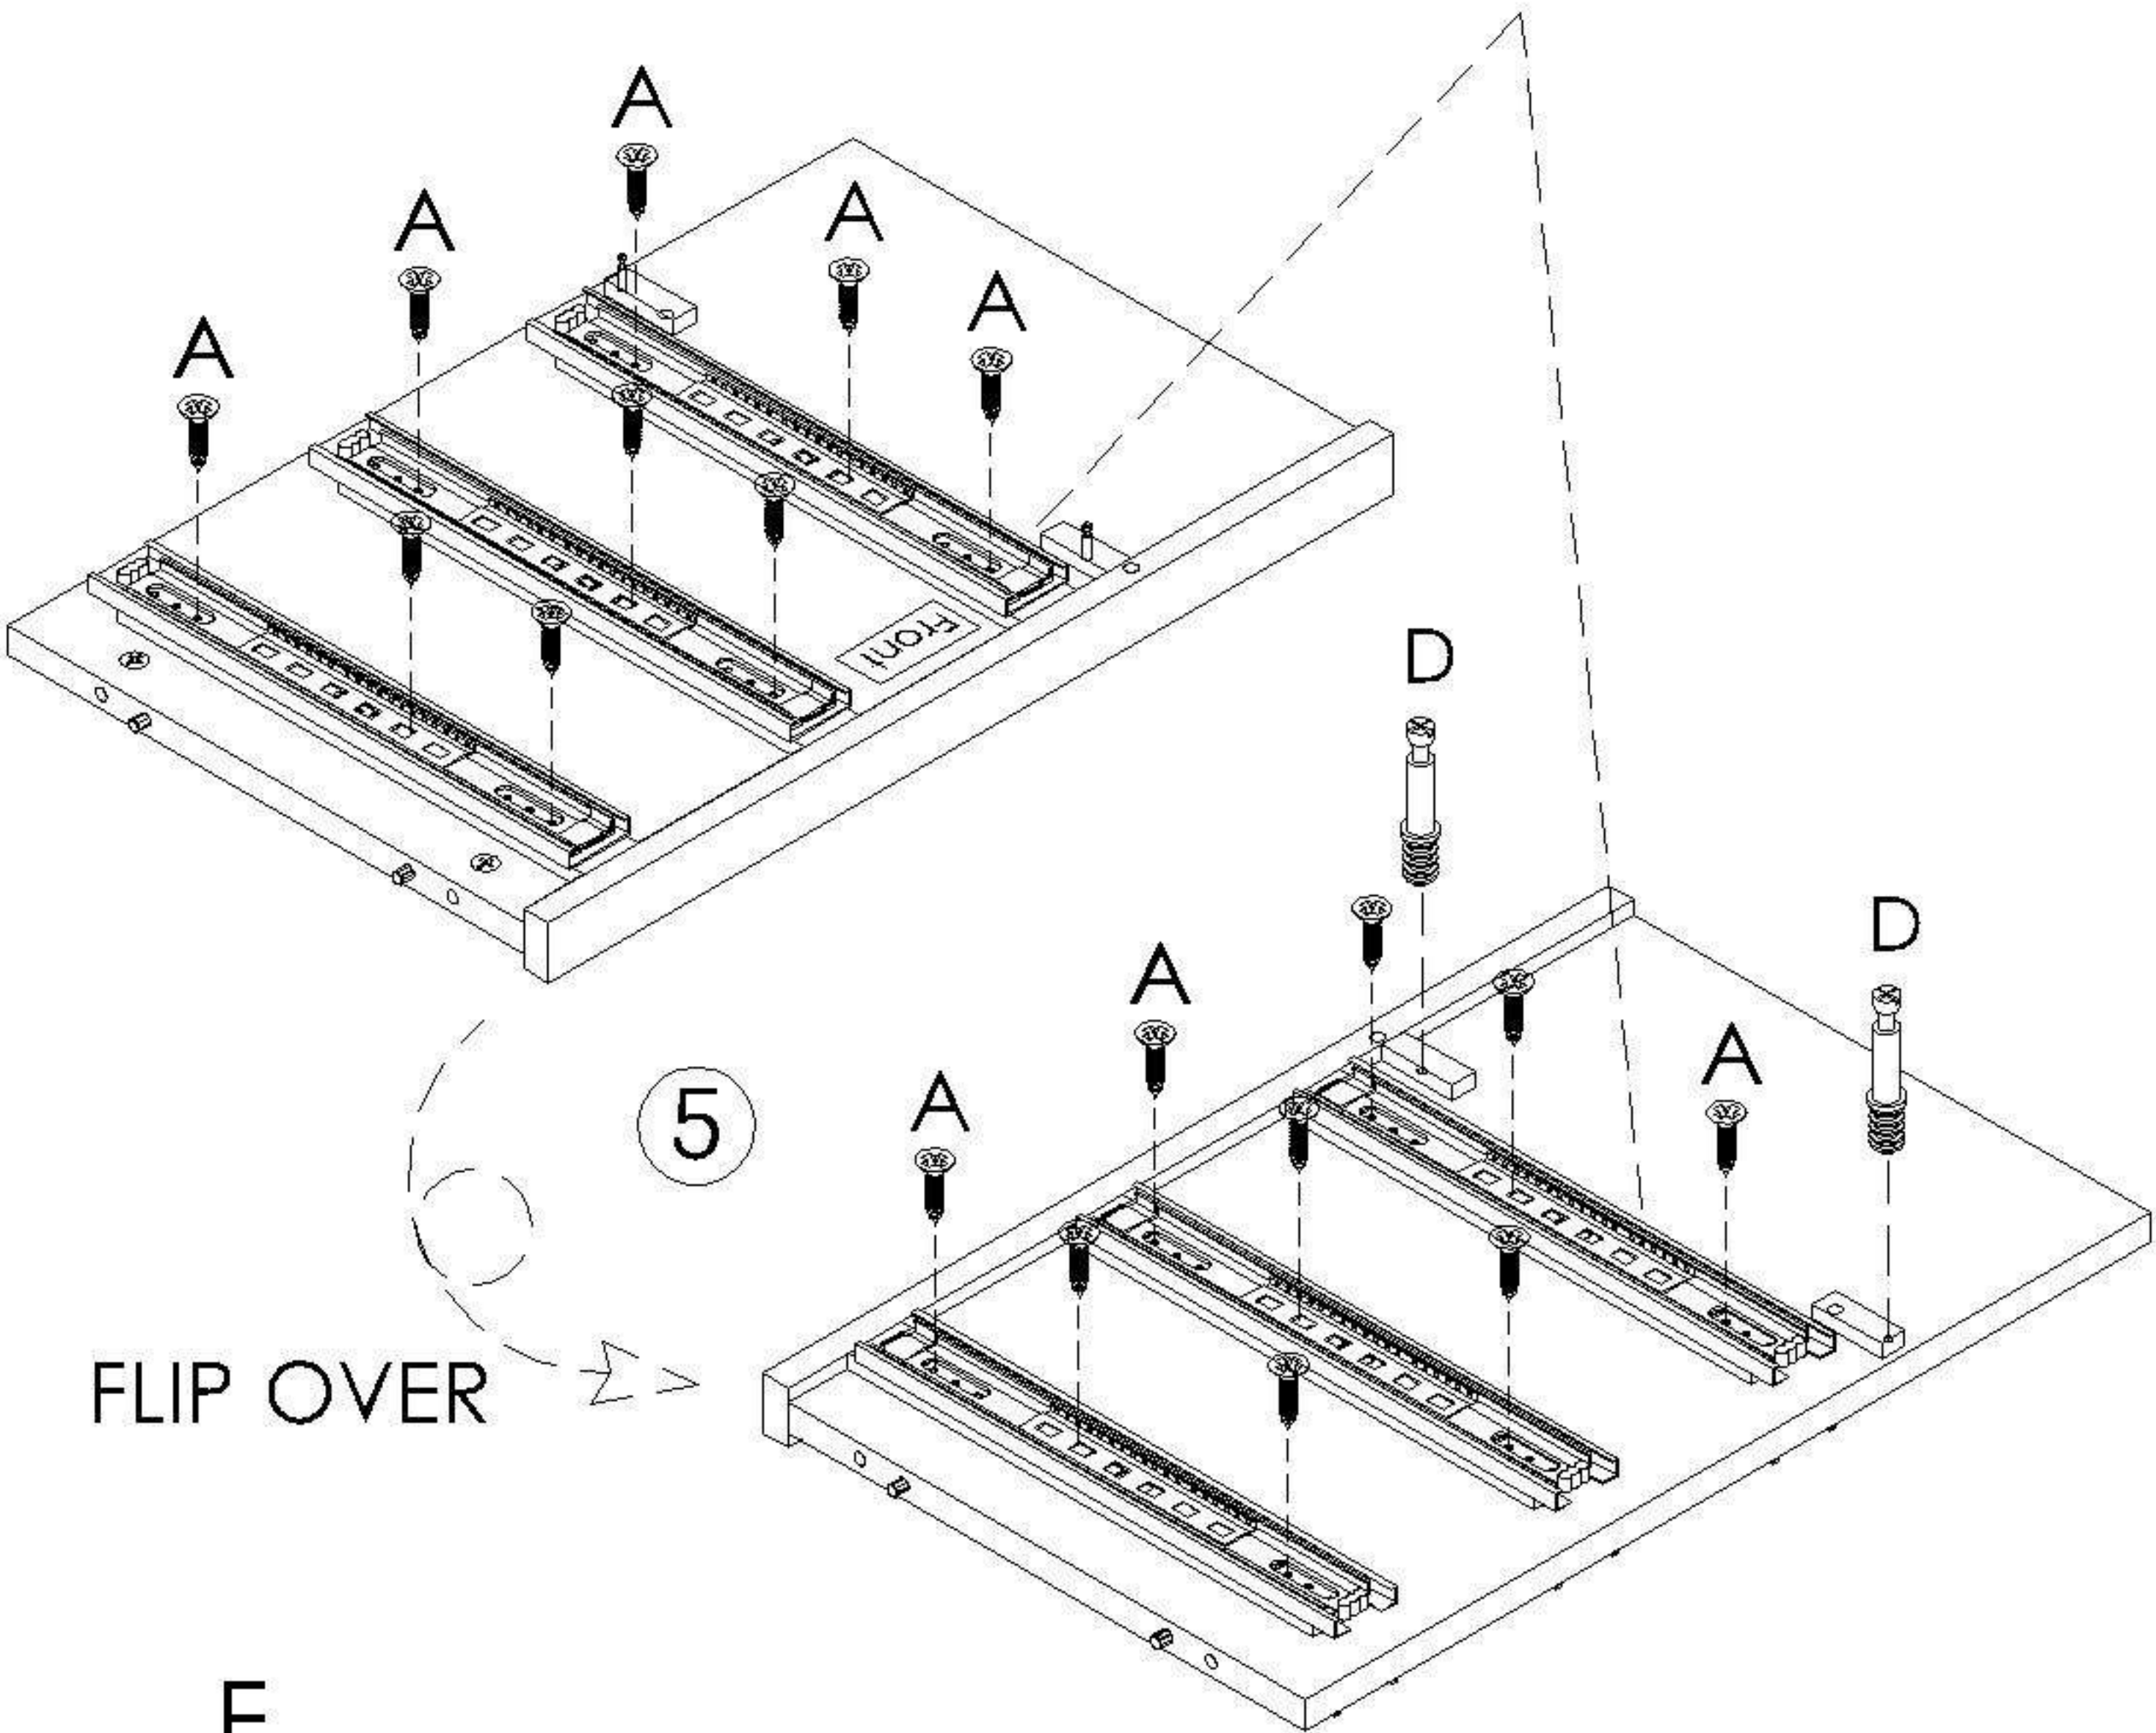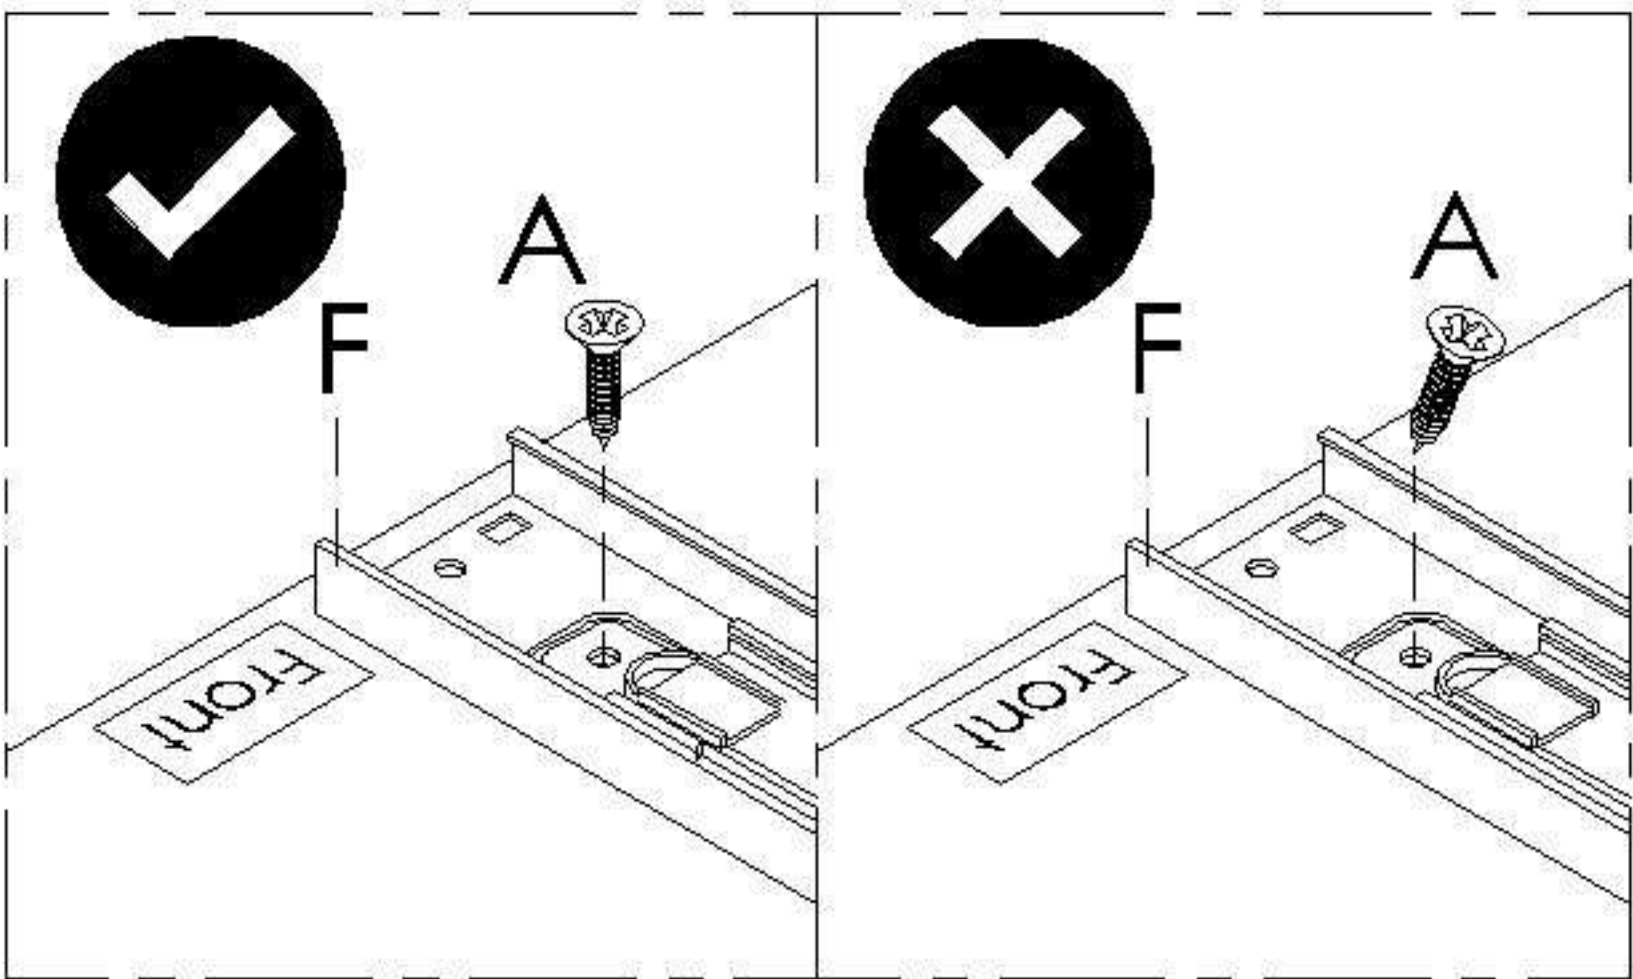


EXTENSION RUNNER DISASSEMBLE STEPS:

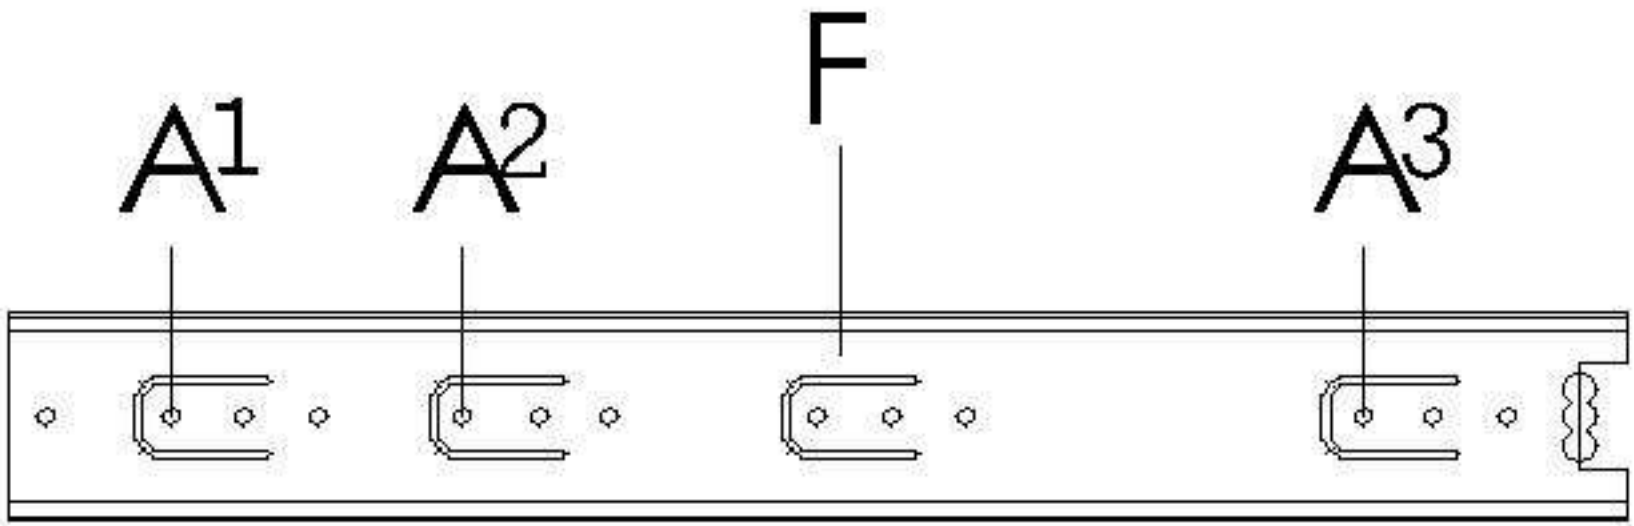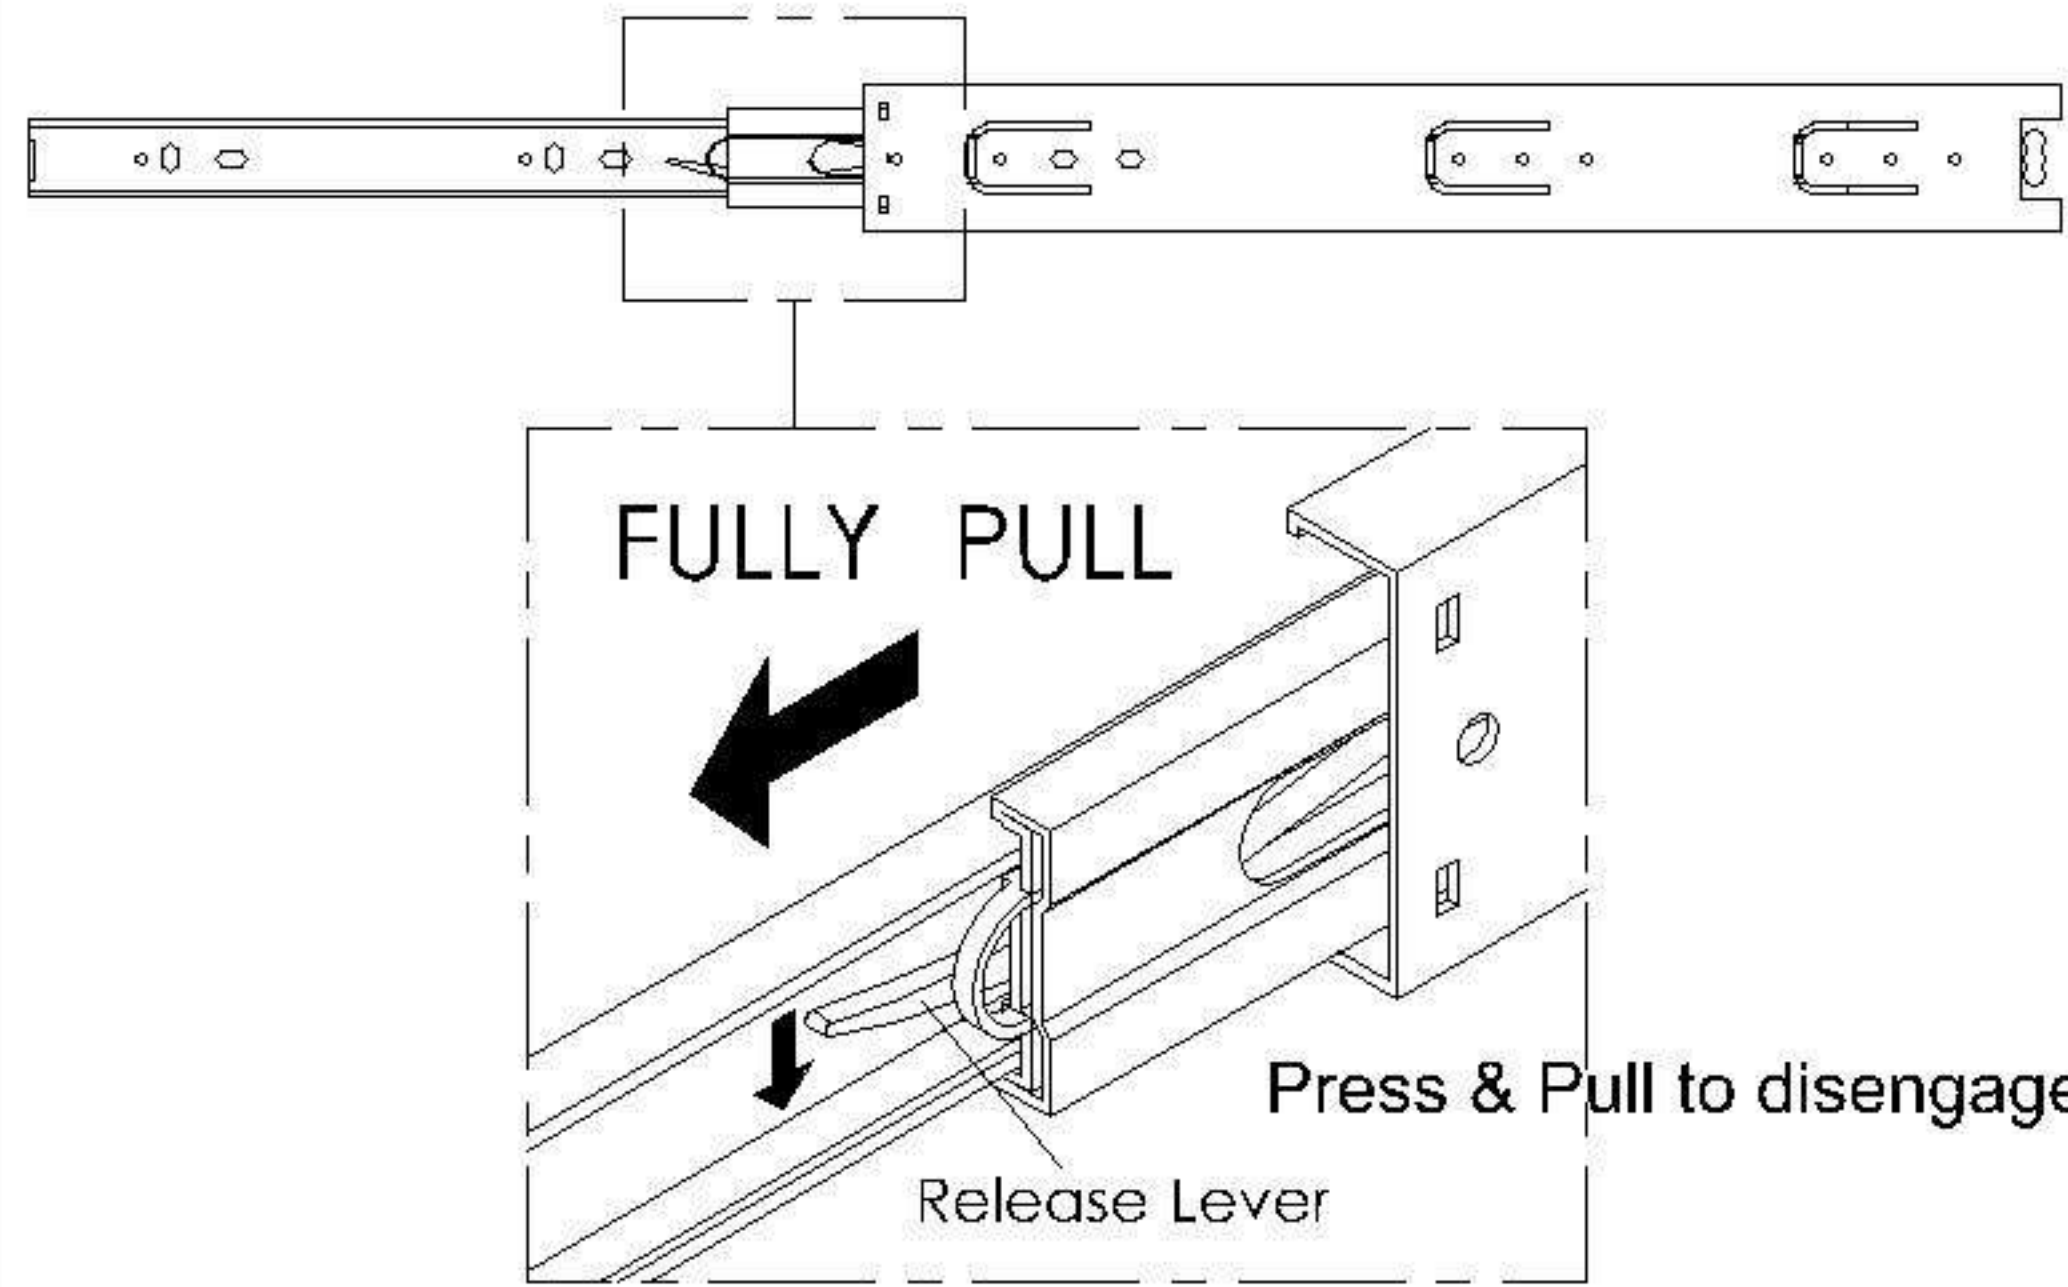

STEP 7


- A) Insert Wood Dowel(C) to Front Bar(6) & Back Bar(8)
- B) Attach Cam Lock(D) to Front Bar(6) & Back Bar(8)

NOTE : Make sure arrows on each Cam Lock points towards nearest edge with holes

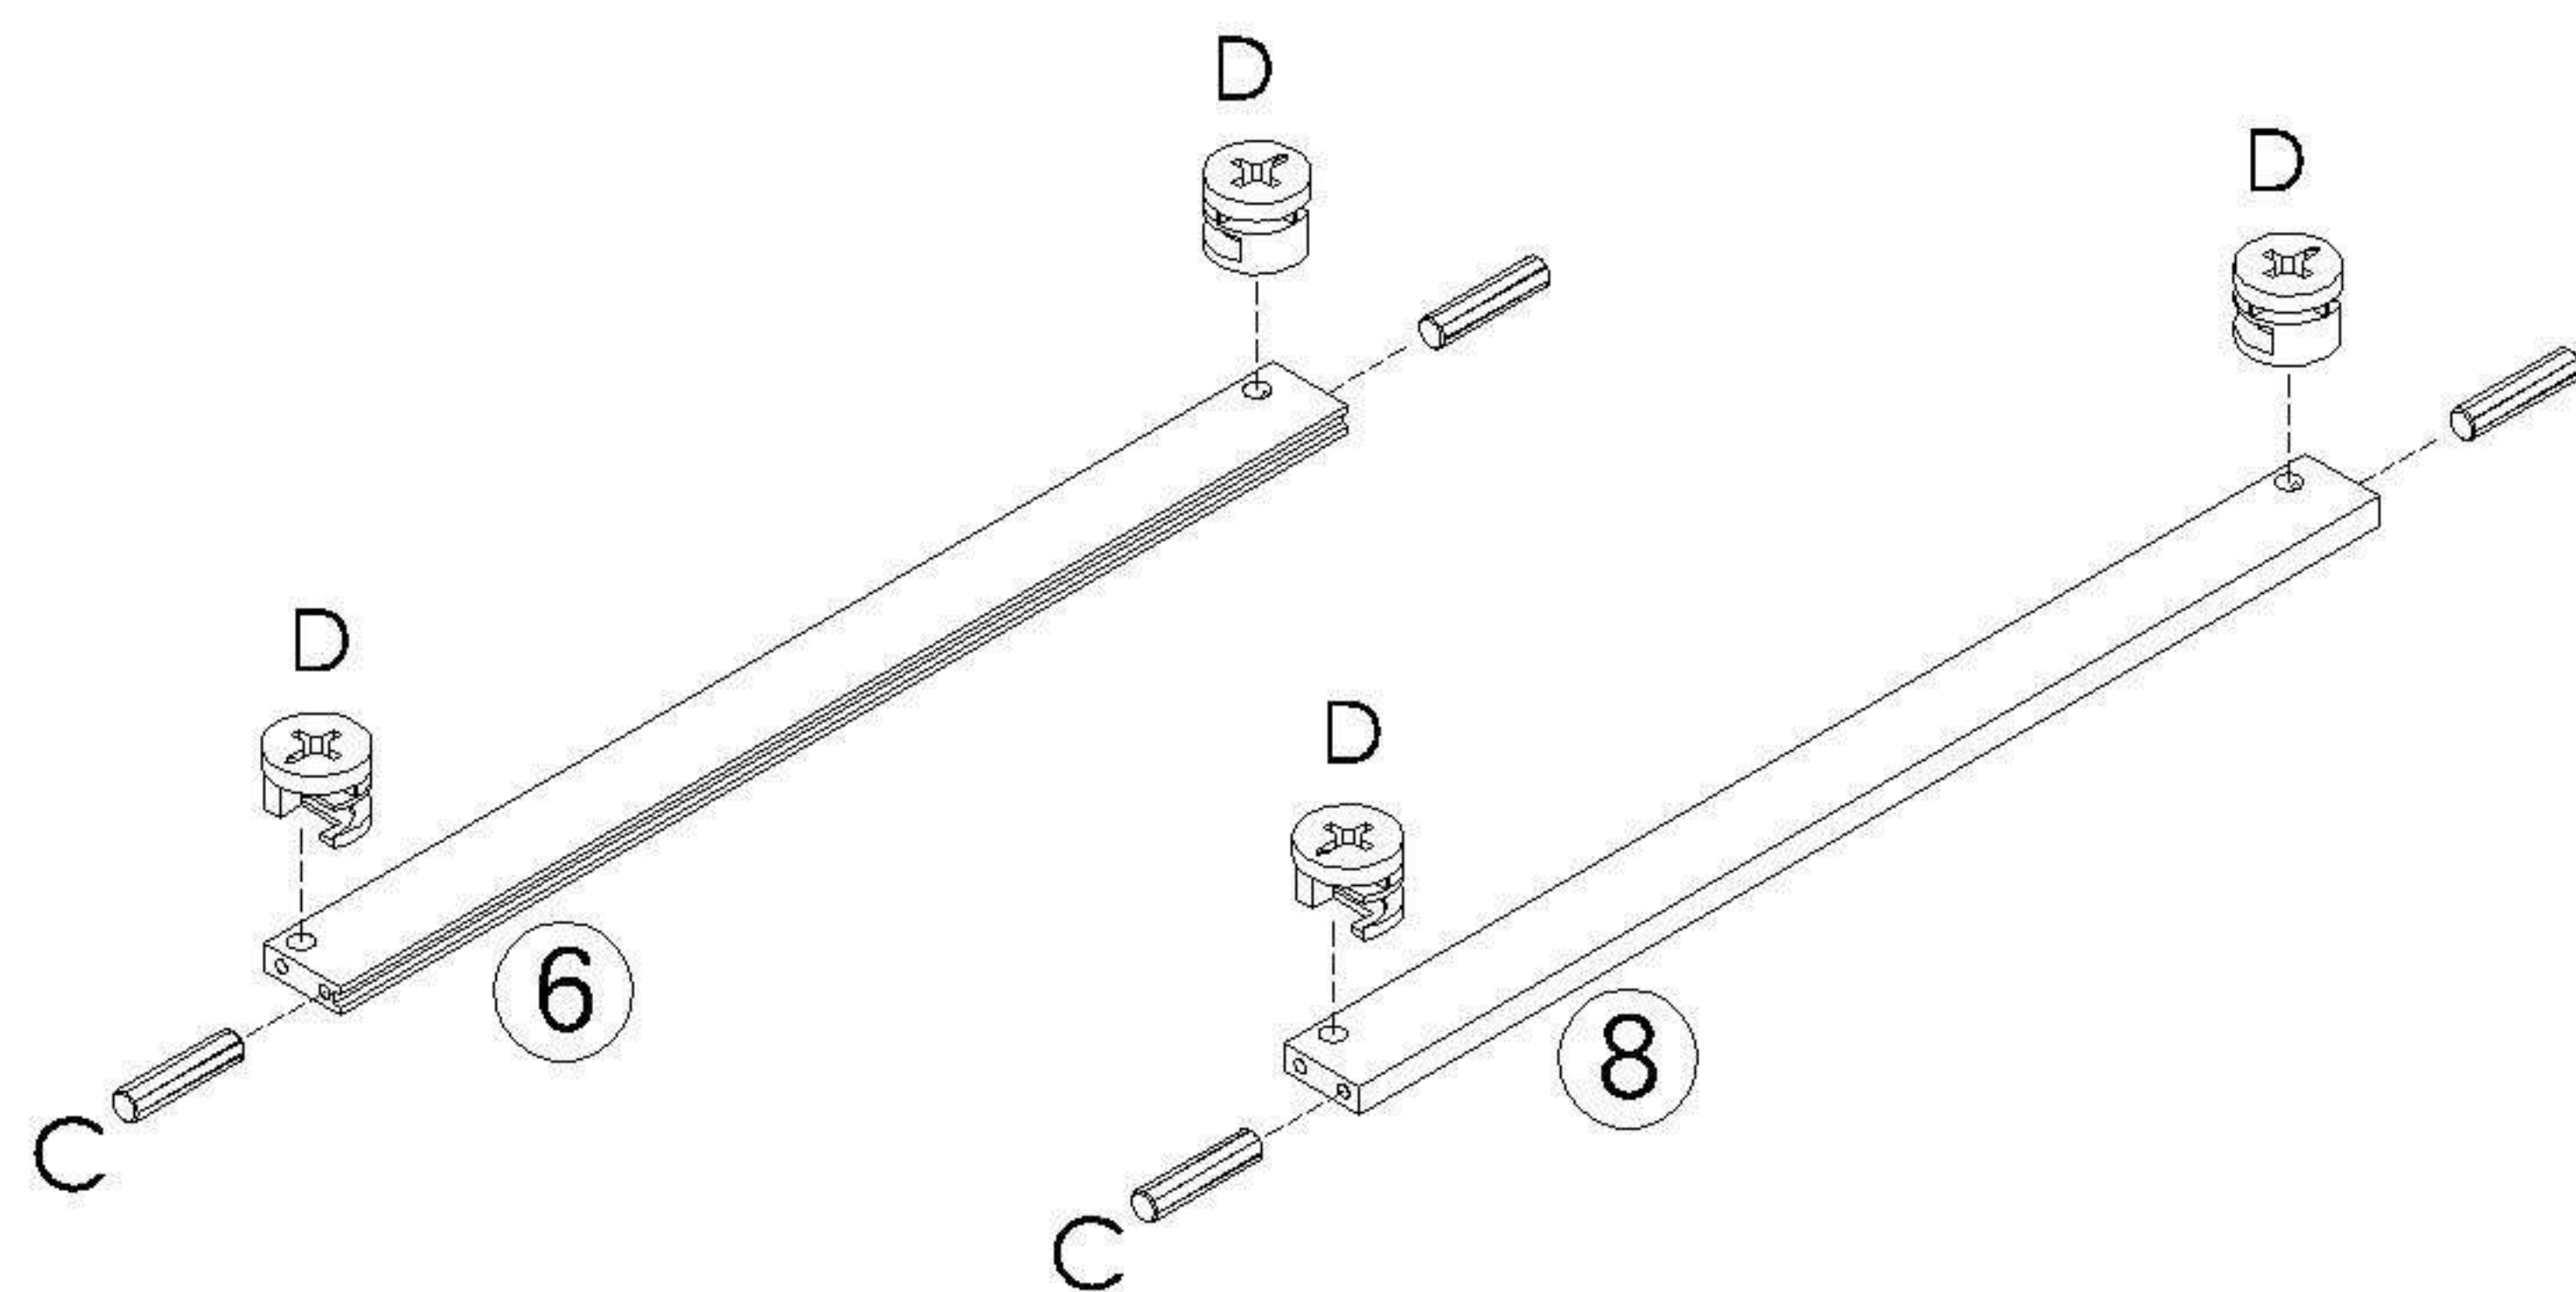


STEP 8

- A) Attach Front Bar(6) to Partition(5) secure with with Cam Lock(D)
- B) Attach Back Bar(8) to Partition(5) secure with with Cam Lock(D)
- c) Cover Cam Lock(D) with Cam Lock Cover(G)

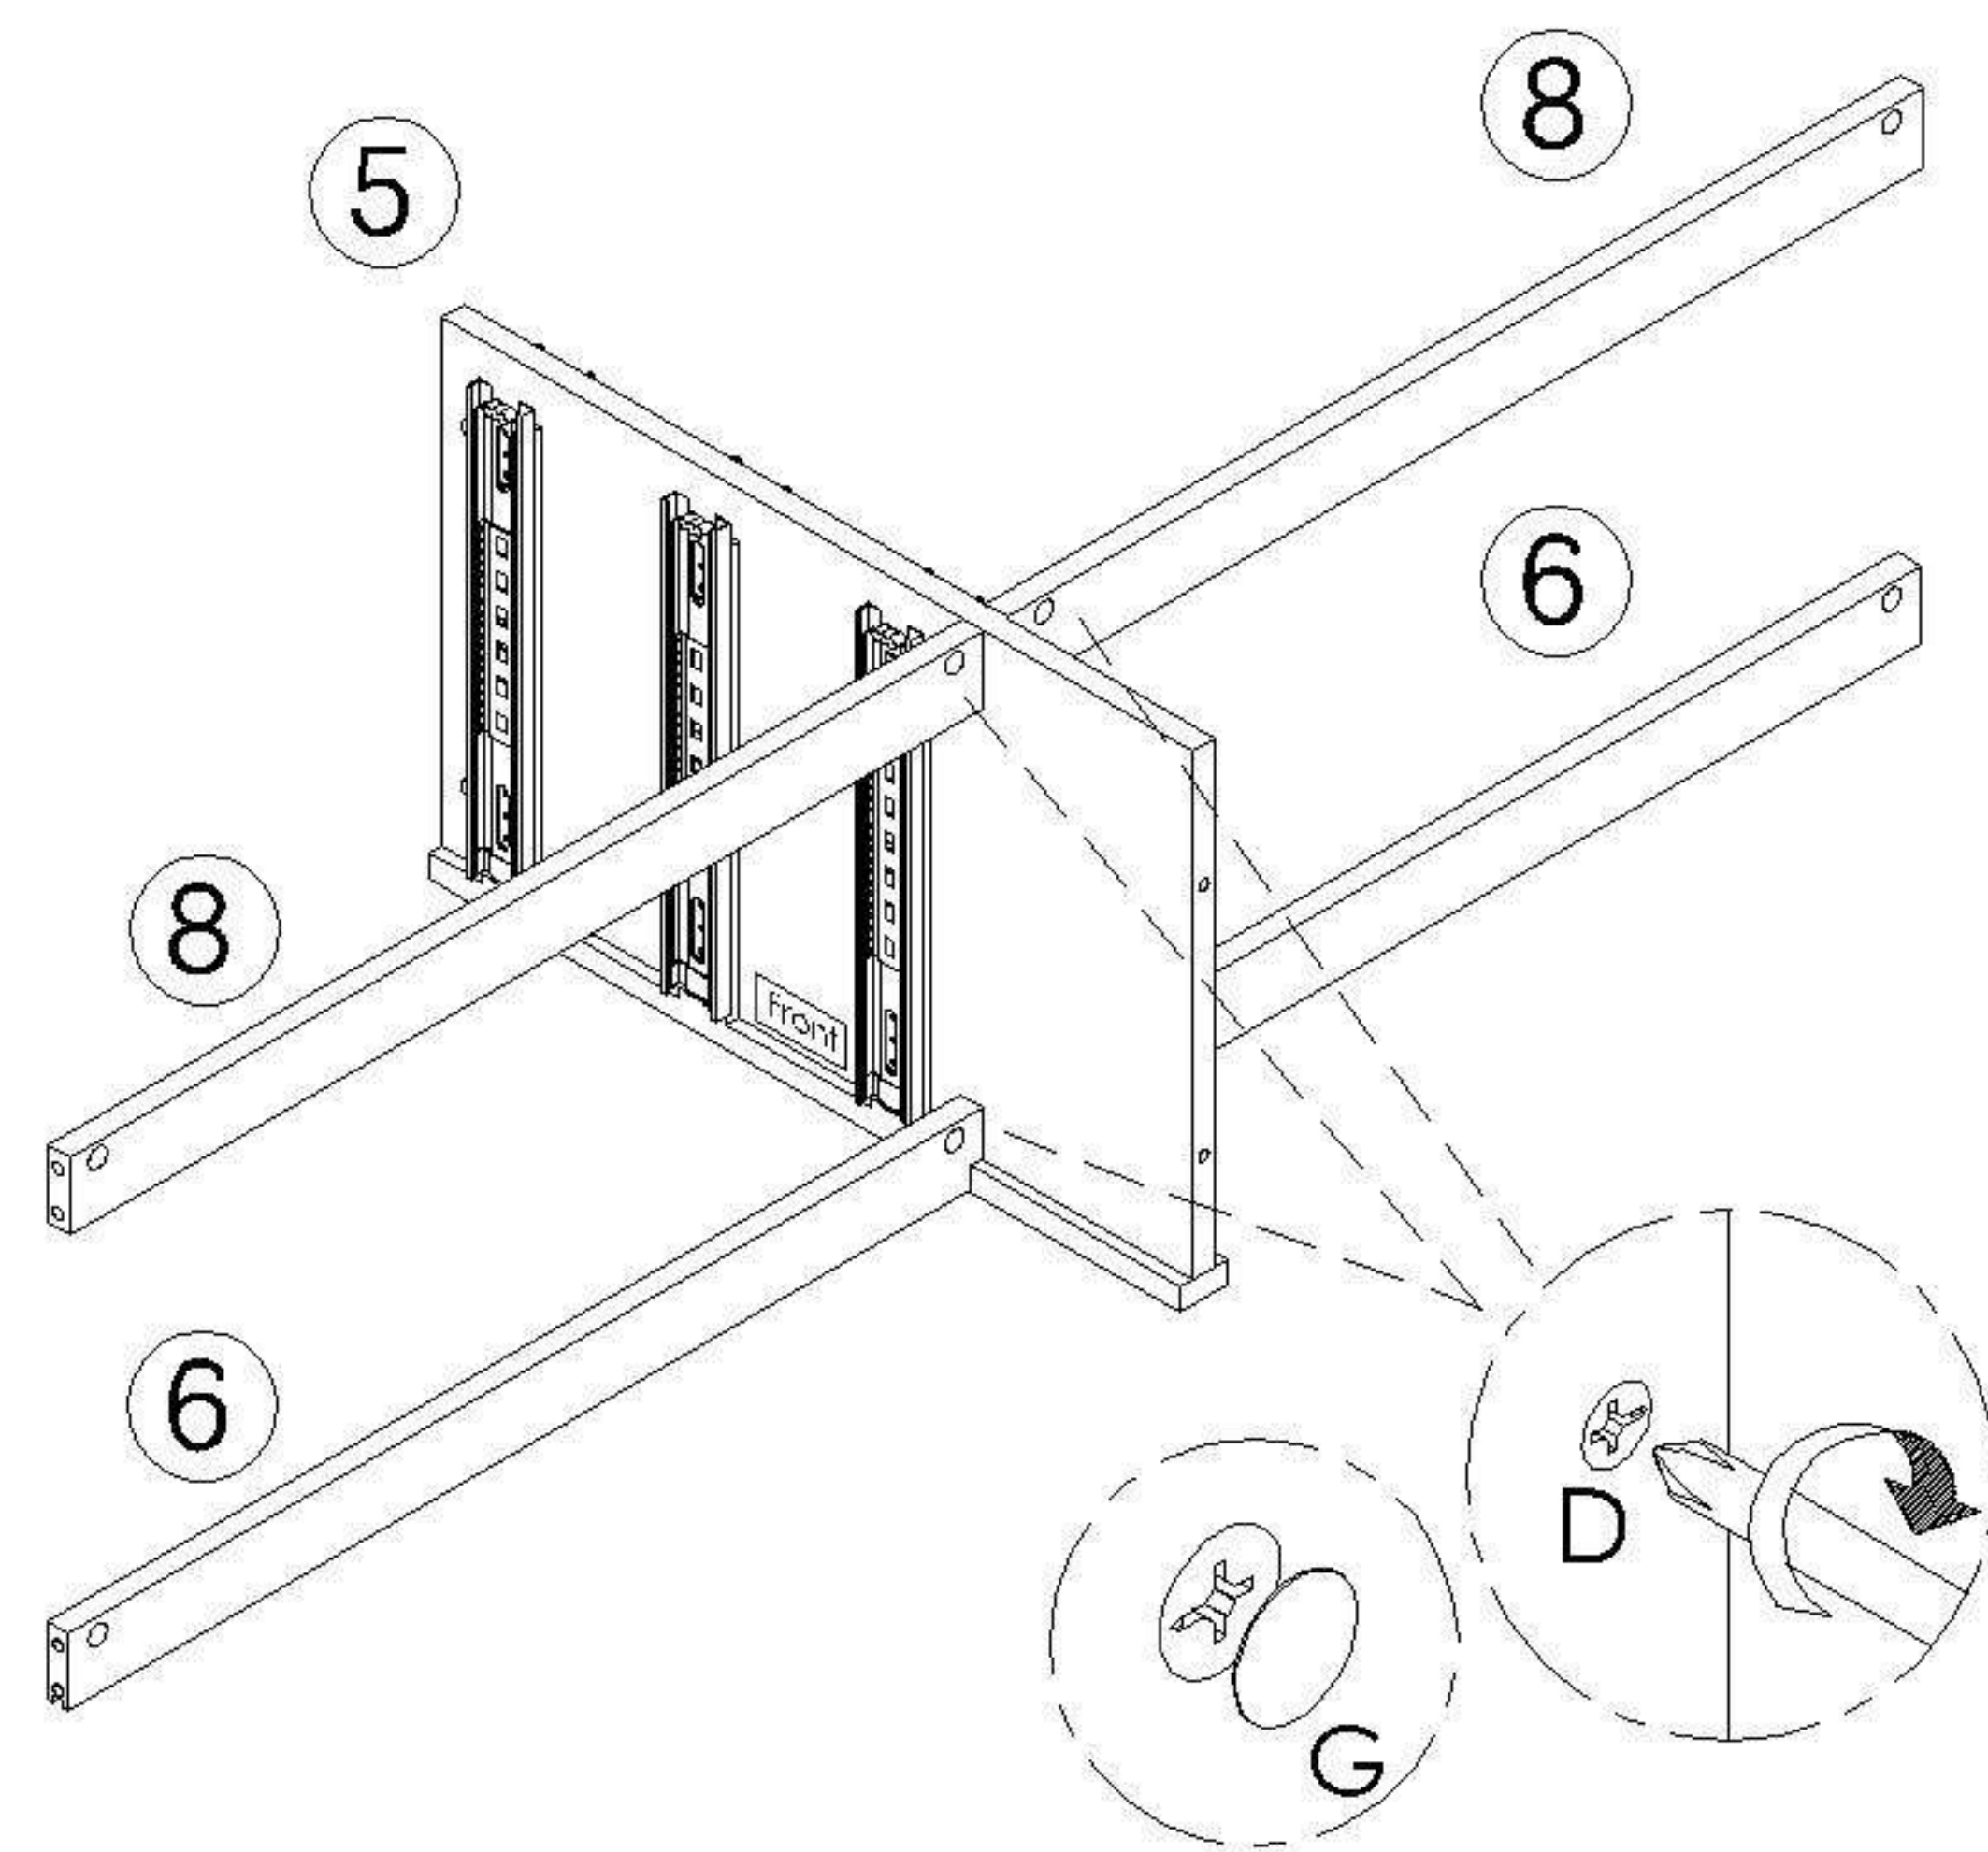


STEP 9

- A) Attach Bottom Panel(4) to Partition(5) secure with Chipboard Screw(B)

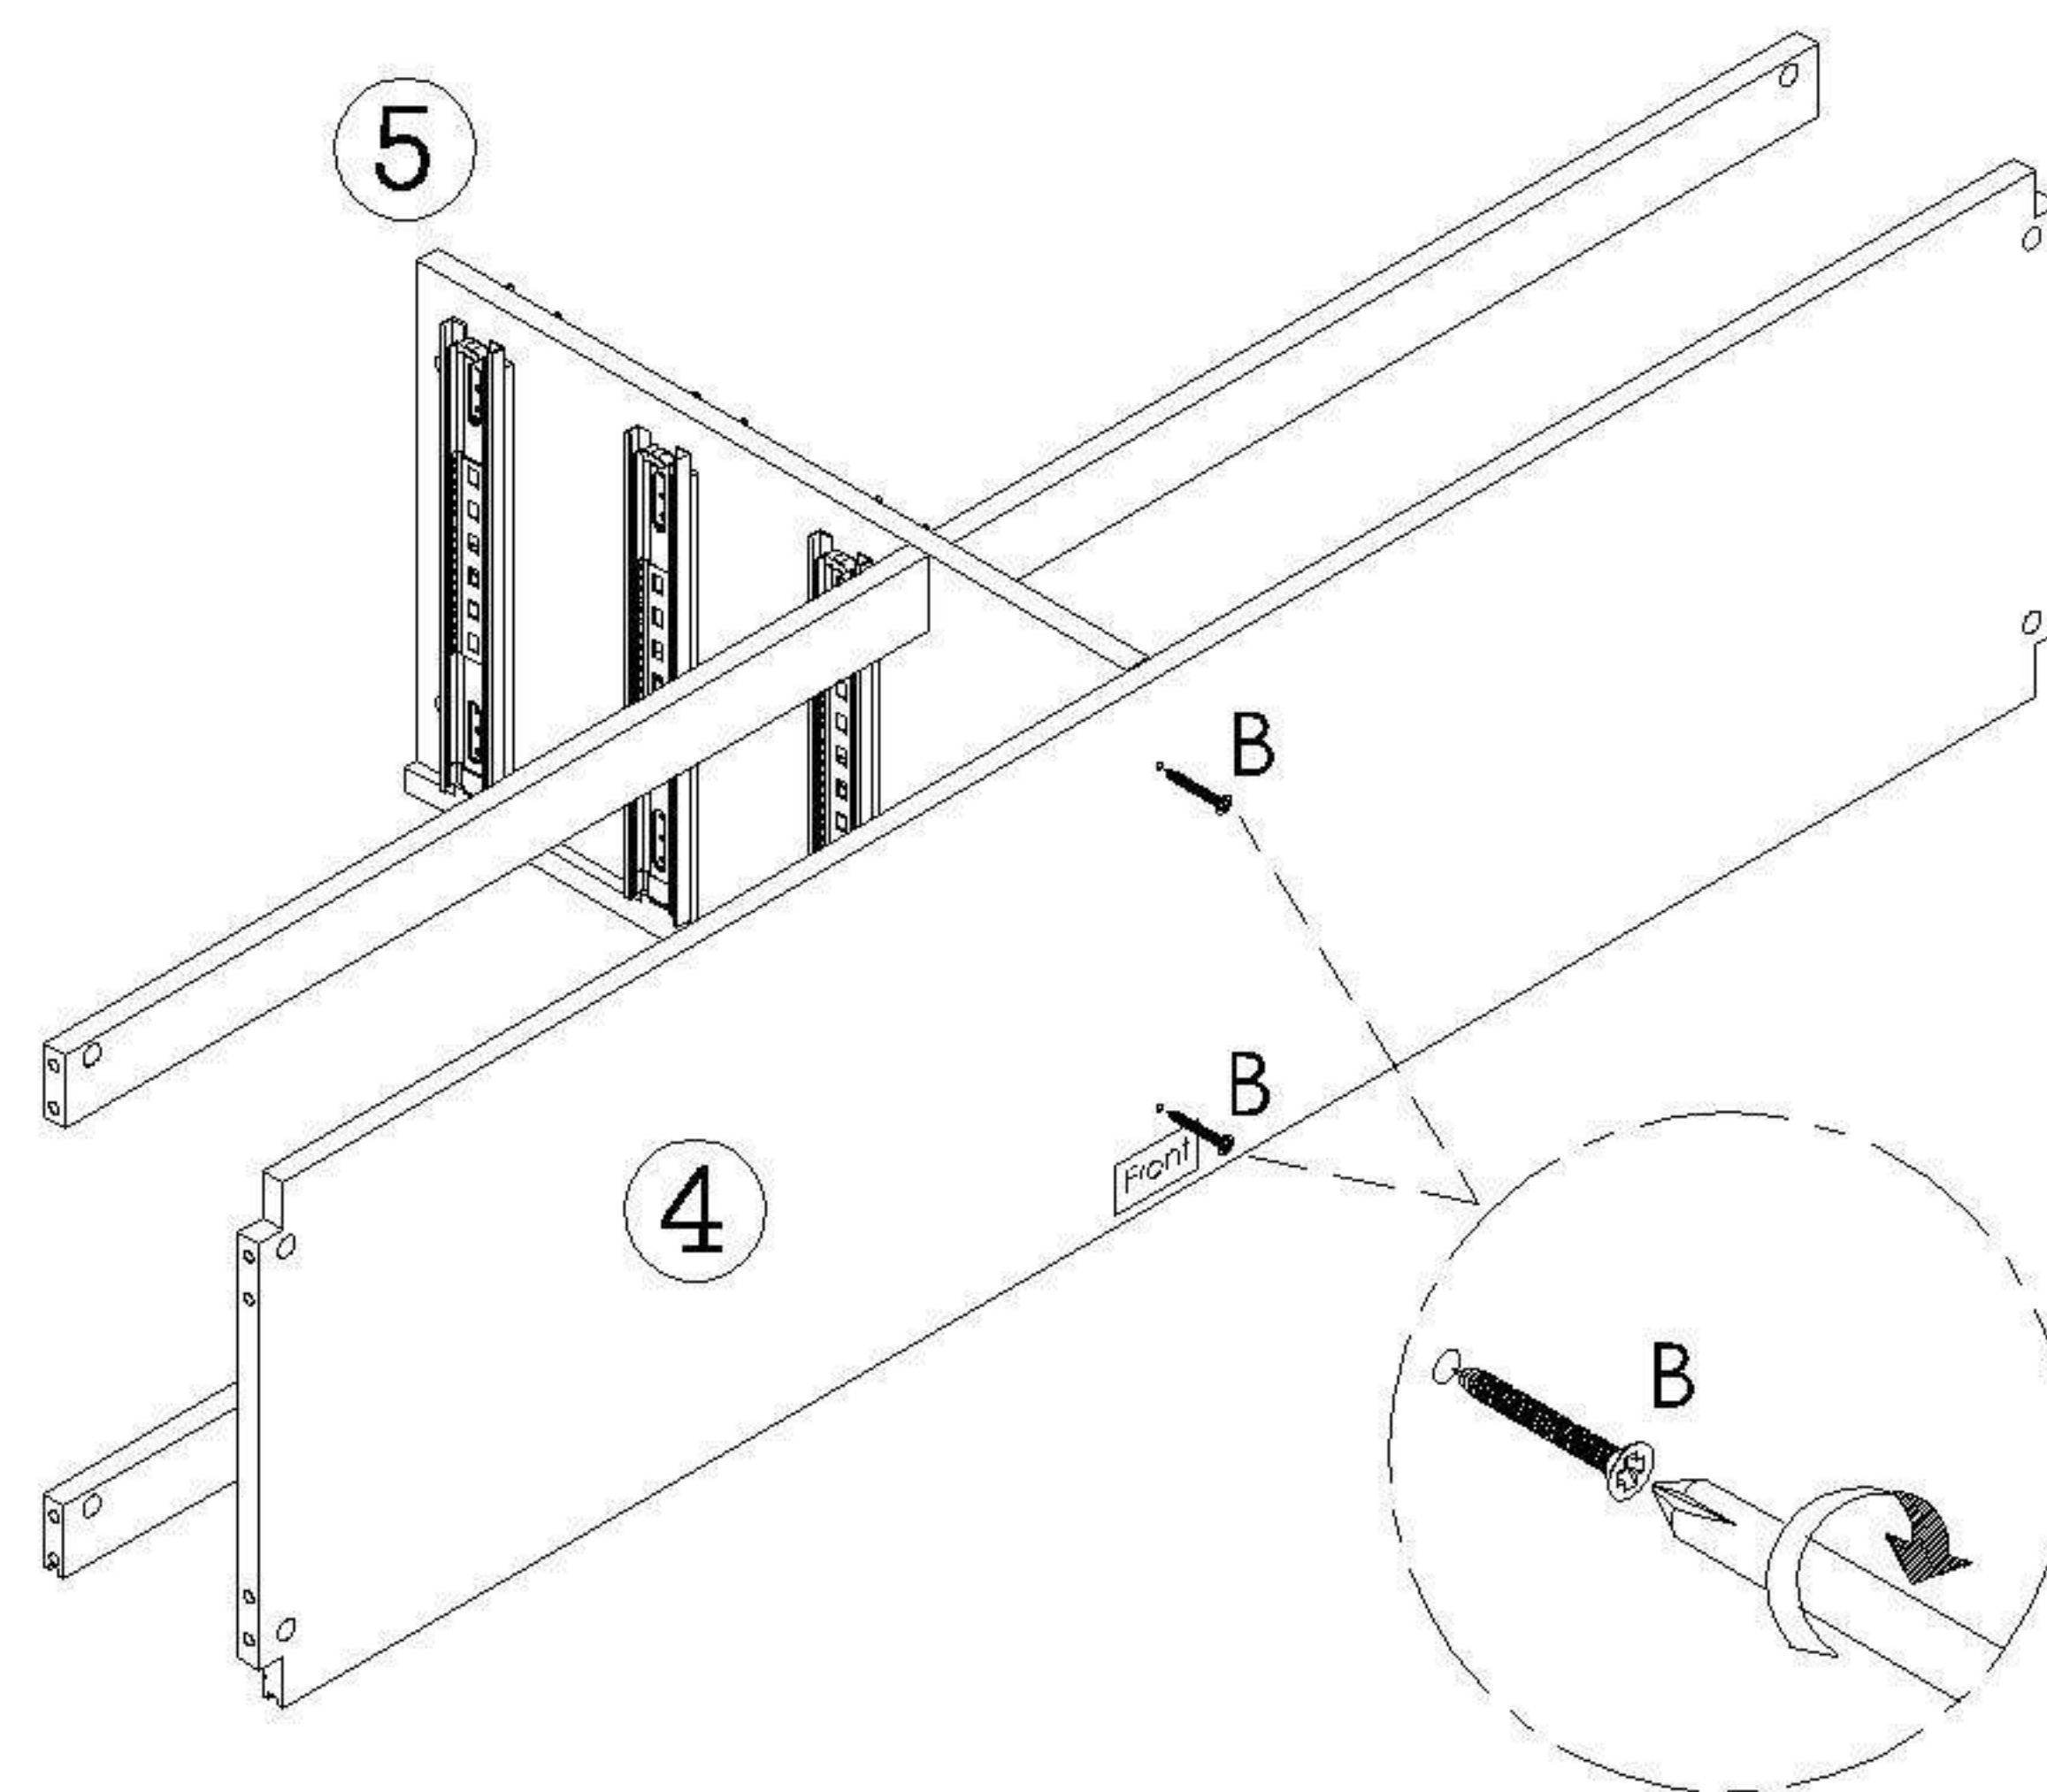


STEP 10

- A) Attach Left Side Panel(2) to Front Bar, Back Bar(6,8) &Bottom Panel(4) secure with Cam Lock(D)
- B) Cover Cam Lock(D) with Cam Lock Cover(G)

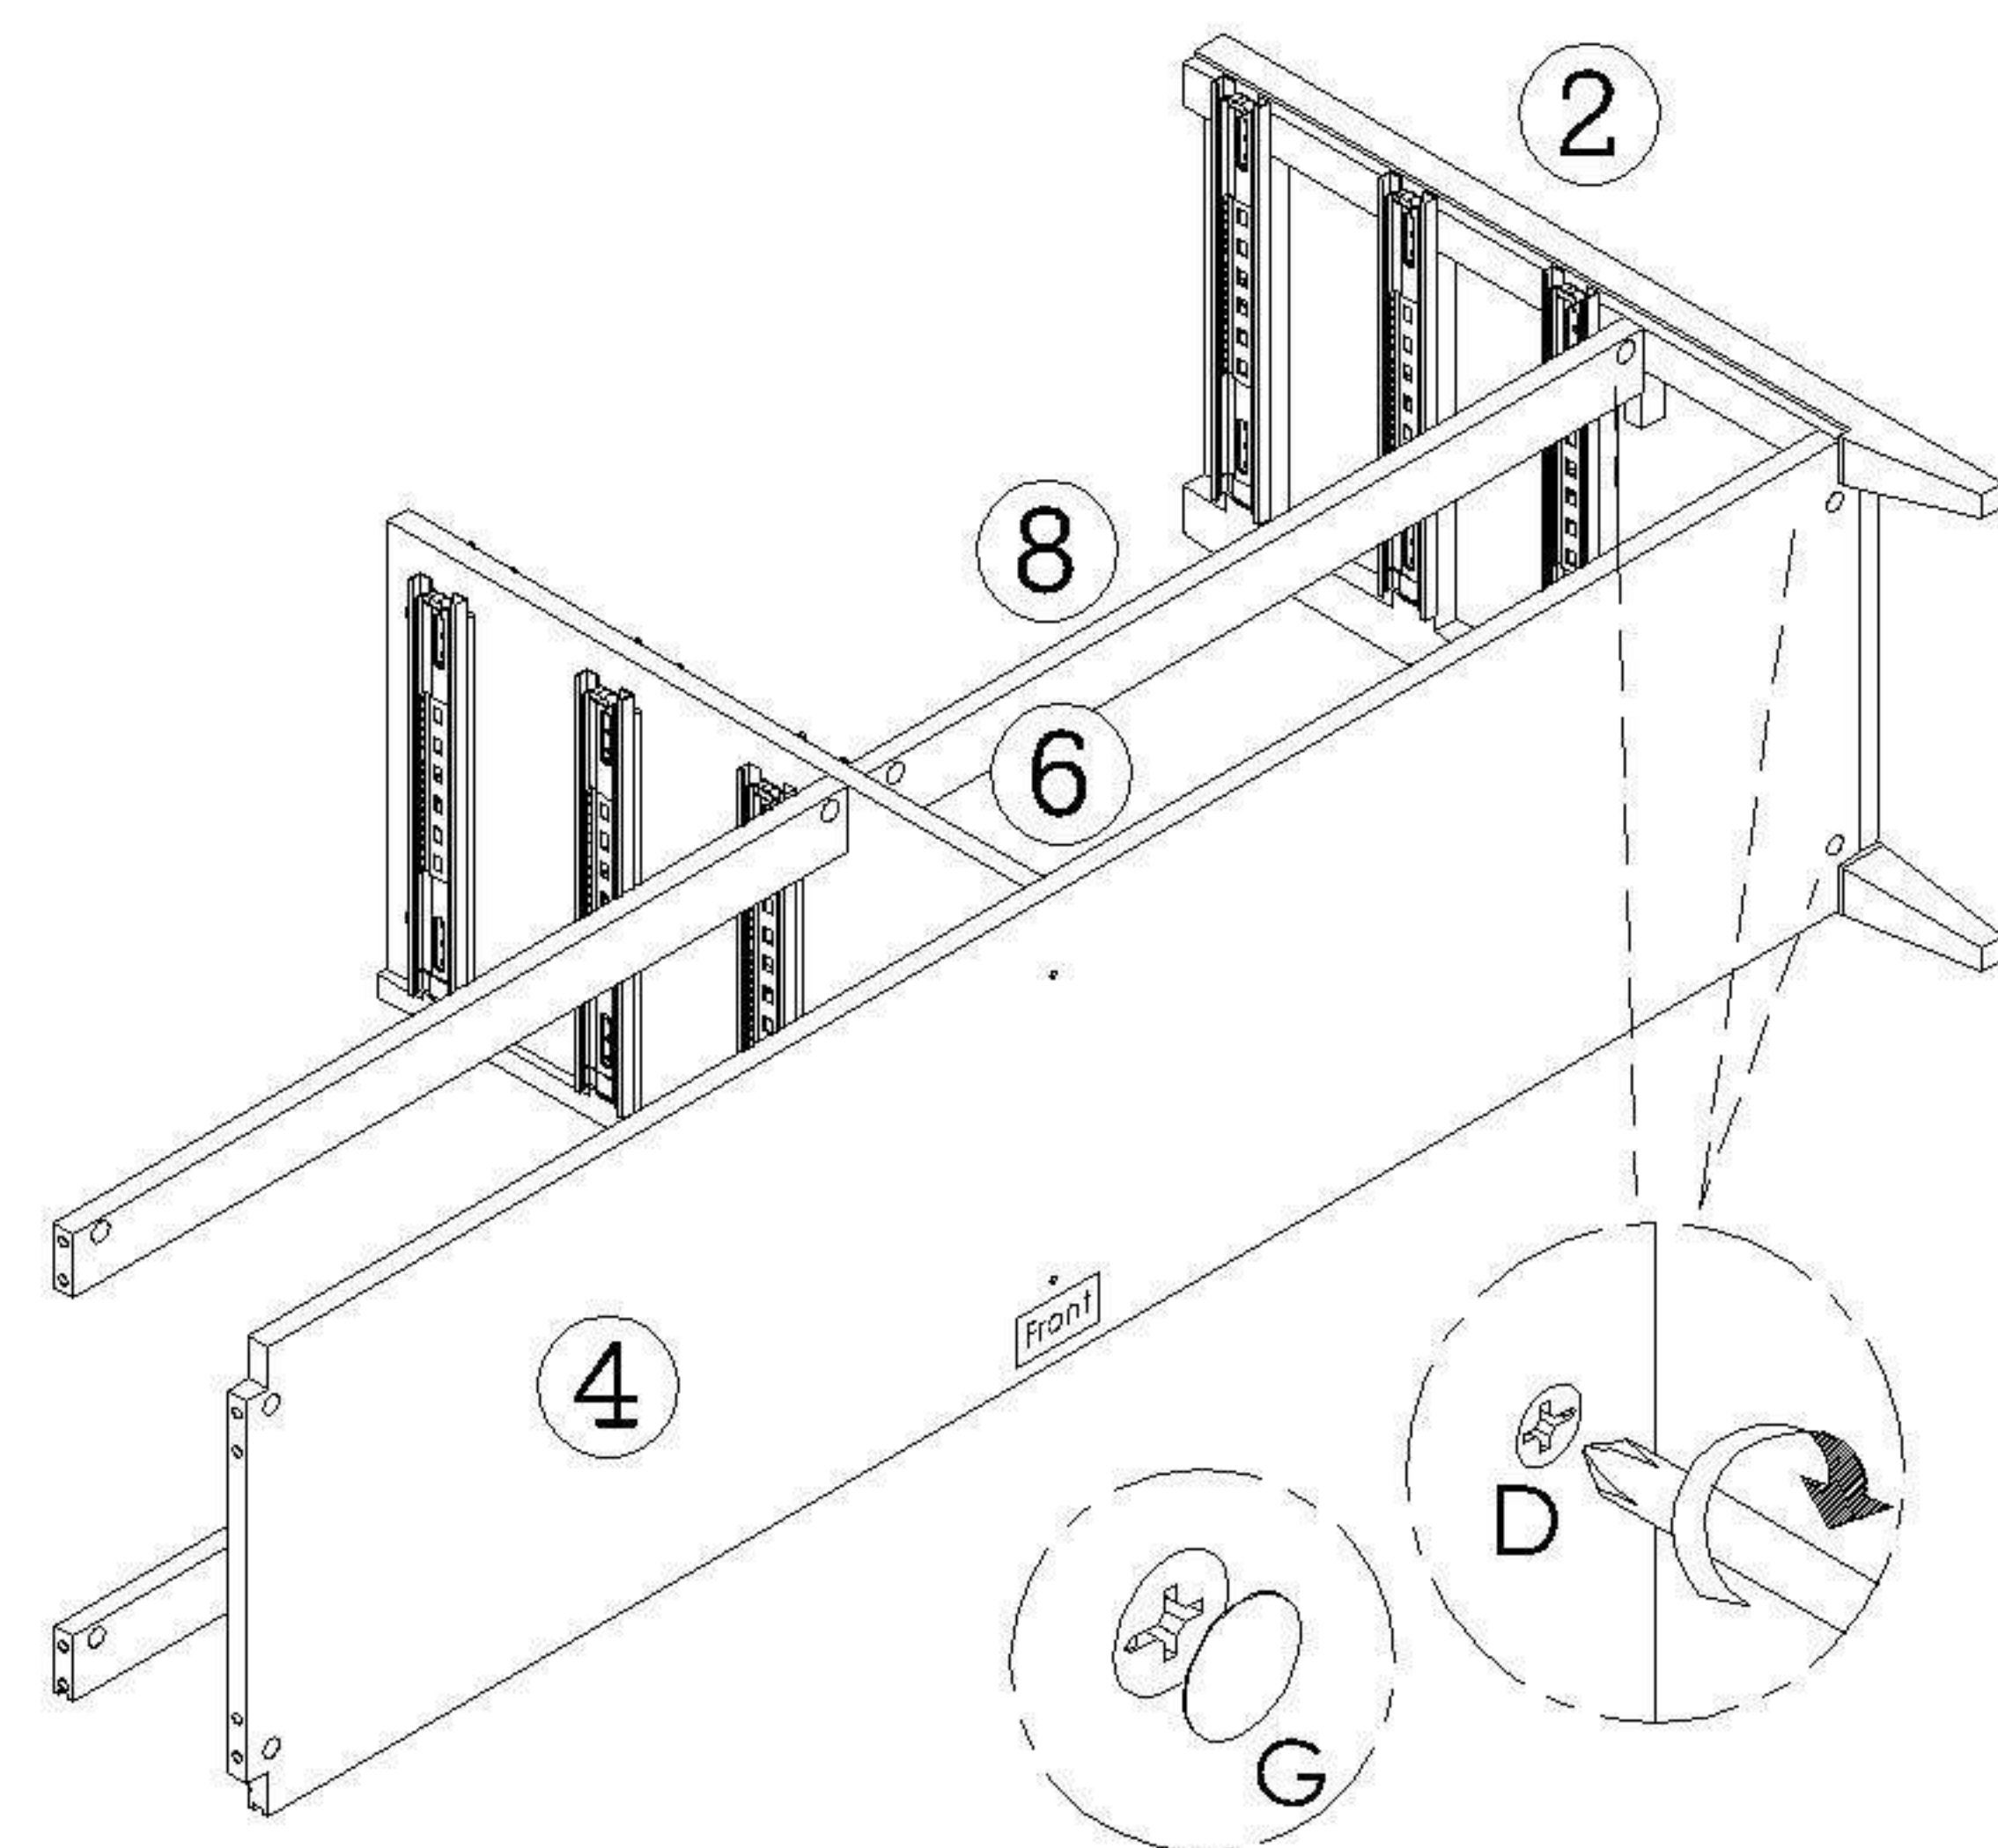


STEP 11

- A) Attach Right Side Panel(3) to Front Bar, Back Bar(6,8) &Bottom Panel(4) secure with Cam Lock(D)
- B) Cover Cam Lock(D) with Cam Lock Cover(G)

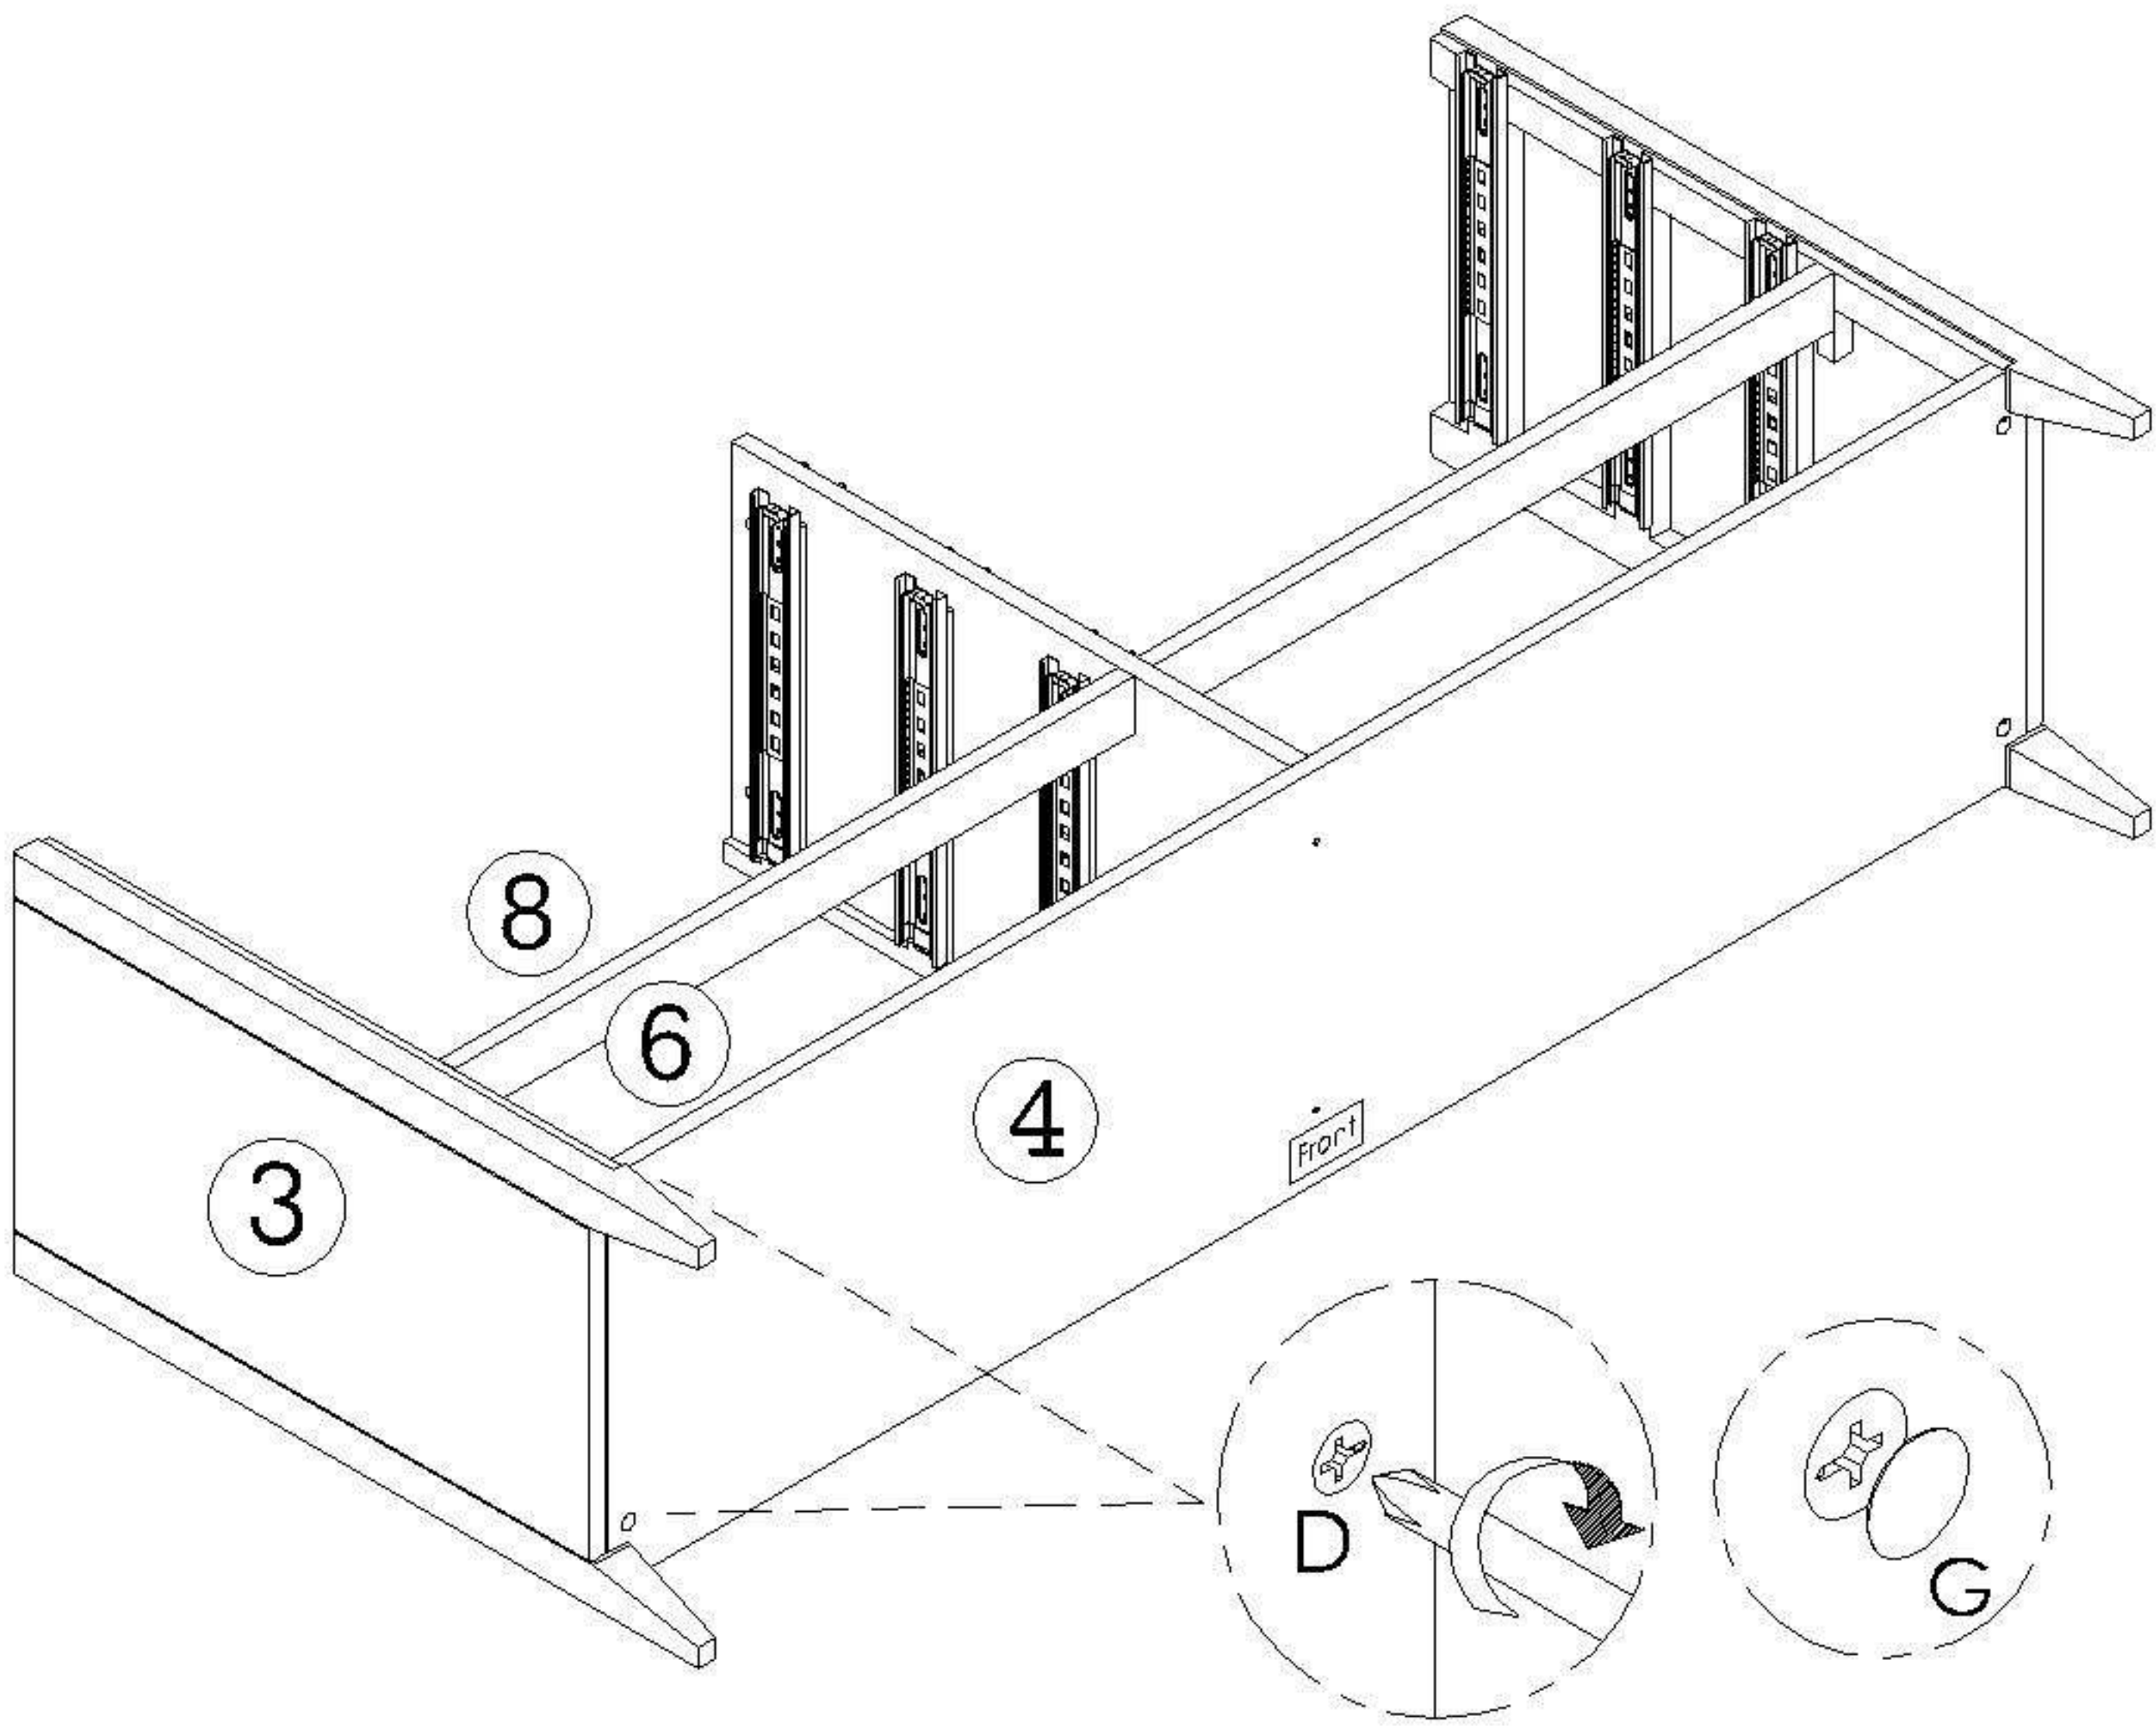


STEP 12

- A) Attach Top Panel(1) and secure with Cam Lock(D)
- B) Cover Cam Lock(D) with Cam Lock Cover(G)

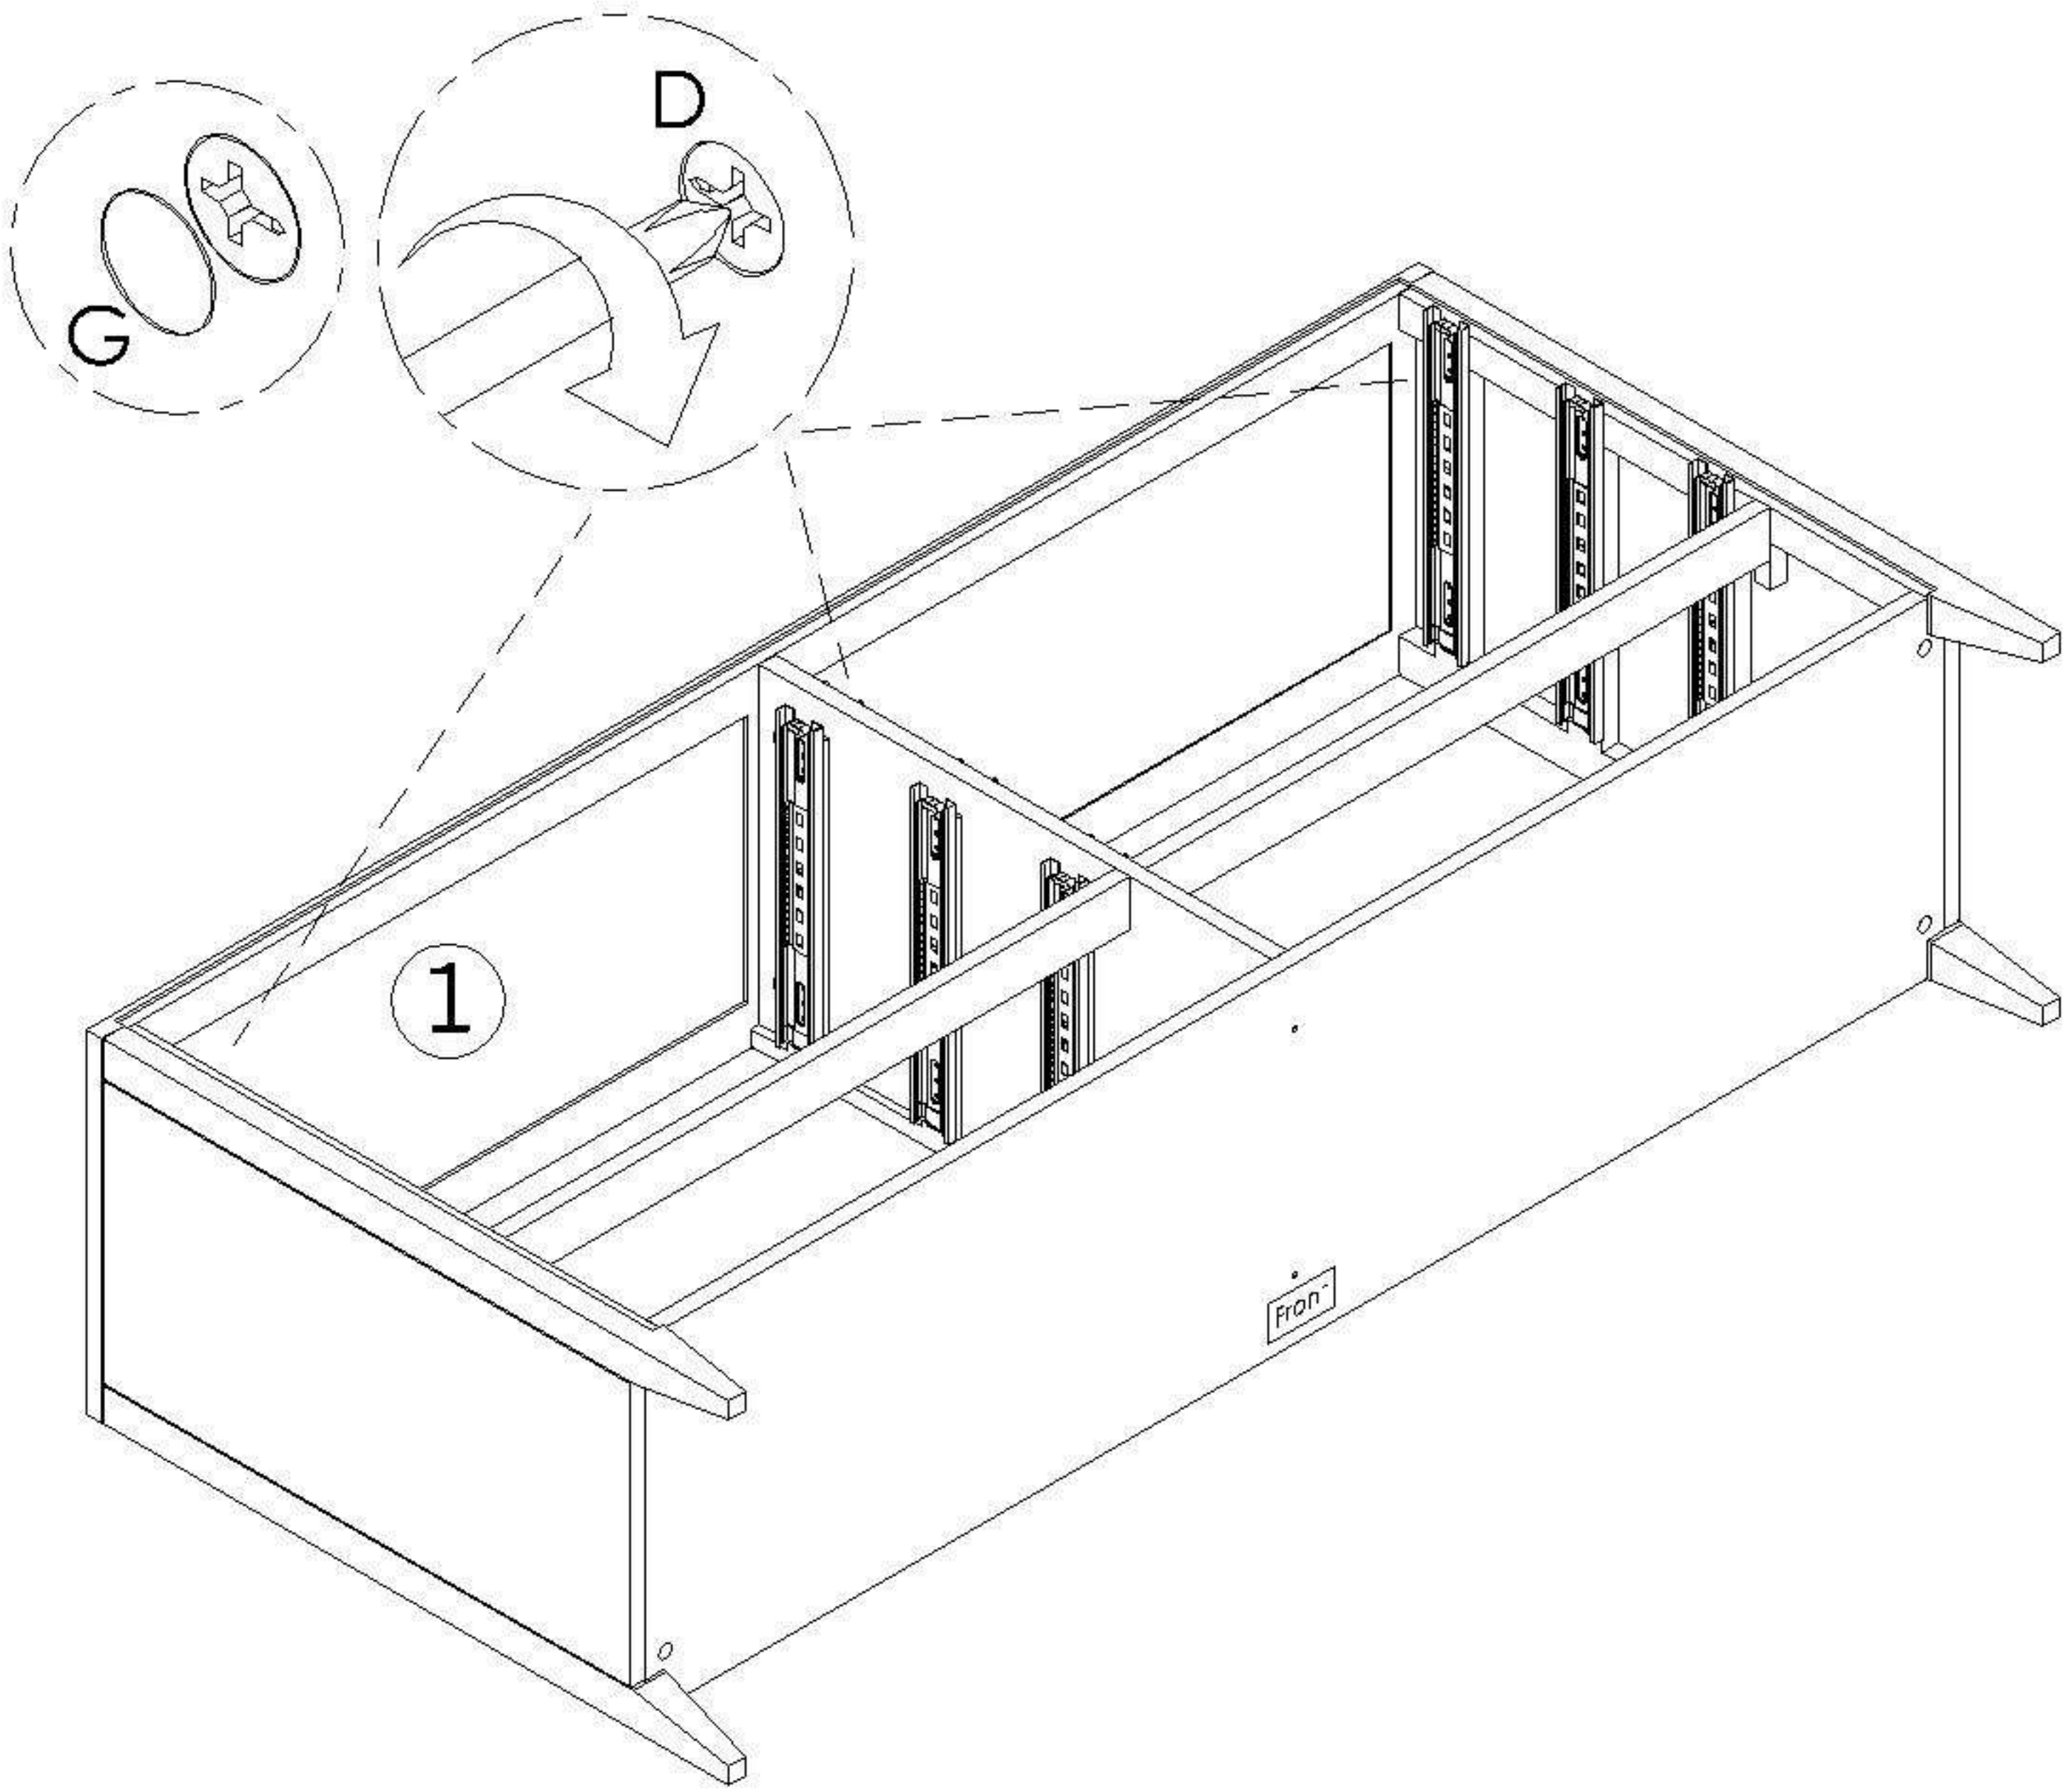

STEP 13


- A) Attach Back Plywood(7) to assembled unit using Panhead Chipboard Screw(Black)(H) to secure

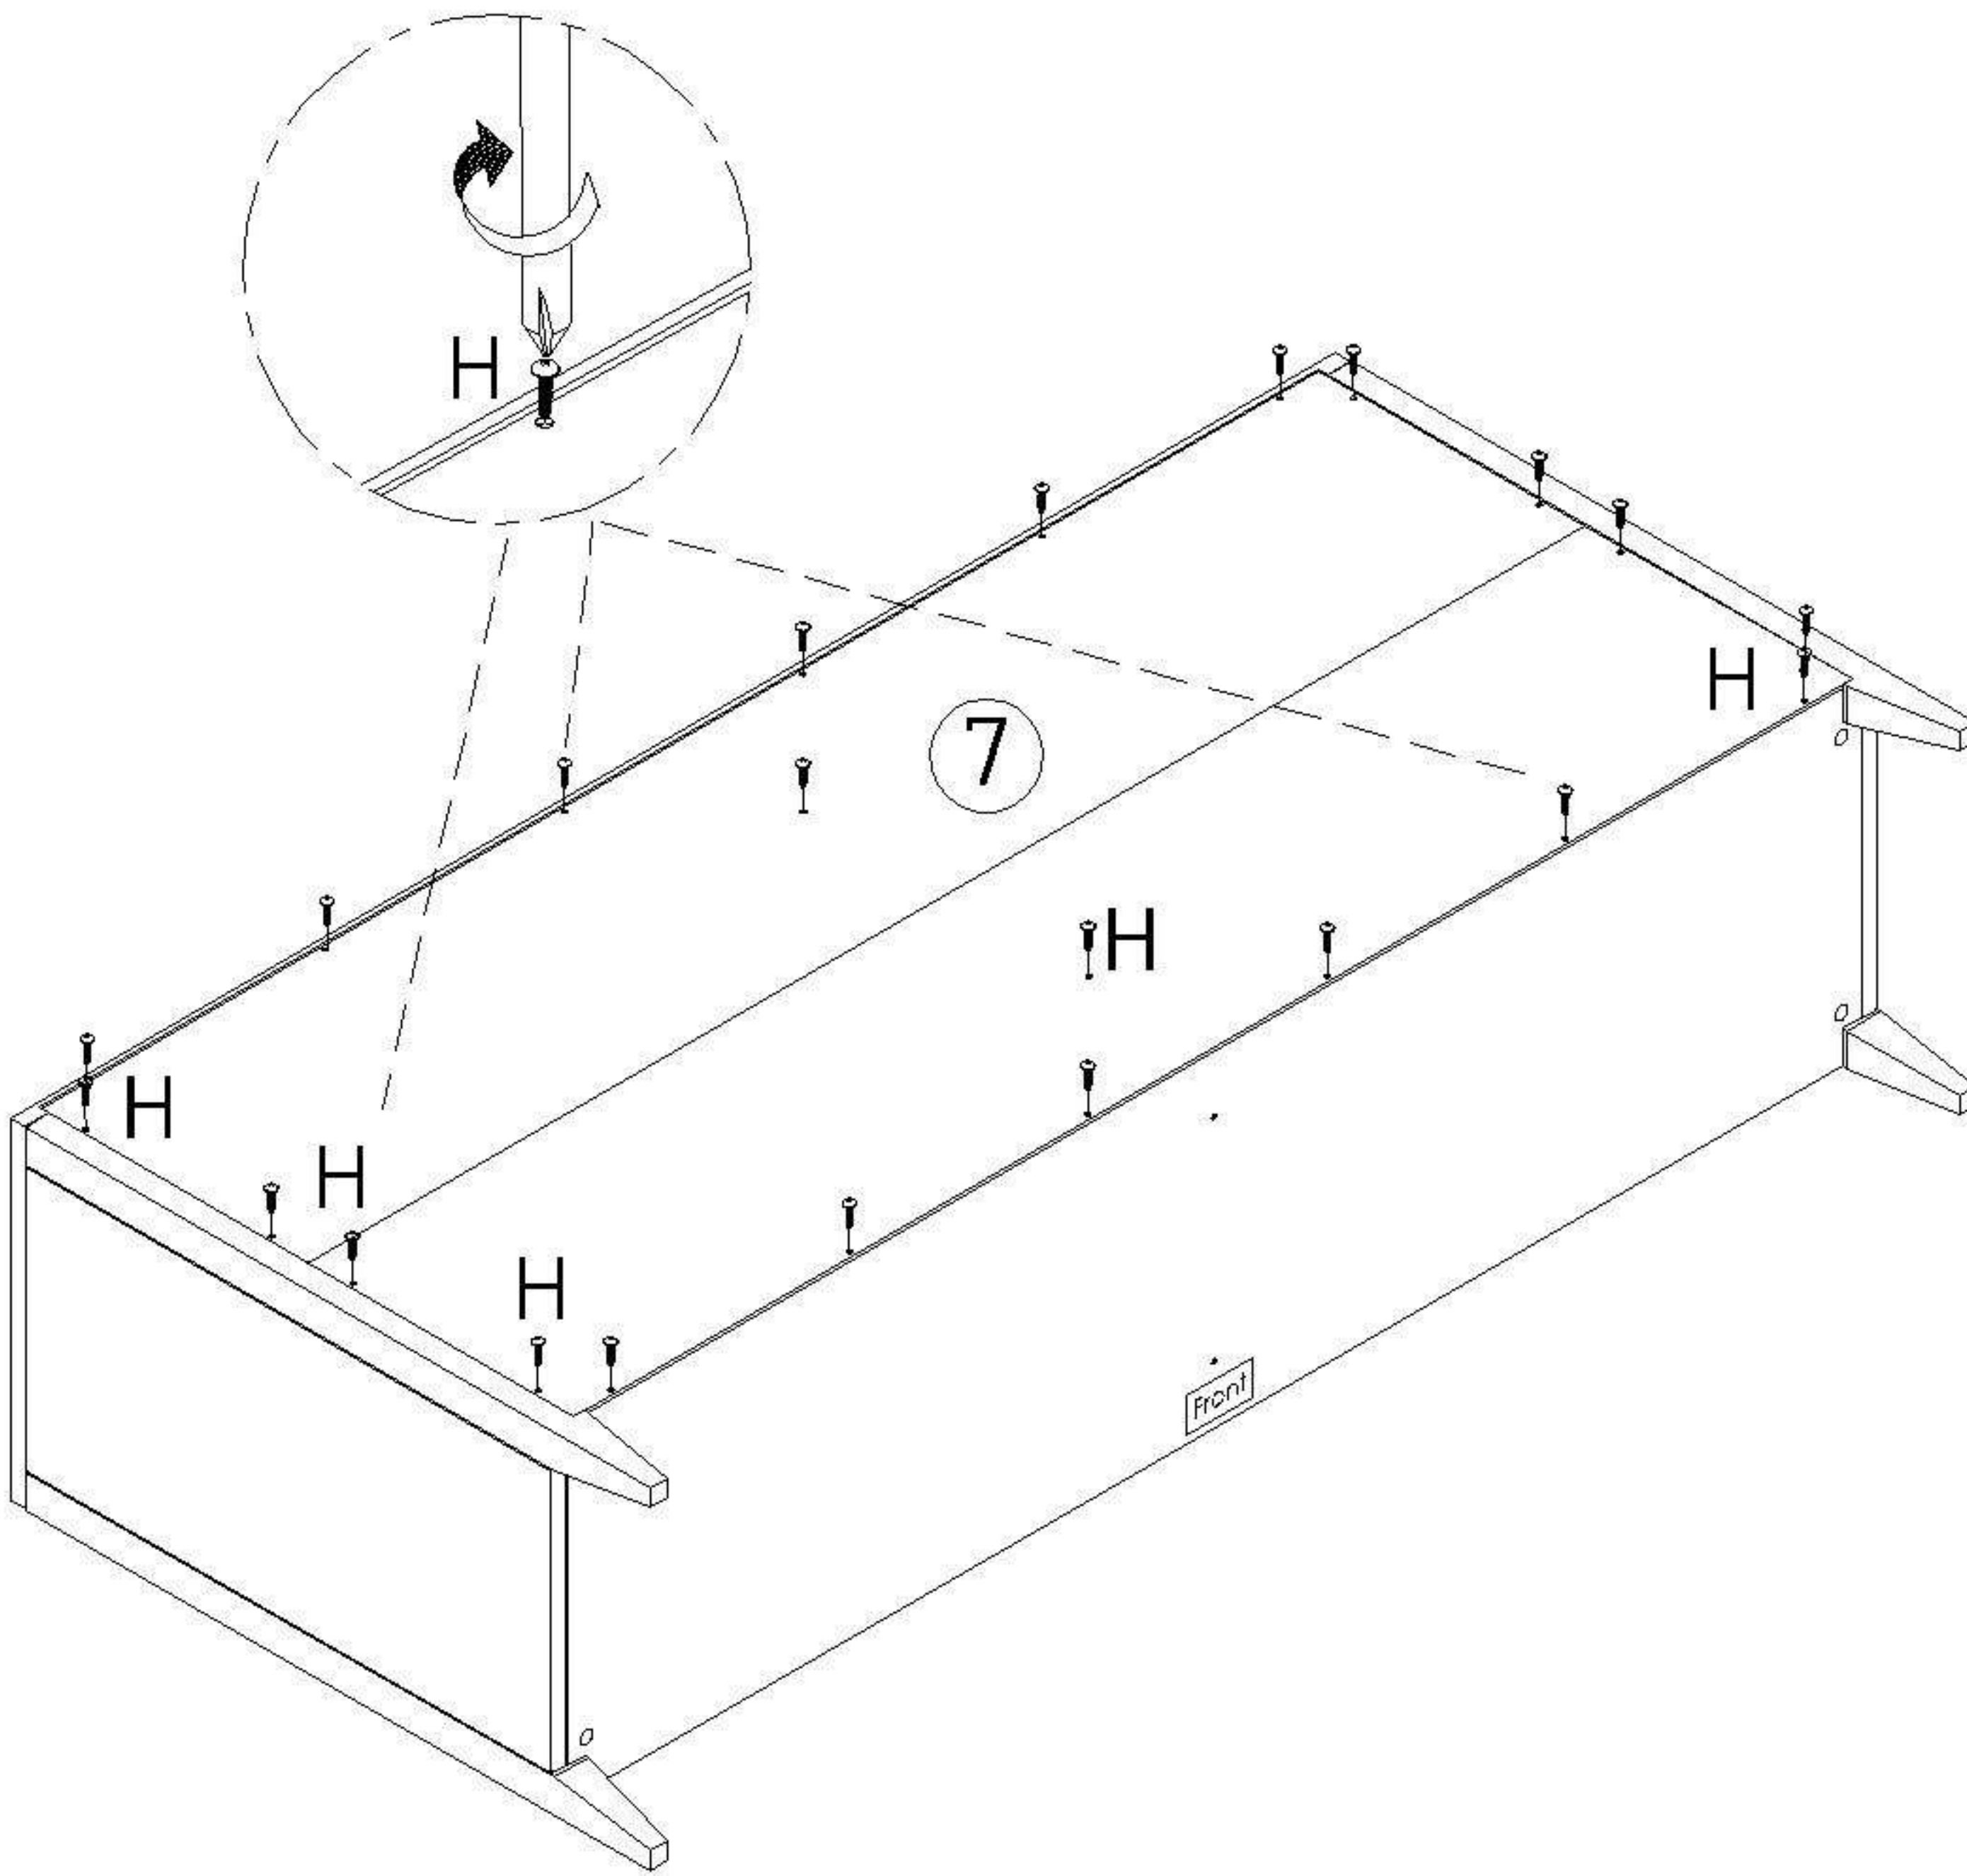

EXTENSION RUNNER ASSEMBLE STEPS:

STEP 14A


- i) Pull Out Metal Chrome Plate on both sides of runner

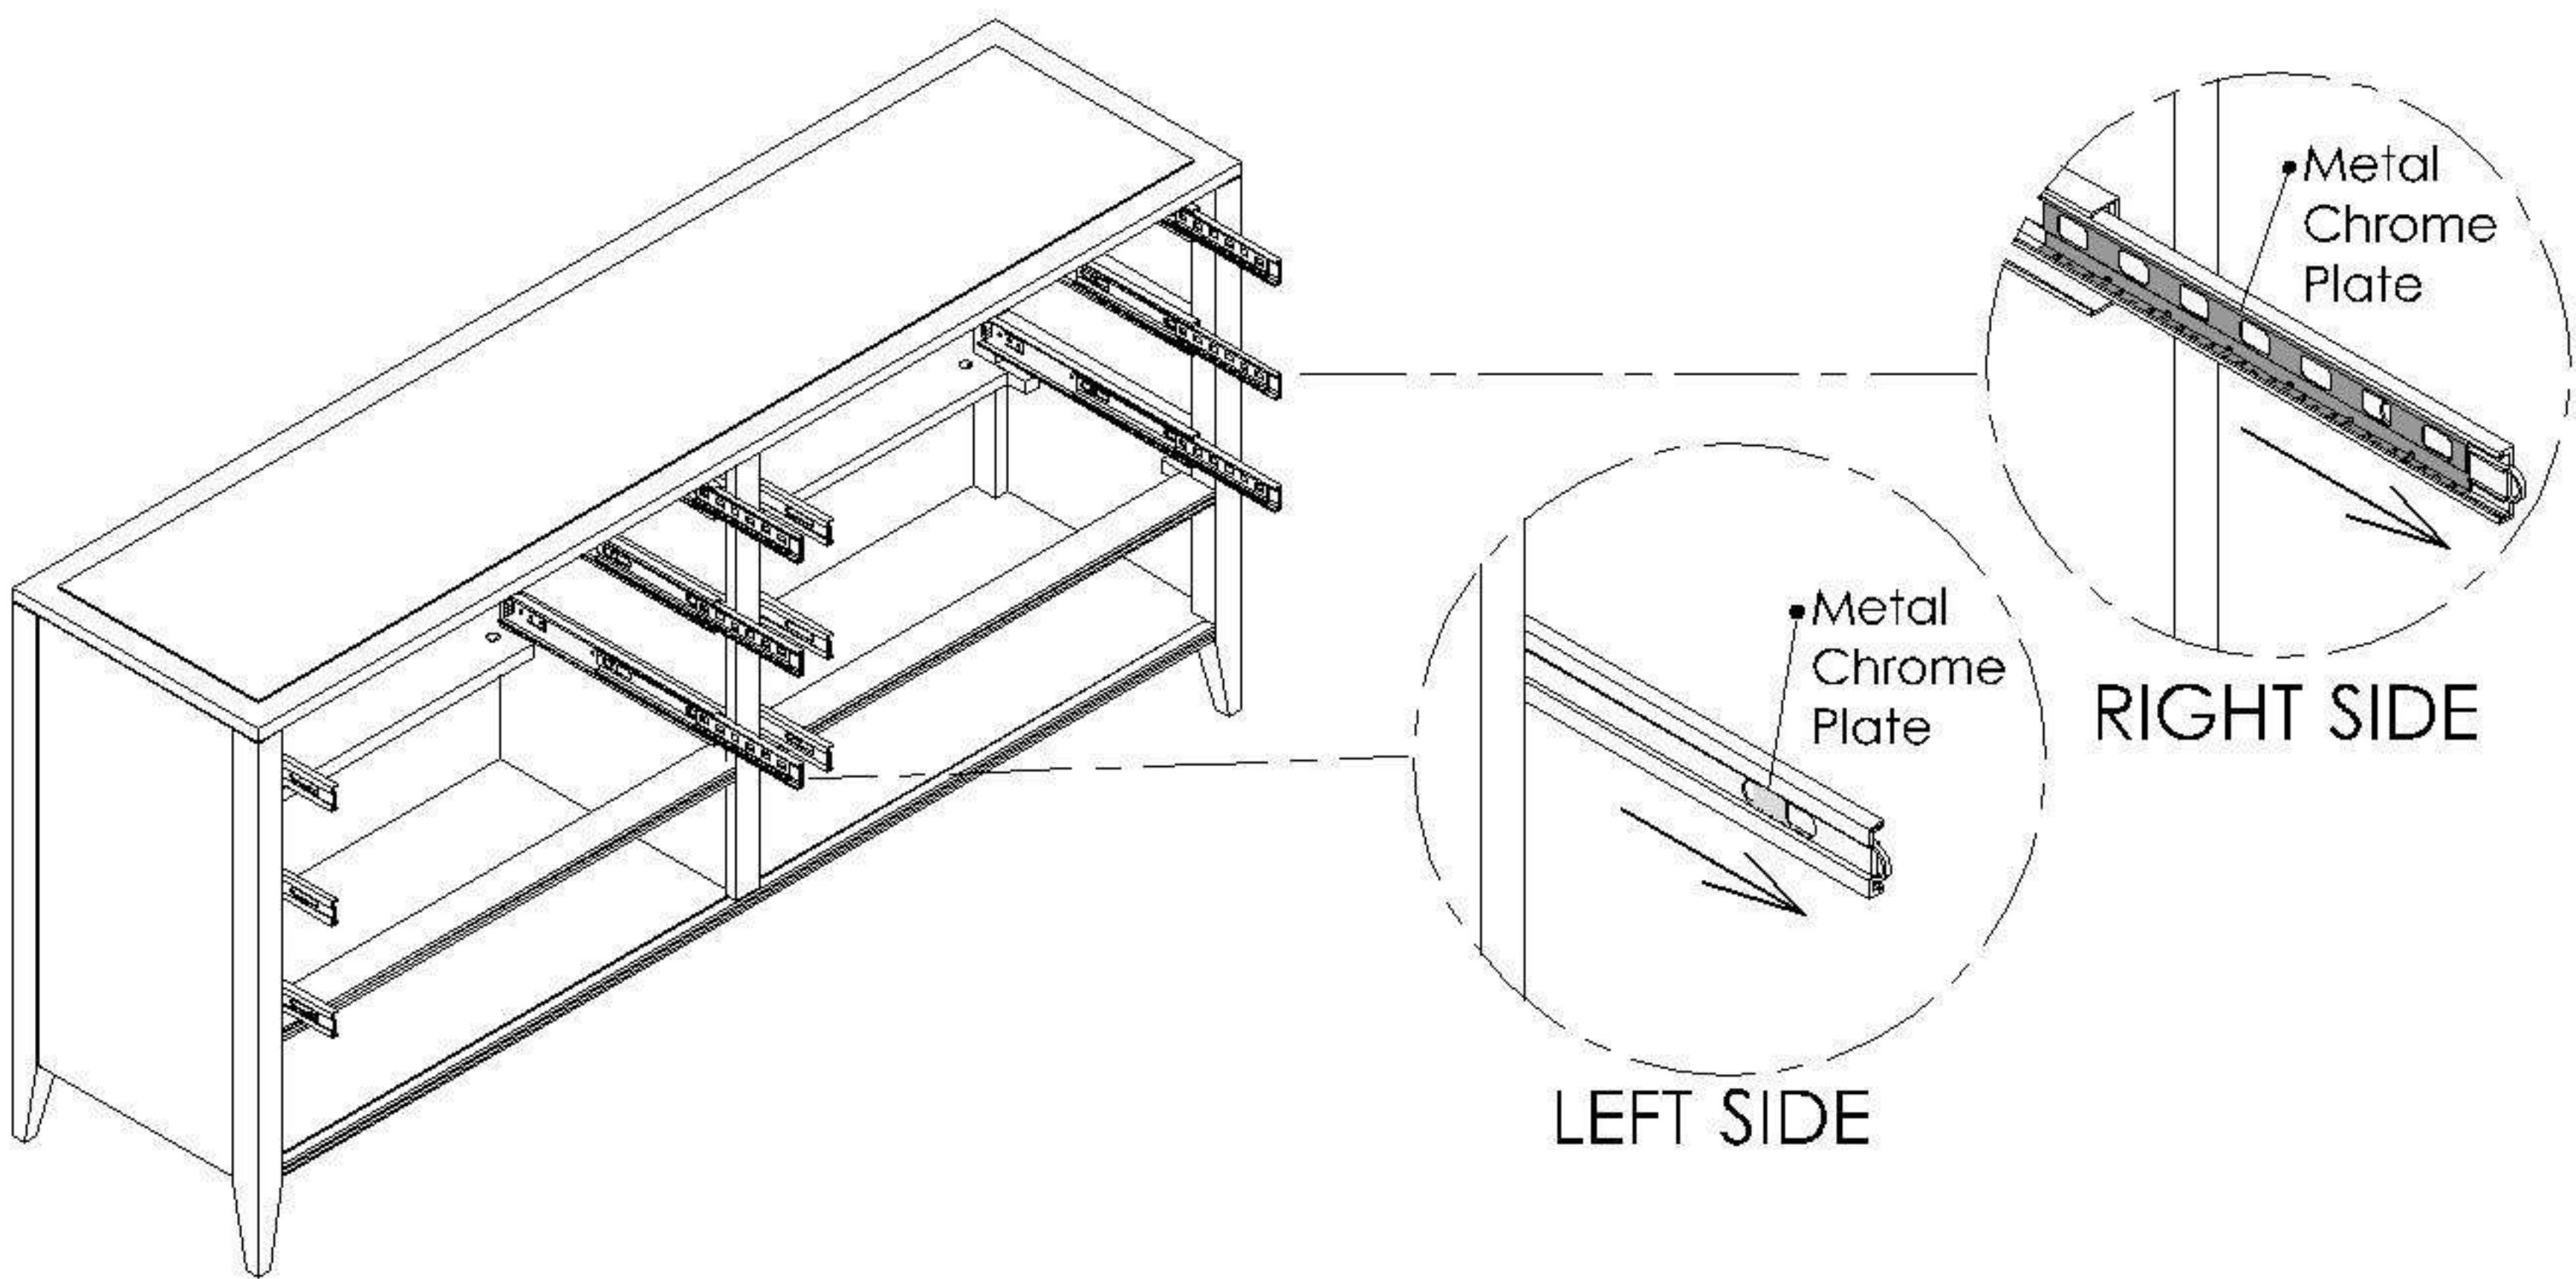

STEP 14B


- i) Align Metal Chrome Plate and Inner Slide on one side first and thereafter on the other side. Remove & repeat if it is not aligned properly
- ii) Slowly push the drawer box into the metal track on interior side of Side Panel

Notes : If runner is stuck on track, slightly pull/push drawer box

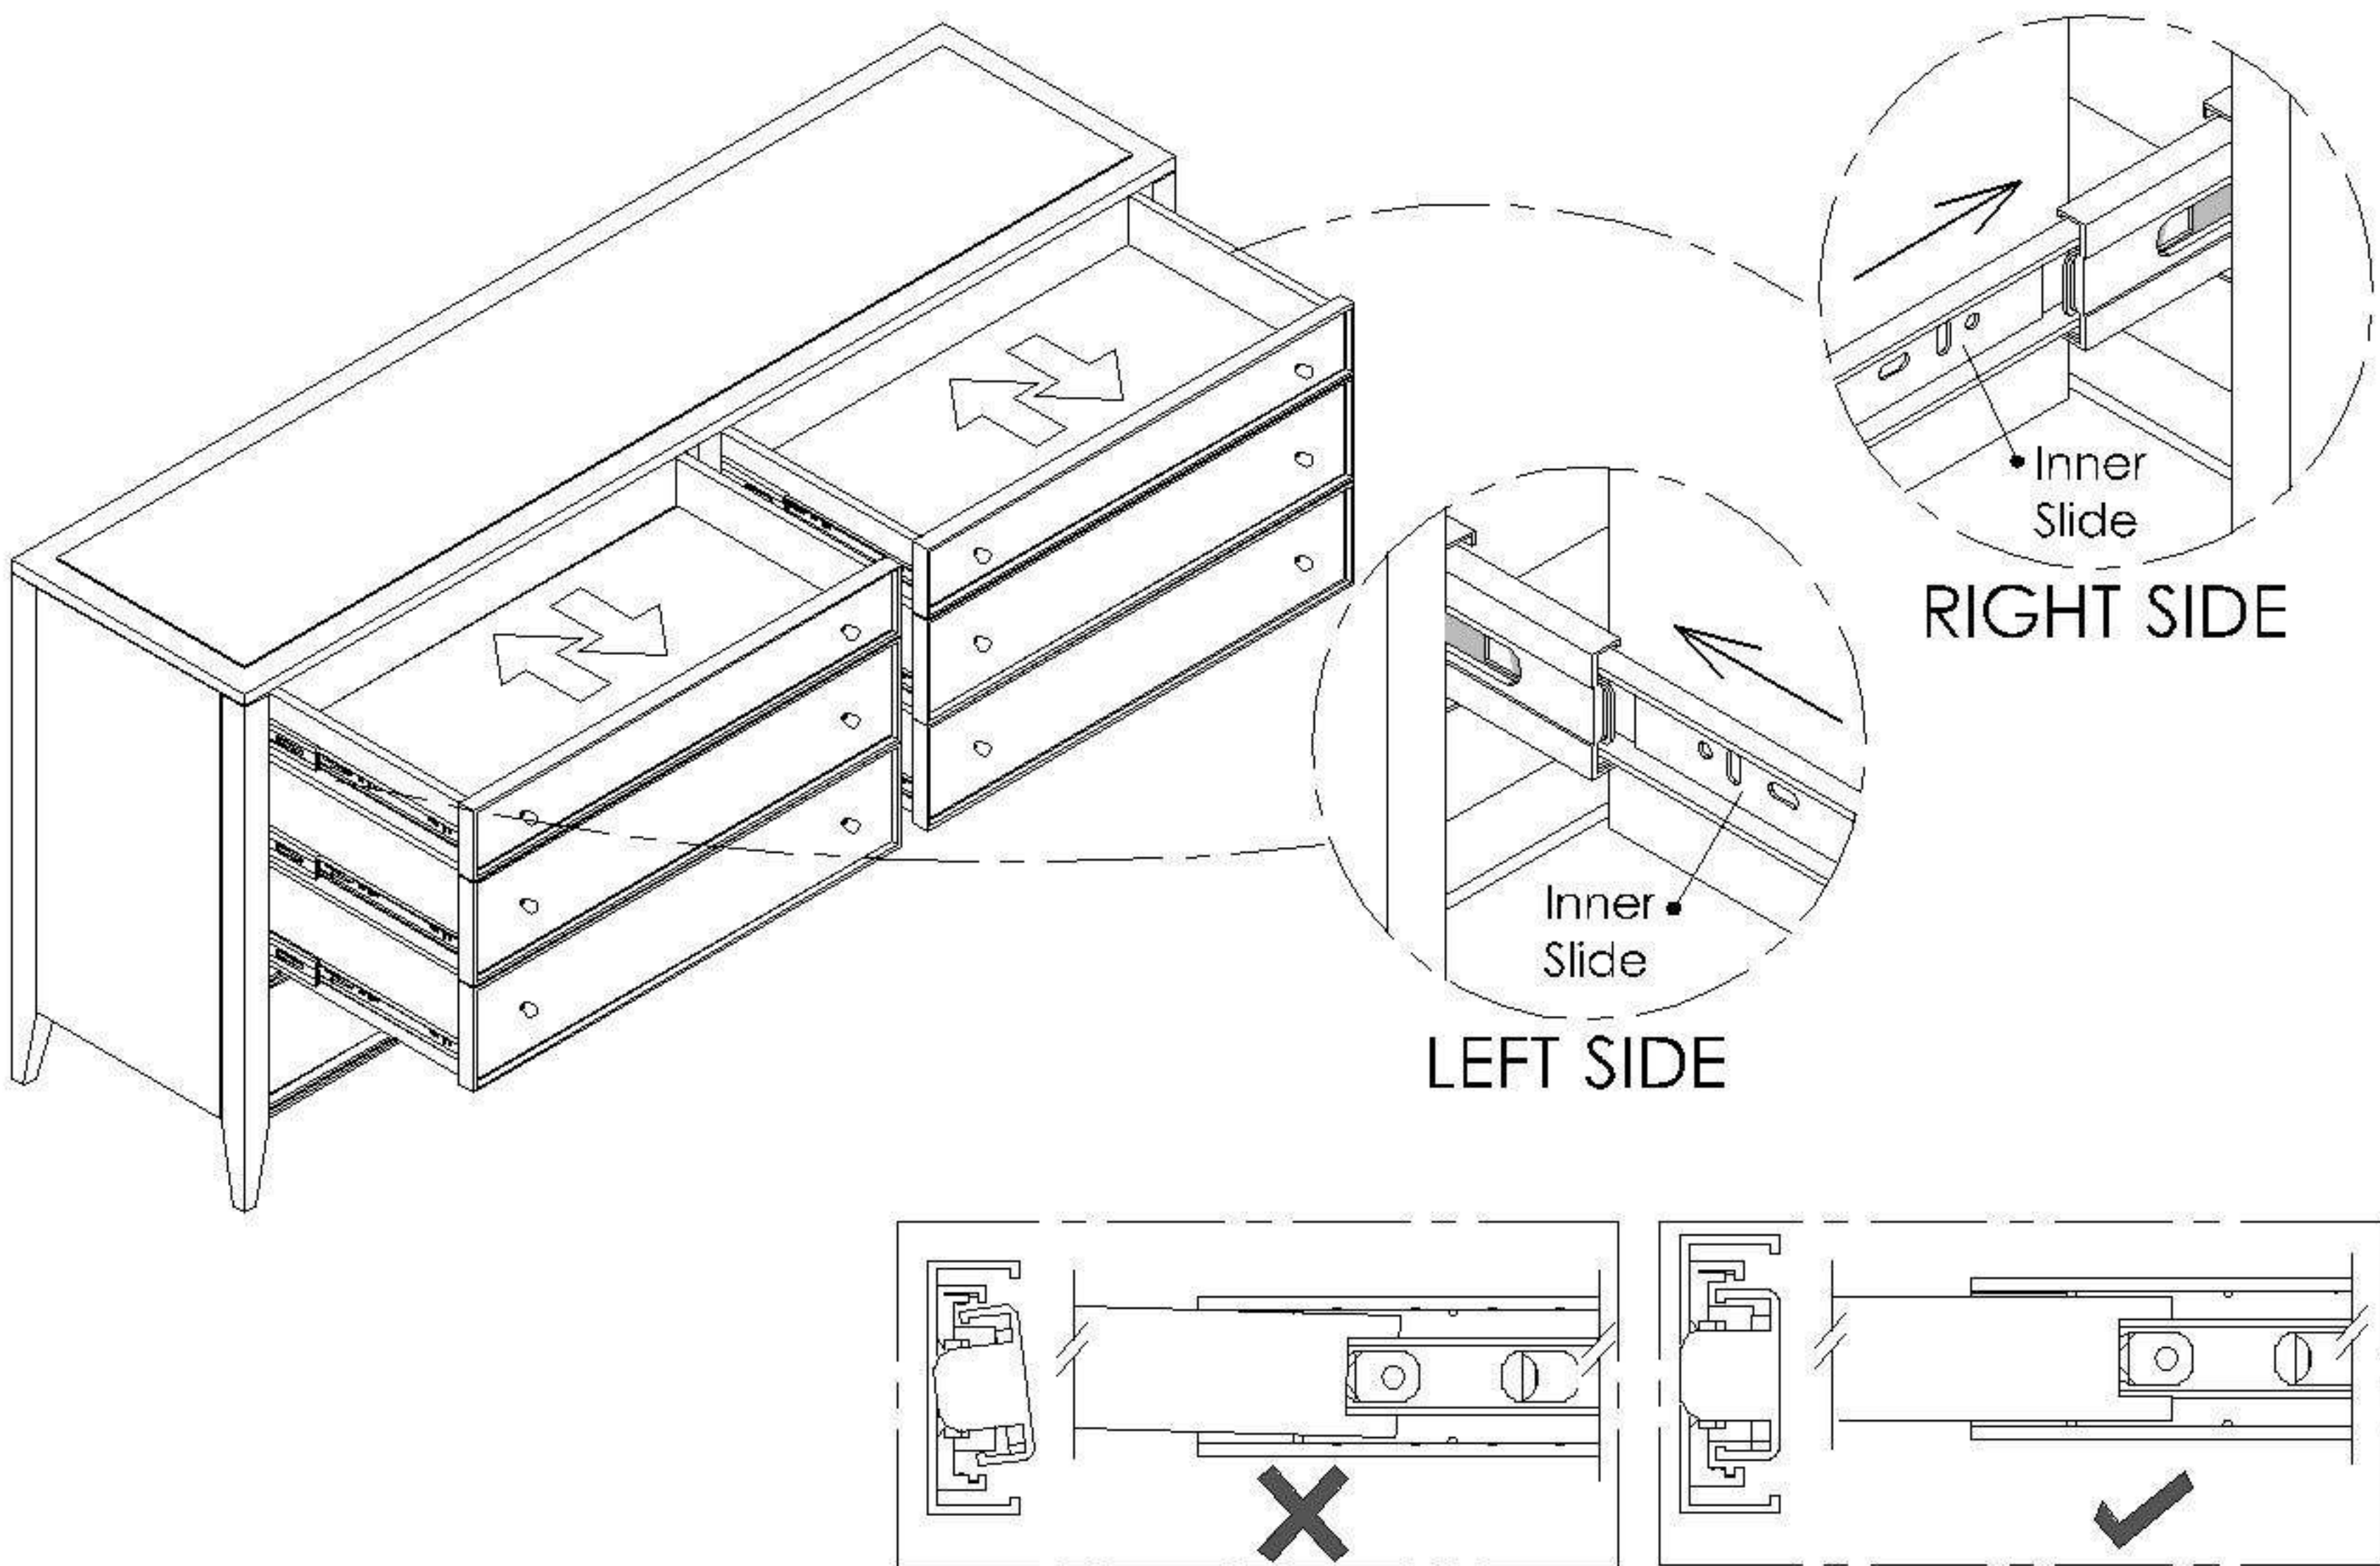

STEP 14C

- i) When both tracks are aligned properly , push the drawer box all the way in.

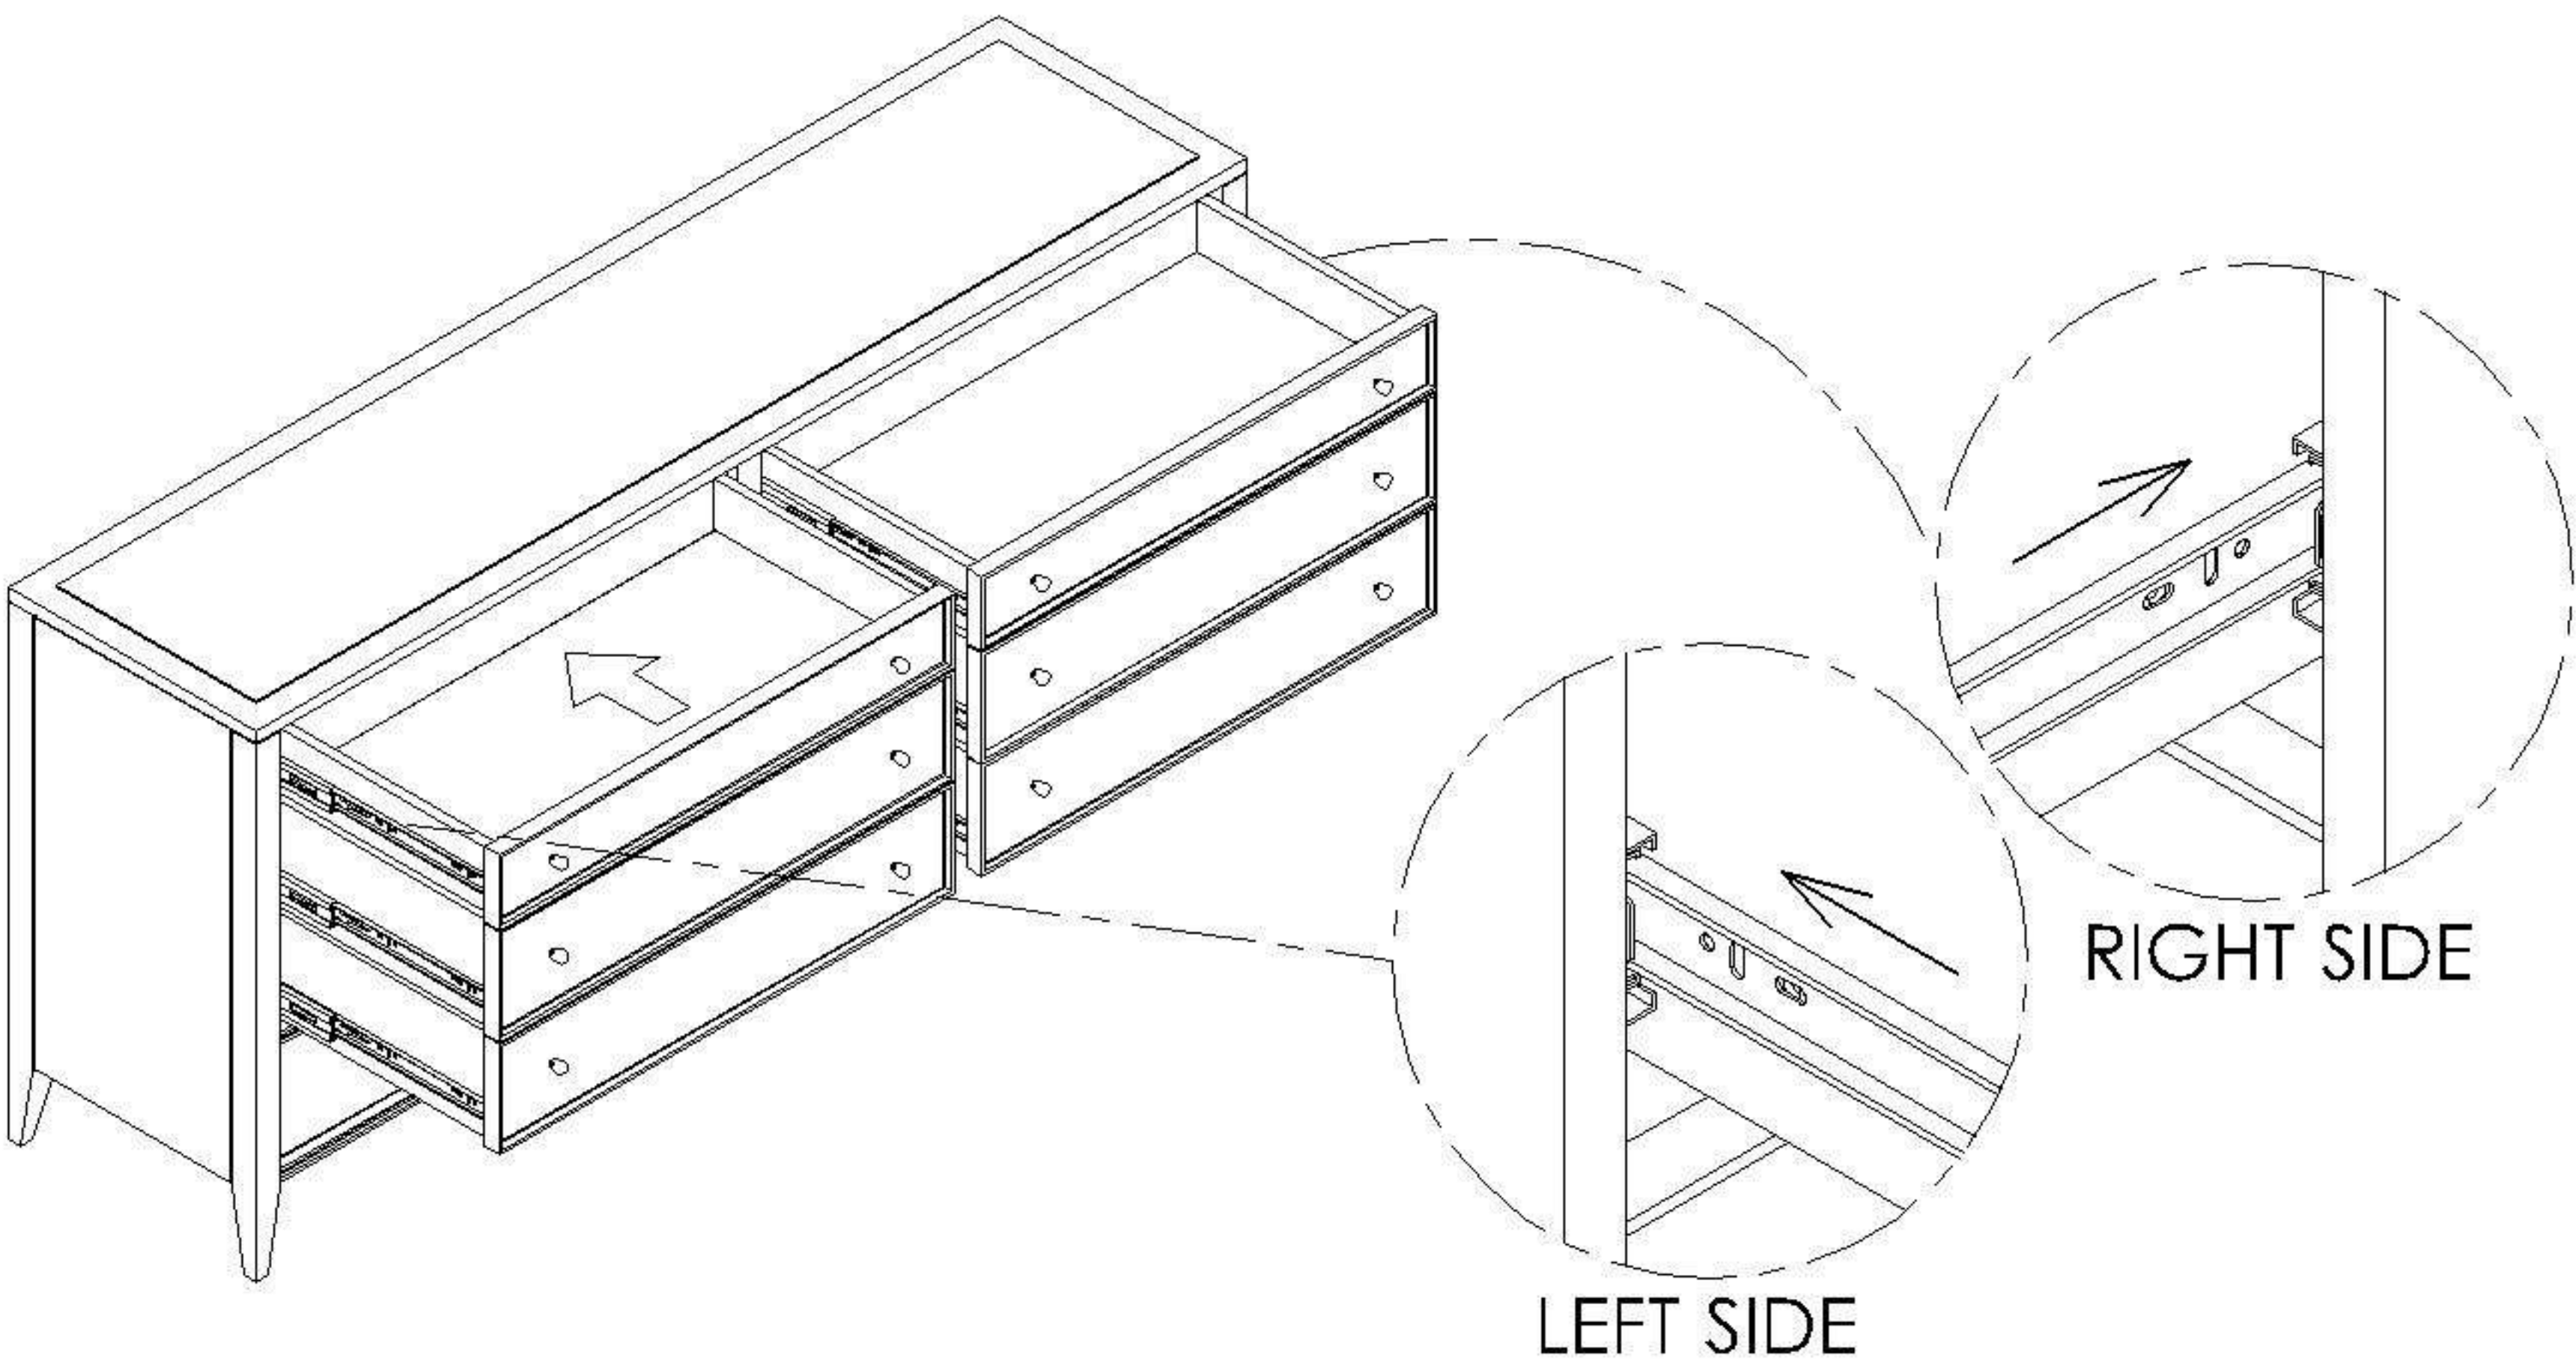

STEP 14D



- i) Drawers should assembled as follows




STEP 15


*Following step is OPTIONAL. Follow these steps if you wish to secure unit to a wall for added safety

- i) Attach Safety Belt(Z) to Back Plywood and secure using Flat Washer(X) Chipboard Screw(W) to secure

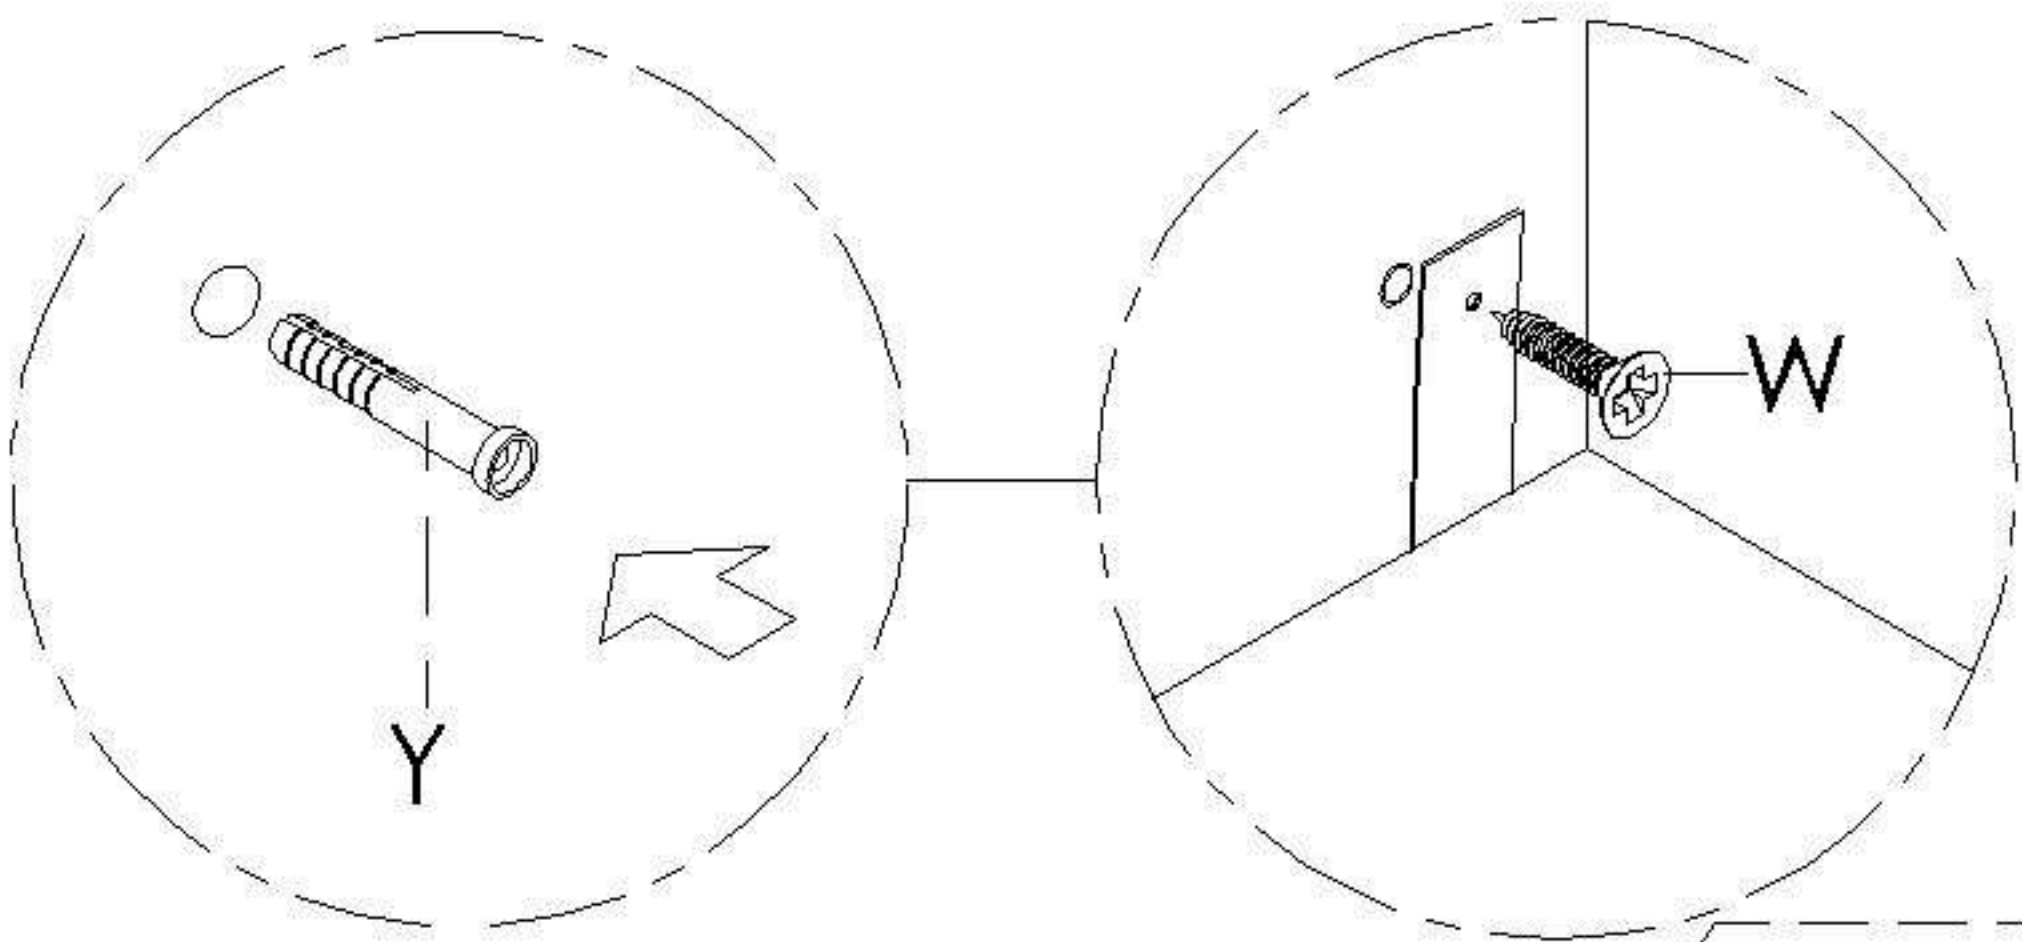
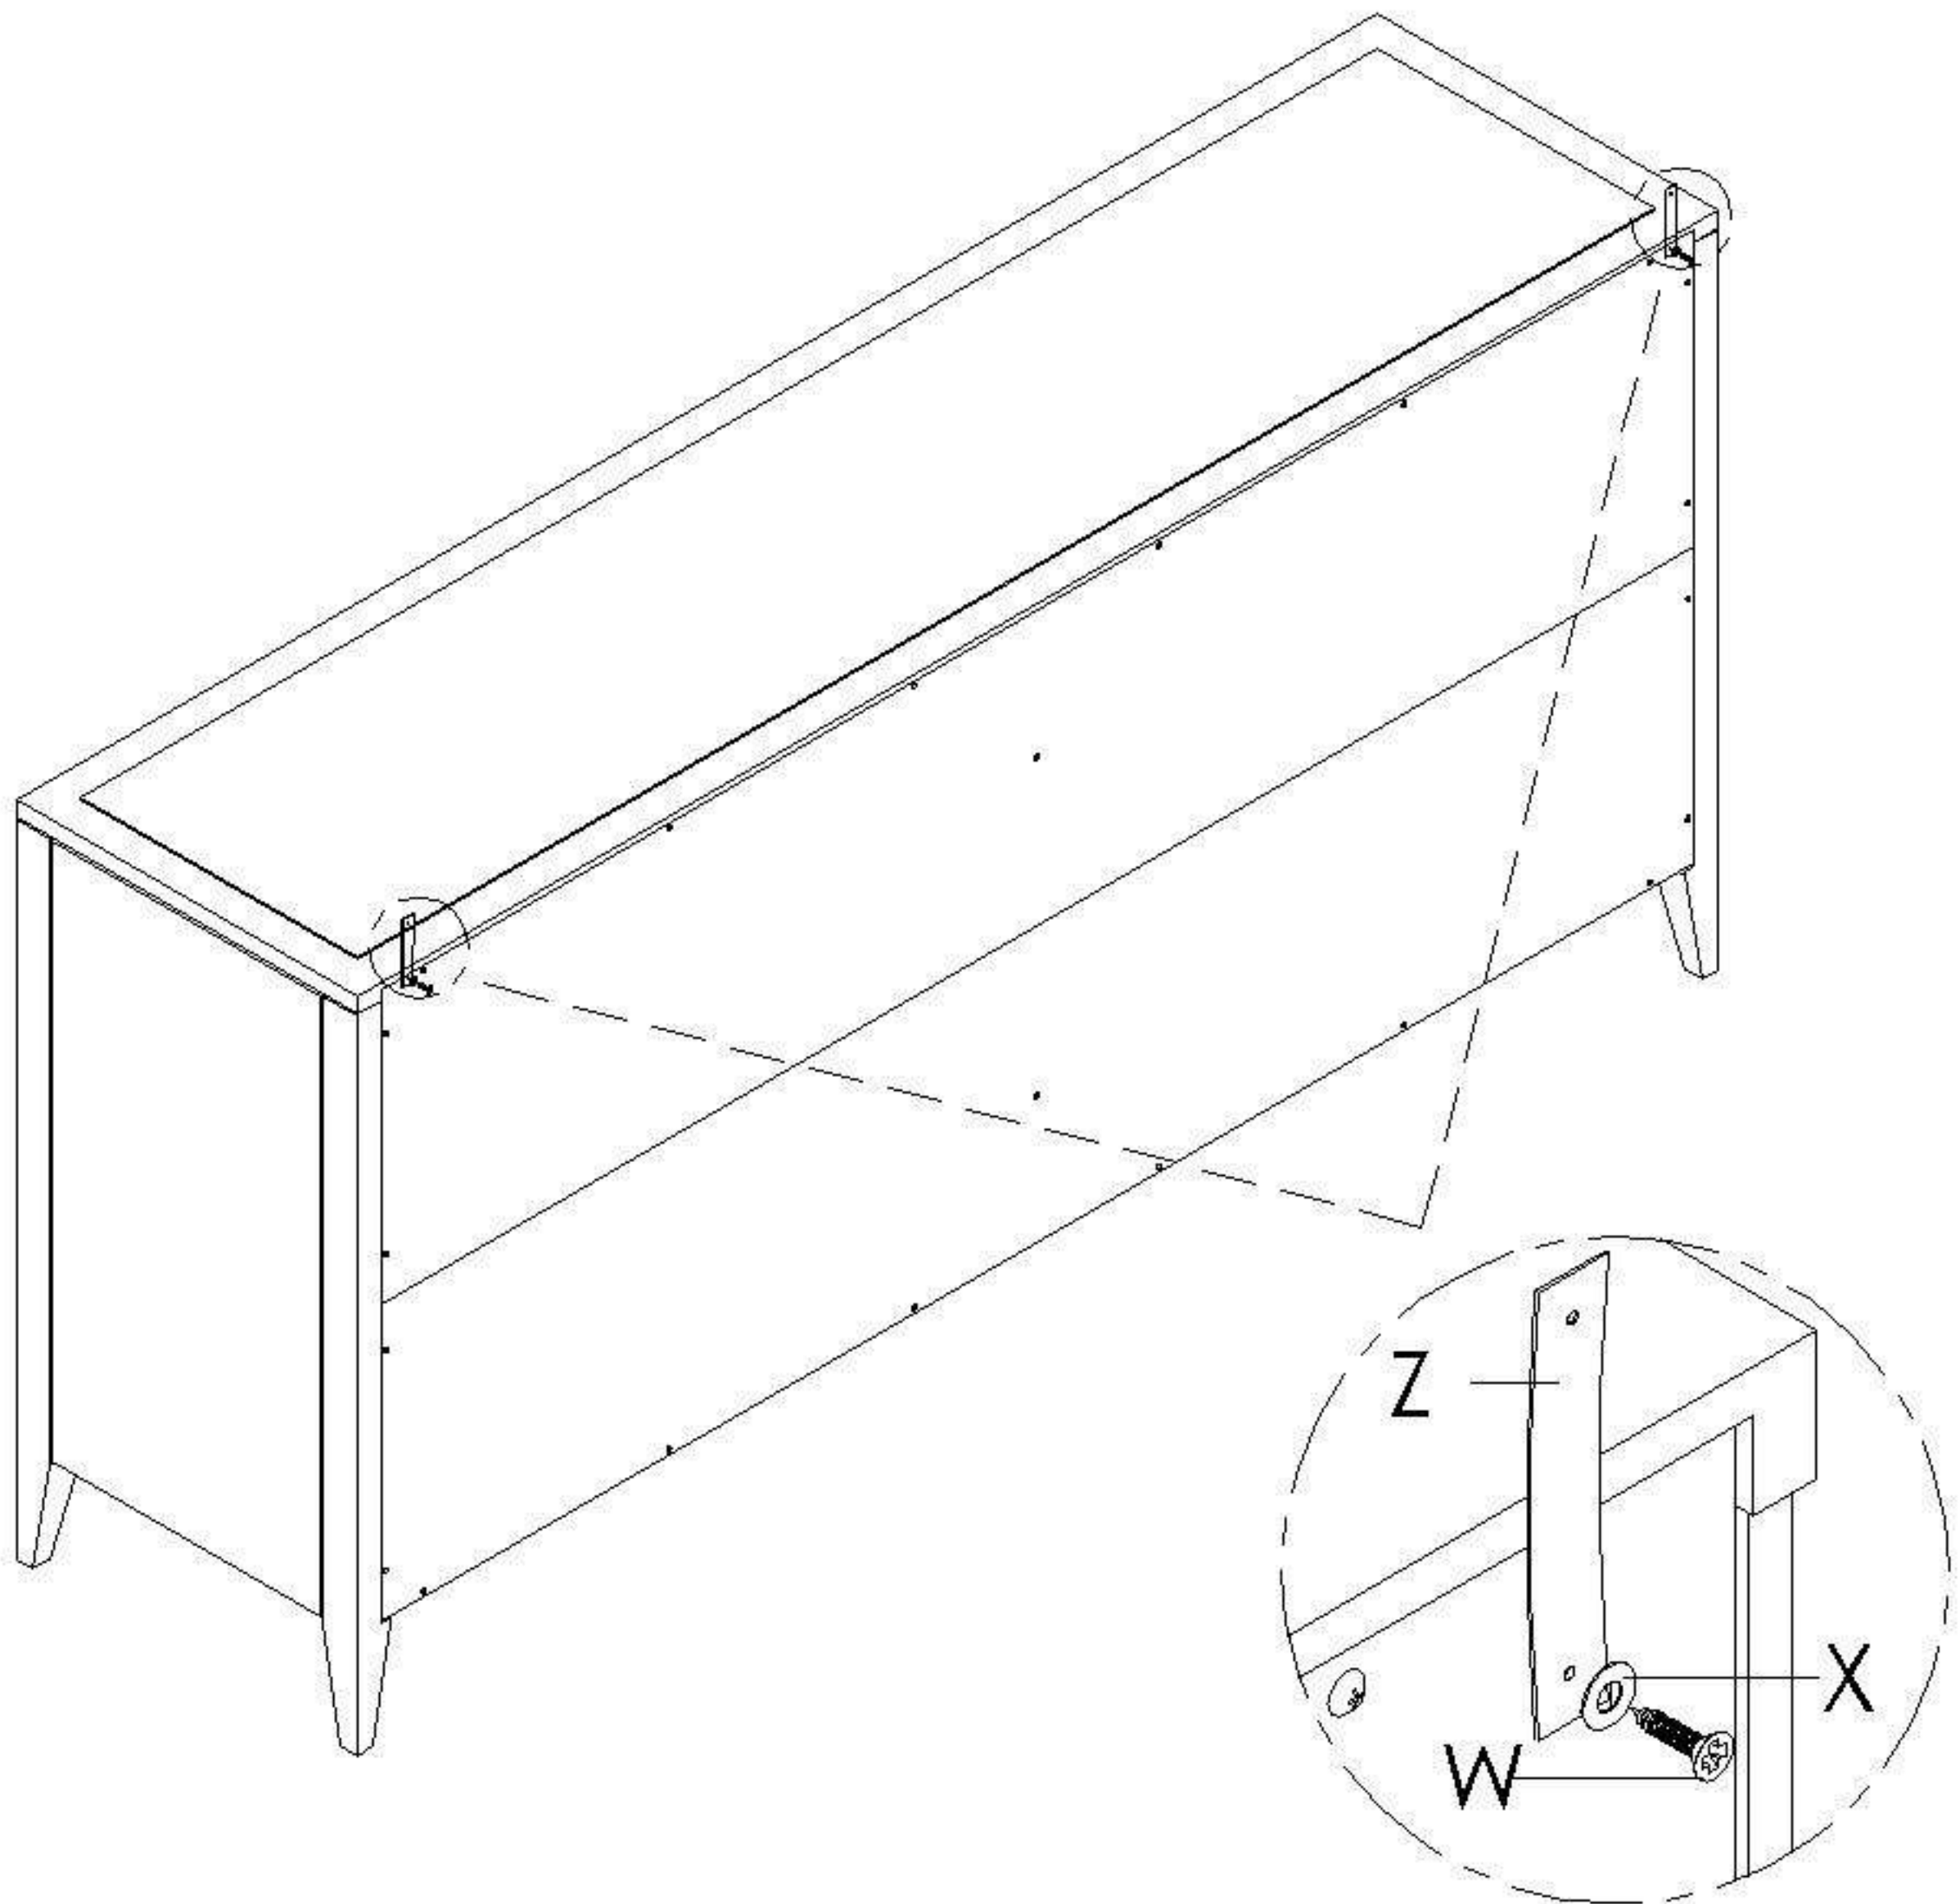


- ii) Drill a hole at the wall, insert Screw Plug(Y) into hole
- iii) Move assembled unit to wall and Screw in Safety Belt(Z) using Chipboard Screw(W)

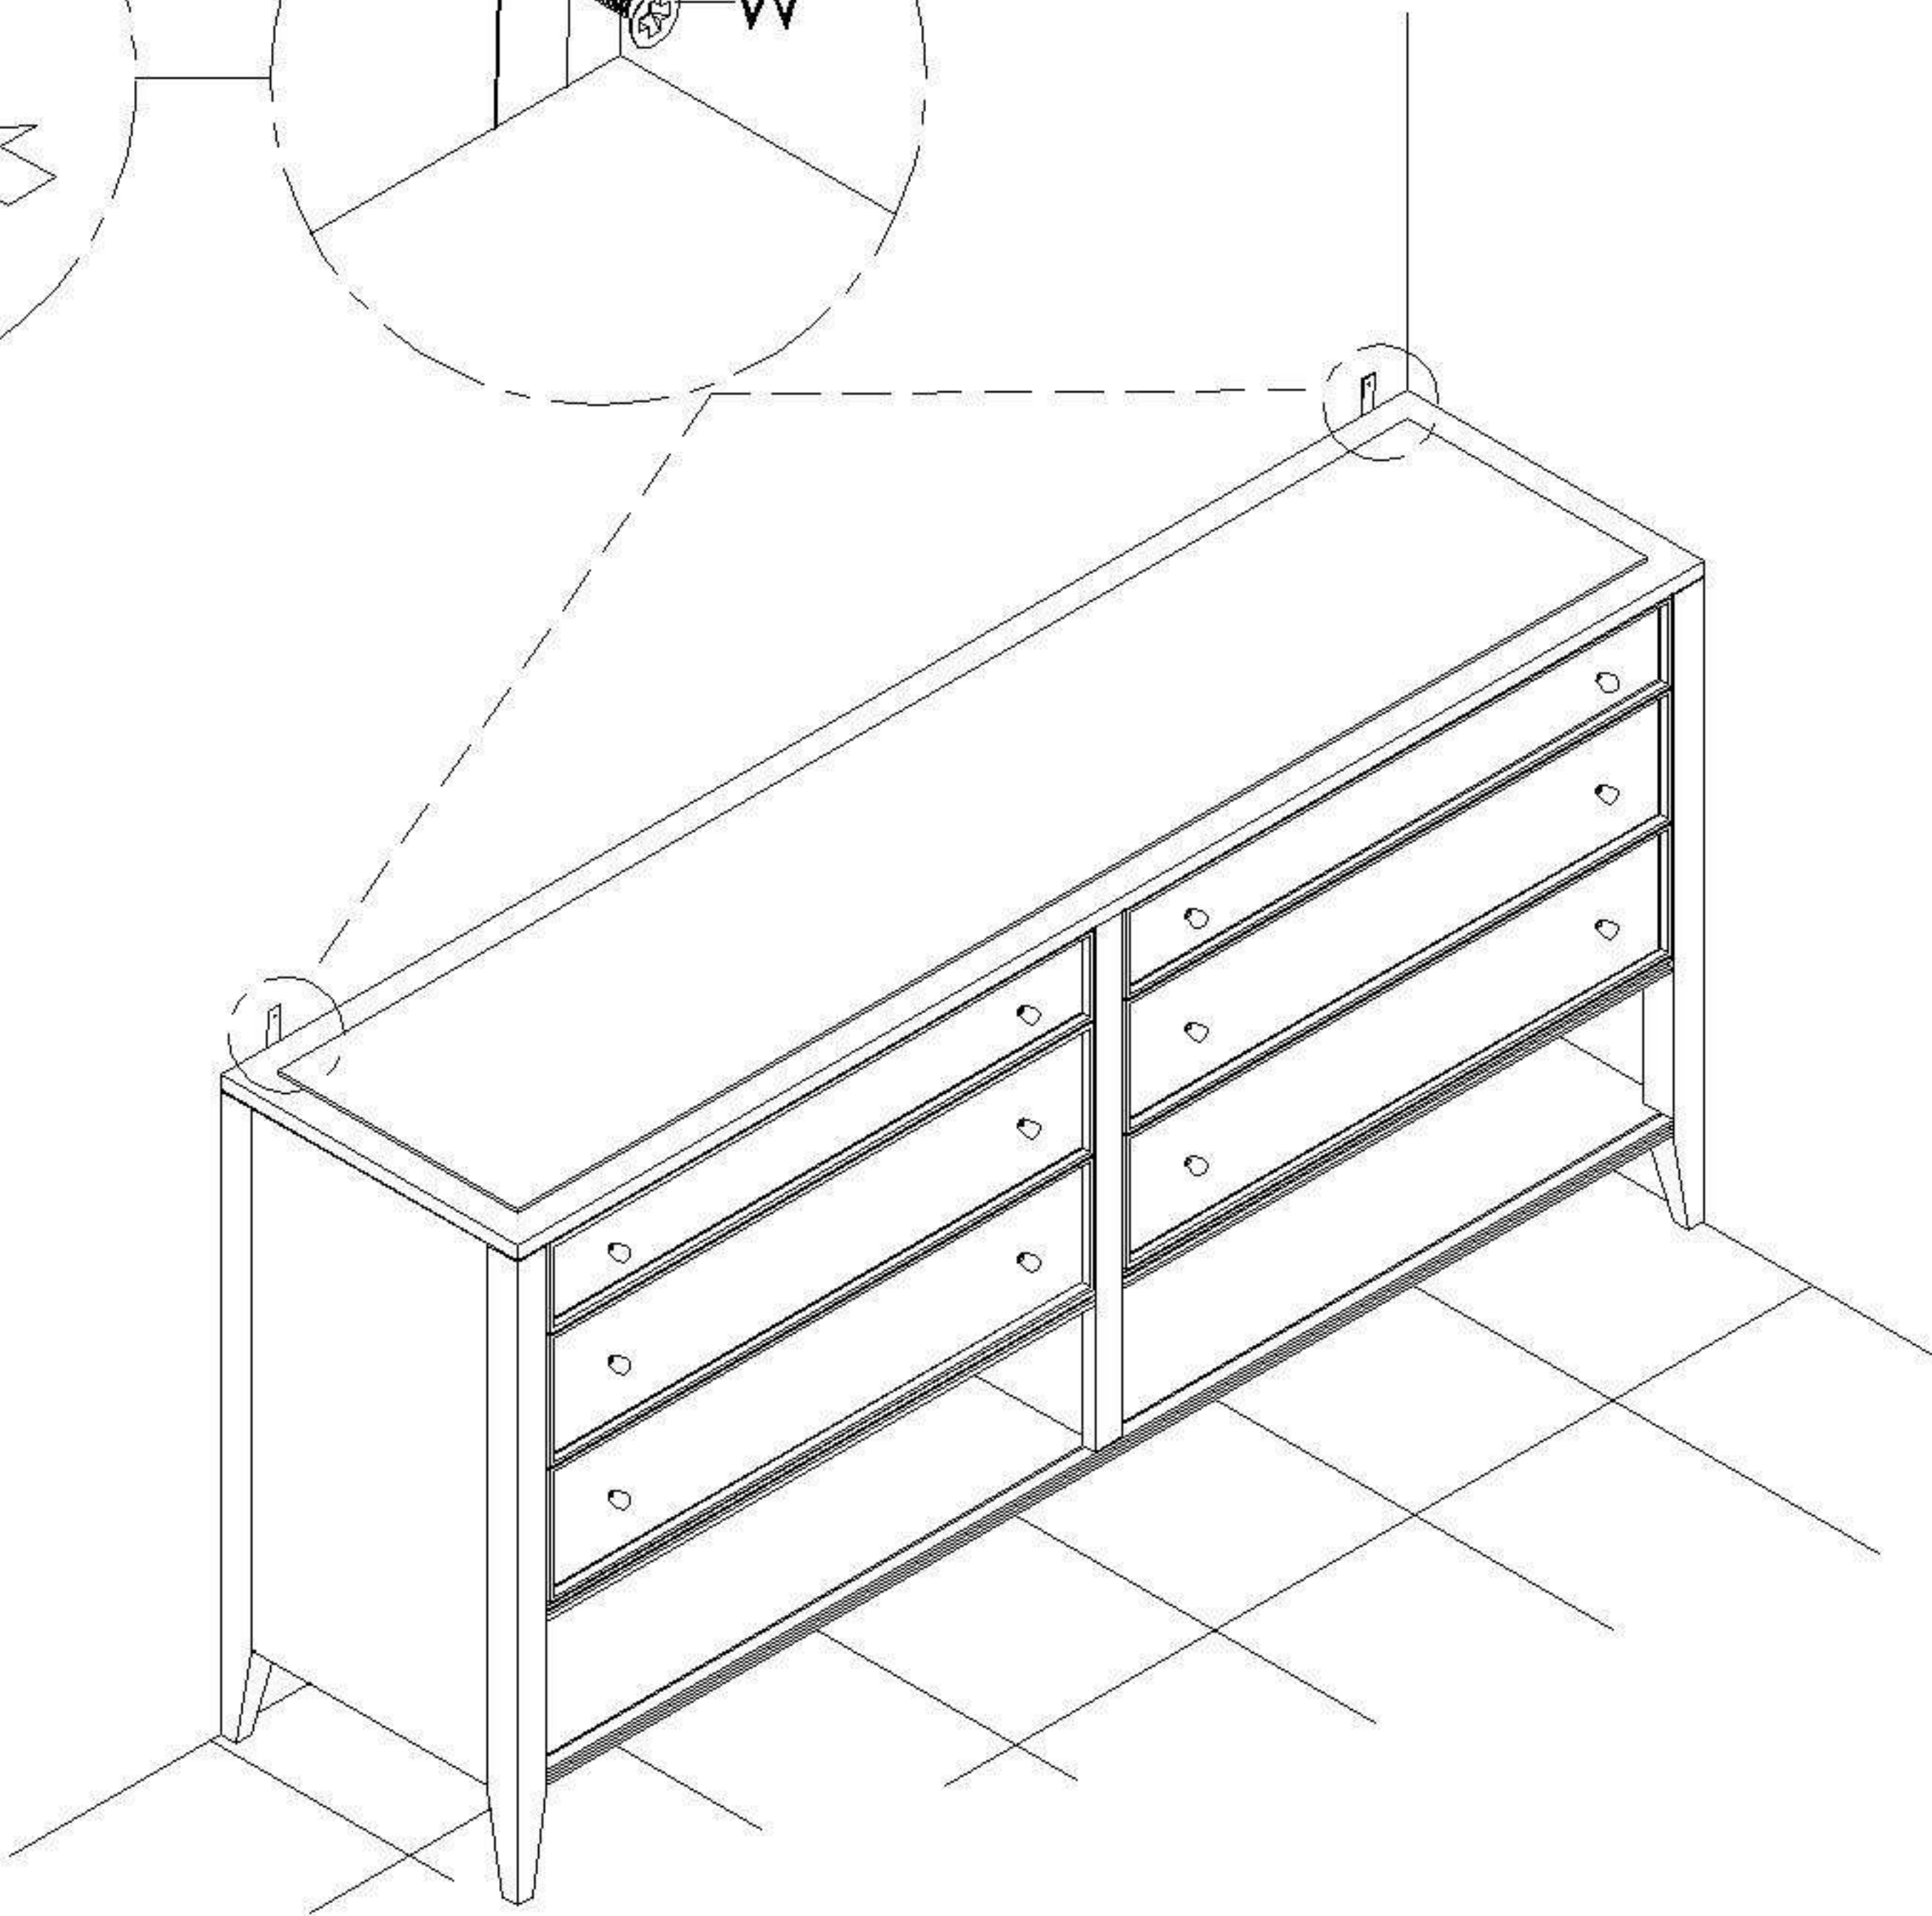


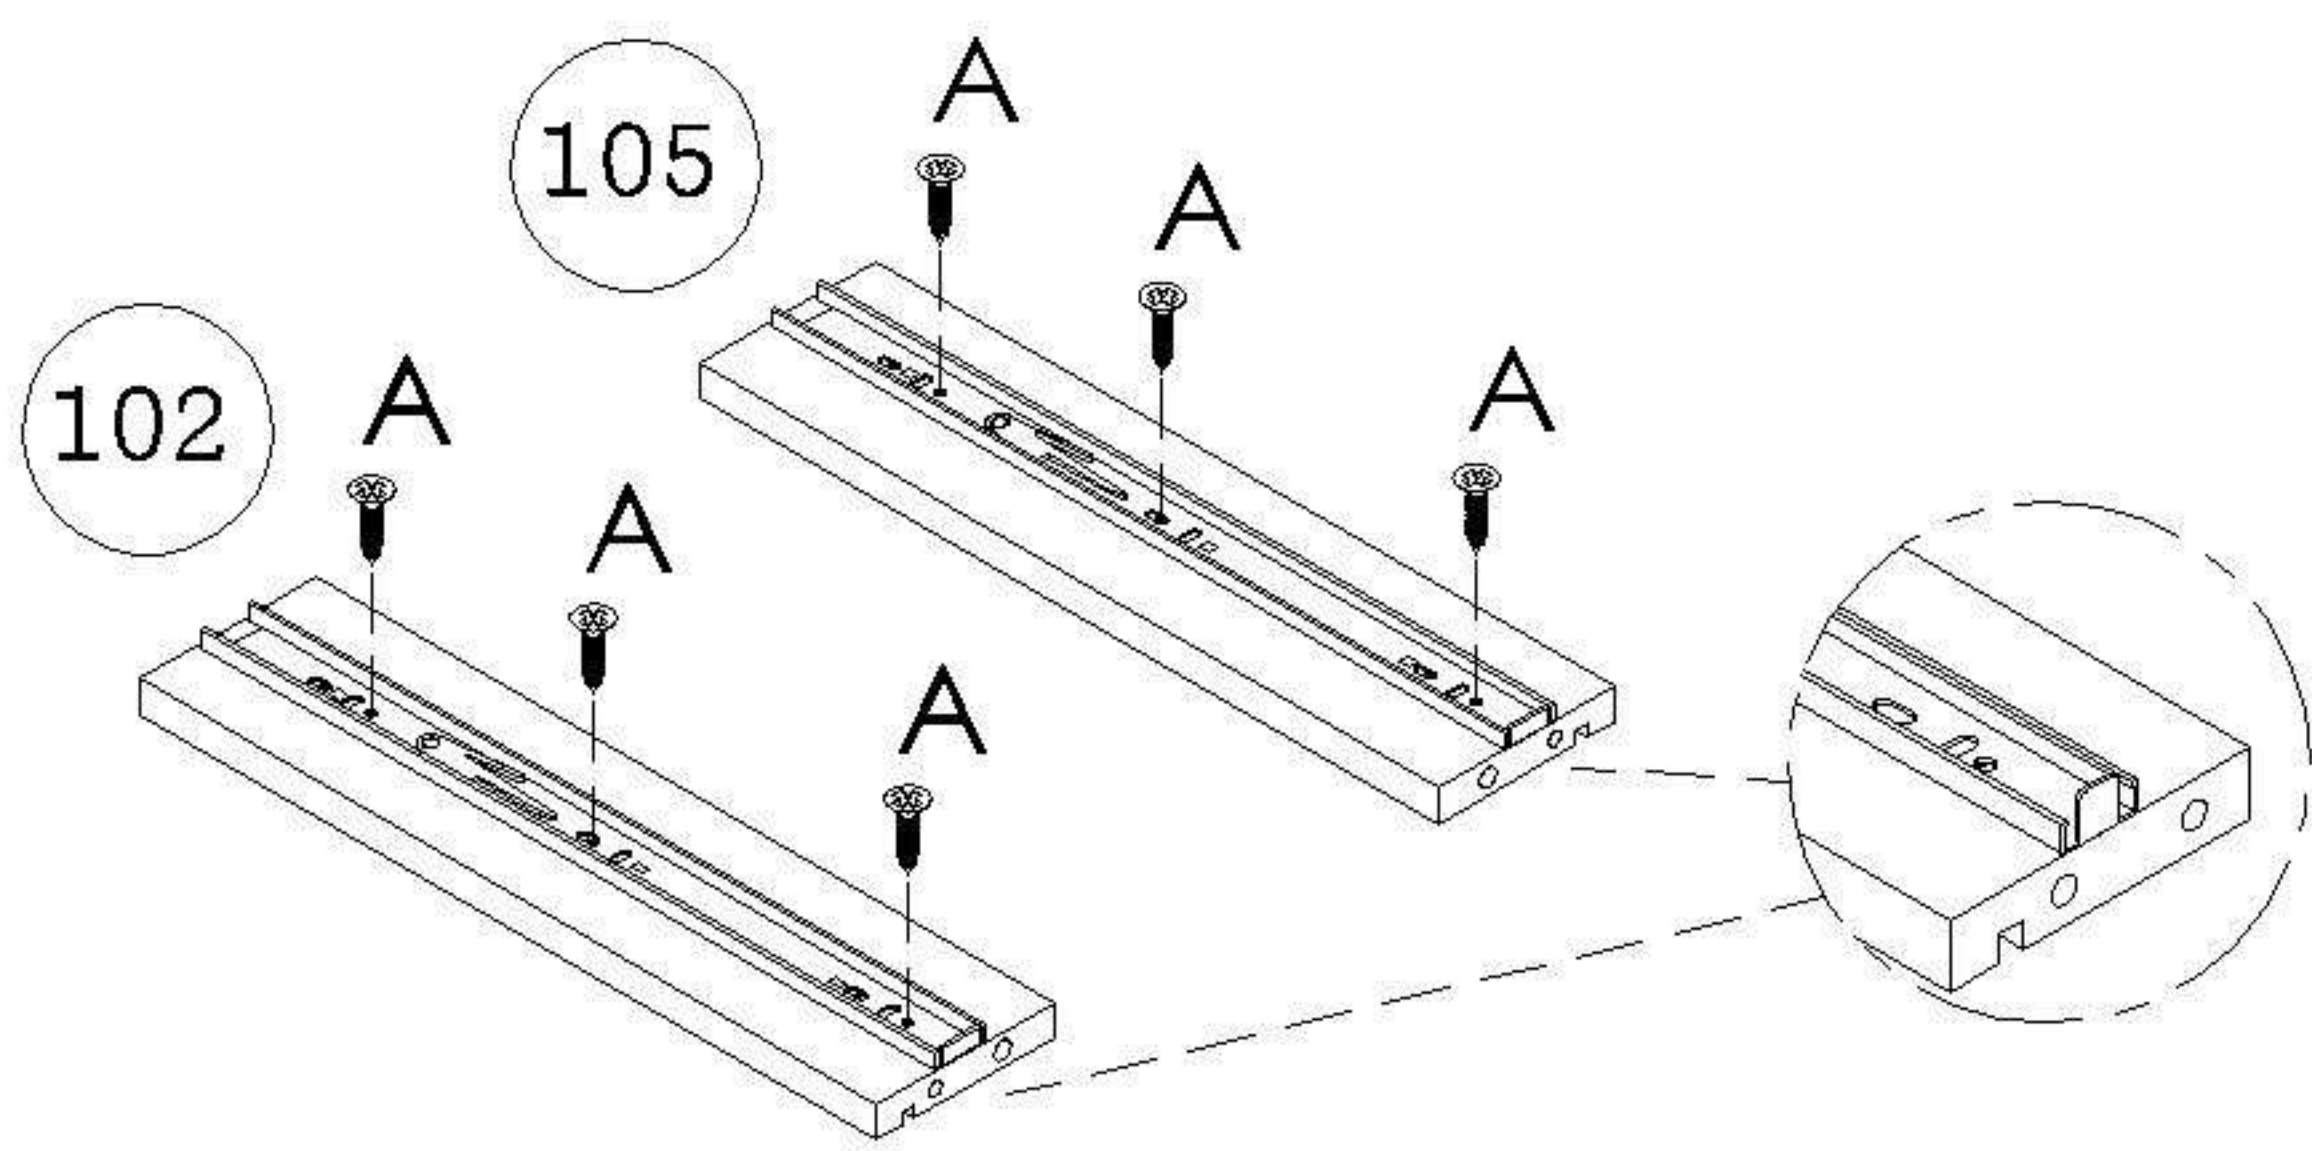

- A) Attach Extension Runner(F) to Left,Right Small Drawer Side (102,105) using Chipboard Screw(A) to secure

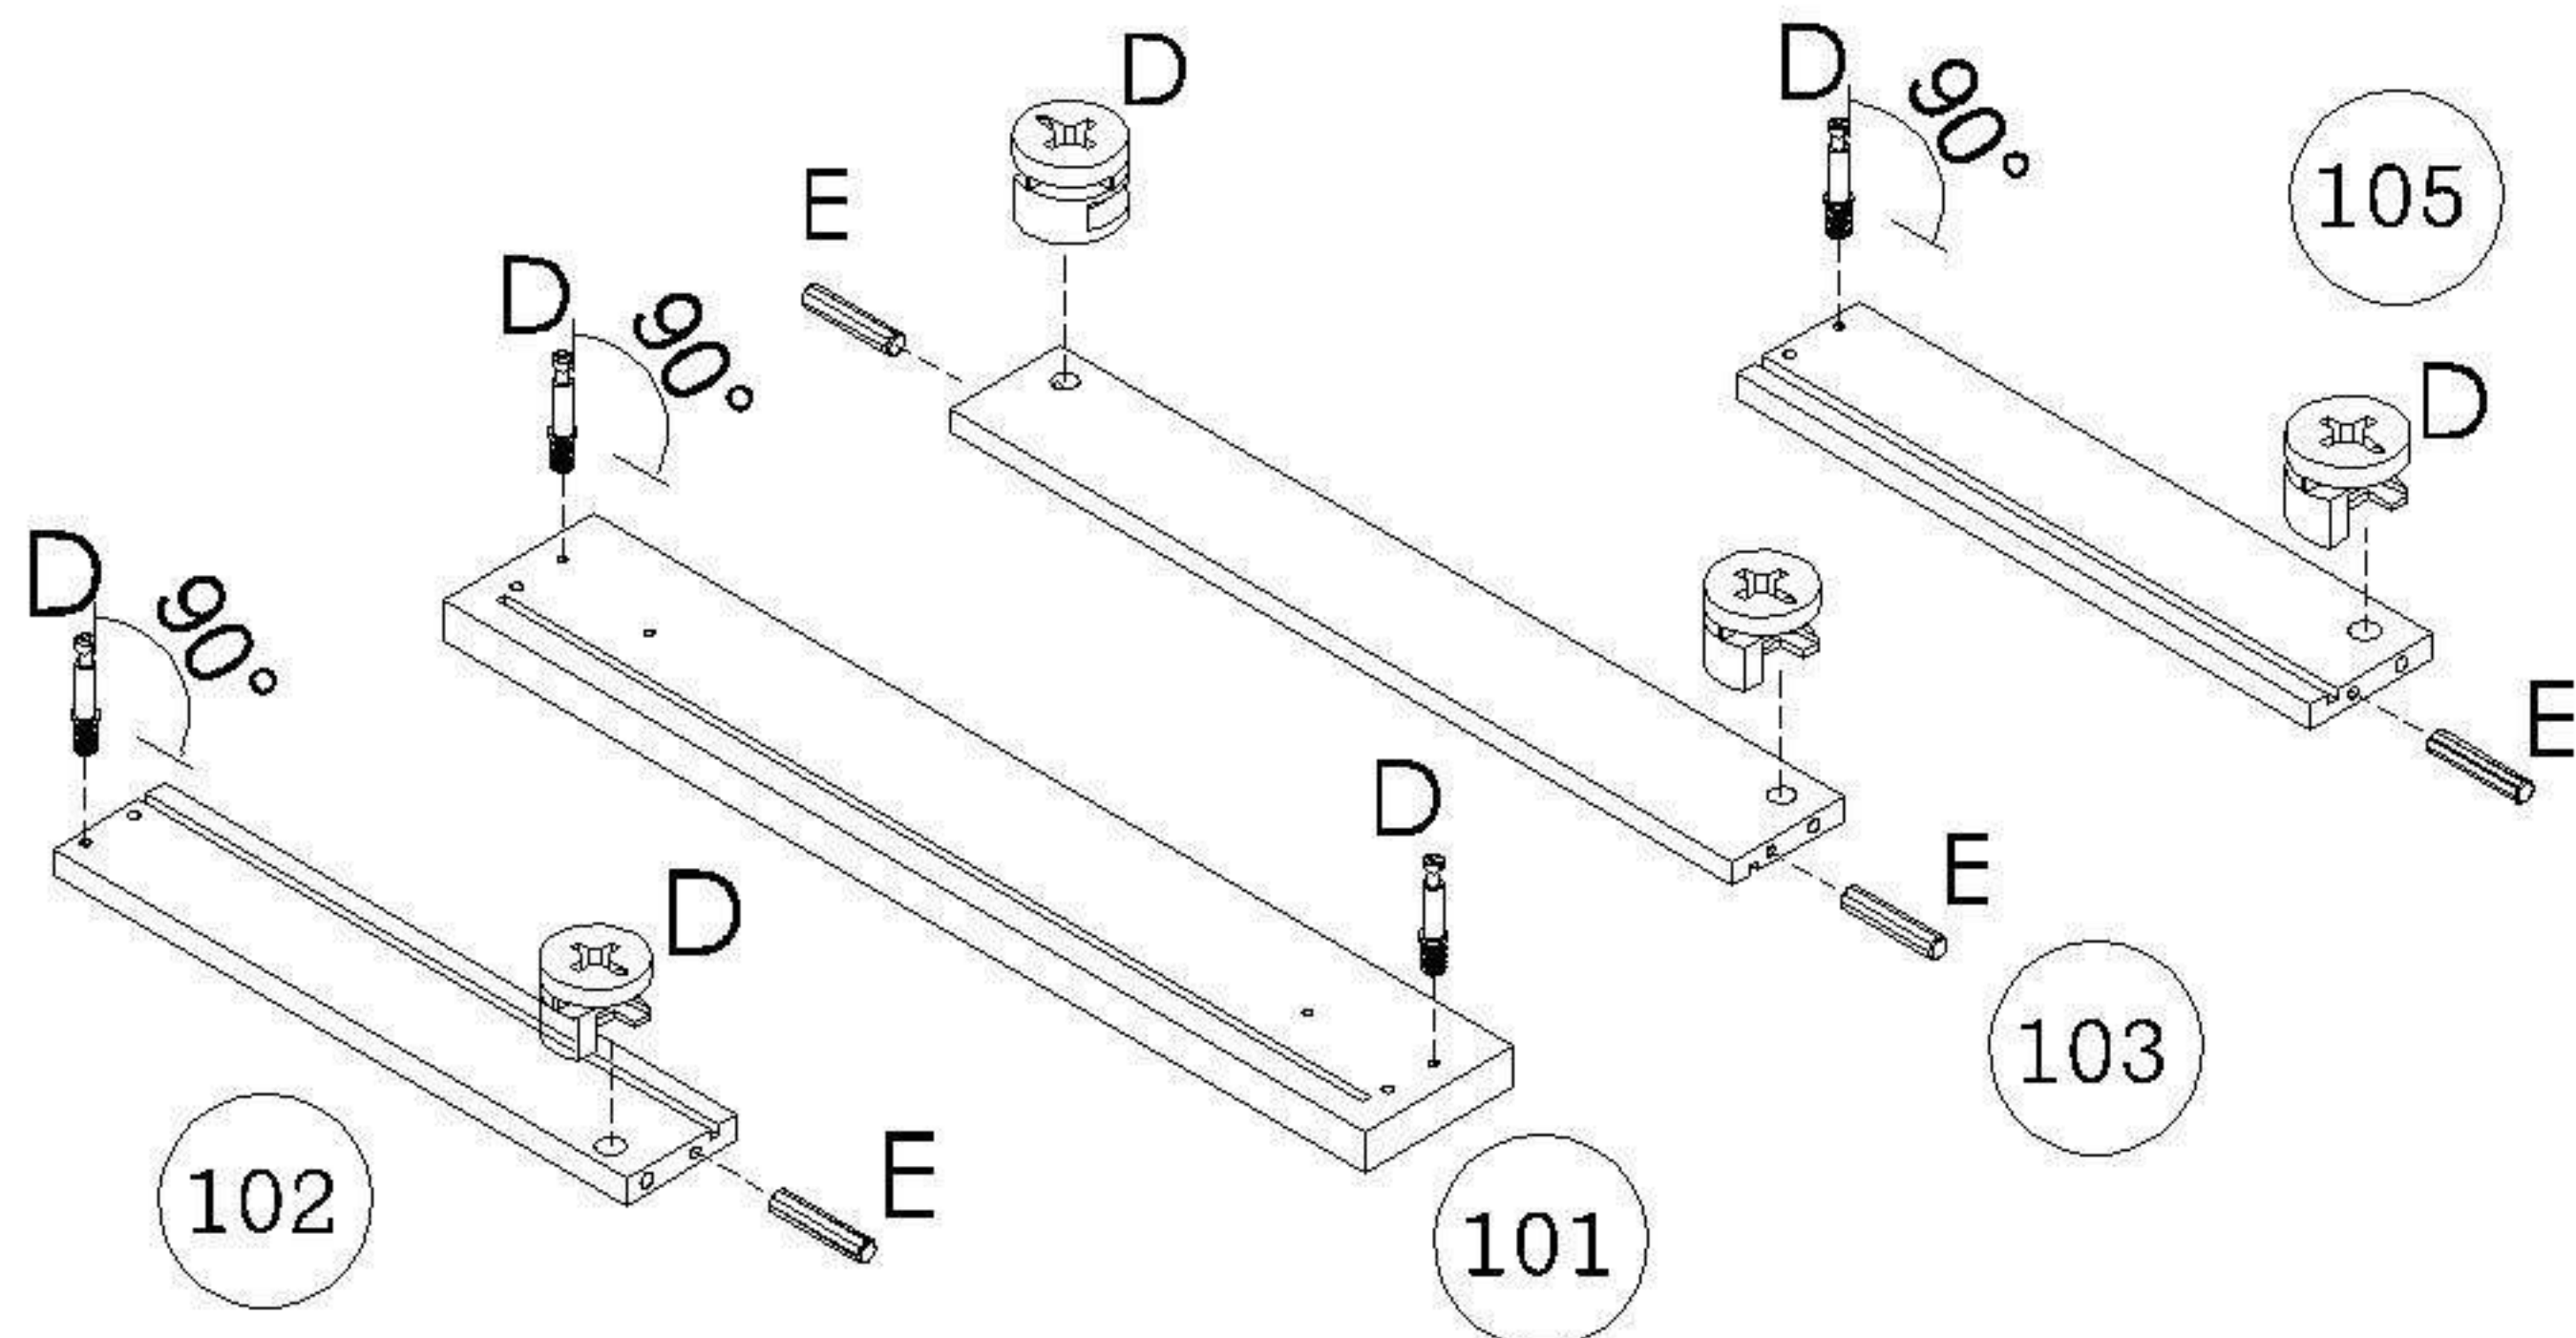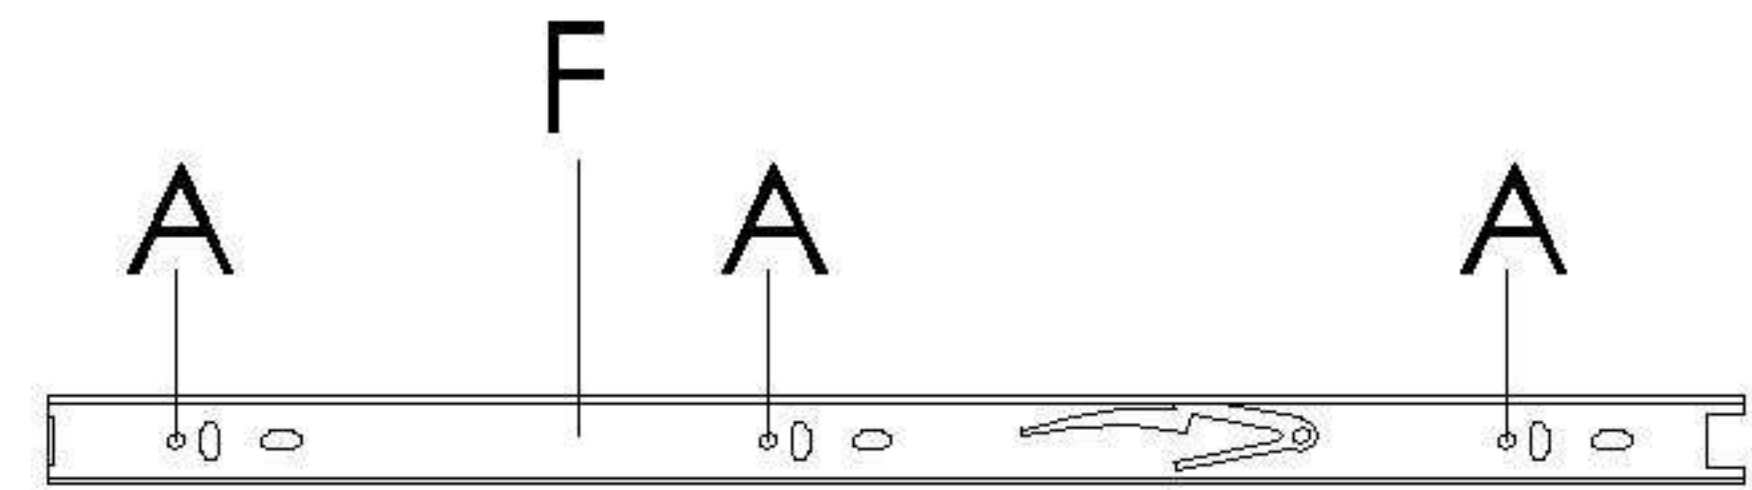


- A) Insert Wood Dowel(E) to Left,Right Small Drawer Side(102,105) & Small Drawer Back(103)
- B) Attach Cam Lock(D) to Left,Right Small Drawer Side(102,105) & Small Drawer Back(103)
- C) Attach Cam Bolt(D) to Small Drawer Front(101) & Left,Right Small Drawer Side(102,105)

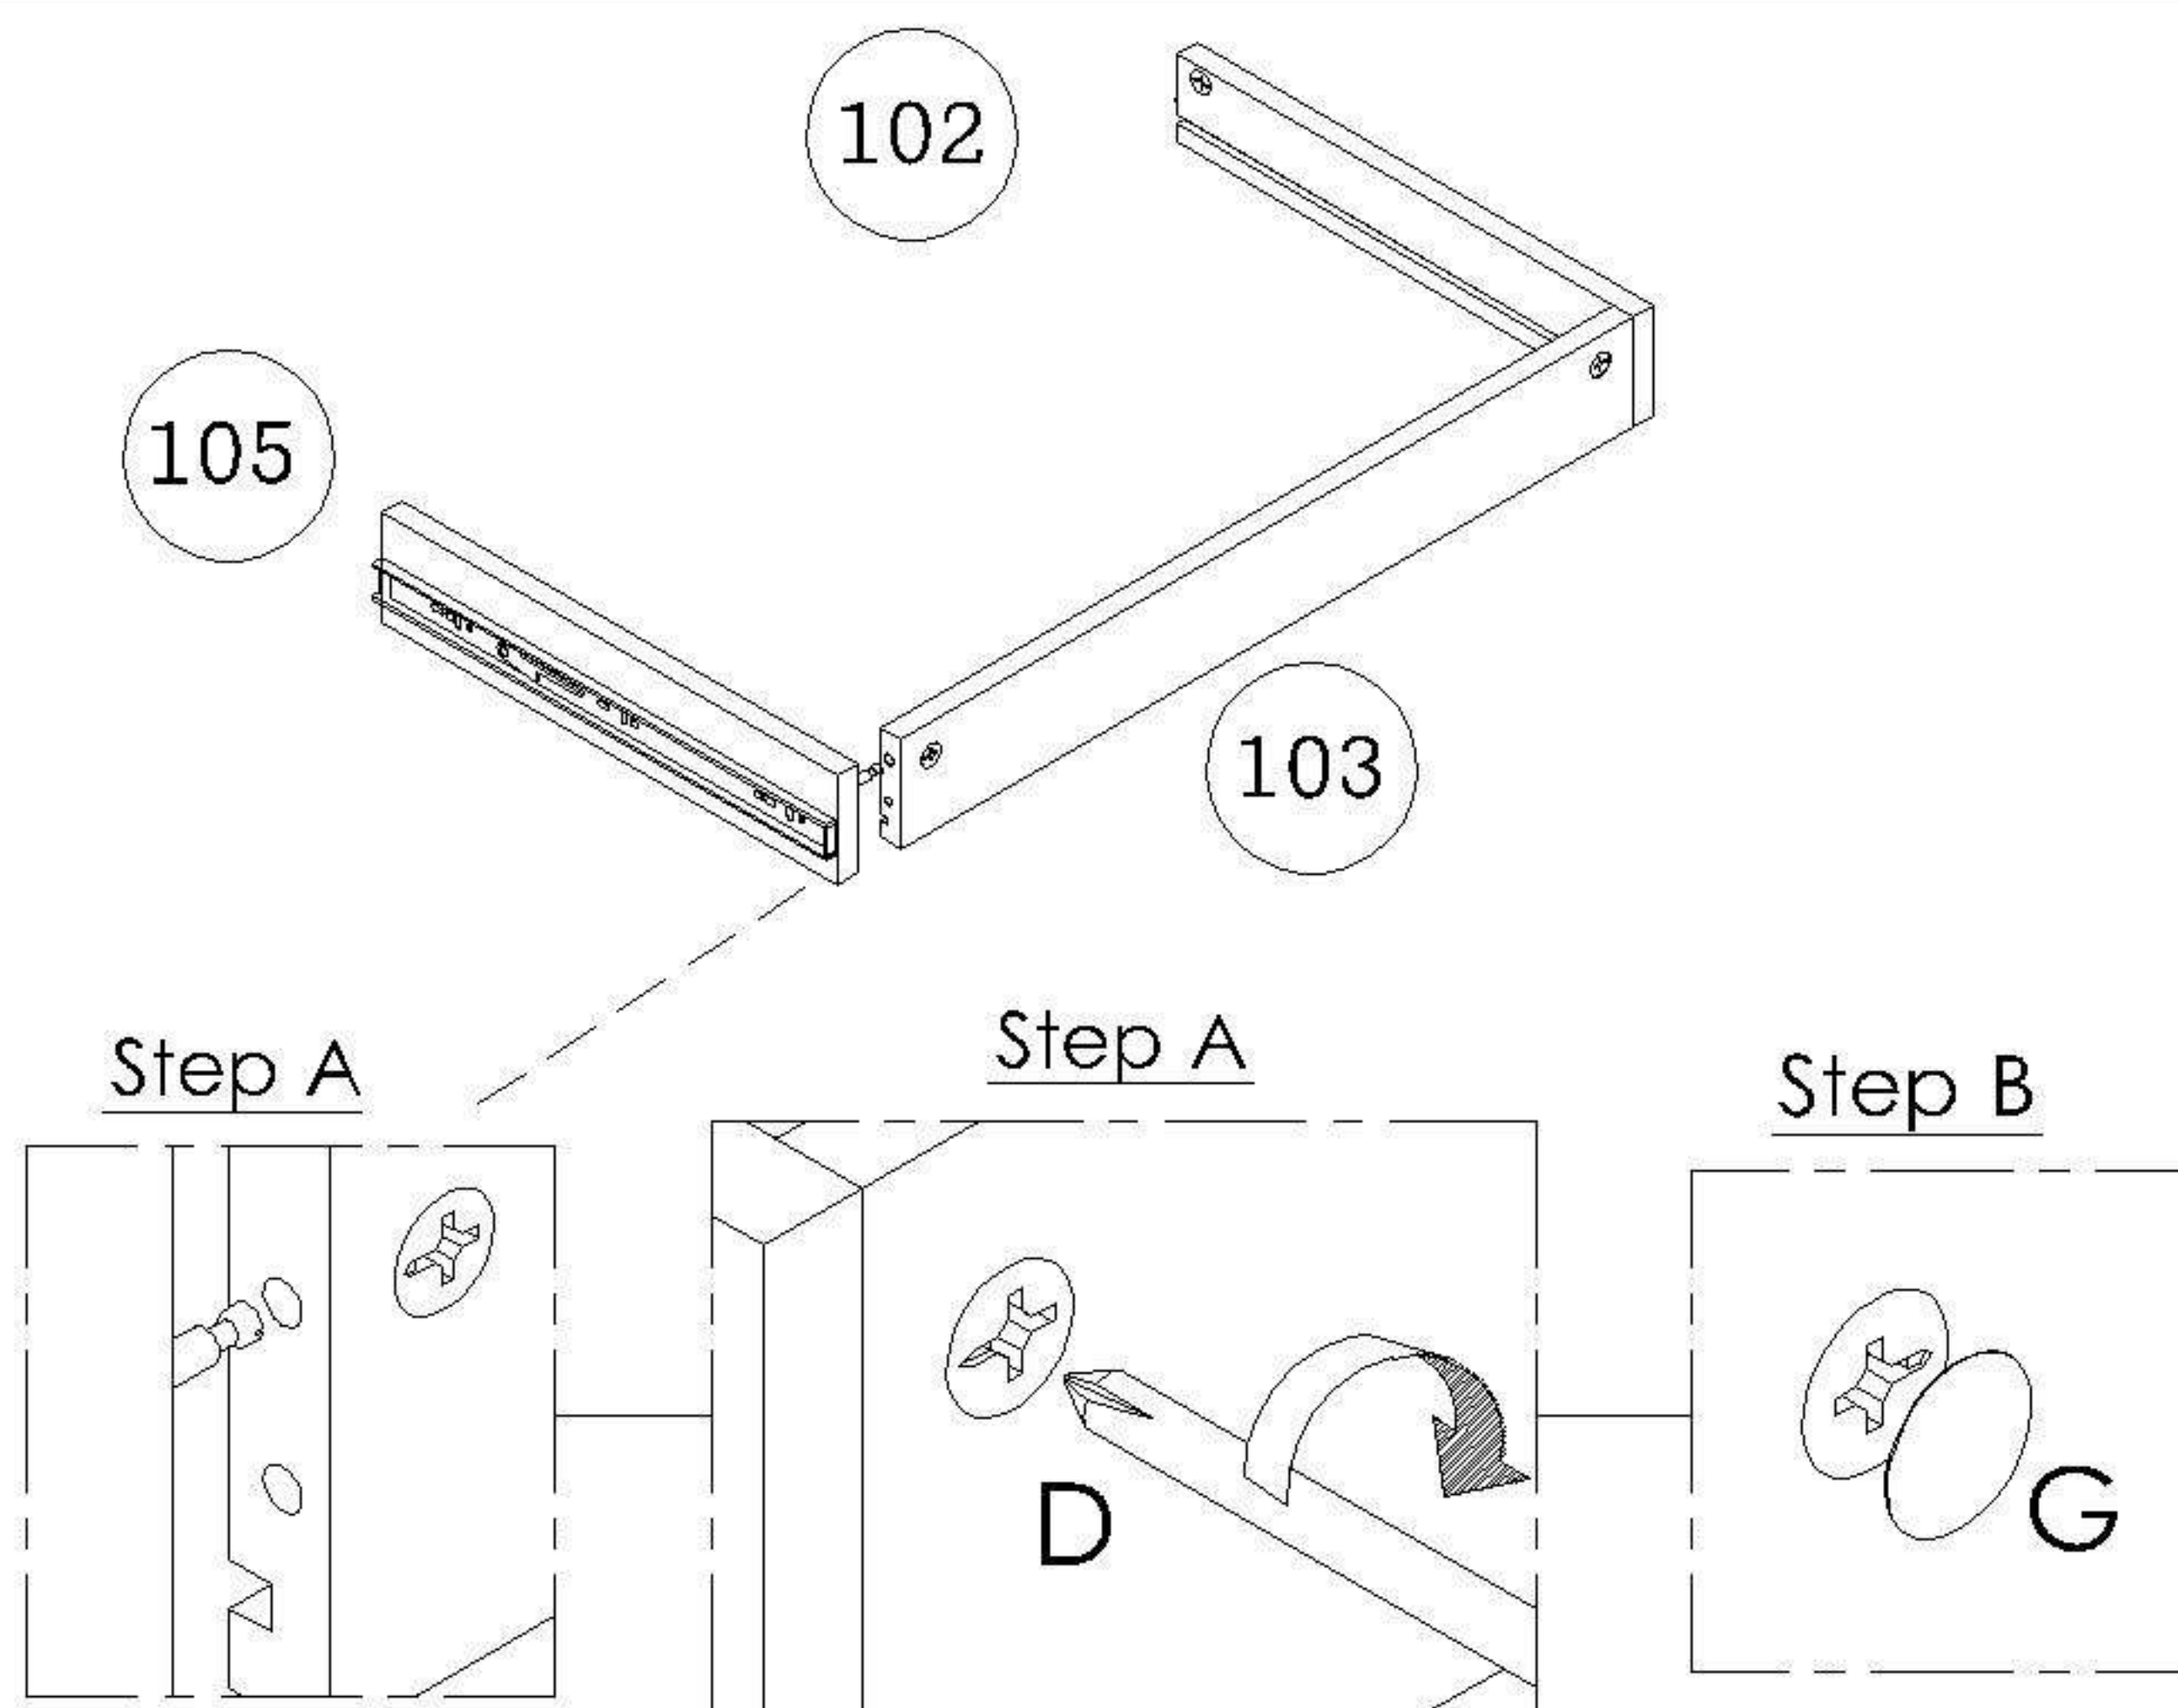


- A) Attach Left,Right Small Drawer Side(102,105) to Small Drawer Back(103) secure with Cam Lock(D)
- B) Using Cam Lock Cover(G) to cover Cam Lock(D)


NOTE : Make sure arrows on each Cam Lock point towards nearest edge with holes

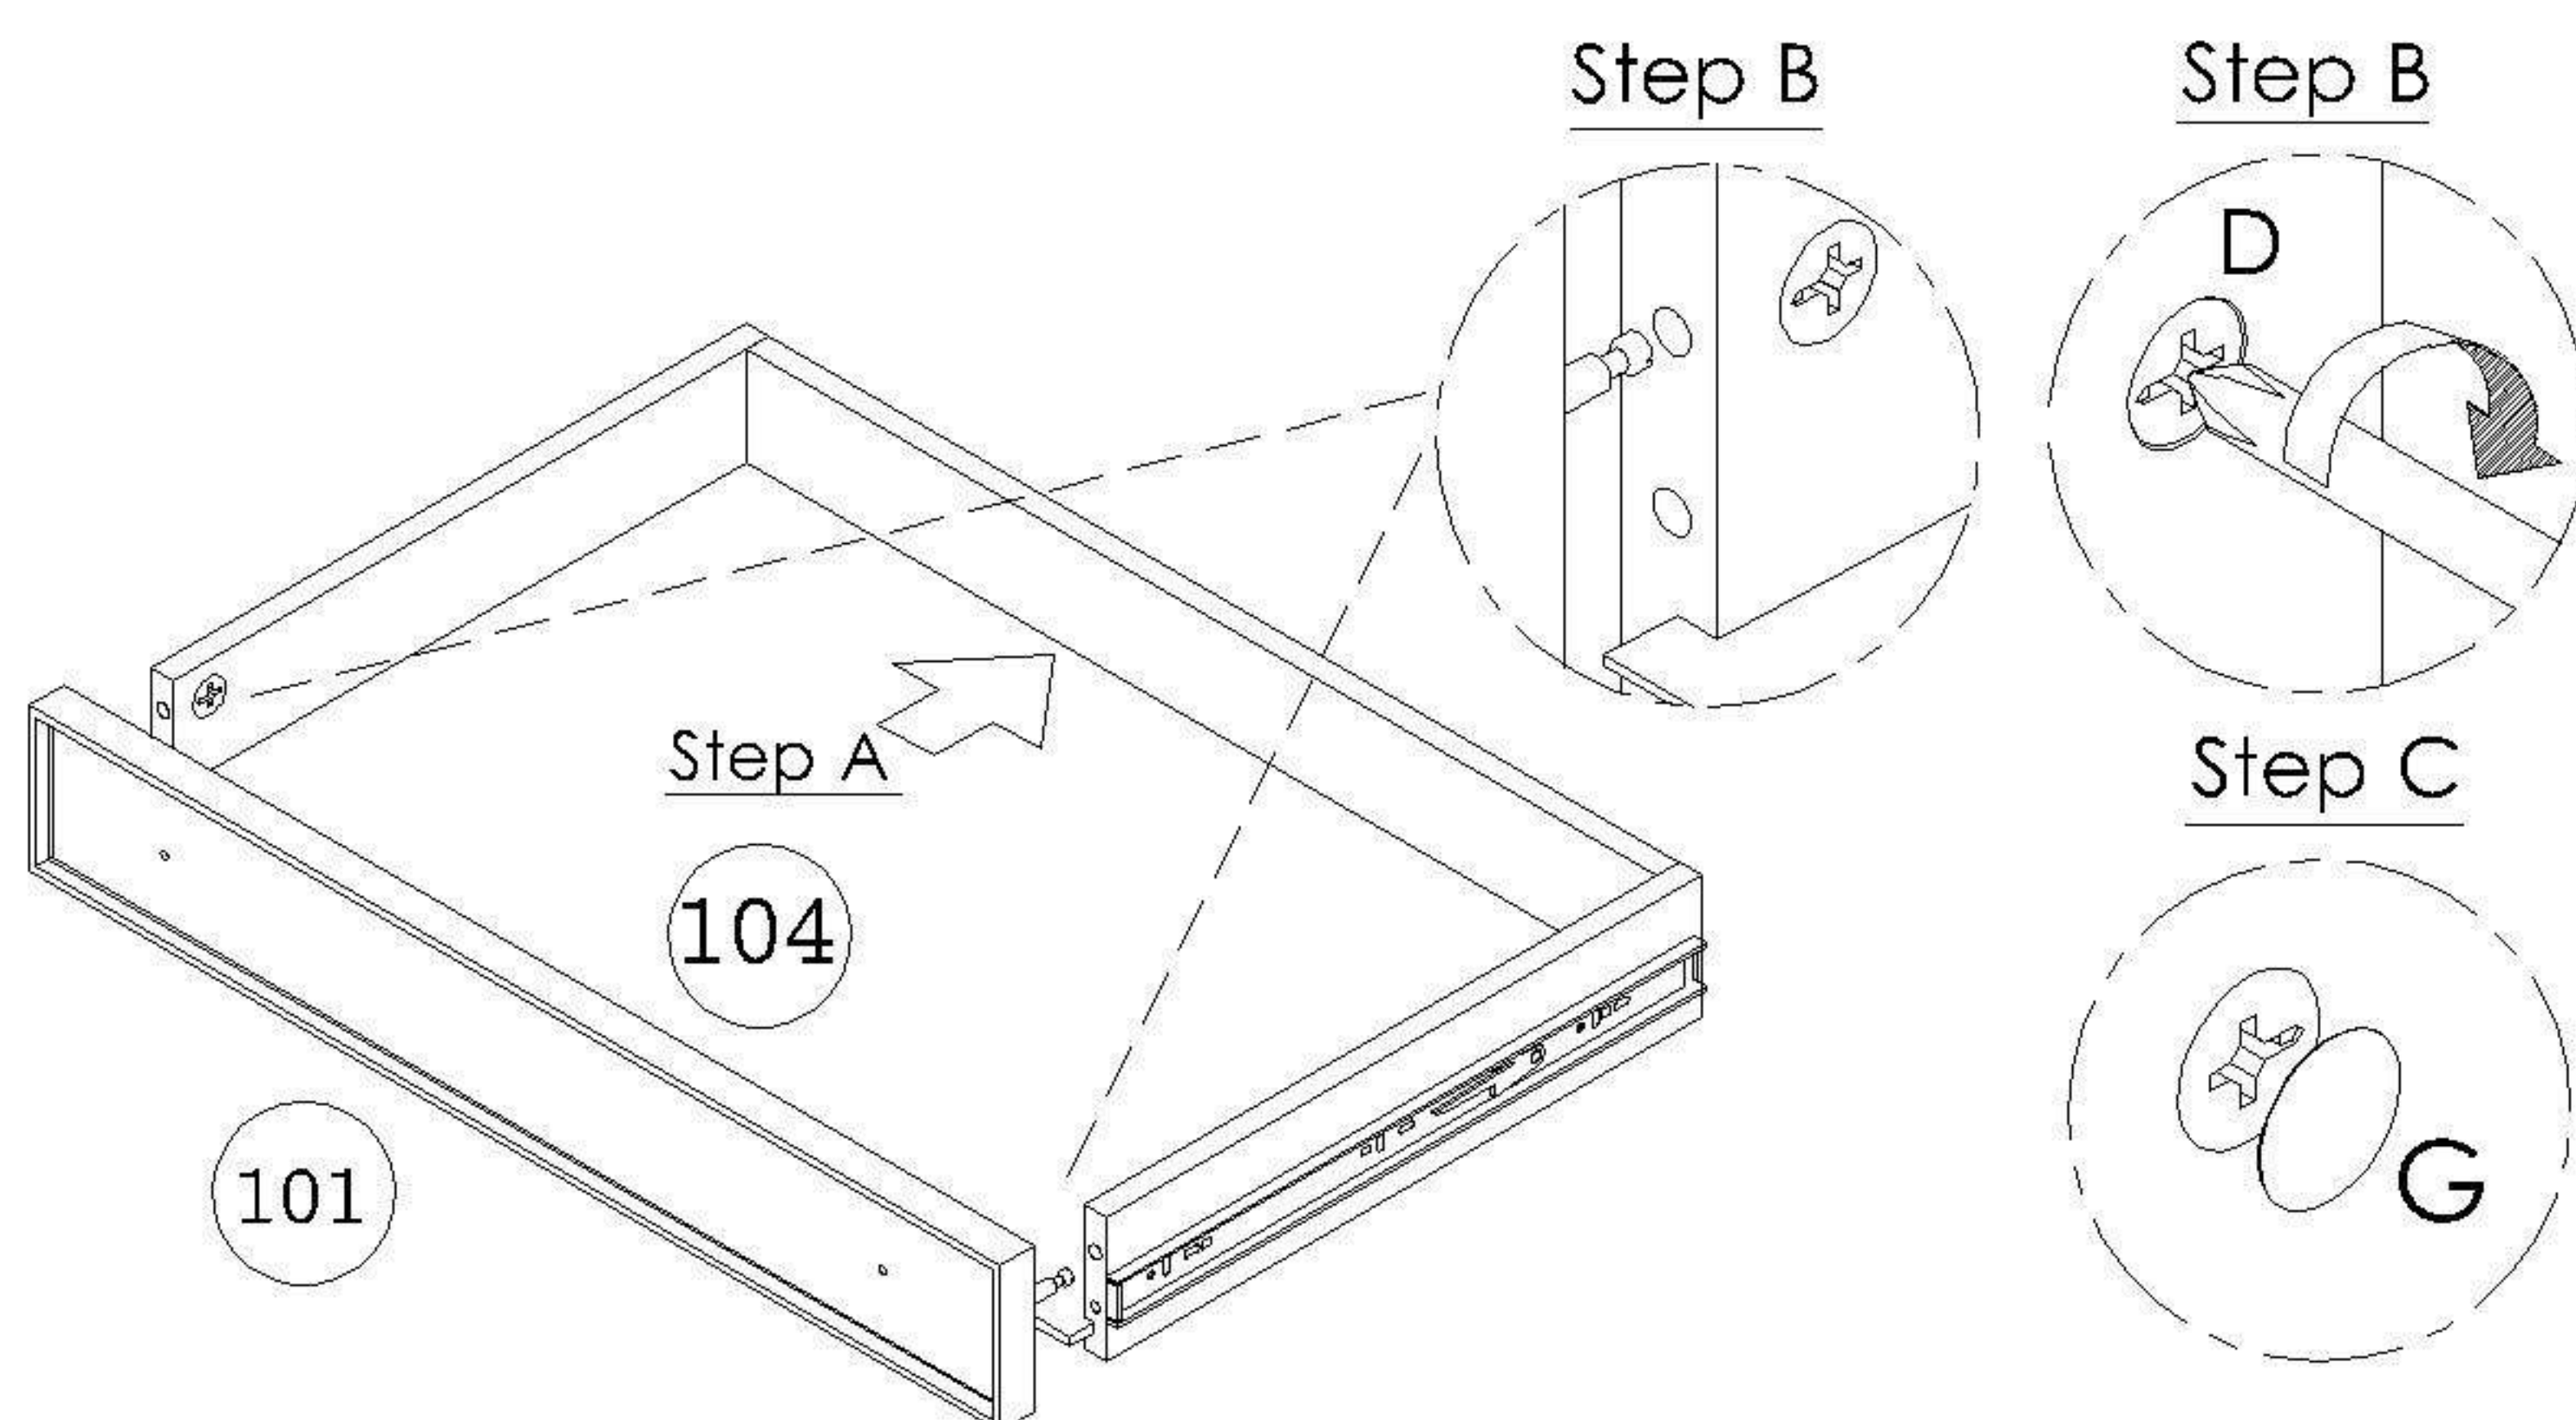



- A) Slot in Drawer Base(104) in corresponding grooves
- B) Attach Small Drawer Front(101) to Drawer Box secure with Cam Lock(D)
- C) Using Cam Lock Cover(G) to Cover Cam Lock(D)

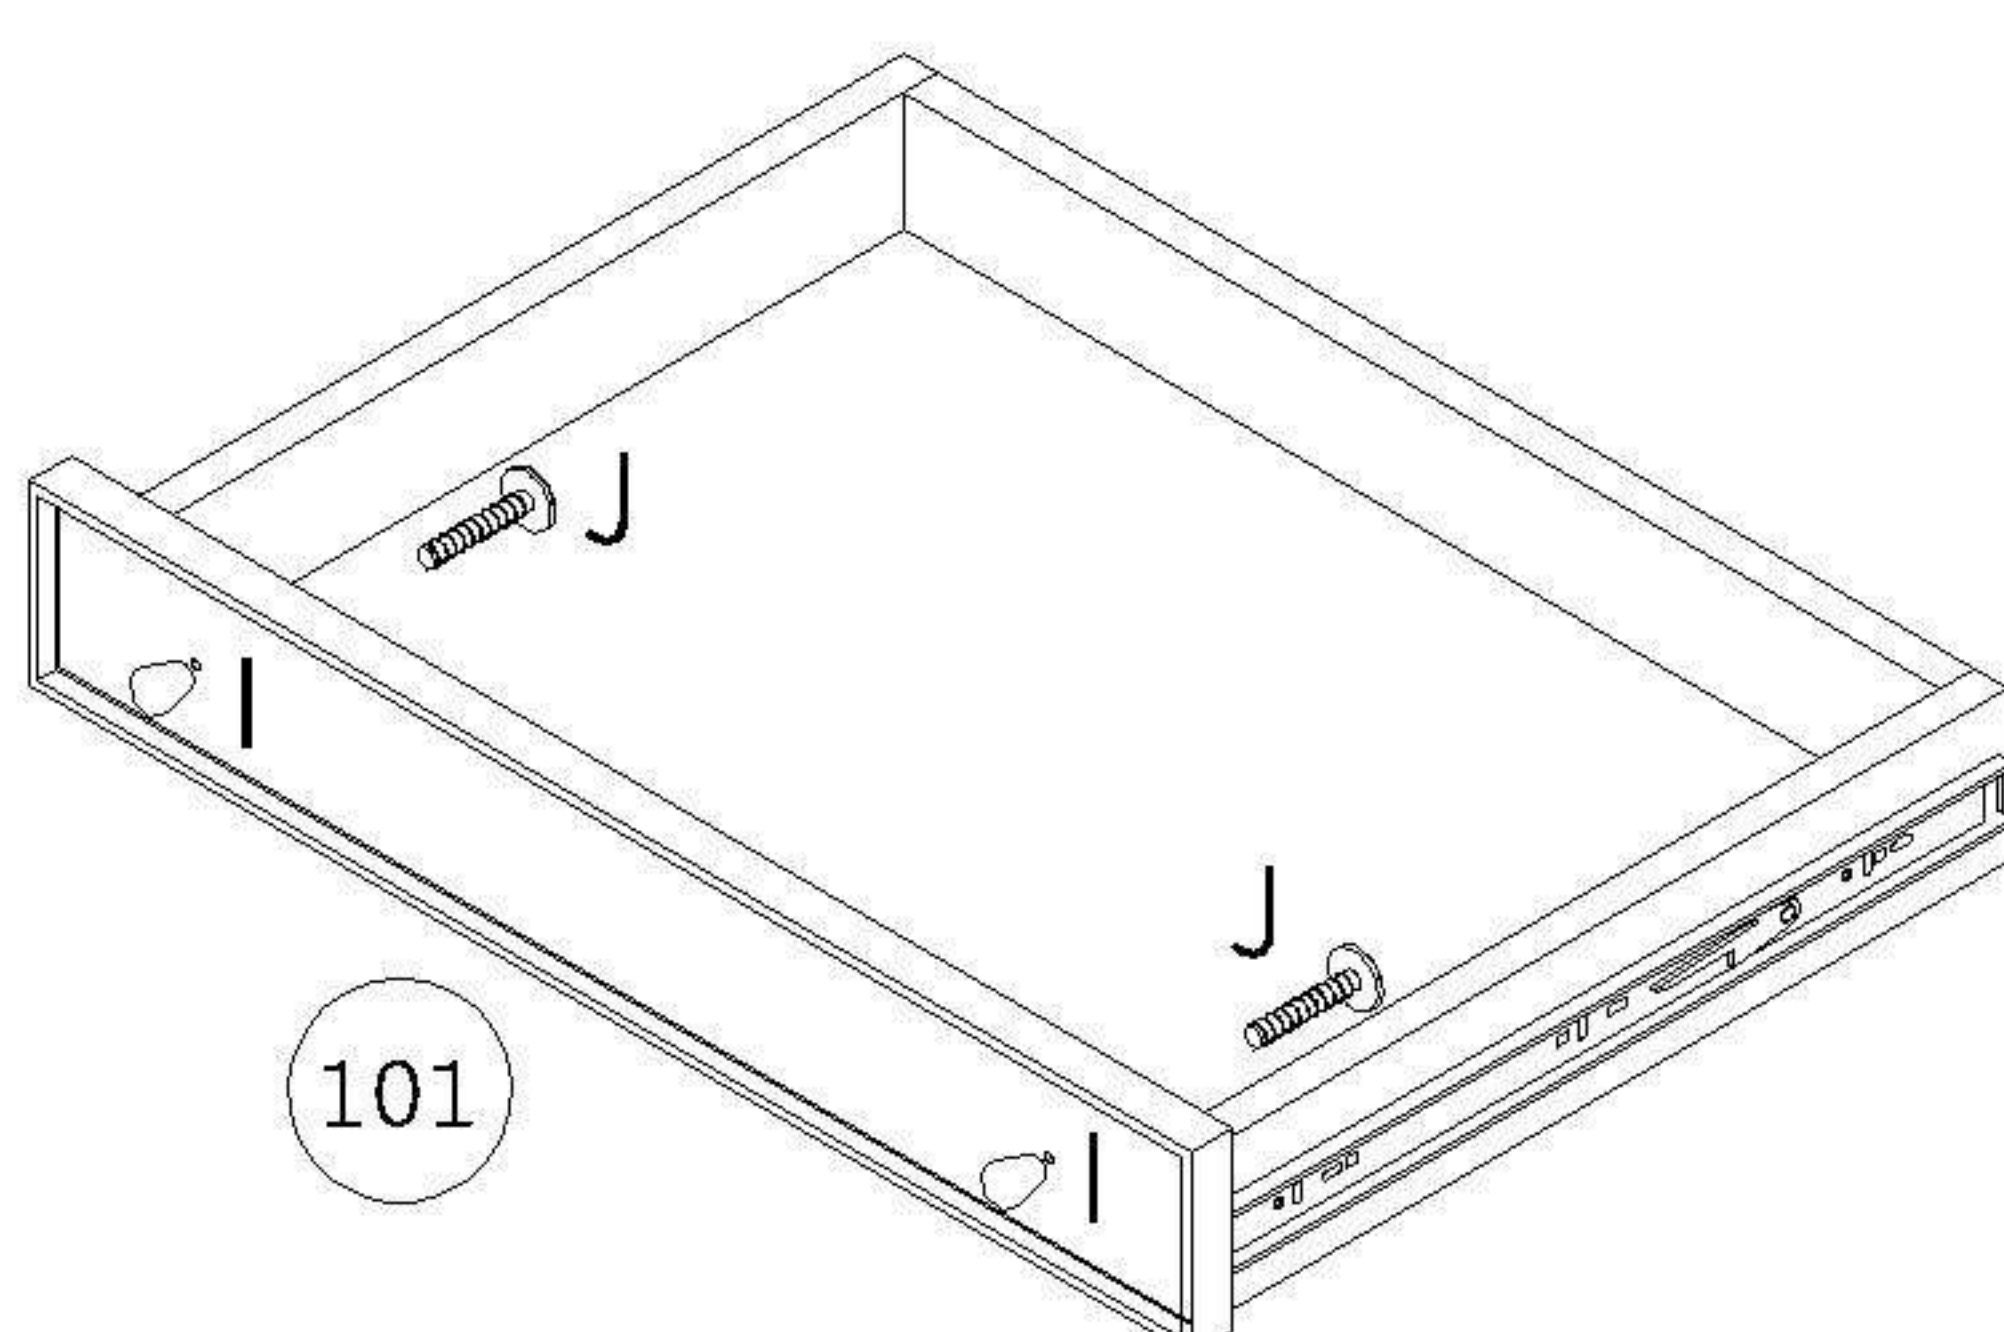


- A) Attach Handle(I) to Small Drawer Front(101) secure using Panhead Screw(J)

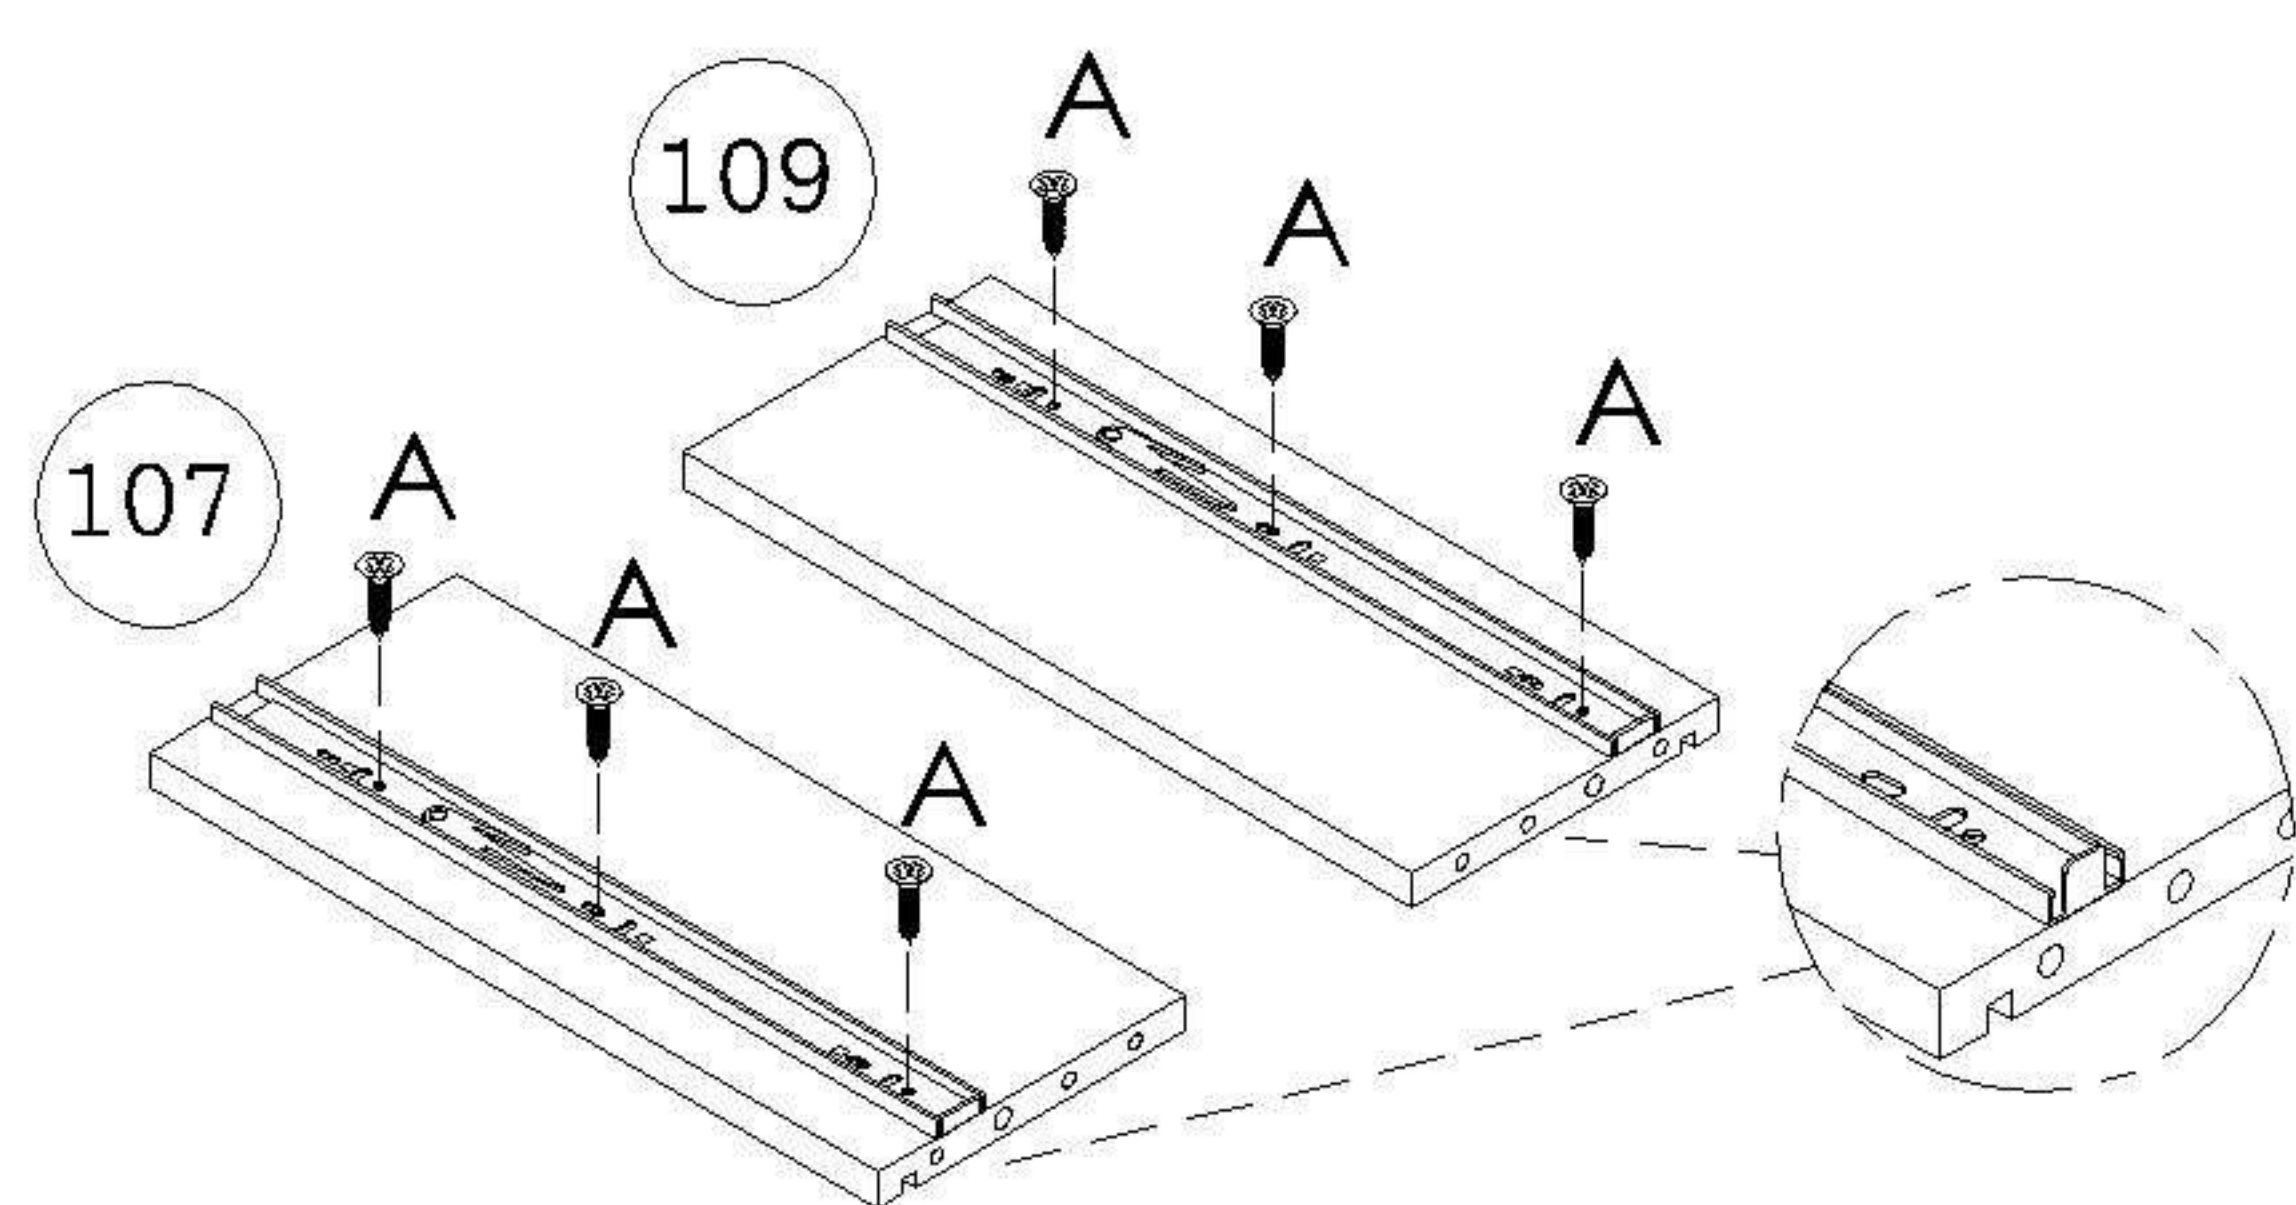

- A) Attach Extension Runner(F) to Left,Right Big Drawer Side (107,109) using Chipboard Screw(A) to secure

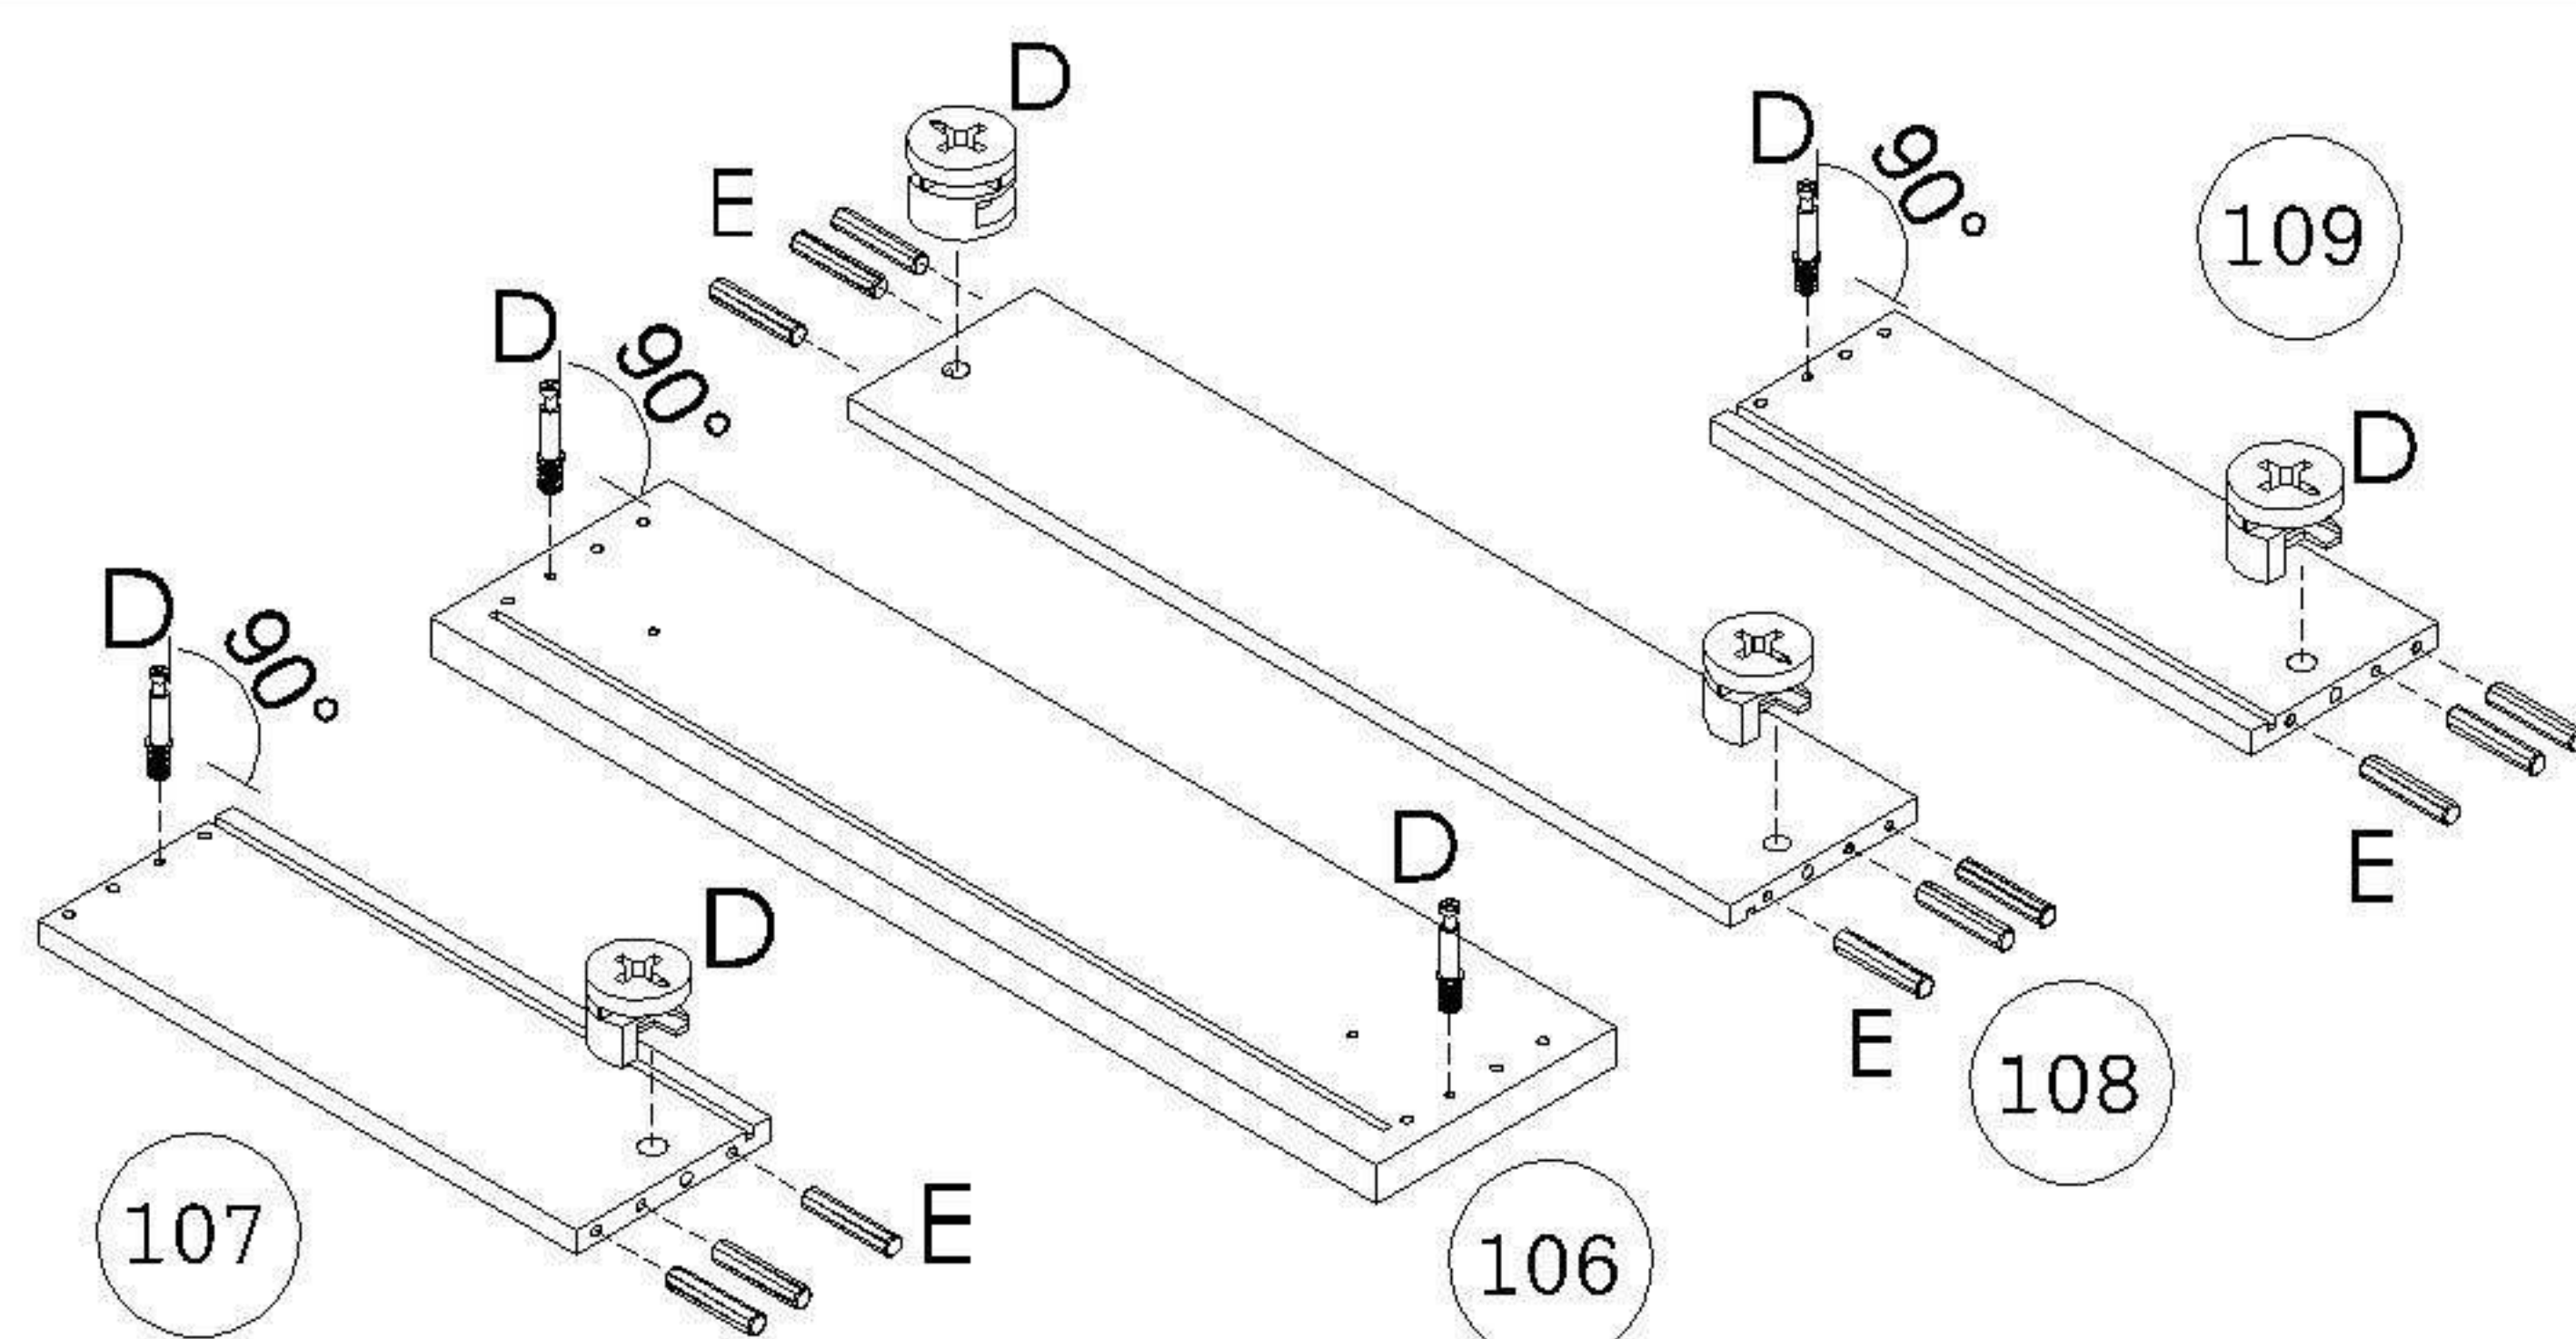
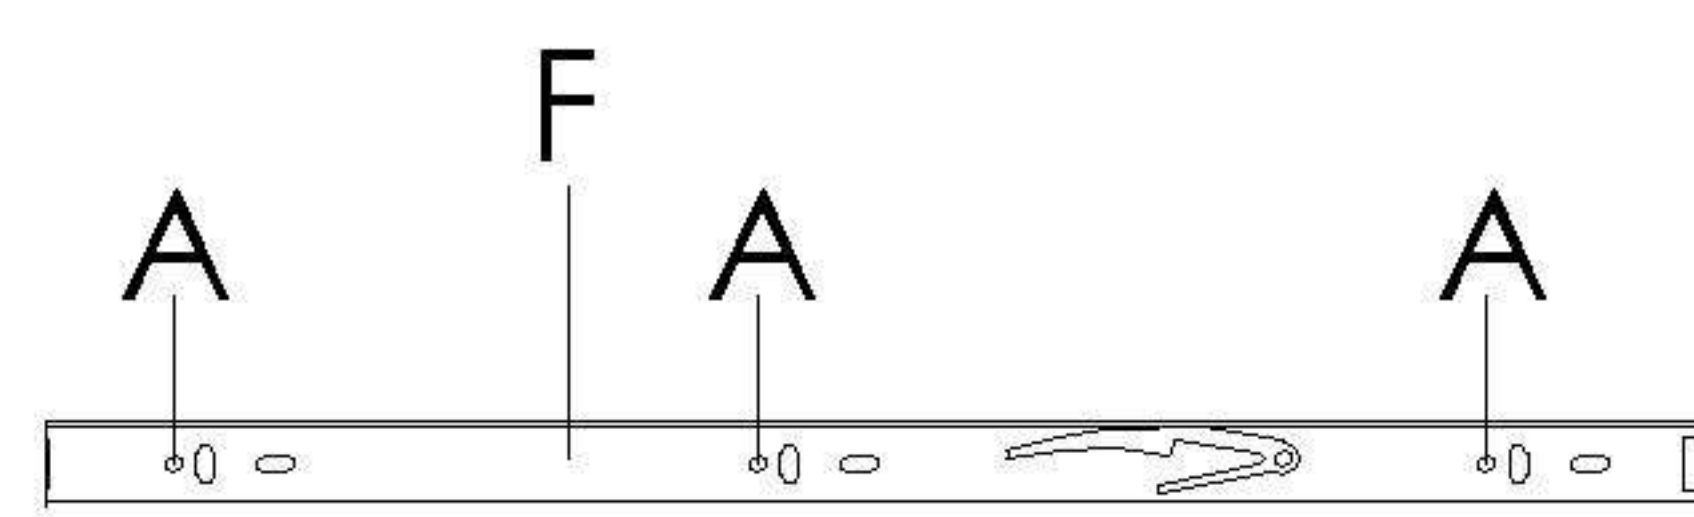


- A) Insert Wood Dowel(E) to Left,Right Big Drawer Side(107,109) & Big Drawer Back(108)
- B) Attach Cam Lock(D) to Left,Right Big Drawer Side(107,109) & Big Drawer Back(108)
- C) Attach Cam Bolt(D) to Big Drawer Front(106) & Left,Right Drawer Side(107,109)

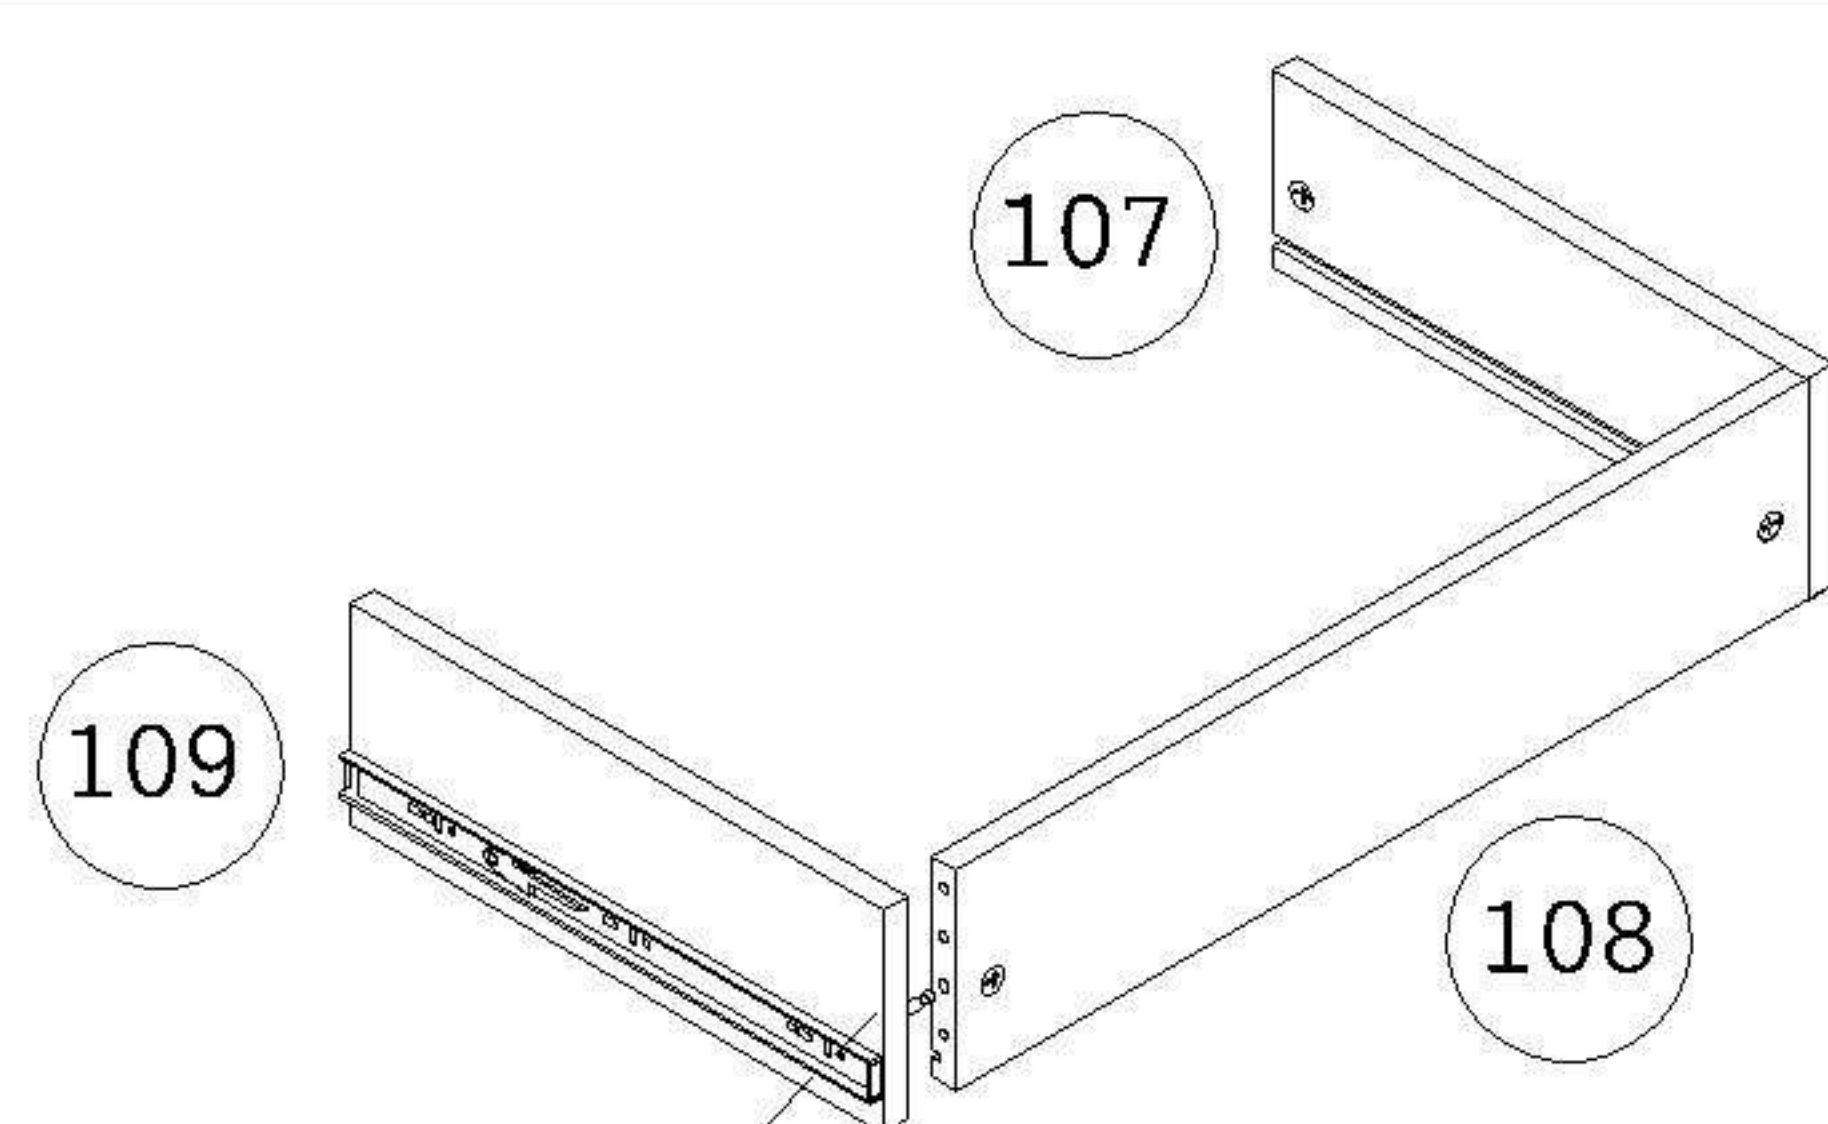


- A) Attach Left,Right Big Drawer Side(107,109) to Big Drawer Back(108) secure with Cam Lock(D)
- B) Using Cam Lock Cover(G) to cover Cam Lock(D)

NOTE : Make sure arrows on each Cam Lock point towards nearest edge with holes

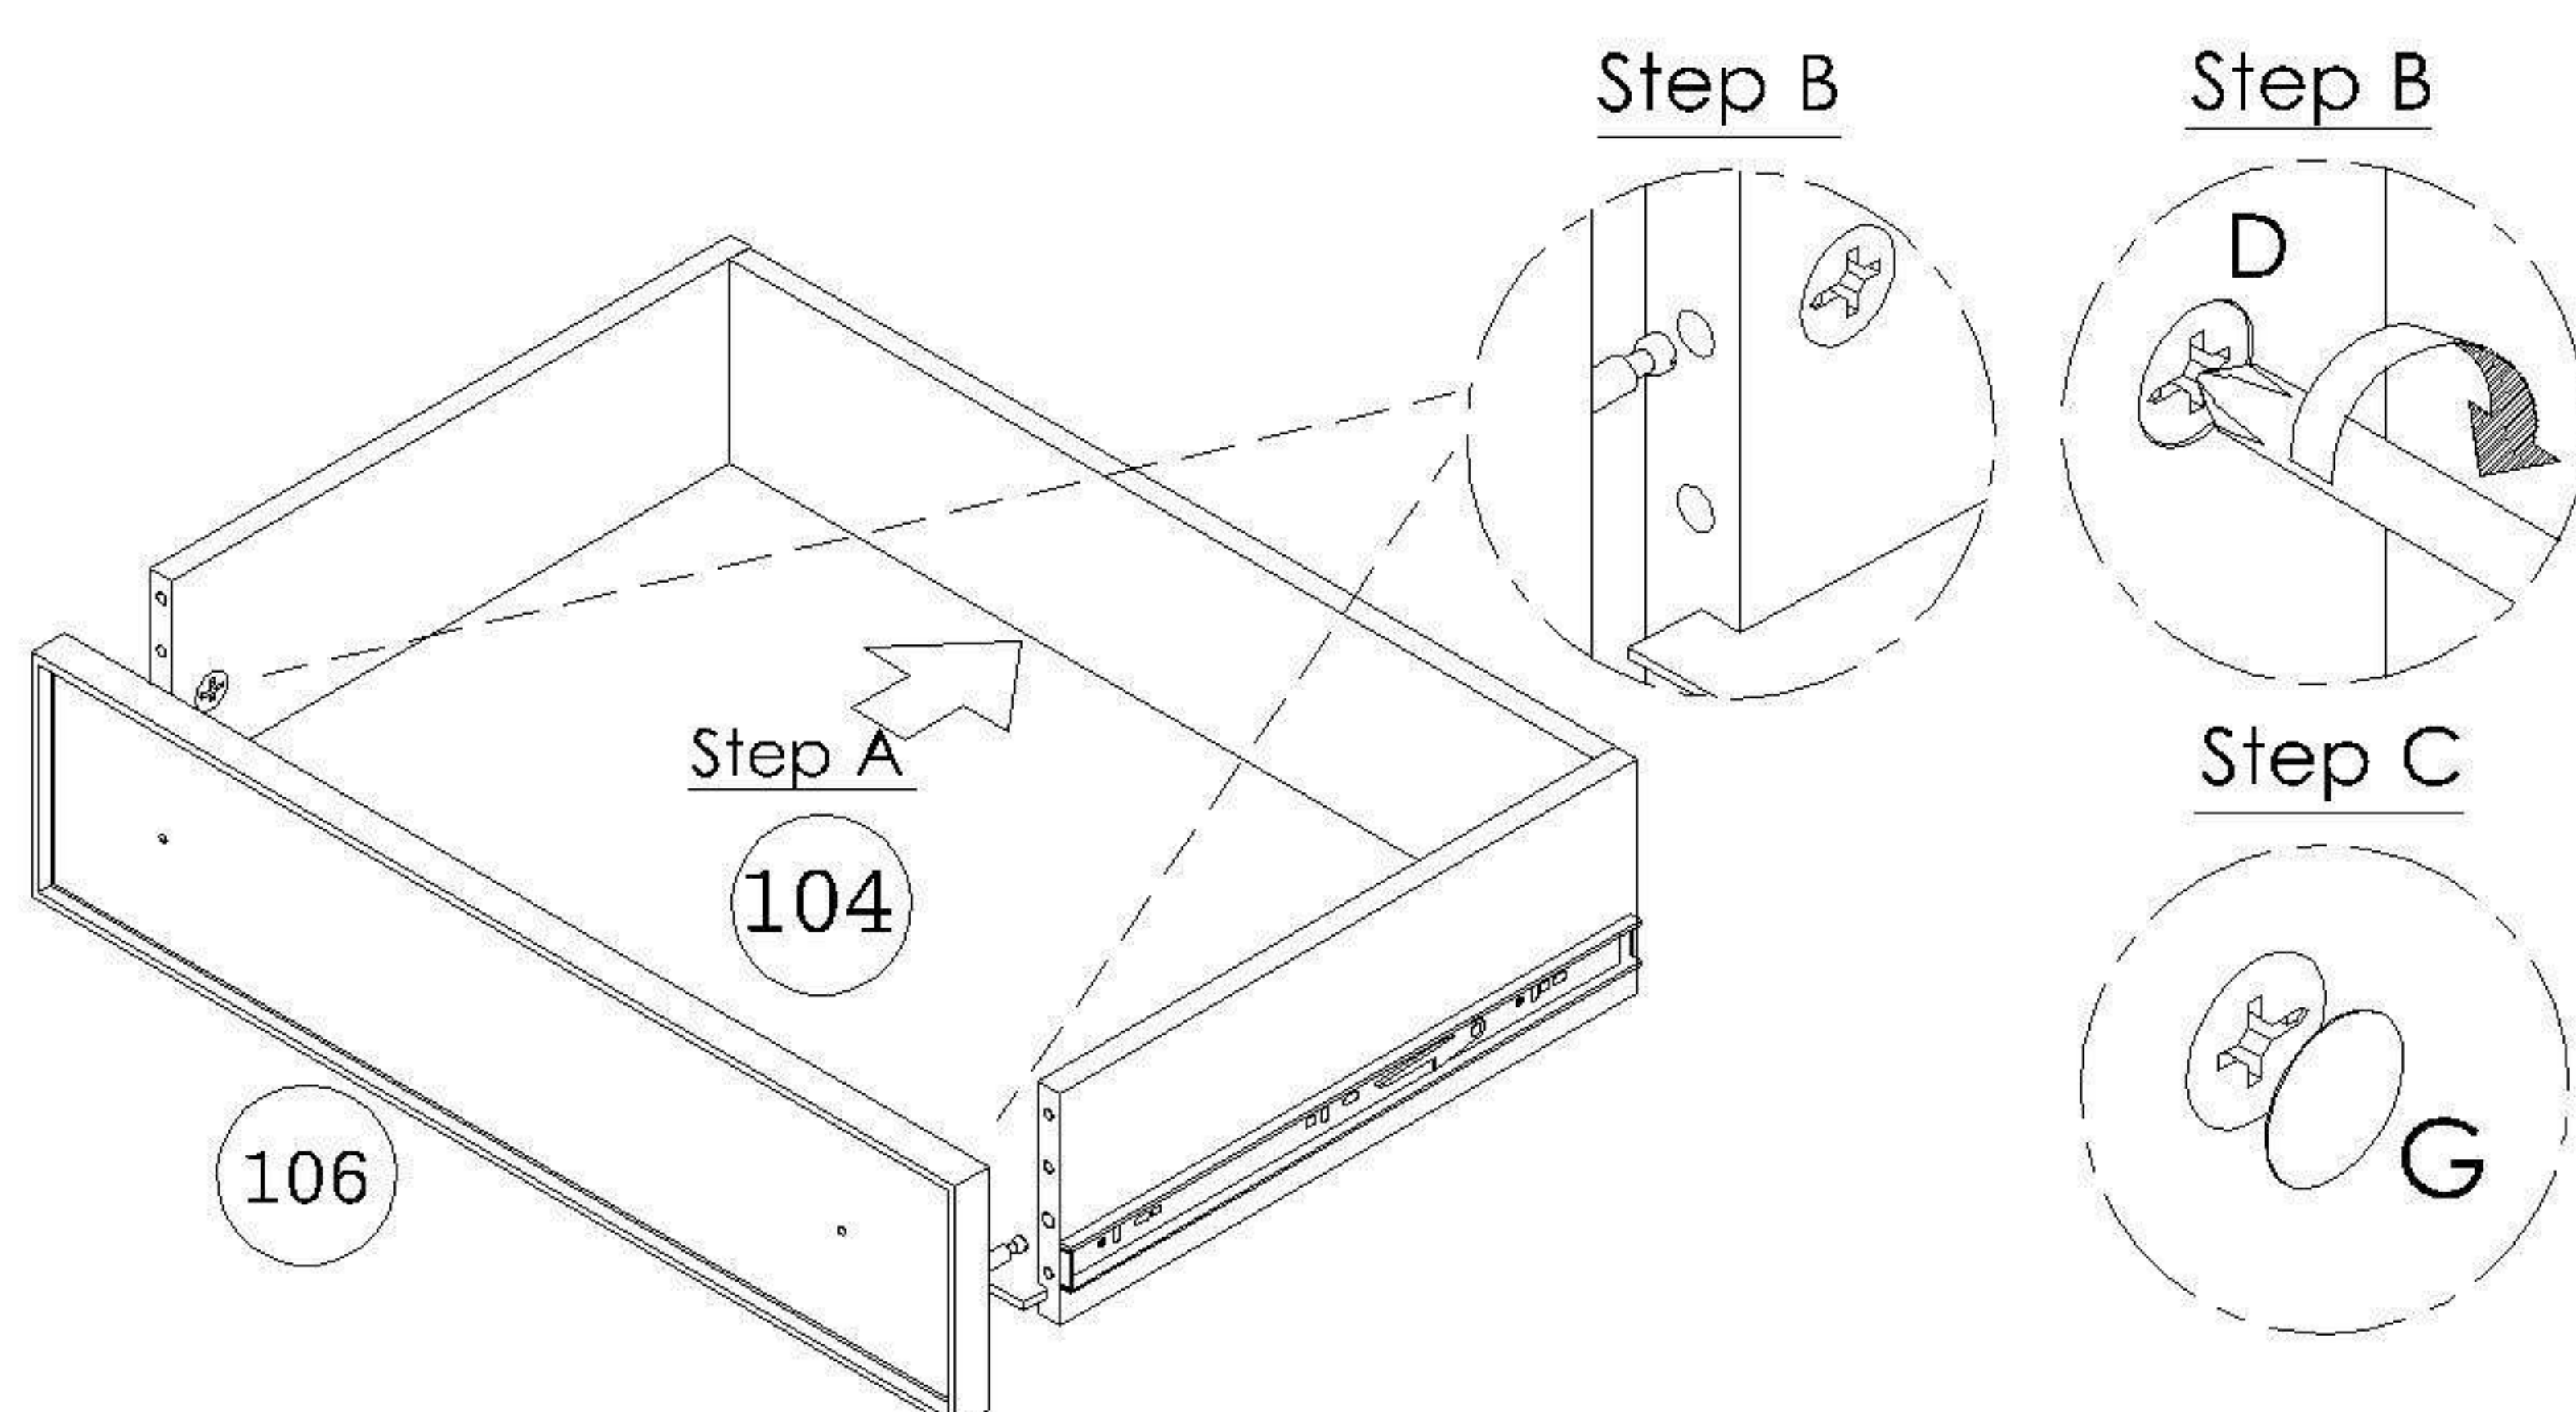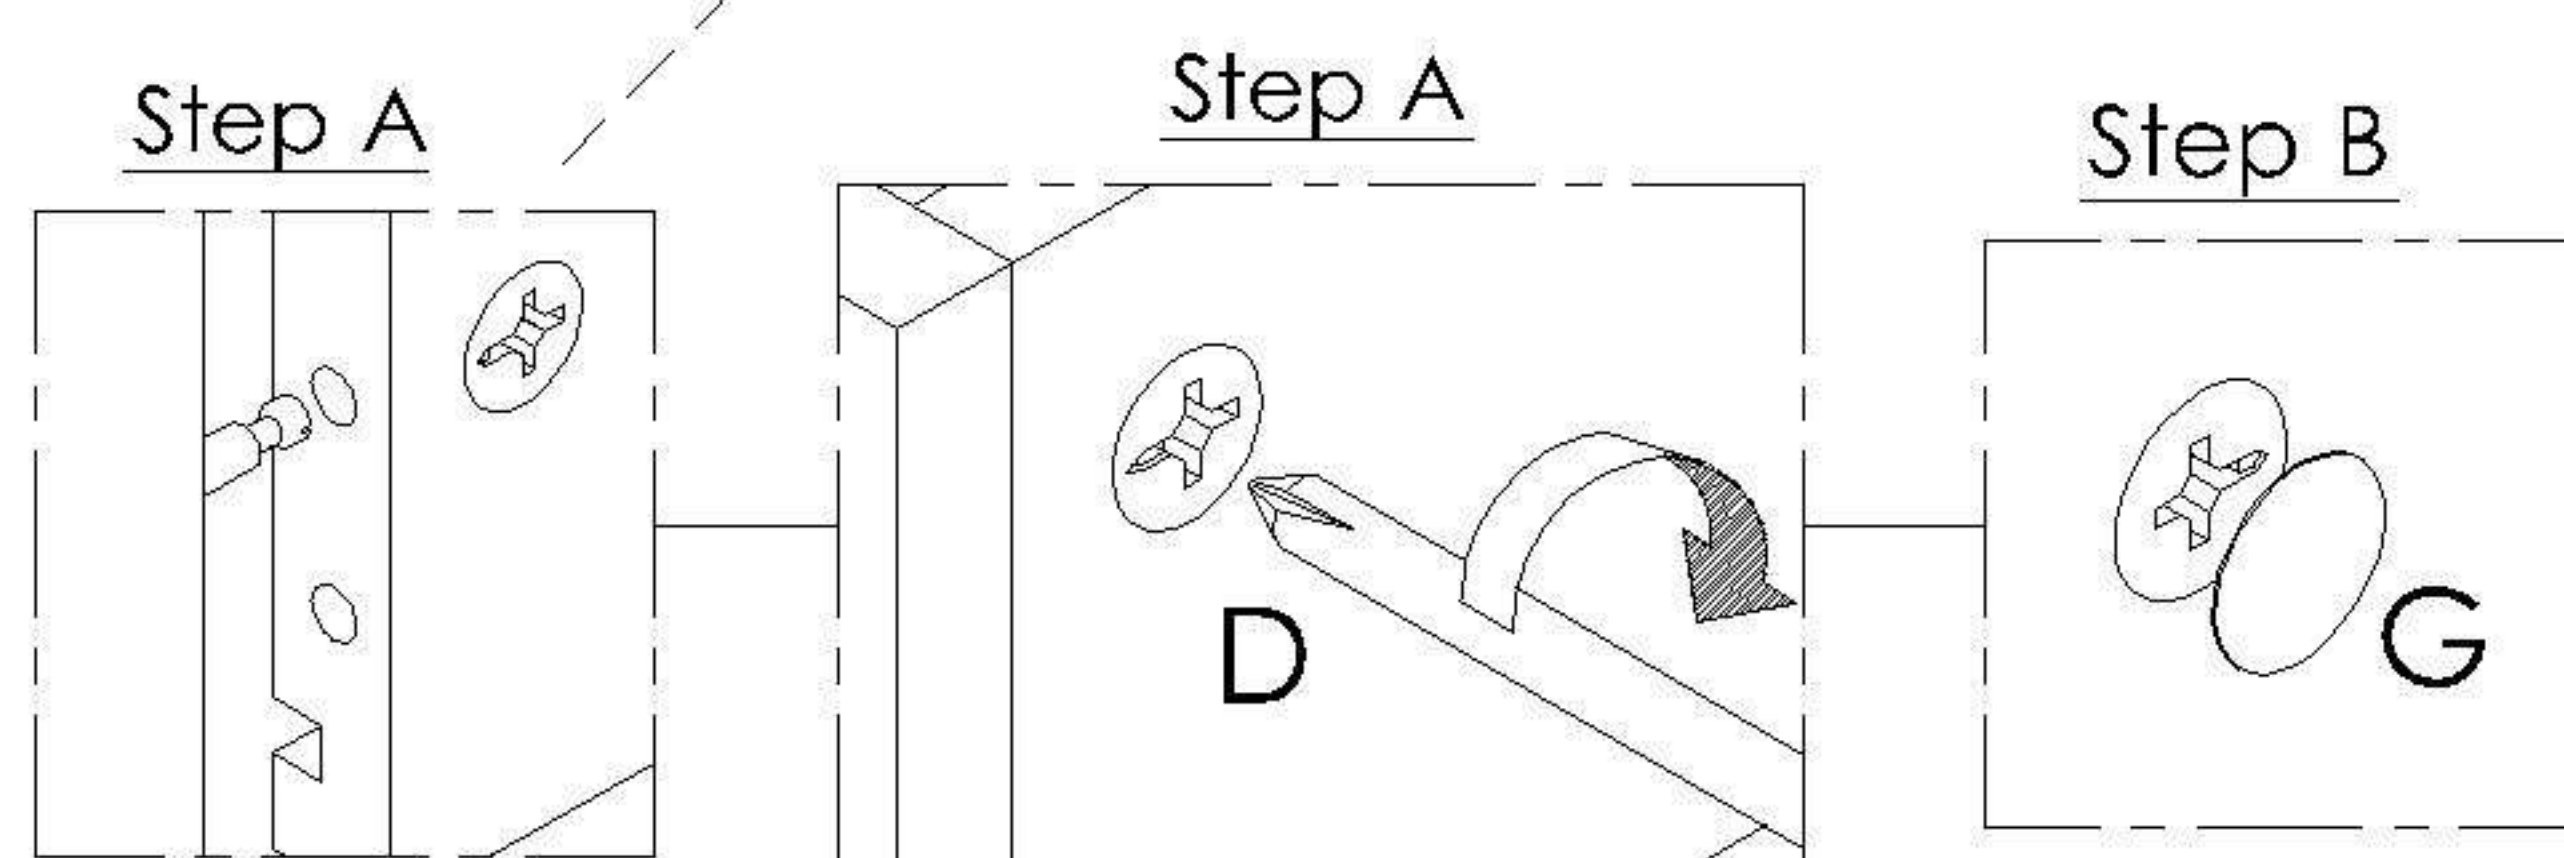

- A) Slot in Drawer Base(104) in corresponding grooves
- B) Attach Big Drawer Front(106) to Drawer Box secure with Cam Lock(D)
- C) Using Cam Lock Cover(G) to Cover Cam Lock(D)

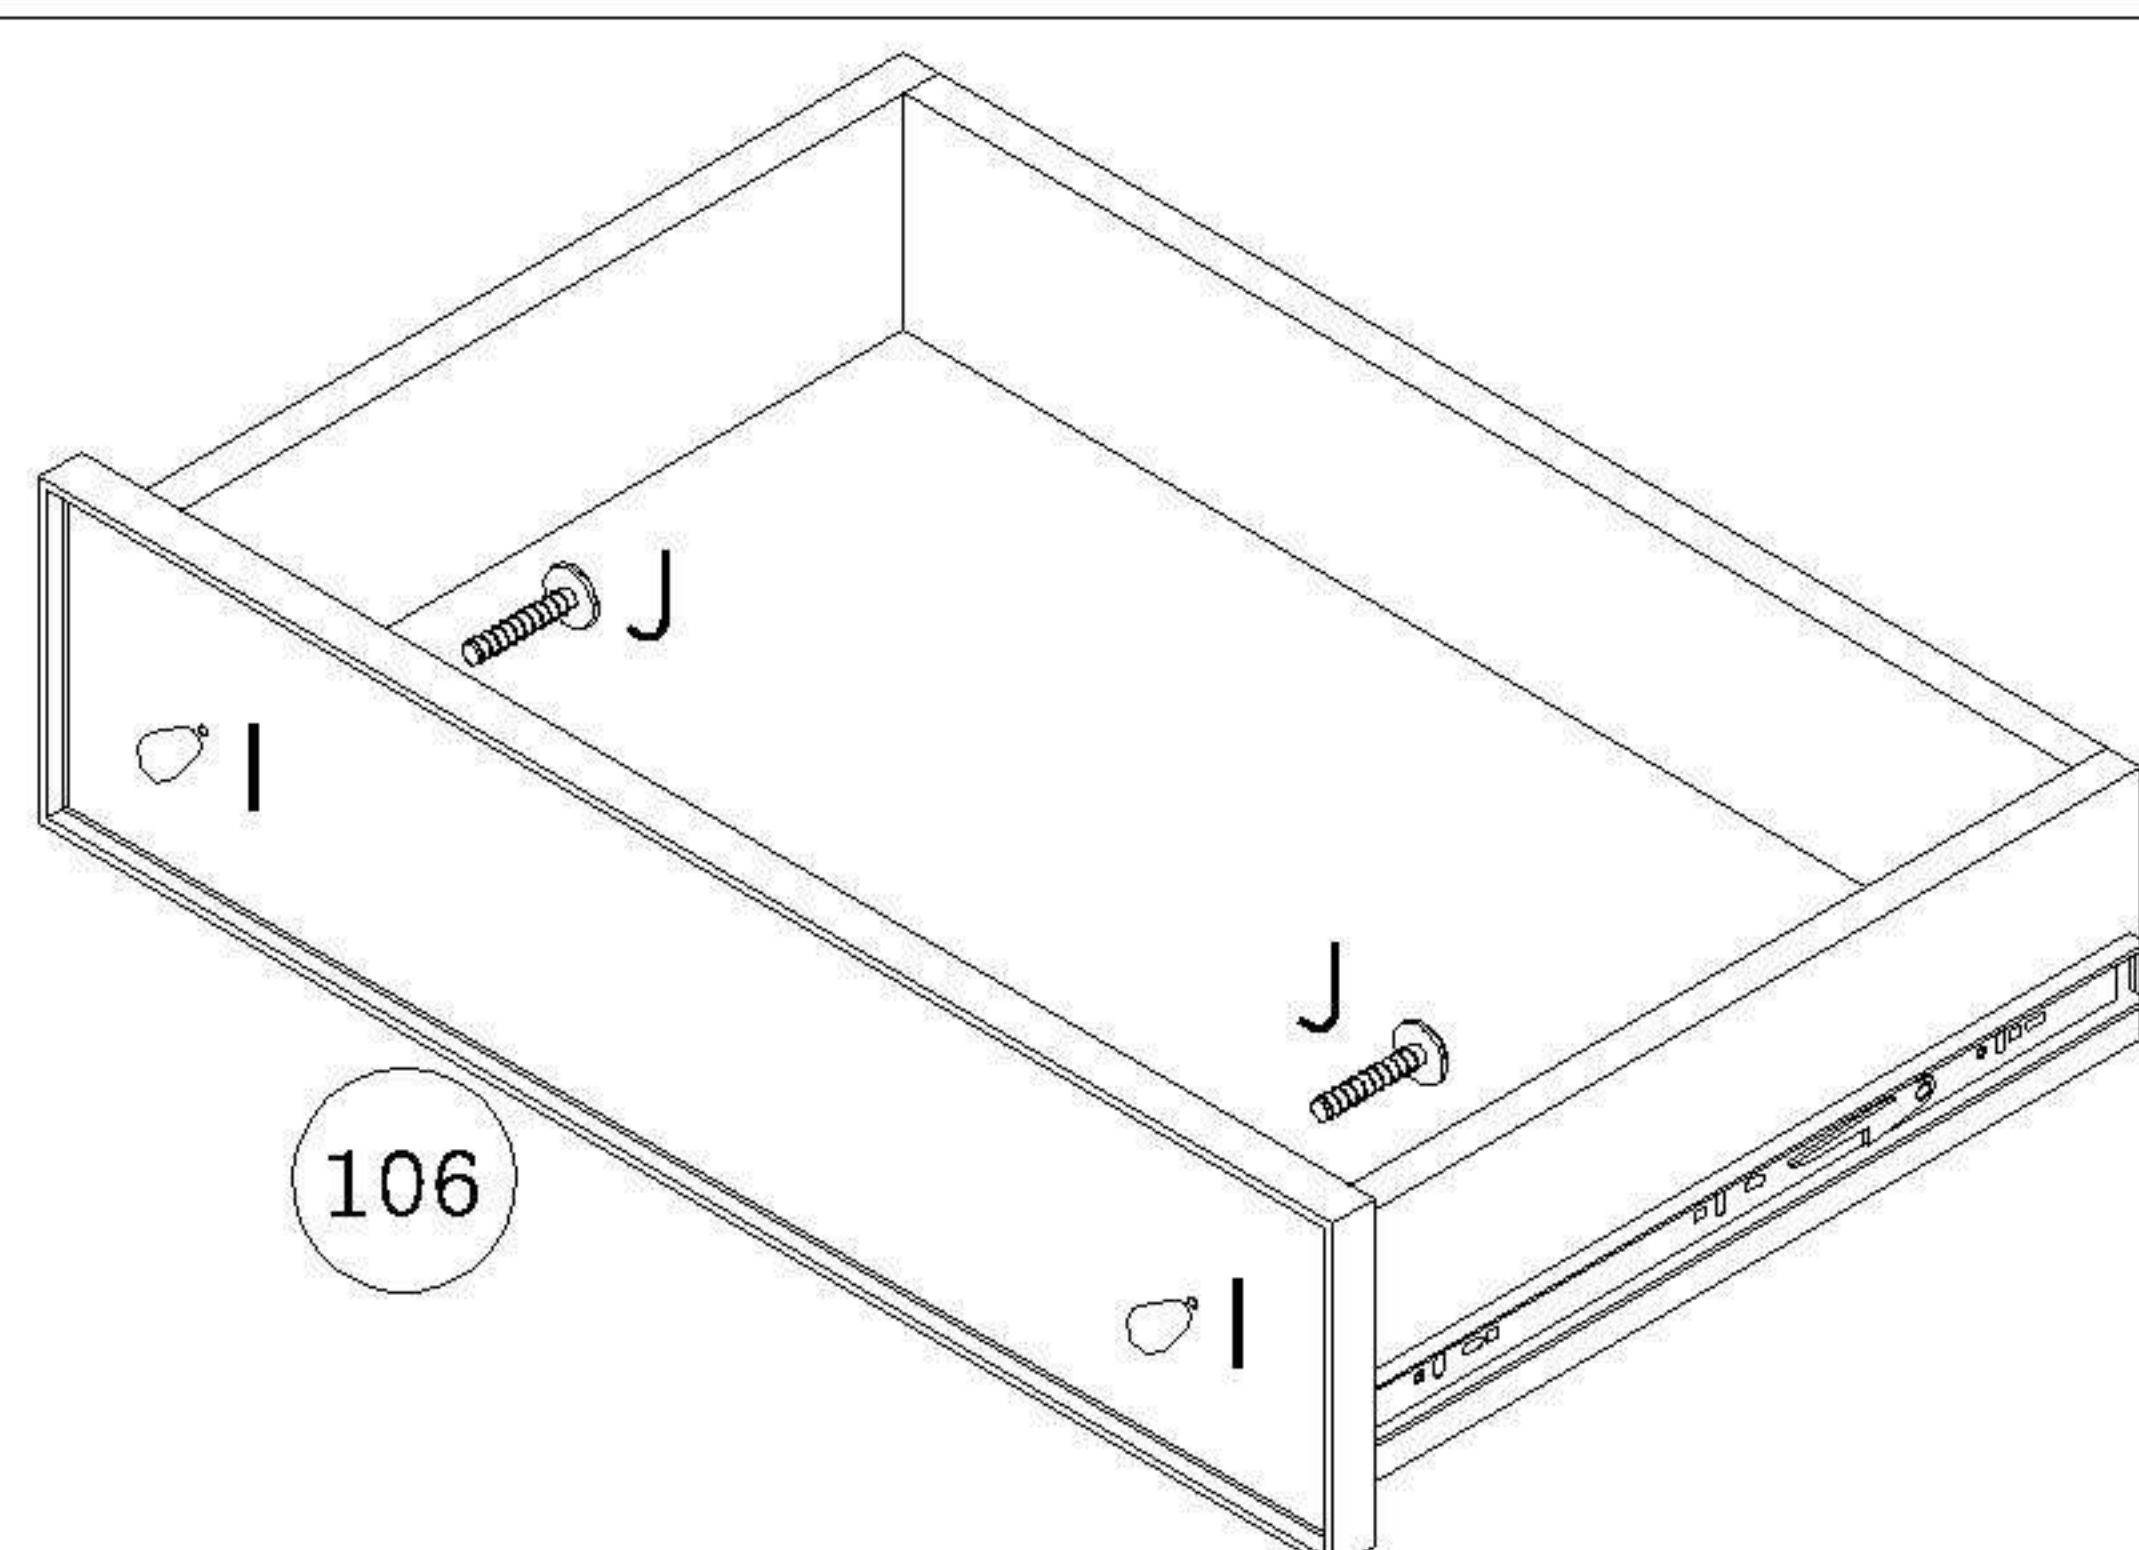

- A) Attach Handle(I) to Big Drawer Front(106) secure using Panhead Screw(J)