

ASSEMBLY INSTRUCTIONS

ASSEMBLY

1.5 Hours

2 -Person Assembly

Tools Required (Not Provided):

REQUIREMENTS

Assembly Time



Phillips Screwdriver



(Approximate)

Flat Head Screwdriver



Thank you for purchasing our product!

THIS PRODUCT IS FOR INDOOR AND HOUSEHOLD USE ONLY - NOT FOR COMMERCIAL USE.

ASSEMBLY PREPARATION

1. Remove all packaging materials, staples and packing straps from the carton.
2. Refer to Parts List and Hardware List and ensure they are correct before assembly.
Contact customer service for missing parts.
3. Place all wooden parts on a clean, flat and soft surface (e.g. carpet or rug) to prevent parts from getting scratched.

SAFETY PRECAUTION

1. KEEP ALL HARDWARE PARTS OUT OF REACH OF CHILDREN.
2. DISPOSE PLASTIC PACKAGING MATERIAL IMMEDIATELY TO AVOID ANY RISK OF SUFFOCATION TO CHILDREN AND ANIMALS.


TIPS FOR ASSEMBLY

1. Allow ample room for assembly and in close proximity to where product will be placed.
2. Assemble the product on a surface that does not scratch or damage the exterior gloss and finish of the furniture.
3. Identify all of the parts, hardware and quantities required for each step.
4. During assembly, do not over-tighten any fittings as this may cause damage.
5. DO NOT USE POWER TOOLS TO ASSEMBLE THIS PRODUCT.
6. Always place the product on a flat, level surface.
7. Do not sit or stand on the partially assembled product; only use the product for which it is intended.












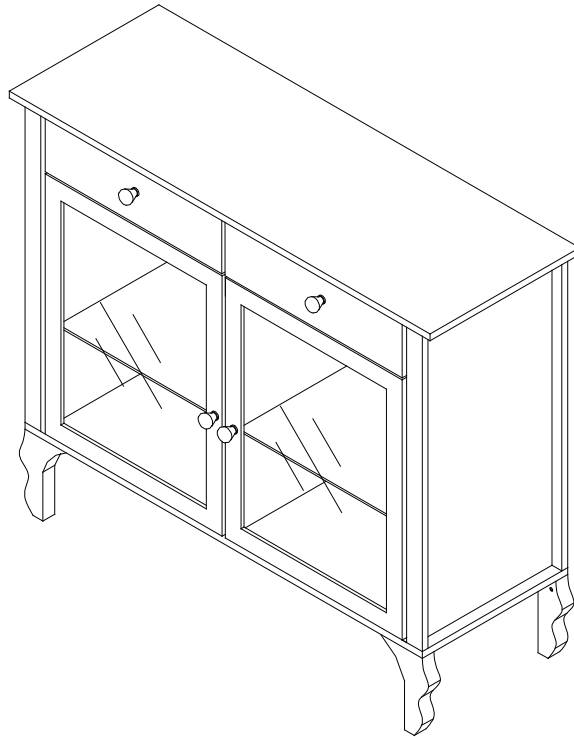











CARE AND MAINTENANCE

1. Wipe clean with a soft, dry cloth; avoid the use of harsh chemicals or household cleaners as they may damage the exterior finish of the furniture.
2. Hardware may loosen over time. Periodically, check that all connections are tight; re-tighten as necessary.
3. Solid wood is impacted by heat and humidity fluctuations which may cause small joint separations or hairline cracks; place the furniture away from direct sunlight and air conditioning vents, heating vents or units to protect the furniture.

ASSEMBLY INSTRUCTIONS




















Hardware List

ITEM	DESCRIPTION	PART	QTY	ITEM	DESCRIPTION	PART	QTY
A	Cam Bolt	 6*35mm	20 pcs	L	Hinge	 45mm	4 pcs
B	Camlock	 15*9mm	20 pcs	M	Handle Bolt	 4*16mm	4 pcs
C	Screw	 4*30mm	8 pcs	N	Handle	 24*23mm	4 pcs
D	Screw	 3*14mm	4 pcs	O	Supporter		8 pcs
E	Screw	 3*12mm	18 pcs	P	Stopper Pin		4 pcs
F	Screw	 3*10mm	8 pcs	Q	Screw	 2.5*10mm	27 pcs
G	Allen Head Bolt	 6*35mm	10 pcs	R	Wooden Dowel	 8*40mm	5 pcs
H	Allen Wrench		1 pc	S	Wooden Dowel	 5.8*30mm	12 pcs
I	Magnetic Catch		2 pcs	T	Plastic Anchor		2 pcs
J	Plastic Drawer Glide	 250*14*7mm	4 pcs	U	Screw	 3.5*40mm	2 pcs
K	Magnetic Bar	 35*12*1mm	2 pcs	V	Bracket		2 pcs
				W	Screw	 3.5*12mm	2 pcs


ASSEMBLY INSTRUCTIONS

Parts List


ITEM	DESCRIPTION	PART	QTY	ITEM	DESCRIPTION	PART	QTY
1	Drawer Right Side Panel		2 pcs	10	Right Side Panel		1pc
2	Drawer Left Side Panel		2 pcs	11	Divide Panel		1pc
3	Drawer Back Panel		2 pcs	12	Back Panel		2 pcs
4	Drawer Left Front Panel		1 pc	13	Right Side Door		1pc
5	Drawer Right Front Panel		1 pc	14	Left Side Door		1pc
6	Drawer Bottom Panel		2 pcs	15	Adjustable Shelf		2 pcs
7	Bottom Panel		1 pc	16	Side Leg		4 pcs
8	Top Panel		1 pc	17	Middle Leg		1 pc
9	Left Side Panel		1 pc				

ASSEMBLY INSTRUCTIONS

ASSEMBLY OVERVIEW

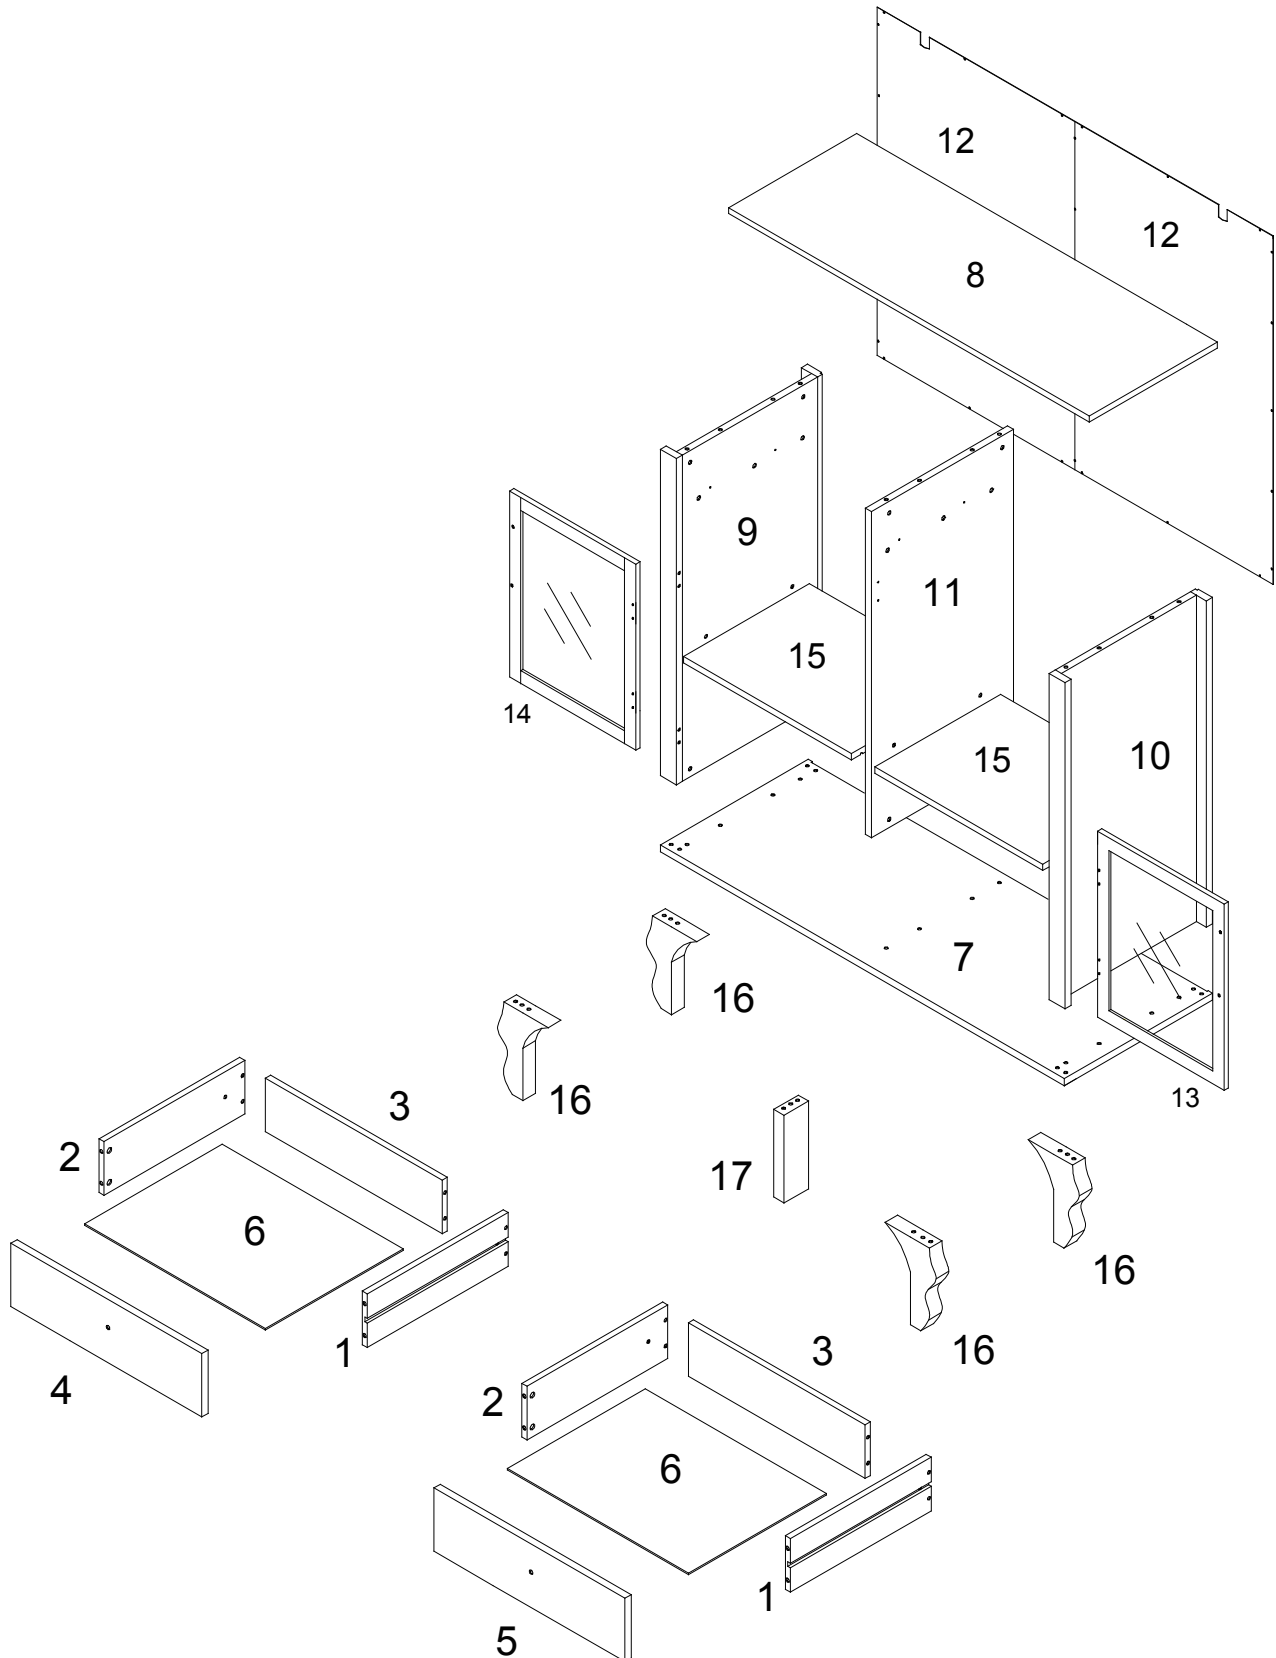

INSTRUCTIONS FOR CAM-BOLT AND CAM-LOCK




CAM-BOLT




CAM-LOCK


Tools Required




INSERTING AND TIGHTENING CAM-BOLT

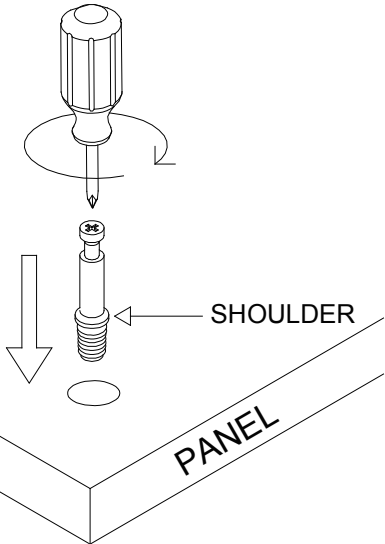

Place Cam-bolt on pre-drilled hole and screw in vertically.

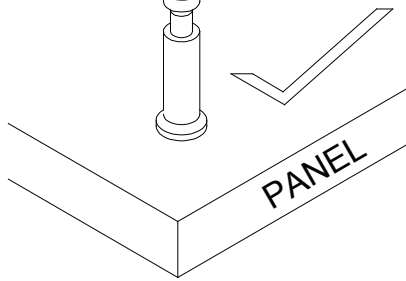


Shoulder is flushed (on the same level) with the panel.

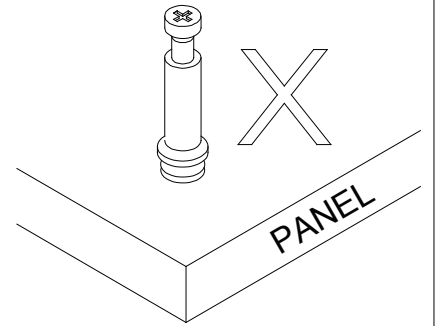


Shoulder is above the panel.

Place Cam-bolt to the designated pre-drilled holes on the panel. Use a Phillips Screwdriver to tighten Cam-bolt vertically until shoulder is flushed (on the same level) with panel. Do not over-tighten or under-tighten.

INSERTING CAM-LOCK




Insert Cam-lock with arrow align to Cam-bolt head.




Align the arrow on the Cam-lock to the Cam-bolt head and insert the Cam-lock. Ensure Cam-lock is fully inserted.

TIGHTENING CAM-LOCK





Use a Flat-head Screwdriver to turn Cam-lock clockwise so it locks onto the head of the Cam-bolt. Turn until it is snug (about 3/4ths of a turn) -- over-tightening could damage Cam-lock or/and Cam-bolt.

STEP 1

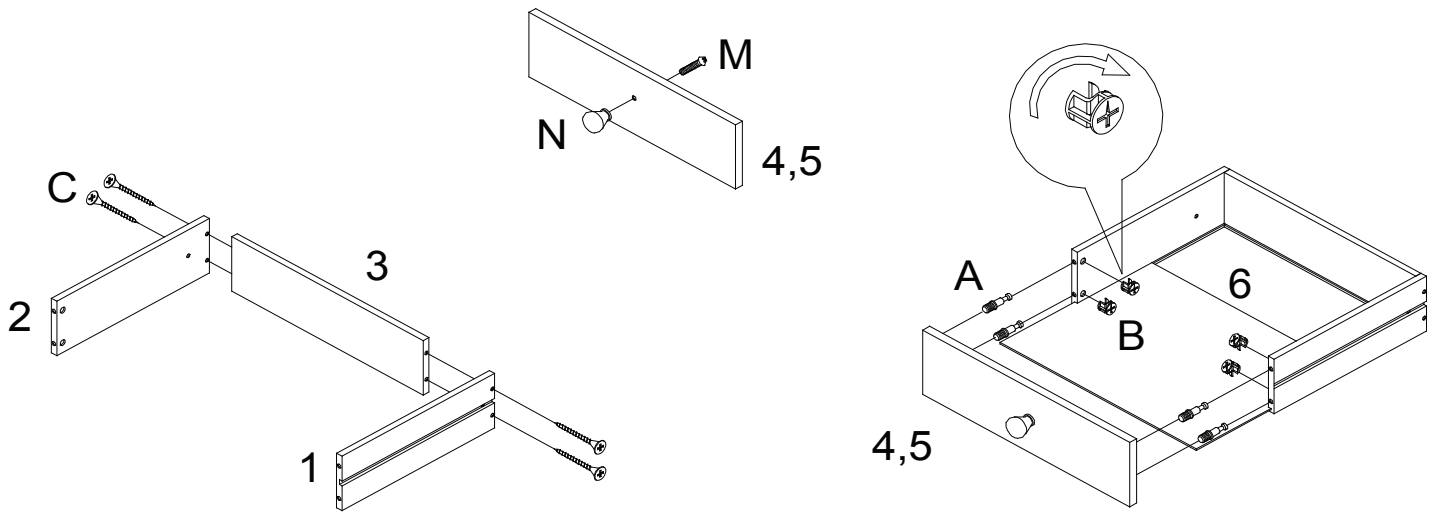


1. Assemble drawer side panel (1 & 2) and drawer back panel (3) together by using screw (C). Do not overtighten.
2. Assemble the handle (N) to drawer front panel (4 & 5) by using handle bolt (M).
3. Insert drawer bottom panel (6) to assembly part.
4. Screw the cam bolt (A) to drawer front panel (4 & 5). Attach the drawer front panel (4 & 5) to drawer, insert camlock to drawer side panel (1 & 2) then rotate clockwise to secure cam bolt in place.

STEP 2

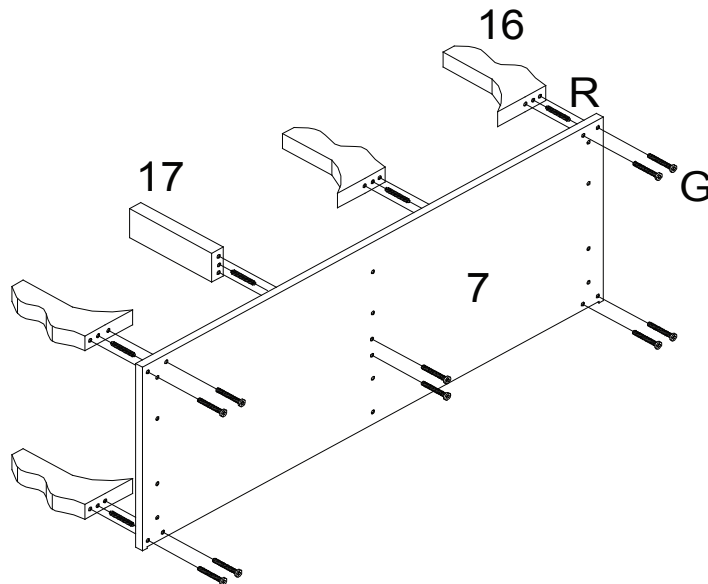



1. Assemble leg (16 & 17) to bottom panel (7) by using wooden dowel (R) and allen head bolt (G), tighten with allen key (H).

STEP 3

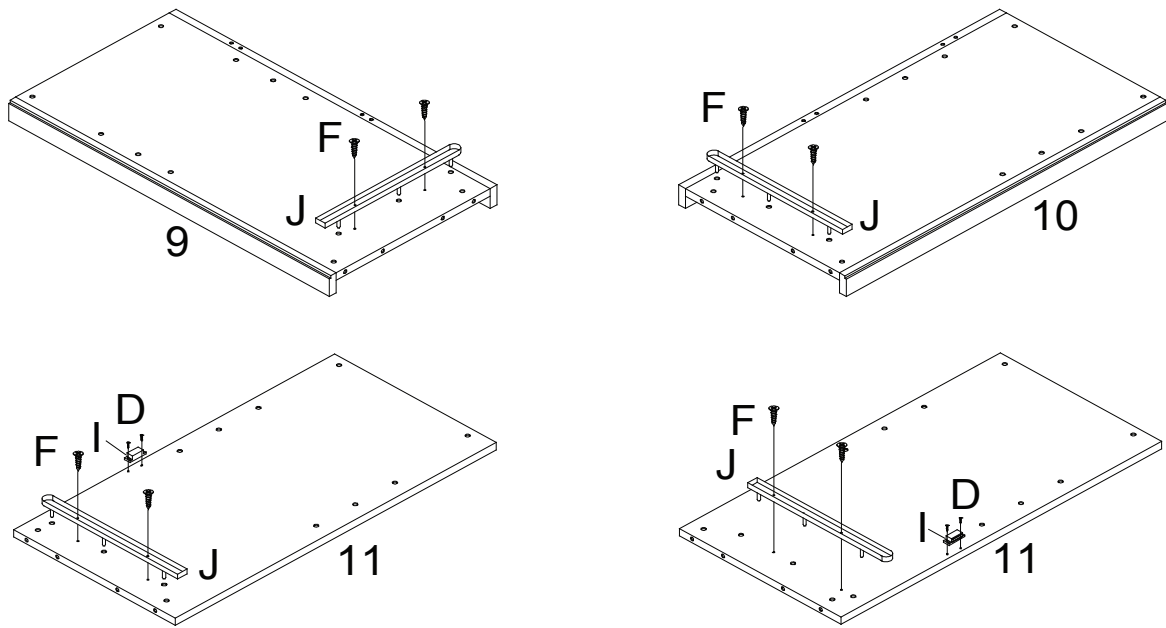



1. Assemble plastic drawer glide (J) to side panel (9 & 10) by using screw (F).
2. Assemble plastic drawer glide (J) to divide panel (11) by using screw (F).
3. Assembly magnetic catch (I) to divide panel (11) by using screw (D).
4. Turn over divide panel (11) and repeat step 2 and step 3.

STEP 4

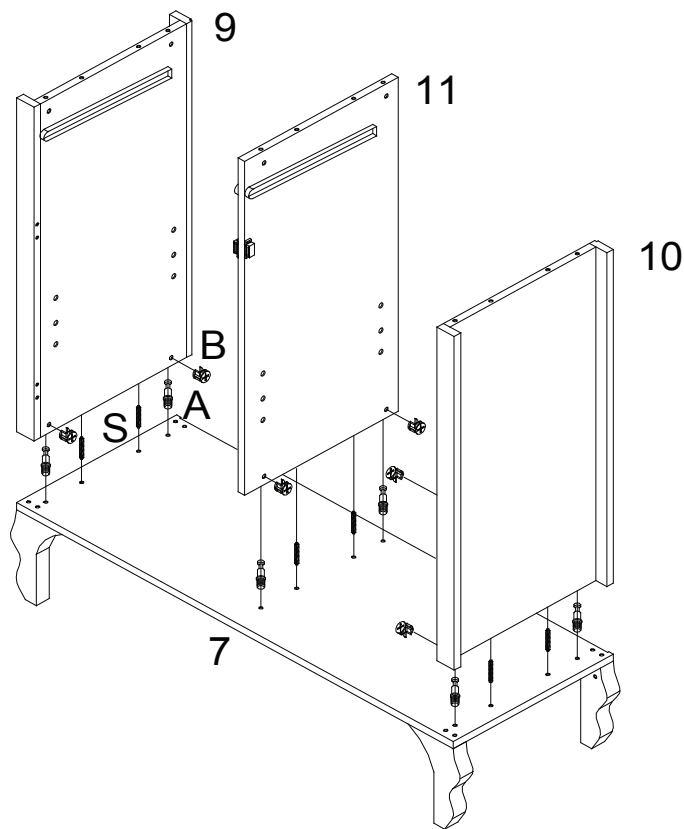



1. Insert wooden dowel (S) and screw the cam bolt (A) to the holes on bottom panel (7) as shown.
2. Attach left side panel (9), right side panel (10) and divide panel (11) to bottom panel (7).
3. Insert camlock (B) as shown then rotate clockwise to secure cam bolt in place.

STEP 5

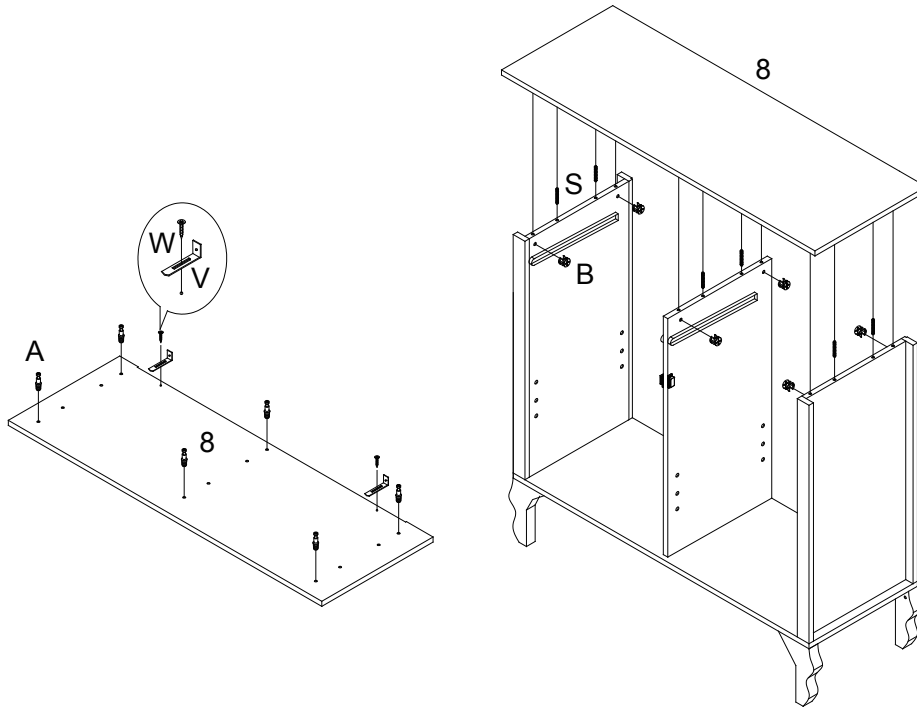



1. Insert wooden dowel (S) and screw the cam bolt (A) to the holes on top panel (8) as shown.
2. Attach top panel (8) to the unit from step 4.
3. Insert camlock (B) as shown then rotate clockwise to secure cam bolt in place.
4. Attach Bracket (V) to (8) by using Screw (W) as shown.

STEP 6

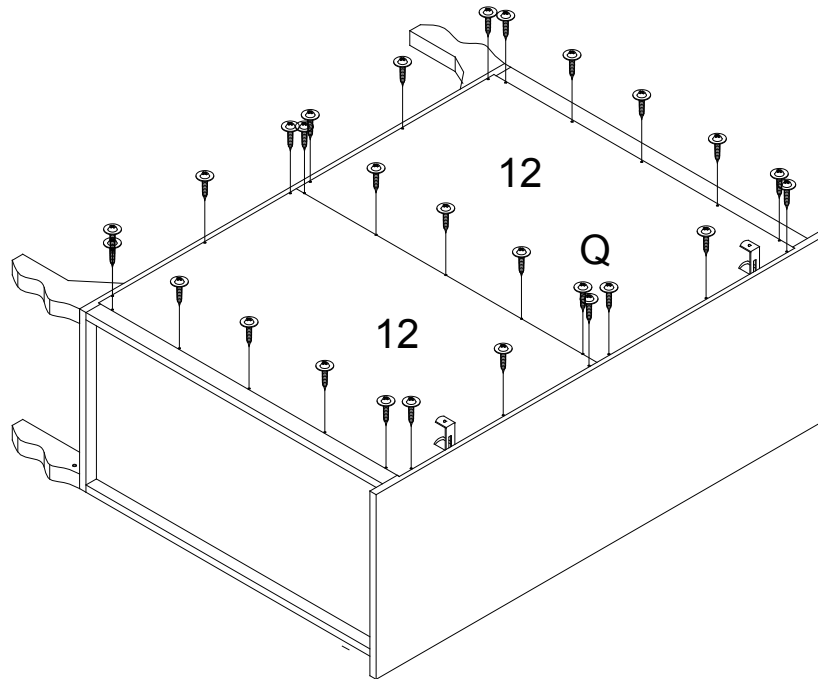


1. Assemble back panel (12) to the unit from step 5 by using screw (Q).

STEP 7

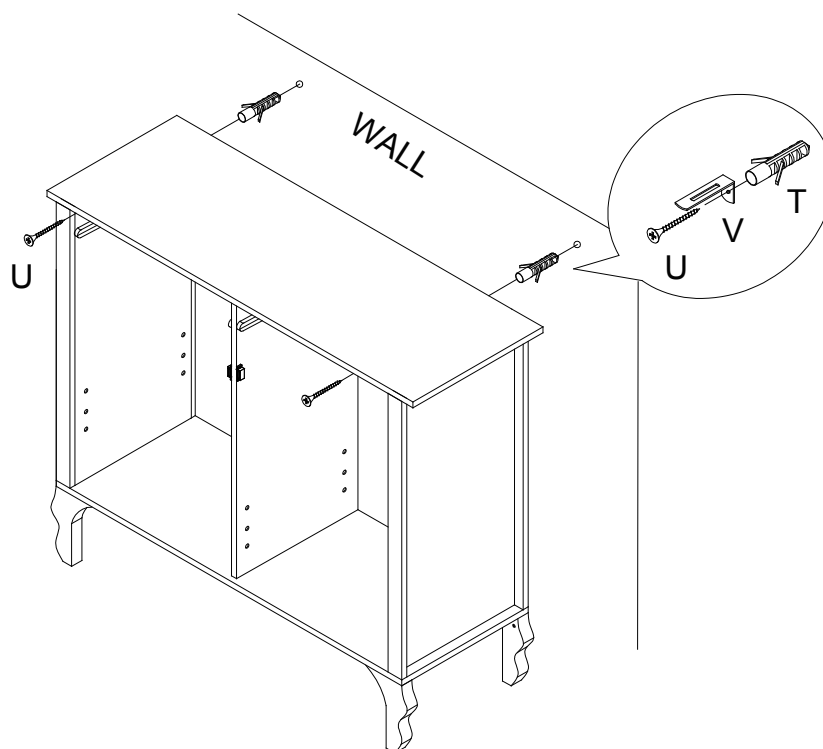


1. Drill two holes in the dry wall as per the length and diameter of Plastic Anchor (T) and the distance between the holes and the height need to be the same as the screw holes on Bracket (V).
2. Press Plastic anchor (T) into the 2 drilled holes. Ensure that the anchor fits securely in the wall.
3. Drive Screw (U) through the screw hole on Bracket (V) into the screw hole on (T) to secure the Buffet to the wall.

STEP 8

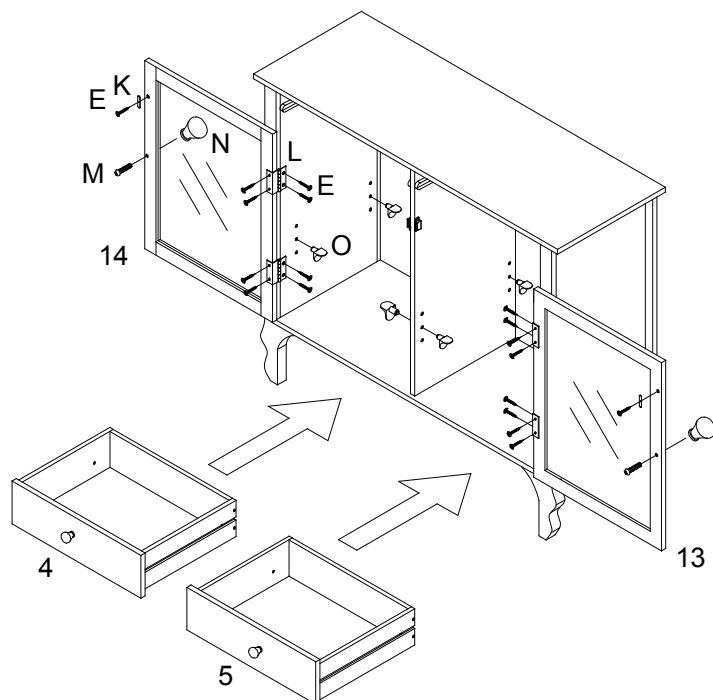

1. Turn back the unit.
2. Assemble handle (N) to door (13 & 14) by using handle bolt (M).
3. Assemble magnetic bar (K) to door (13 & 14) by using screw (E).
4. Attach left side door (14) to left side panel (9) and right side door (13) to right side panel (10) by using hinge (L) and screw (E).
5. Insert drawer as shown. **Import:** Please separate left and right drawer.

STEP 9

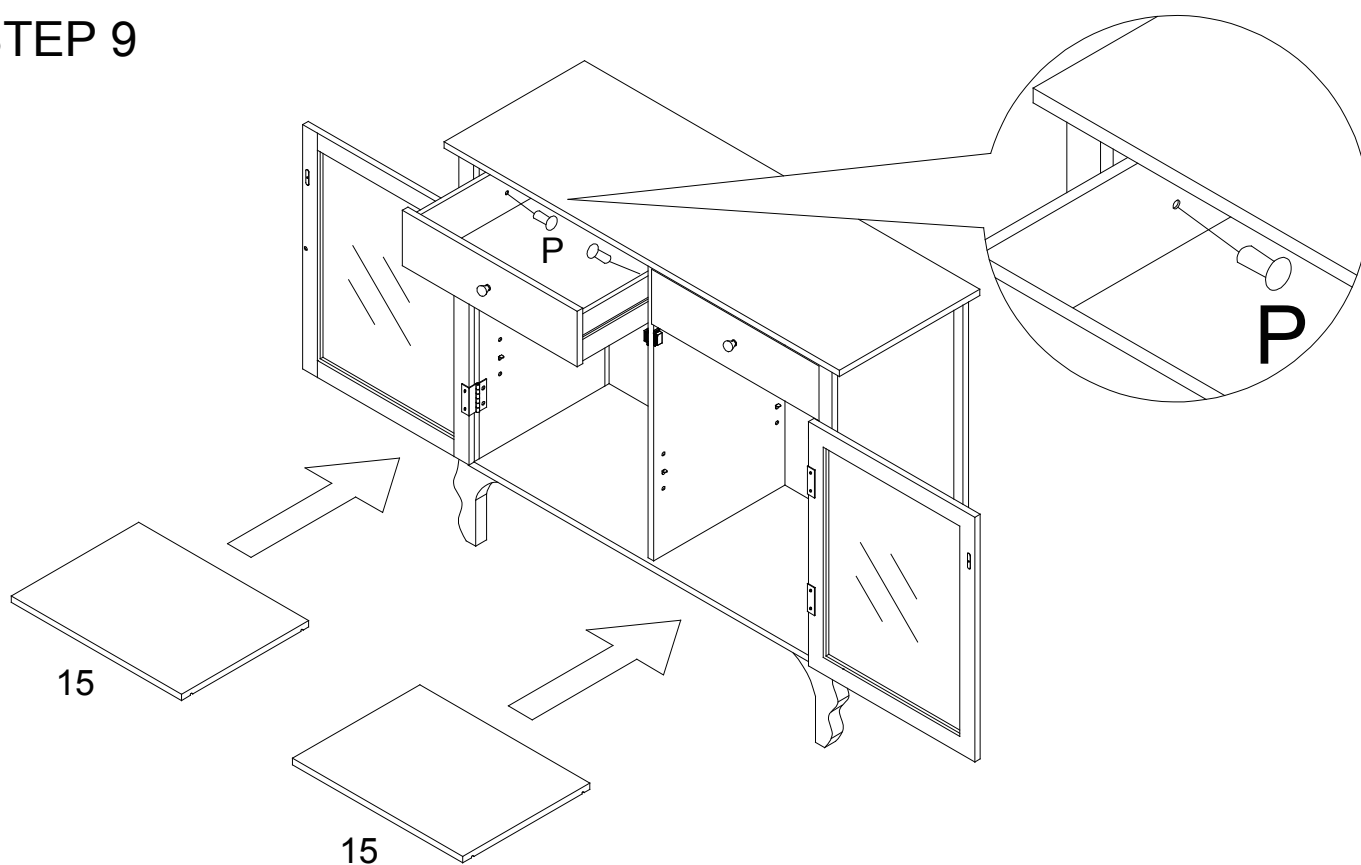

1. Insert stopper pin (P) to drawer side panel (1 & 2) as shown.
2. Insert adjustable shelf (15).