




TAM

Large Sideboard

Assembly Guide

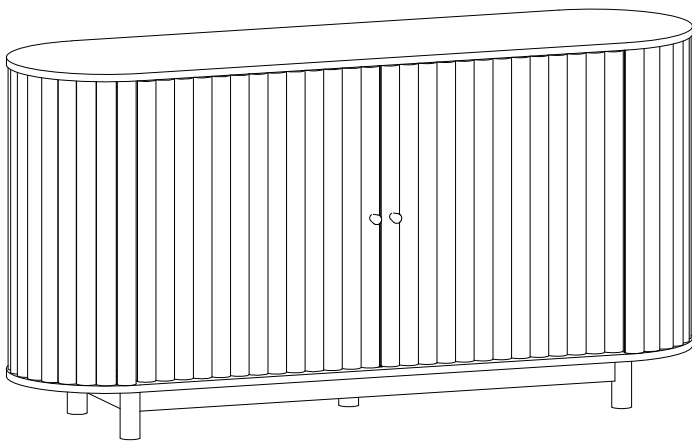

EasyBuild Design, powered by owvo. Less assembling, more living.

www.furniturebox.co.uk

IMPORTANT: please read these instructions
fully before starting assembly



**SAFETY AND
CARE ADVICE**



NO POWER TOOLS

- Check you have all the components and tools listed
- Remove all fittings from their bags and separate into groups
- We do not recommend use of power tools - this could damage the unit. Only use hand screwdrivers and Allen keys
- Keep children and animals away from the work area, small parts could cause choking if swallowed
- Make sure you have enough space to lay out the parts before starting
- Assemble the item as close to its final position (same room) as possible
- Do not over tighten the nuts to avoid damage to the threads
- Only clean using a damp cloth and mild detergent. Do not use bleach or abrasive cleaners
- Do not allow children to climb or play on this product. From time to time, check there are no loose screws in this unit
- This product should not be discarded with household waste. Take to your local authority waste disposal centre
- Unless otherwise stated, this product is designed for domestic use and is not certified for commercial or contract settings

IMPORTANT INFORMATION



60 Minute
Build



Two Person
Build




Max Weight
Capacity
40kg

Note: Assembly estimates are approximate and can differ based on the specific environment and user experience.

WHAT'S IN THE BOX

Note: the quantities are the correct amount to complete the assembly. In some cases more fixings may be supplied than are required.









Getting to know your product:

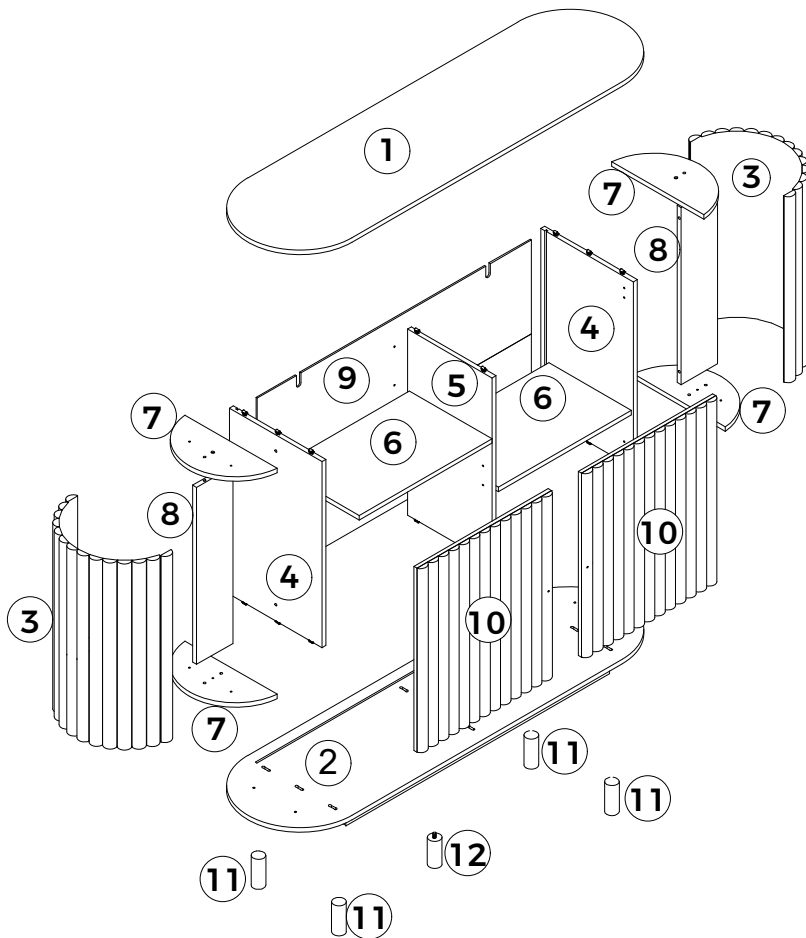

WHAT'S IN THE BOX

Note: the quantities are the correct amount to complete the assembly. In some cases more fixings may be supplied than are required.

Parts Key:

Label	Part Name	Image / Drawing	Quantity	Label	Part Name	Image / Drawing	Quantity
1	Top Panel		1	8	Support Panel		2
2	Bottom Panel		1	9	Back Panel		1
3	Side Decor Panel		2	10	Door		2
4	Side Panel		2	11	Leg		4
5	Divider Panel		1	12	Middle Leg		1
6	Shelf		2				
7	Arc Panel		4				

WHAT'S IN THE BOX

Note: the quantities are the correct amount to complete the assembly. In some cases more fixings may be supplied than are required.

Hardware Key:


Label	Hardware Description	Image / Drawing	Size(mm)	Quantity
A	Cam Bolt		ø7x34	6
B	Cam Nut		ø15x12	6
C	Dowel		ø8x30	12
D	Hinge		ø35	6
E	Screw		ø4x15	12
F	L-Bracket		80x30x15mm	2
G	Screw		ø4x14	4
H	Shelf Pin		ø6.5x16	8
J	Felt feet		ø30x5mm	4
k	Bolt		M6x55mm	8
L	Washer		ø16x8x1.5	8
M	spring washer		ø10x8x2.5	8
N	Allen Key		M4	1
P	Handle		ø18x24	2
Q	Bolt		Mx30	2
R	Screw		ø4x25	8
S	Screw		ø5x30	10
T	Screw		ø3x19	4

Note:


- Use a clear, flat surface to avoid bumps or scratches before assembling.
- Insert all fixings loosely at first to allow for alignment; only tighten them once everything is properly positioned, as some adjustment may be required.
- Avoid over-tightening, as this may damage the parts.
- Seek assistance when moving large or heavy parts

Fitting Assembly Instructions


Assembly

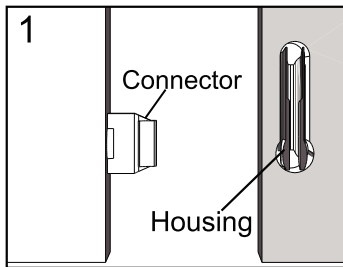



Push connector into housing to join.



Make sure there is no gap between the panels.




Disassembly



STEP 1

Attach 4 x Legs [11] to Bottom panel [2] using 8 x bolts [K], 8 x washers [L] and 8 x spring washers [M] with allen key [N] as shown.
 Attach 4 x felt feet [J] to 4 x legs [11].
 Attach 1 x Middle leg [12] to bottom base [2].

									
J	4PCS	k	8PCS	L	8PCS	M	8PCS	N	1PC


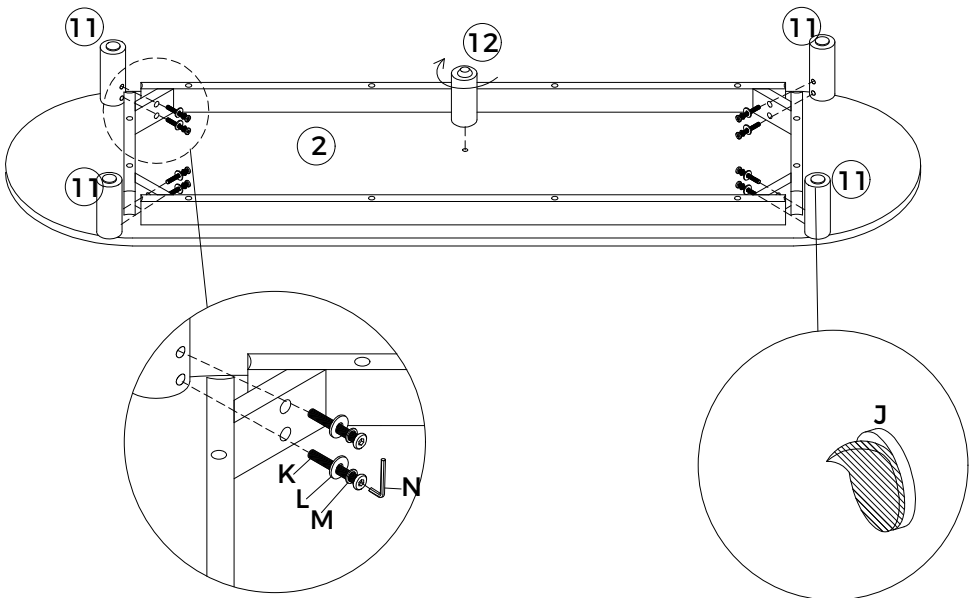


STEP 2

Insert 6 x dowels [C] to each x Support panel [8](12 total).

If needed use a mallet to gently tap the dowels into place.


Attach 4 x Arc panels [7] to 2 x Support panels [8] with 4 x Screws [S] as shown, tighten with a phillips head screwdriver.

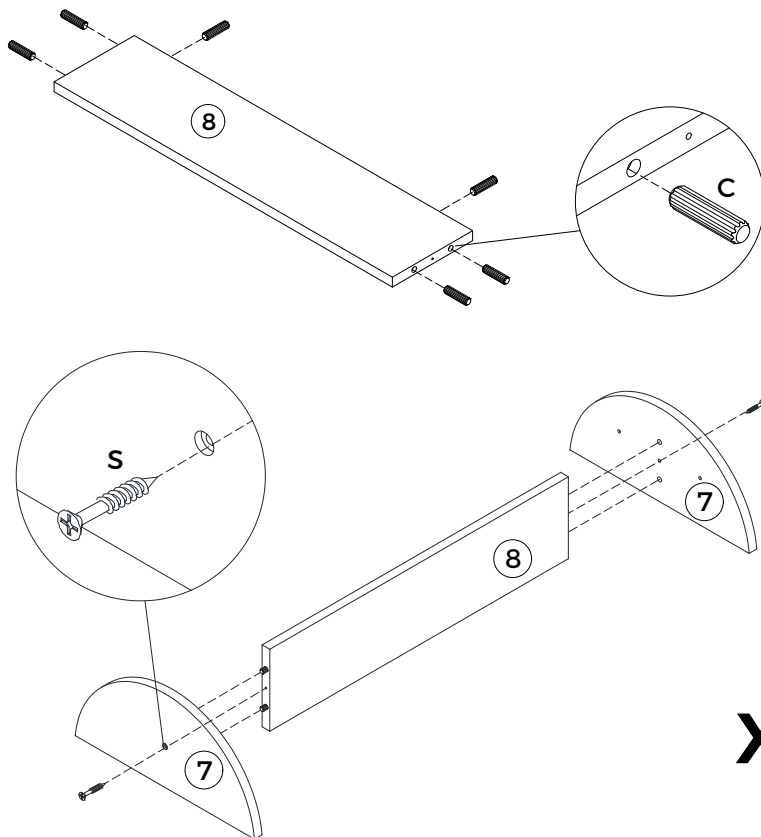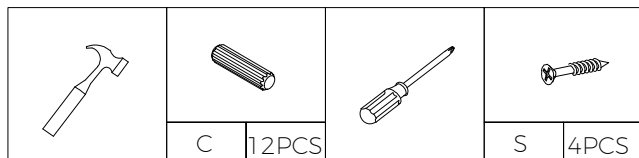

x2


STEP 3

Insert 2 x Side panels [4] and 1 x Divider panel [5] to bottom panel [2] as shown.

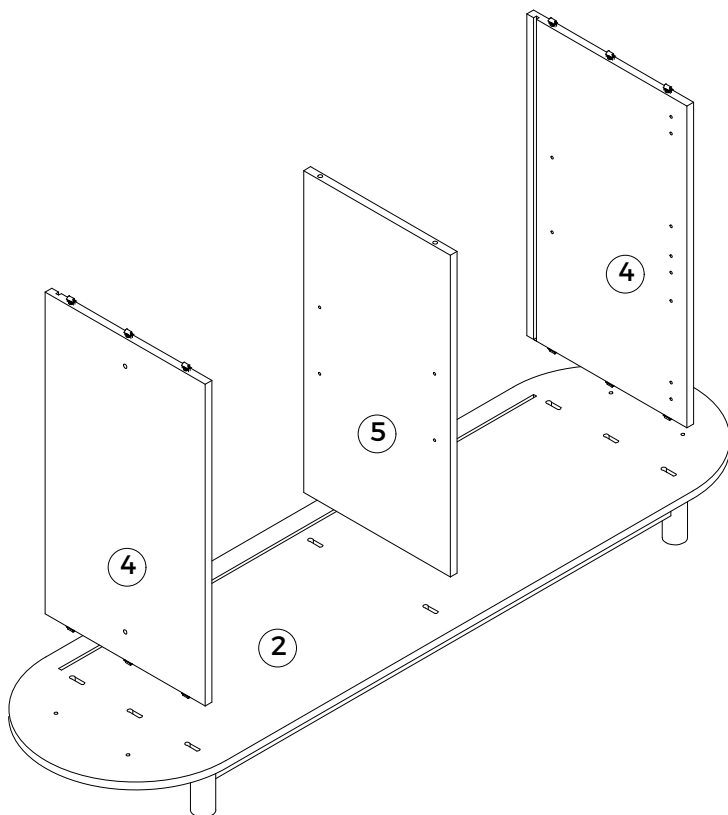



STEP 4

Attach Support panels [8] to Side panels [4] as shown.

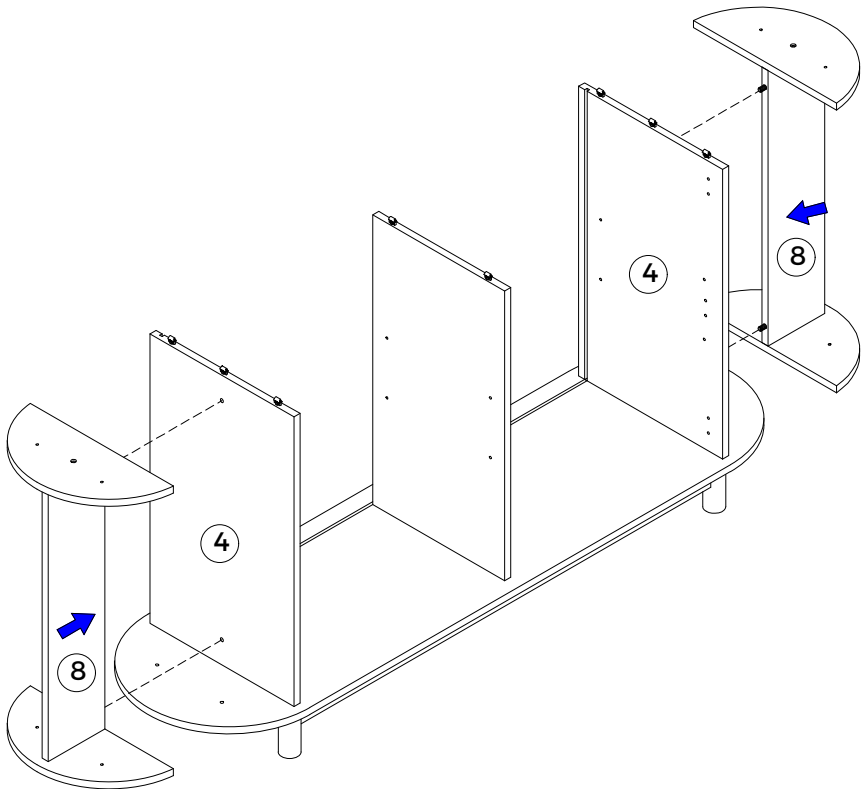



STEP 5

Insert 2 x screws [R] into Arc panel [7] as shown, tighten with a phillips head screwdriver.

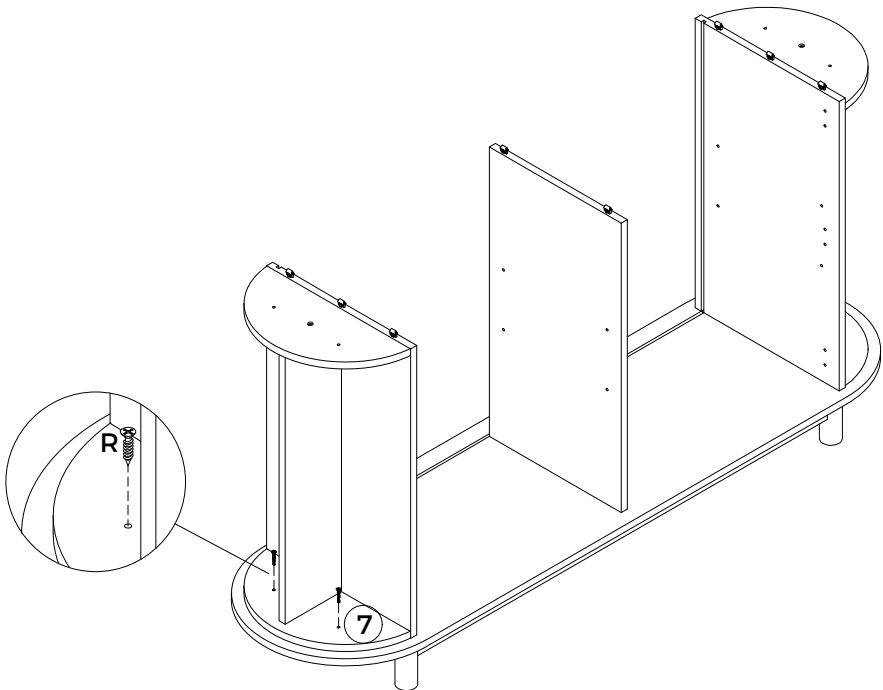

STEP 6


Insert 2 x screws [R] into Arc panel [7] as shown, tighten with a phillips head screwdriver.

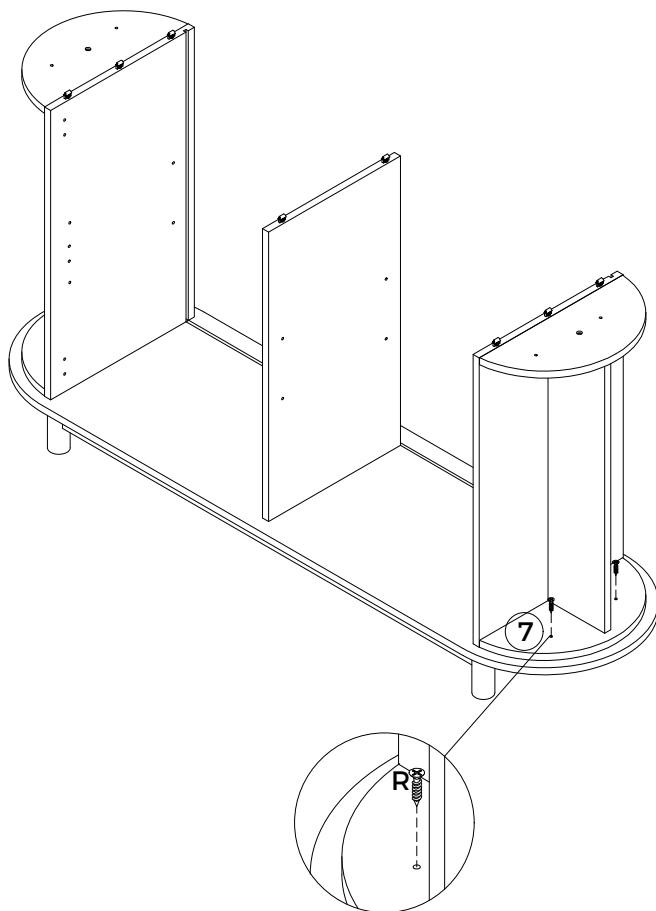

STEP 7



Slot in the back panel [9] into the grooves on Side panels [4] and Bottom panel [2] as shown.


Ensure back panel is fully slotted into the grooves.

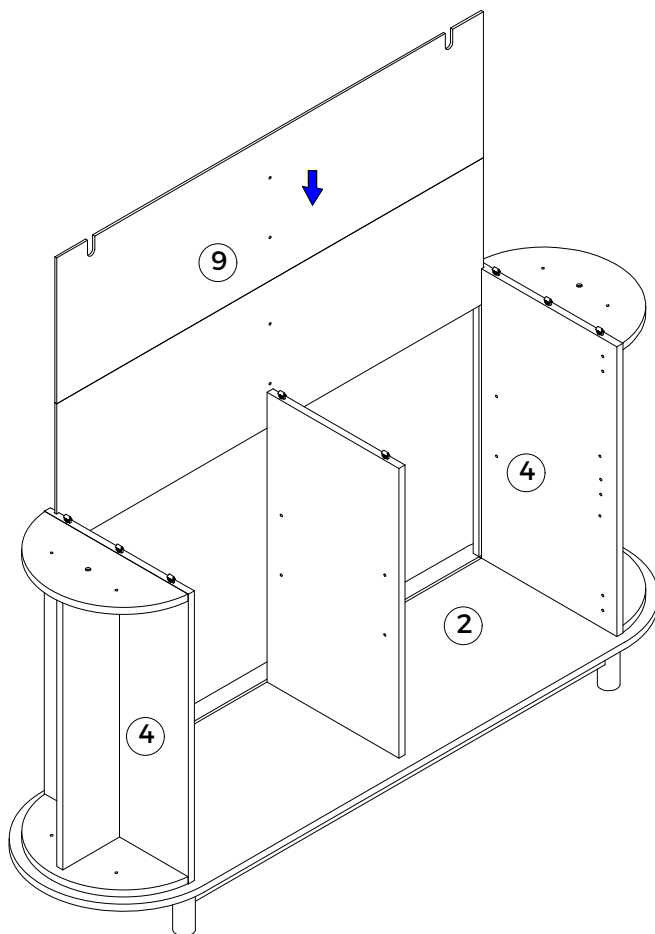

STEP 8


Attach 2 x L-brackets [F] to Top panel [1] with 4 x screws [G] using a phillips head screwdriver.

		
	F 2PCS	G 4PCS

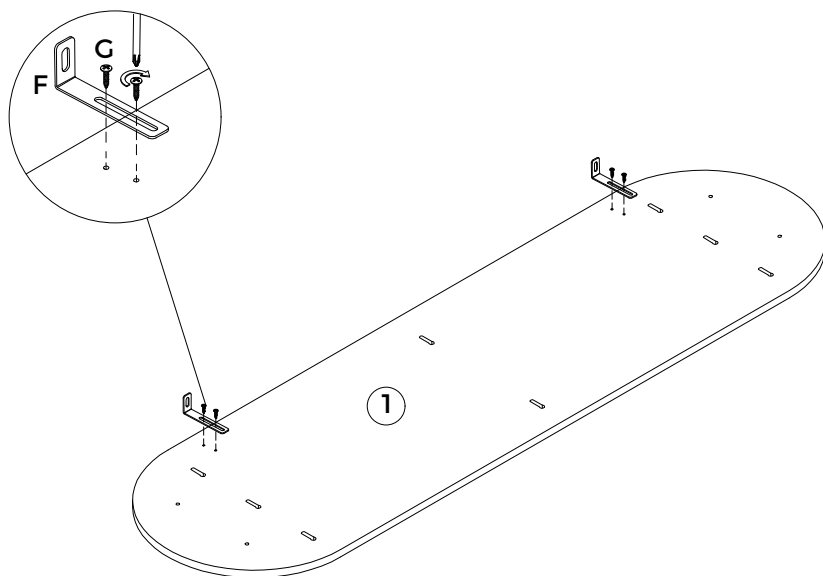



STEP 9

Attach Top panel [1] to assembled frame as shown.

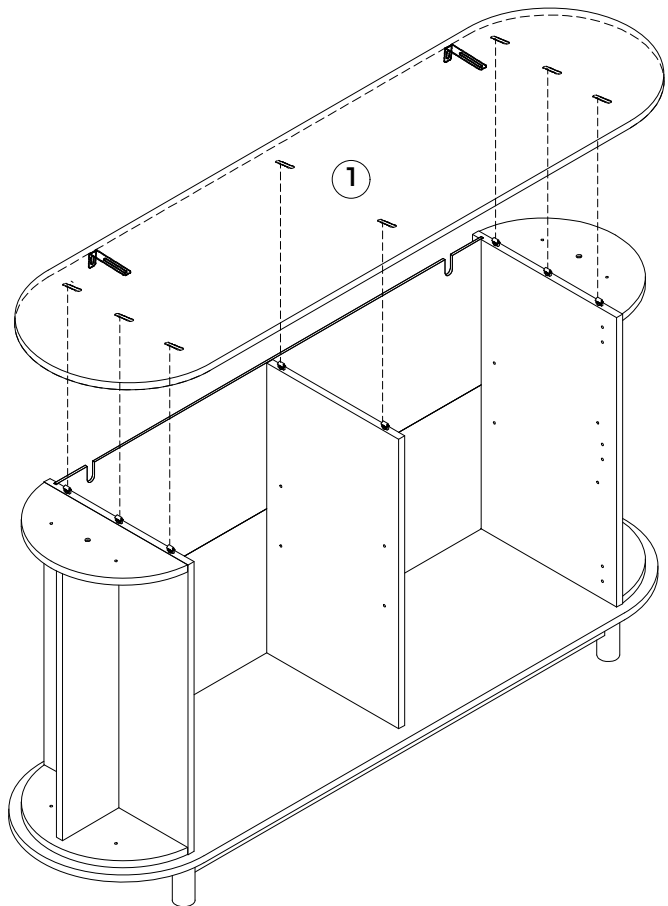

STEP 10



Screw 4 x screws [T] into Back panel [9] as shown, tighten with a phillips head screwdriver.

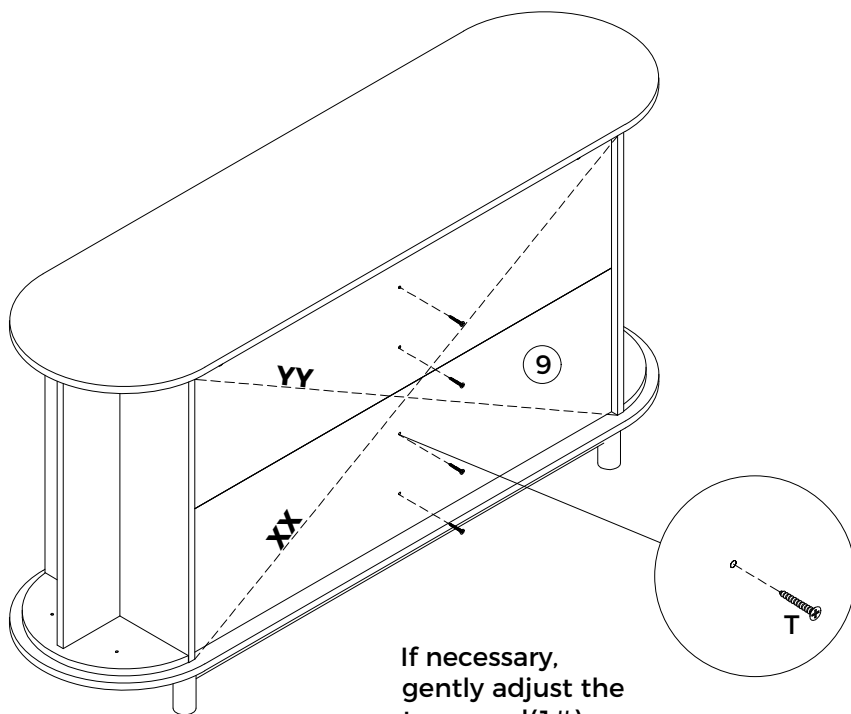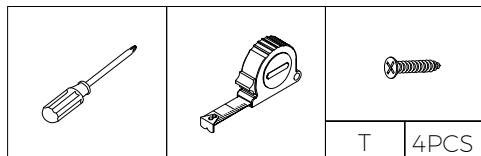

If necessary,
gently adjust the
top panel(1#)
sideways in either
direction until XX
and YY are equal.



STEP 11

Insert 2 x screws [R] into Arc panel [7] as shown, tighten with a phillips head screwdriver.

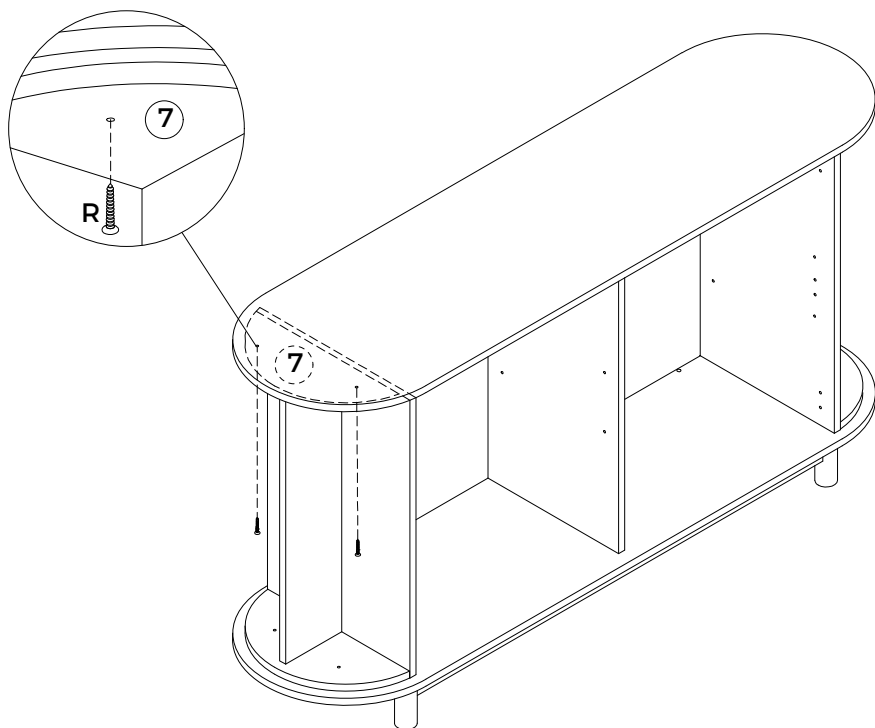



STEP 12

Insert 2 x screws [R] into Arc panel [7] as shown, tighten with a phillips head screwdriver.

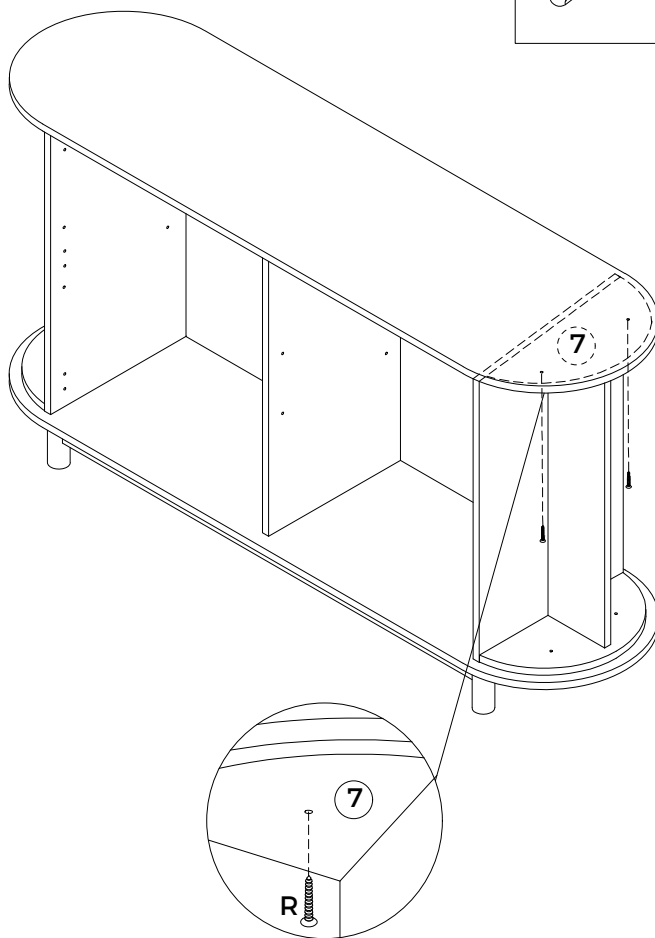

STEP 13

Screw 6 x cam bolts [A] into 2 x Side decor panels [3] as shown.

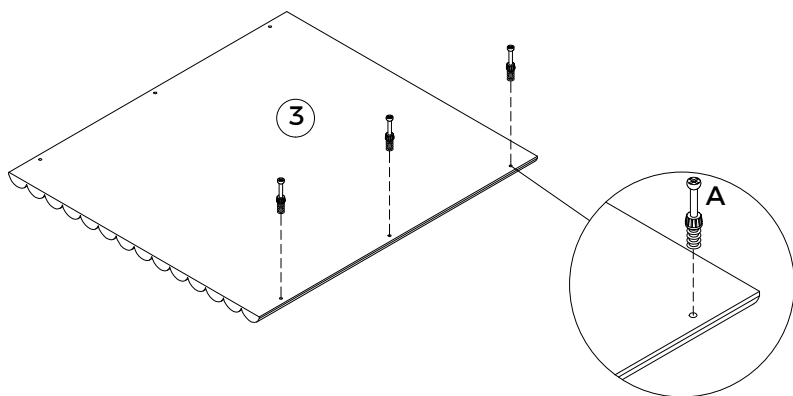



x2

STEP 14



Attach 1 x Side decor panel [3] onto Side panel [4] as shown.
Insert 3 x cam nuts [B] into Side panel [4].

Turn cam nuts clockwise to lock using a flat head screwdriver.

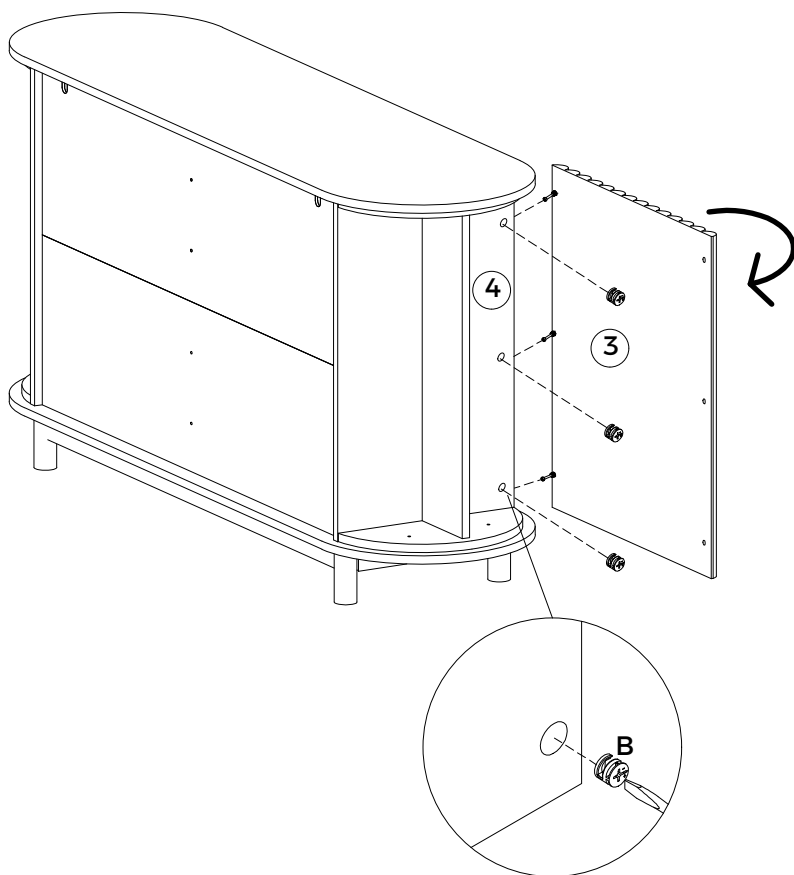

STEP 15

Secure 1 x Side decor panel [3] to assembled frame with 3 x screws [S] as shown, tighten with a phillips head screwdriver.

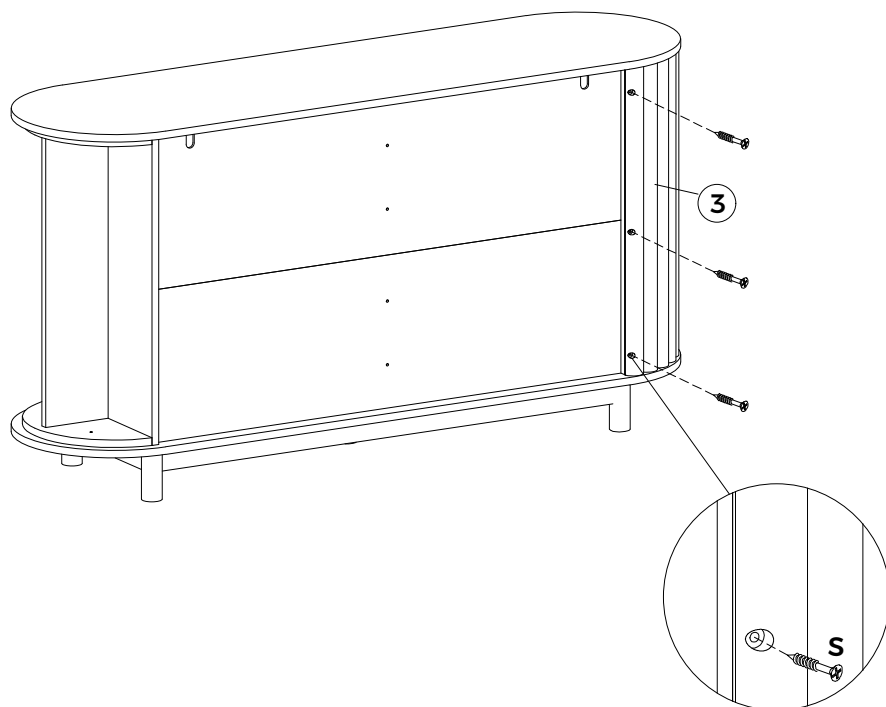



STEP 16

Attach 1 x Side decor panel [3] onto Side panel [4] as shown.



Insert 3 x cam nuts [B] into Side panel [4].

Turn cam nuts clockwise to lock using a flat head screwdriver.

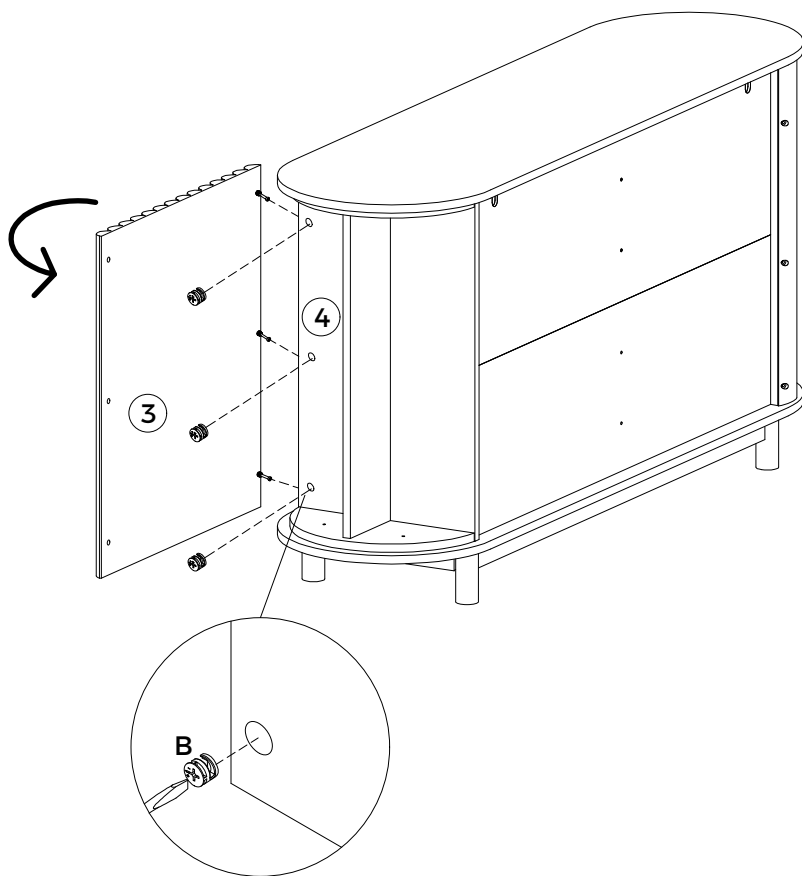


STEP 17

Secure 1 x Side decor panel [3] to assembled frame with 3 x screws [S] as shown, tighten with a phillips head screwdriver.

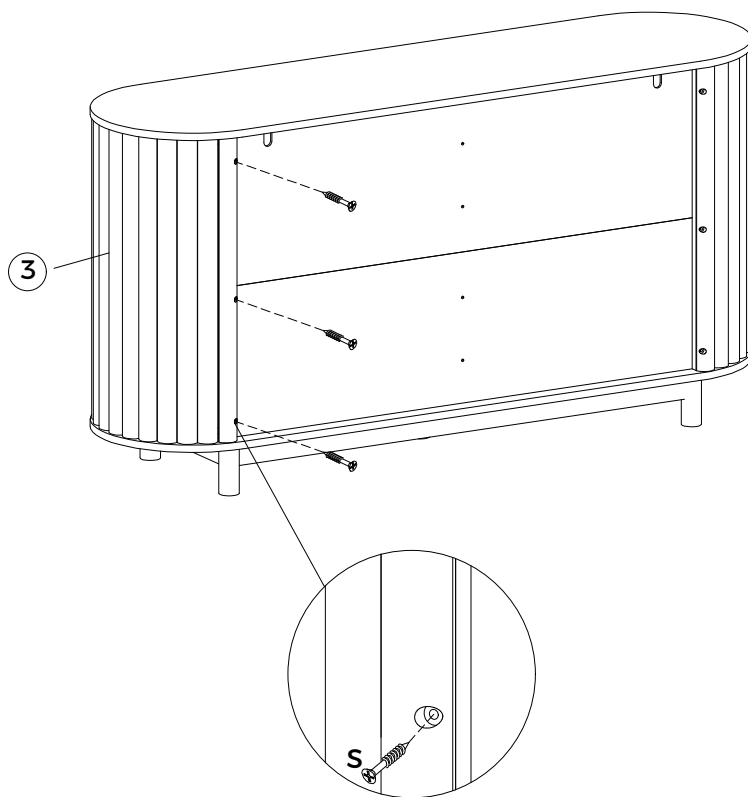

STEP 18

With assistance, move the sideboard to the final position.
If needed, adjust the sideboard's level by rotating the feet.

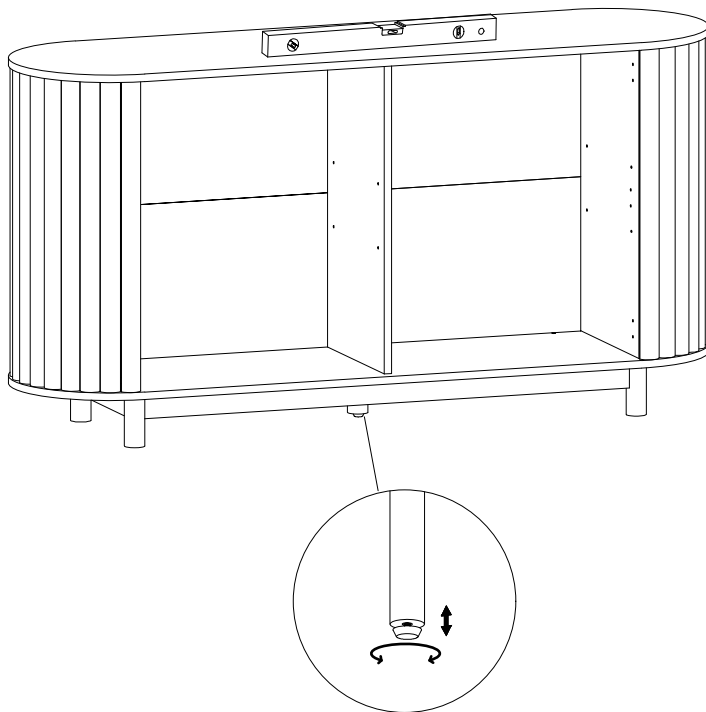

STEP 19 - Anti-Tip Restraint

WARNING

To reduce the risk of serious injury or death from tip-over, this unit must be securely anchored to a suitable wall before use.


- Never allow children to climb, stand or hang on this furniture.
- Always secure the unit to a suitable wall using appropriate fixings for your wall type.
- Before drilling, check for hidden electrical cables, water pipes and other concealed services.
- If you are unsure how to install the anti-tip restraint or select suitable fixings, seek advice from a qualified installer or your local hardware store.

Installation

1. With assistance, move the cabinet into its final position.
2. Using the attached L-brackets [F] as a guide, mark the fixing positions on the wall.
3. Move the cabinet away from the wall and prepare the wall for fixing as required.
4. Reposition the cabinet and securely fasten the L-brackets [F] to the wall using fixings suitable for your wall type.
5. Check that the cabinet is level, stable and securely anchored before use.



Important Handling Note

Always lift the cabinet from the base. Do not lift or carry the cabinet by the top panel, as this may cause damage or separation.

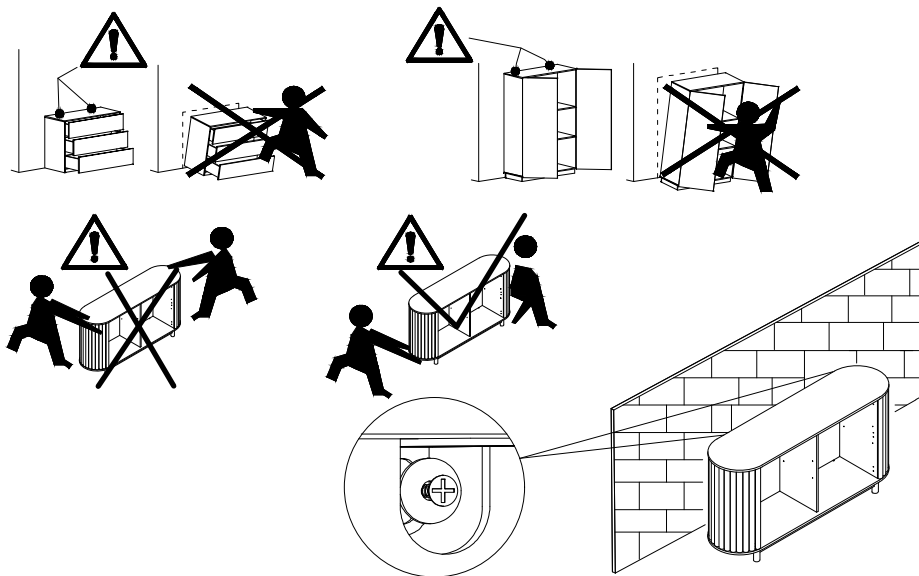



STEP 20


Insert 8 x shelf pins [H] into desired holes in the panels.

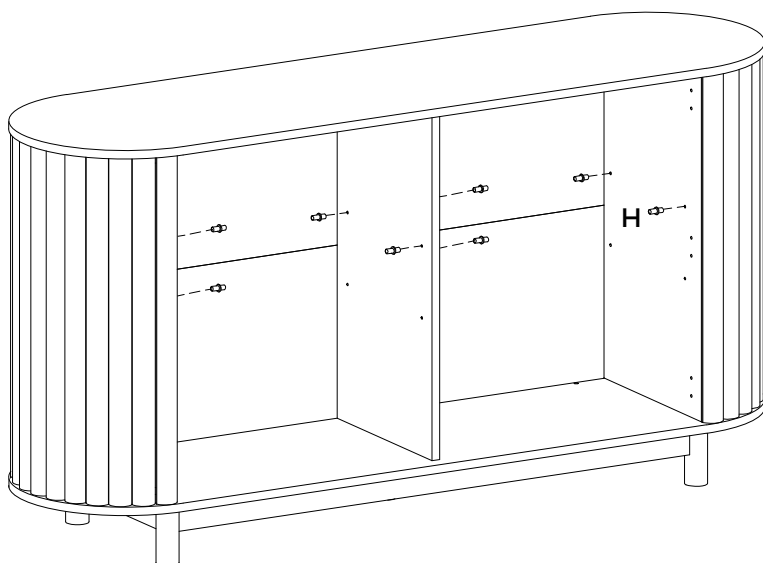

STEP 21


Attach 6 x Hinges [D] to 2 x Doors [10] with 12 x screws [E] as shown, tighten with a phillips head screwdriver.


				
	D	6PCS	E	12PCS

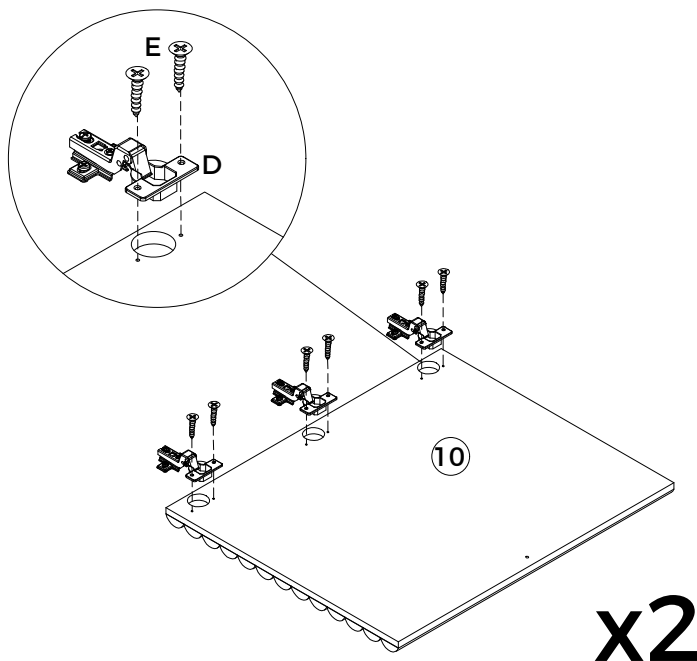

STEP 22


Attach 2 x Doors [10] to side panels as shown.
Attach 2 x handles [P] to Doors [10] with 2 x bolts [Q],
tightening using a phillips head screwdriver.

		
	P 2PCS	Q 2PCS












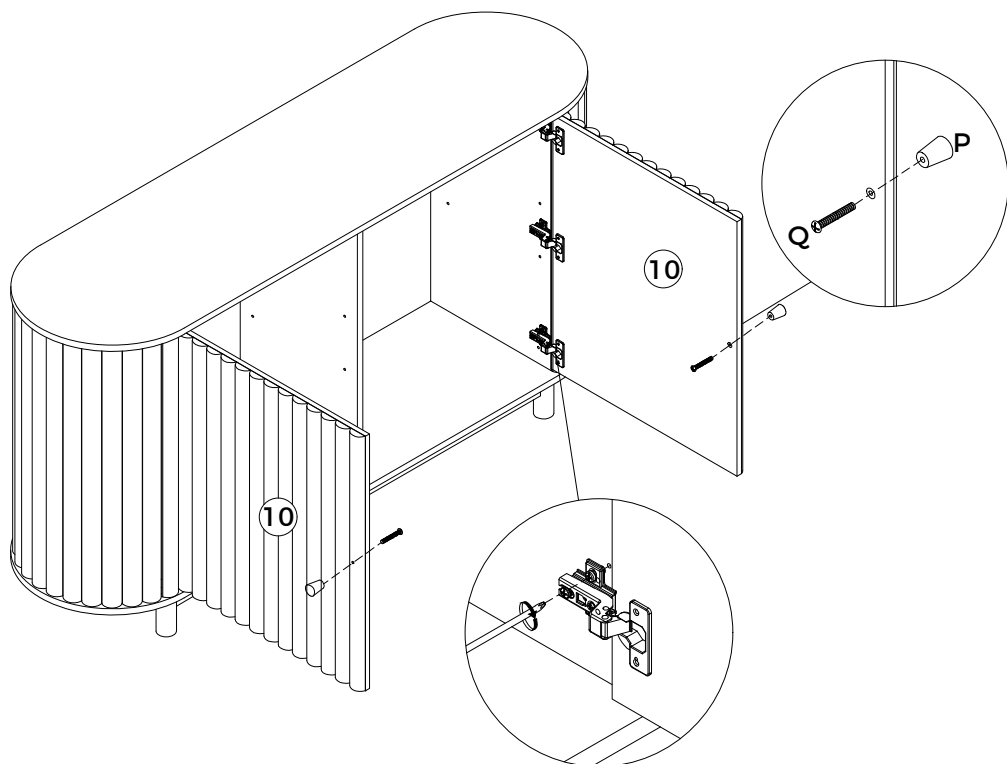


STEP 23

Place 2 x Shelves [6] into cabinet as shown by resting on the shelf pins.

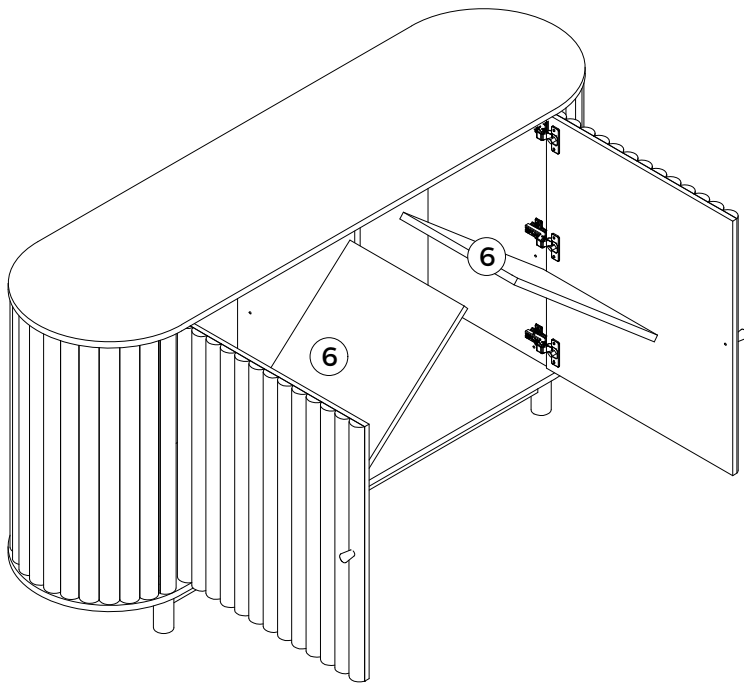

STEP 24





our 2 year GUARANTEE

Our products come with a 2 year guarantee, giving you extra peace of mind when shopping with us!

What the guarantee covers



PRE-INSERTED FIXINGS
e.g. loose metal threads



FAULTY JOINTS
e.g. legs bending



EXTERNAL FIXING FAULTS
e.g. metal discs removing
from table top



STRUCTURAL INTEGRITY
e.g. the frame of the
product

Activate your Guarantee

Scan the QR code to read the full guarantee online and register your product. It only takes a moment to fill out.

Or visit: furniturebox.co.uk/our-guarantee

