



Assembly Instructions

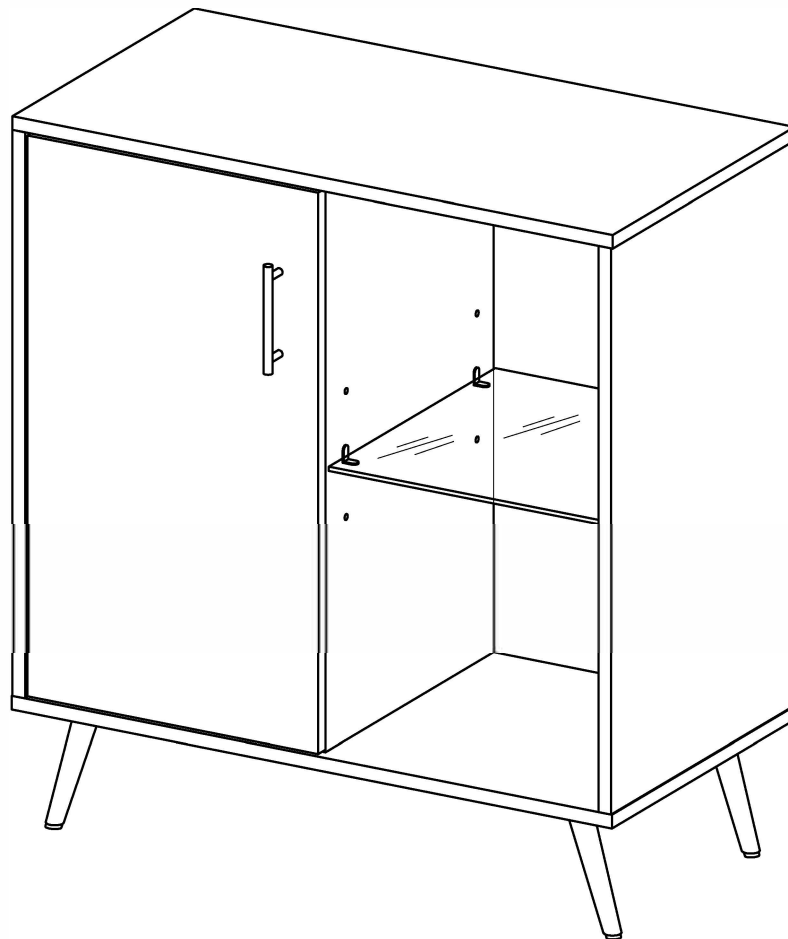


General Assembly Guidelines


- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are: wood dowels, screws and bolts.
- V. The provided glue is to secure wood dowels in place. When first inserting dowels, locate the appropriate hole for the dowel, place a small amount of glue in the hole and insert the dowel. Wipe away excess glue immediately.




In future assembly steps when dowels are necessary to attach assembly parts together, place a small amount of glue on the end of the dowel before attaching parts together. Wipe away excess glue immediately.



- VI. A Phillips head screwdriver is required for the assembly of this product.




- VII. Power tools should not be used to assemble this product.




- VIII. Drill may be needed for securing product to wall.


- IX. Concealed hinges are three-way adjustable.

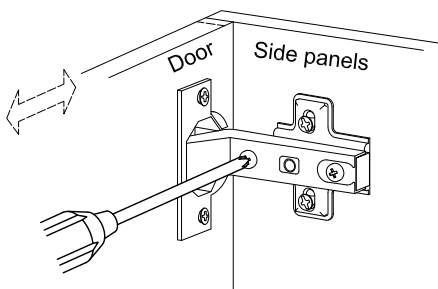

Horizontal
by screw adjustment

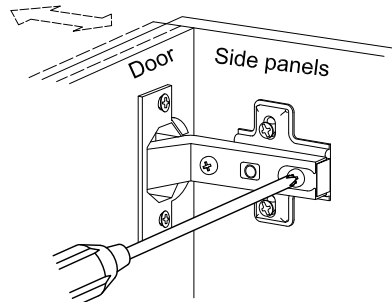


In-and-Out
by loosening the hinge-arm
mounting screw or via cam
adjustment

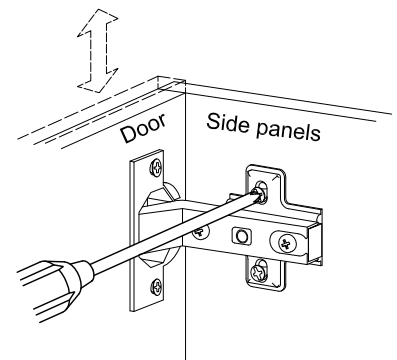





















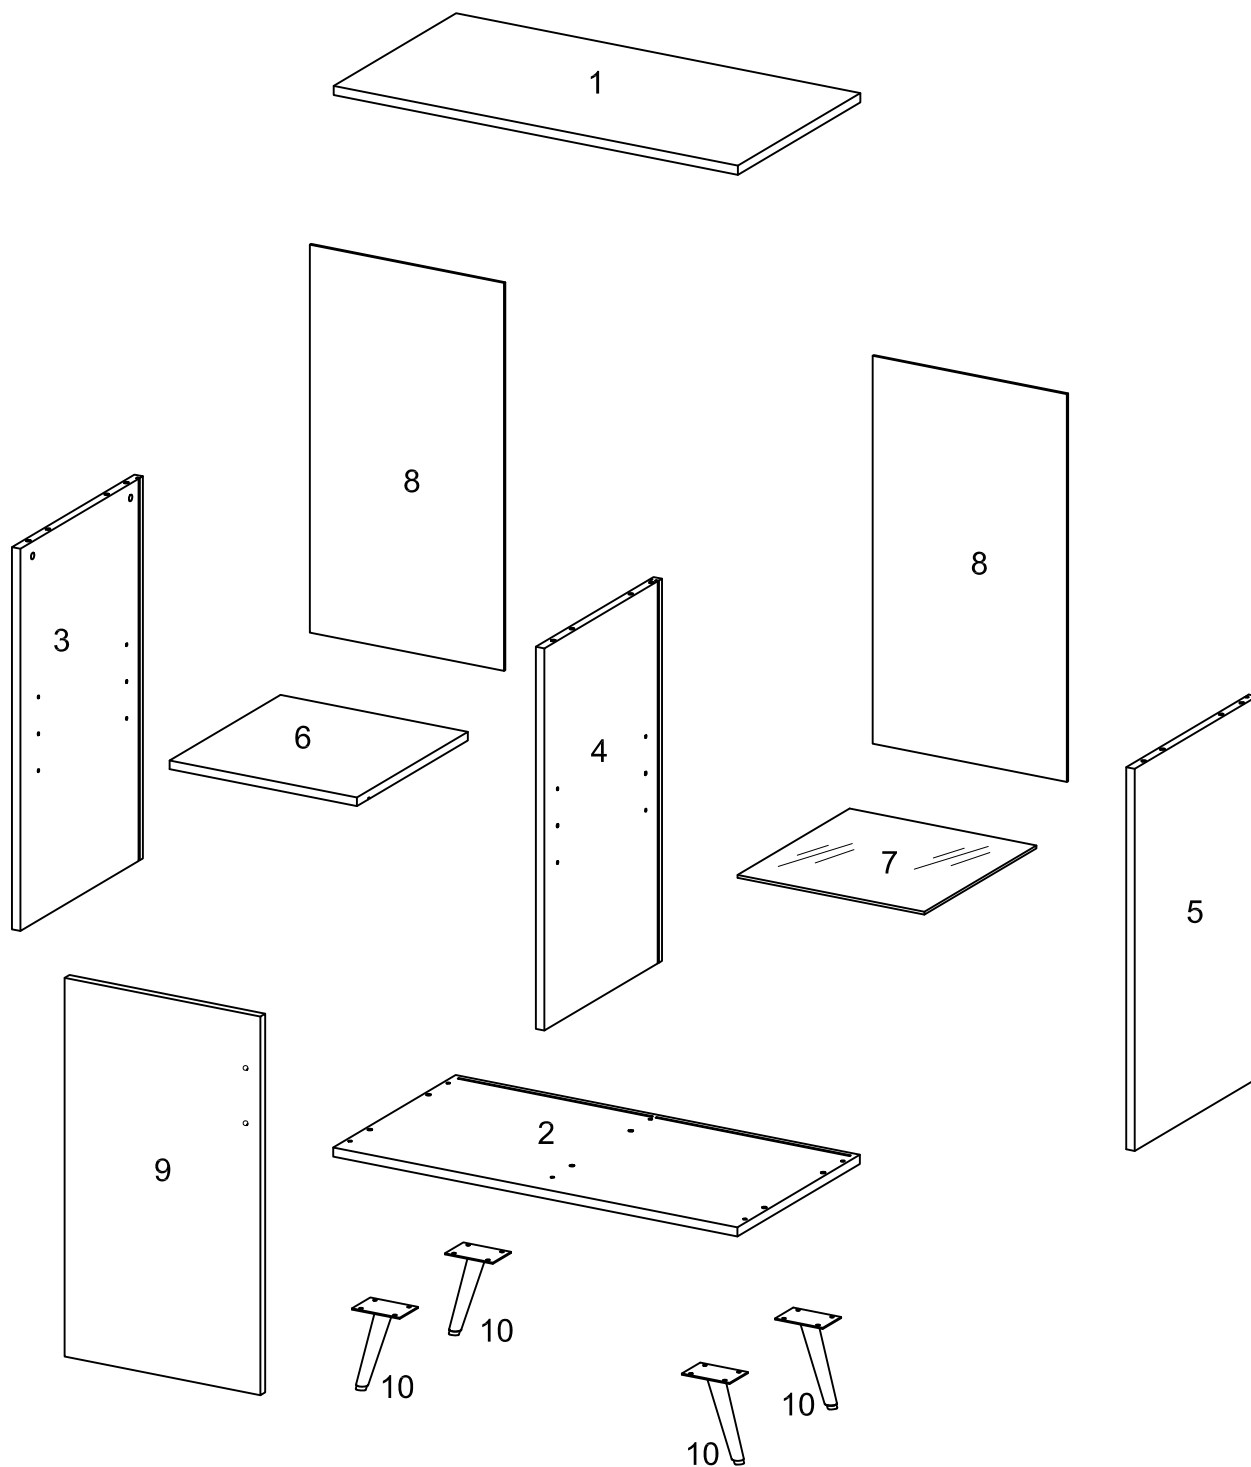
Vertical
Via slots in the mounting
plate or via cam adjustment

Parts List



Hardware List


A		Ø8x30mm	Wooden dowel	12 pcs
B		Ø6x35mm	Cam bolt	6 pcs
C		Ø15x12mm	Cam lock	6 pcs
D		Ø6x50mm	Bolt	6 pcs
E			Shelf support pin	4 pcs
F		M6*12	Bolt	16 pcs
G			L shape Bracket	4 pcs
H			Handle	1 pc
J		Ø4x22mm	Bolt	2 pcs
K			Glue tube	1 pc
L		Ø30mm	Sticker	6 pcs
M		Ø35mm	Hinge	2 pcs
N		Ø3.5x14mm	Screw	12 pcs
P		M4	Hex Key	1 pc
Q			Velcro strap	1 pc
R		Ø4x30mm	Screw	1 pc
S			Plug	1 pc
T		Ø4*15mm	Screw	1 pc
U			Plastic wedge	8 pcs
V		Ø3x17	Screw	8 pcs



Philips head screwdriver required for assembly
(not included)


*The hardware quantities listed above are required for proper assembly.
Some extra hardware may also have been included.*

Step 1

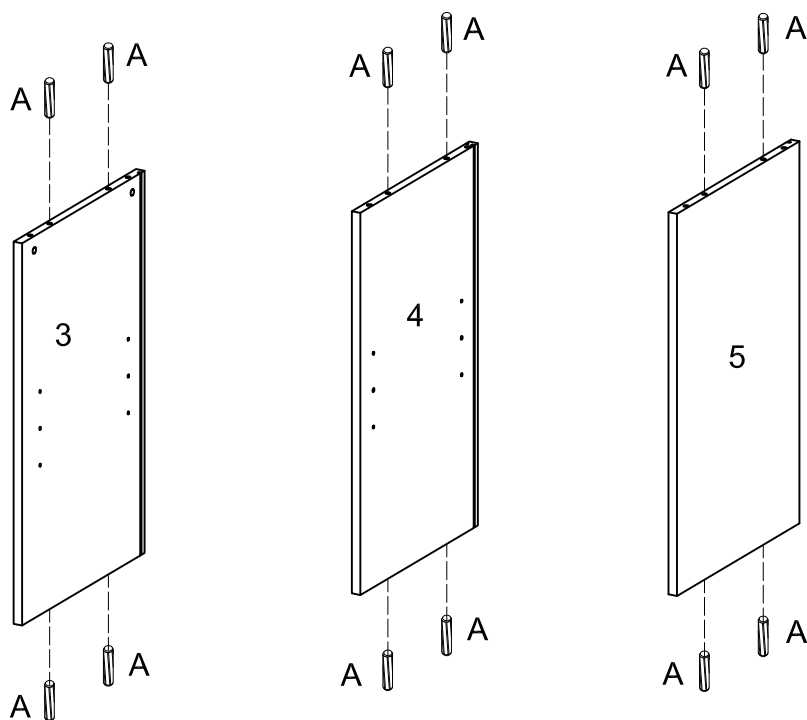


Insert dowels (A) into side panels (3) (4) (5) .

Step 2

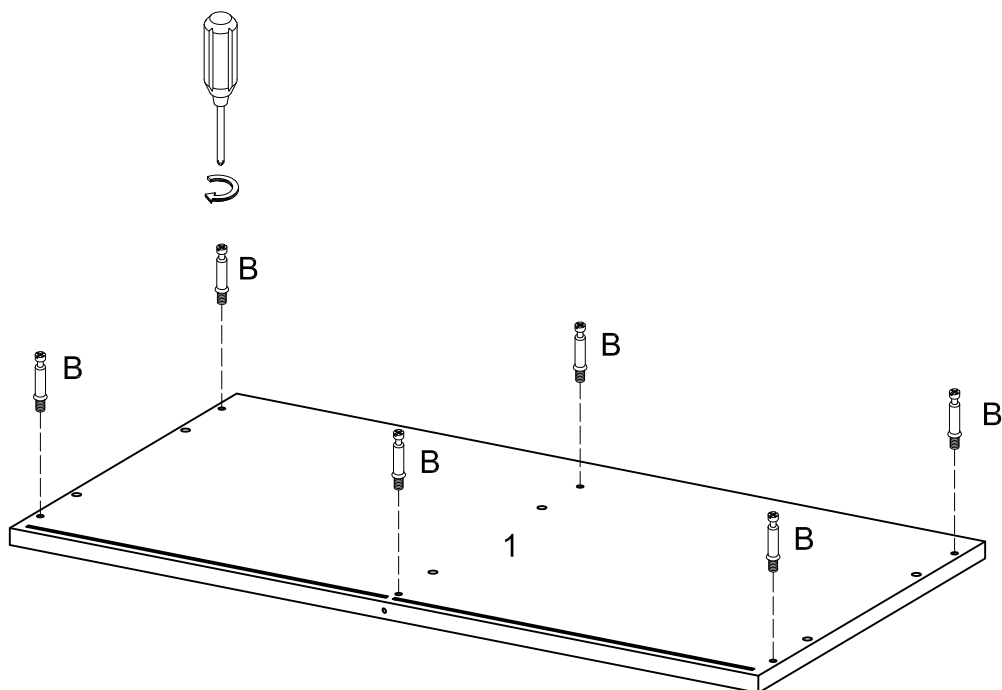


Screw cam bolts (B) into panels (1)

Step 3

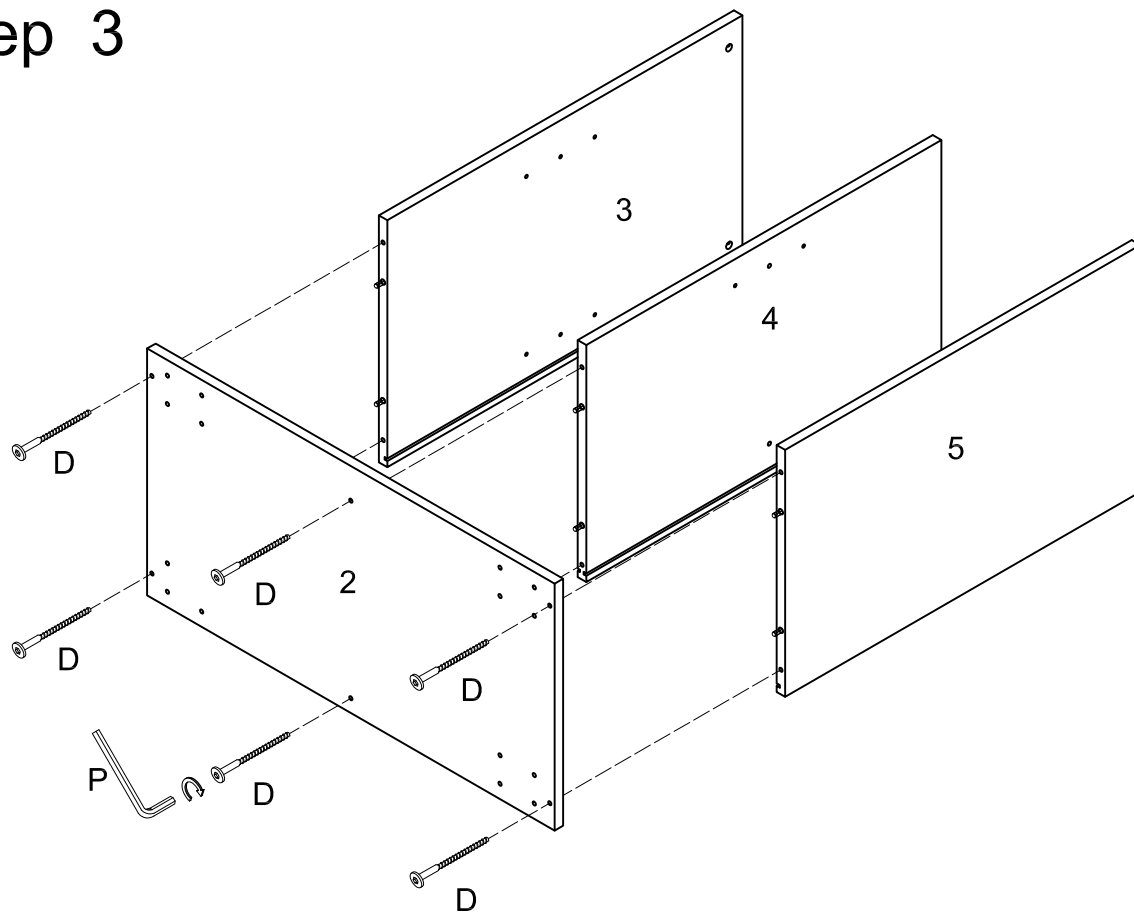


Use hex key (P), screw (D) to secure the bottom panel (2) to the side panels (3,4,5).

Step 4

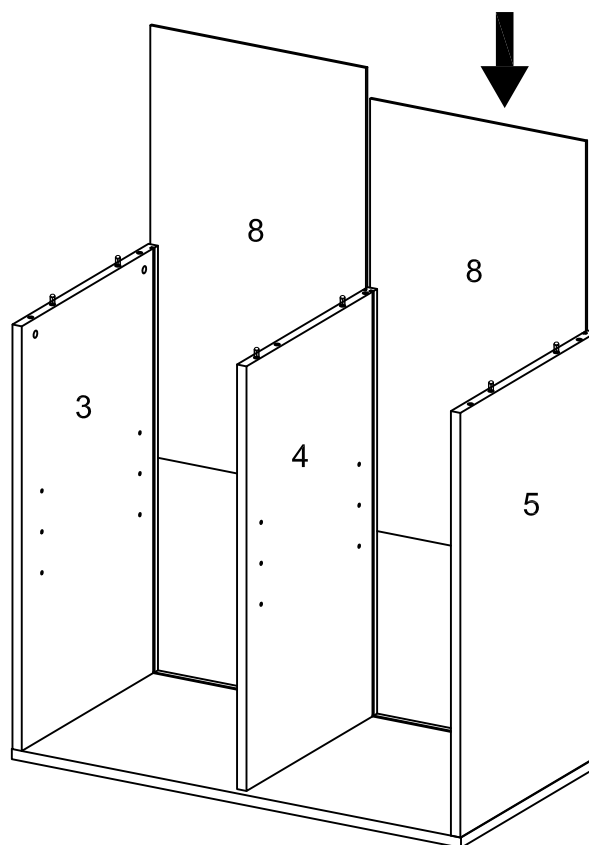


Slide back panel (8) into side panel(3,4,5)

Step 5

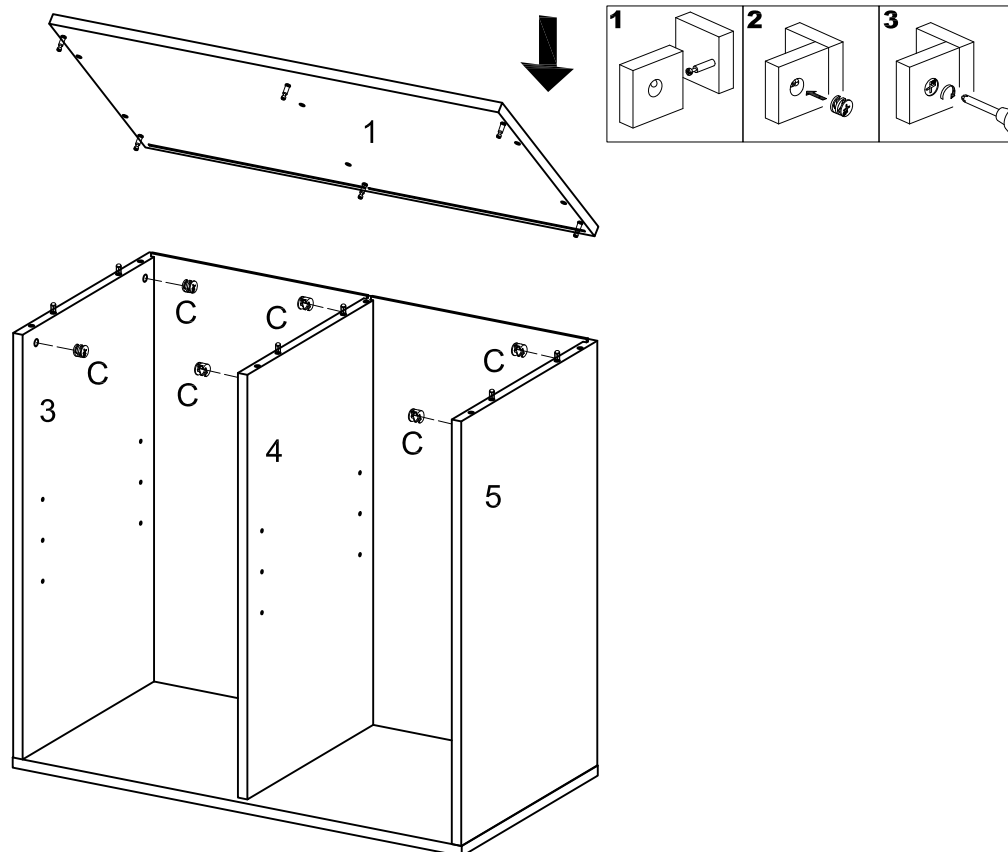


Place the top panel (1) to the side panels (3,4 , 5). Insert cam locks (C) into side panels (3,4,5) and tighten with a screwdriver.

Step 6

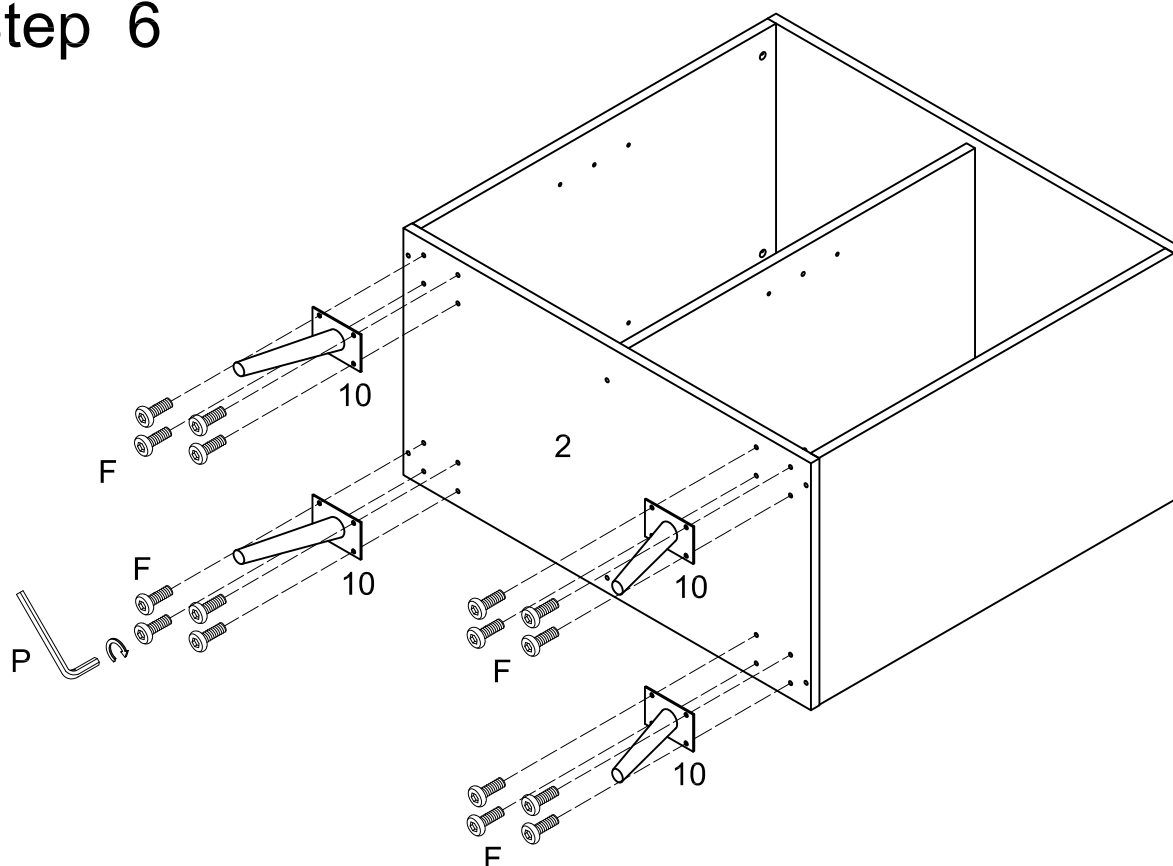


Use wrench (P), bolts (F) to secure legs (10) into bottom panel (2).

Step 7

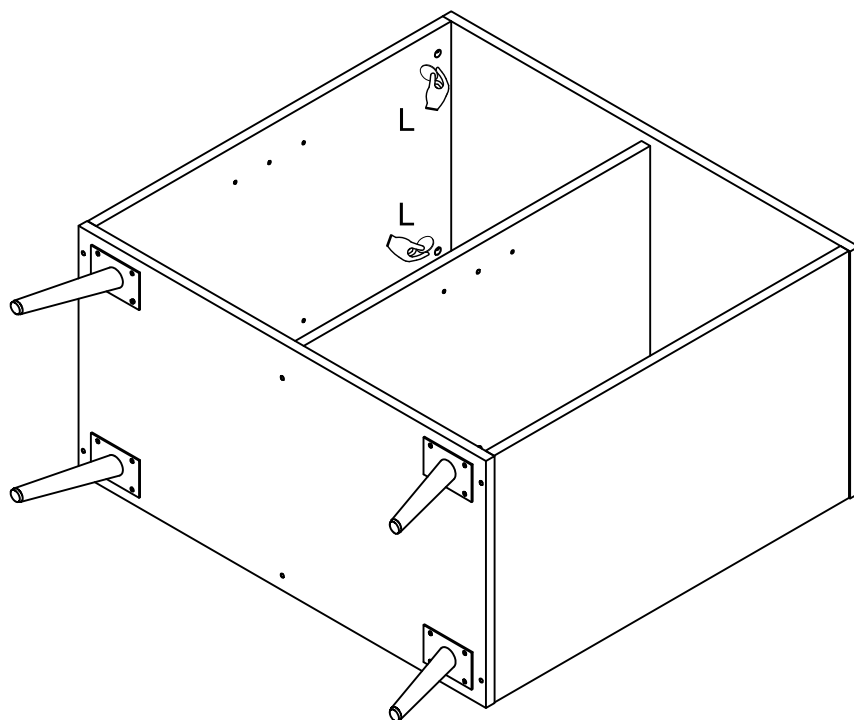

Place sticker (L) over holes as per diagram


Step 8

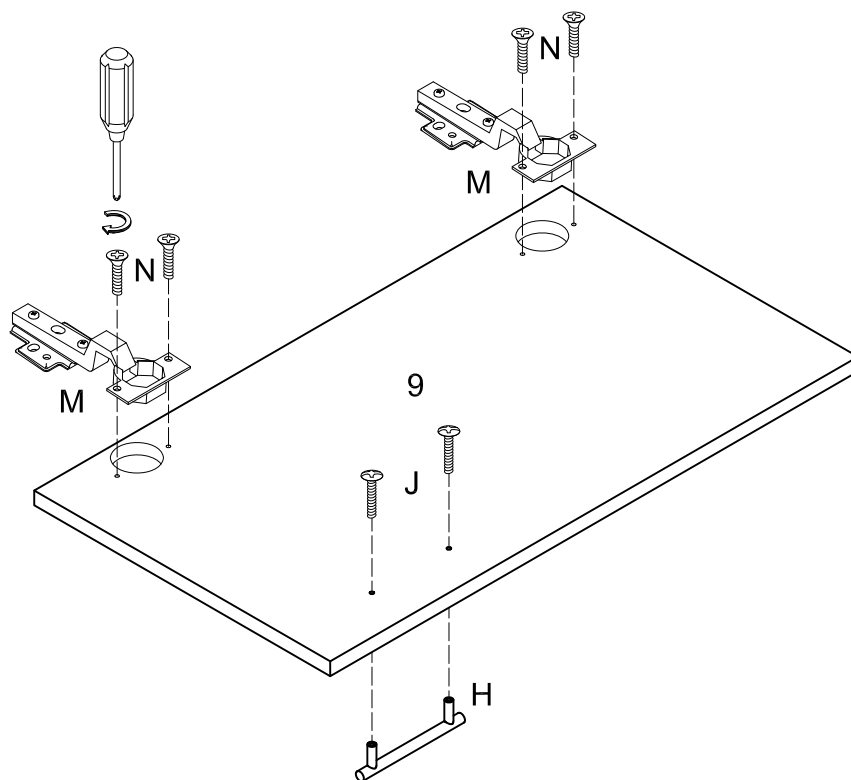

Attach hinge locks (M) to Door (9) using screws (N) as shown in the diagram.


Attach handle (H) to Door (9) using bolts (J)

Step 9

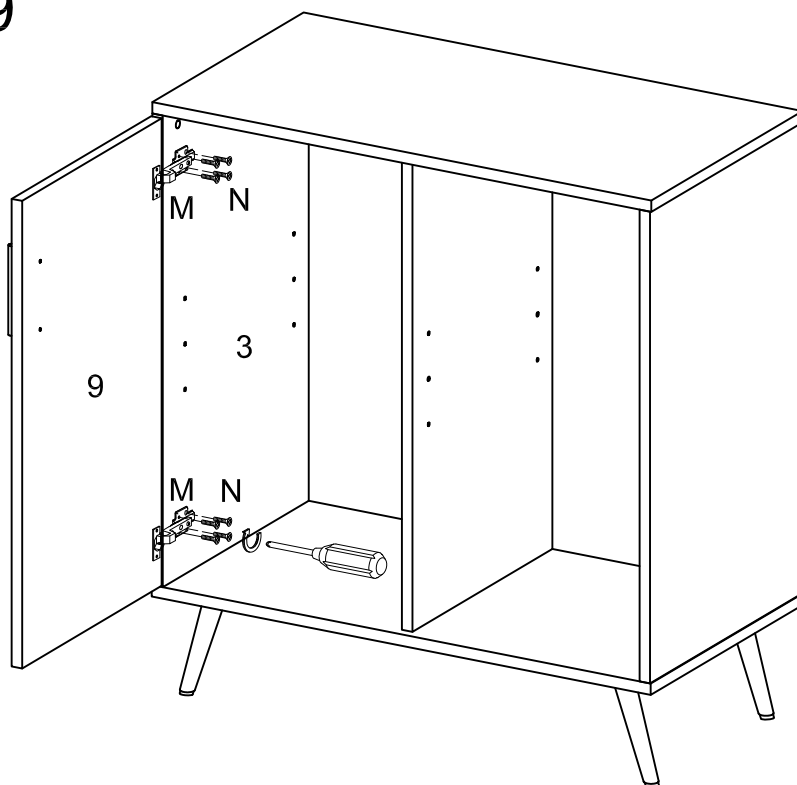


Attach door(9) to assembled unit using screws (N). Tighten screws (N) with a screwdriver.

Step 10

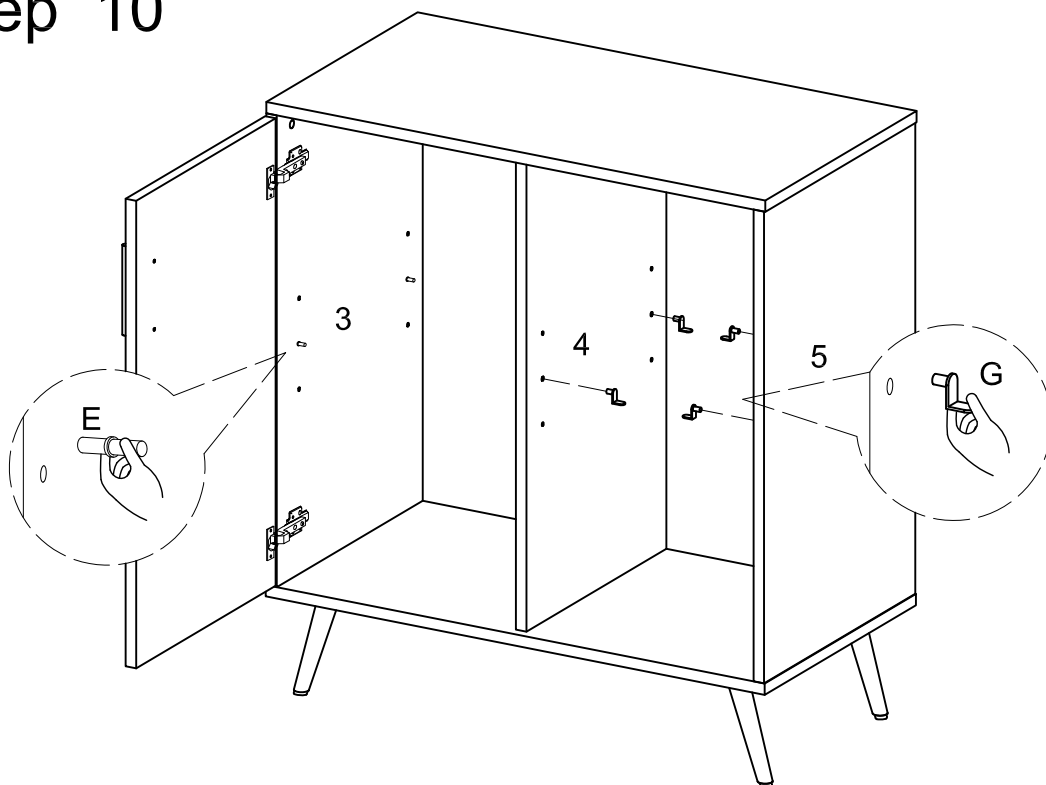


Insert support Pin(E) into Side panel (3,4), insert L shape Bracket (G) into side panel (4,5)

Step 11

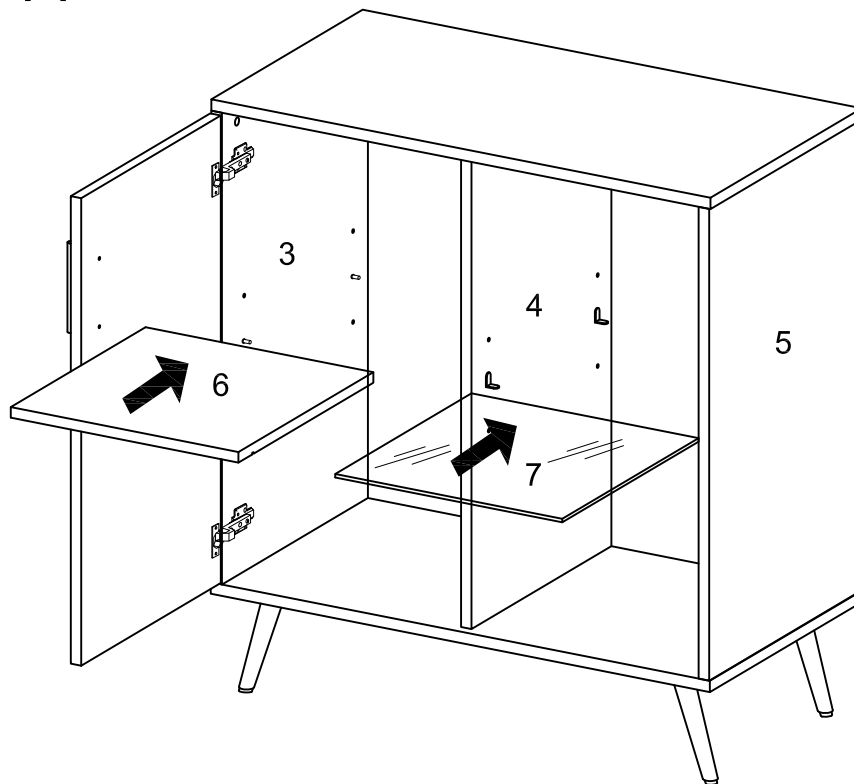


Insert shelf (6) into side panels (3,4). Place glass(7) on top of L shape Bracket carefully.

Step 12

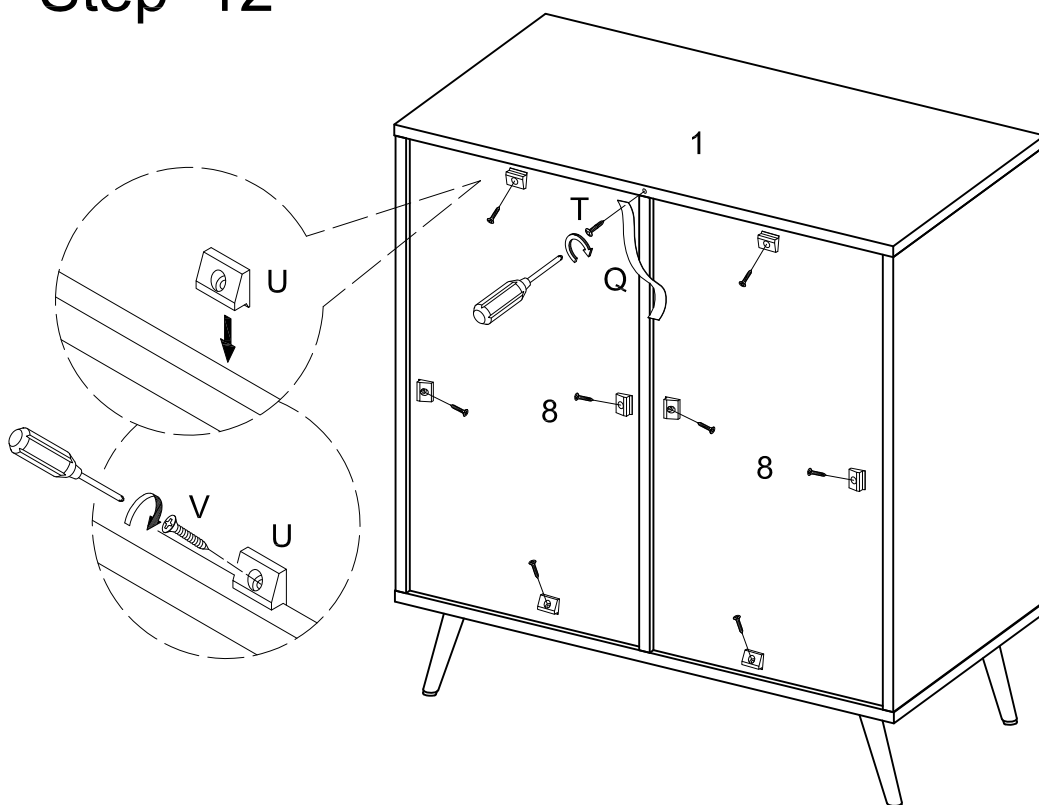


Attach velcro strap (Q) to part (1) using screw (T) with screwdriver. Attach plastic wedge (U) into part (8) for 8 times.

Step 13

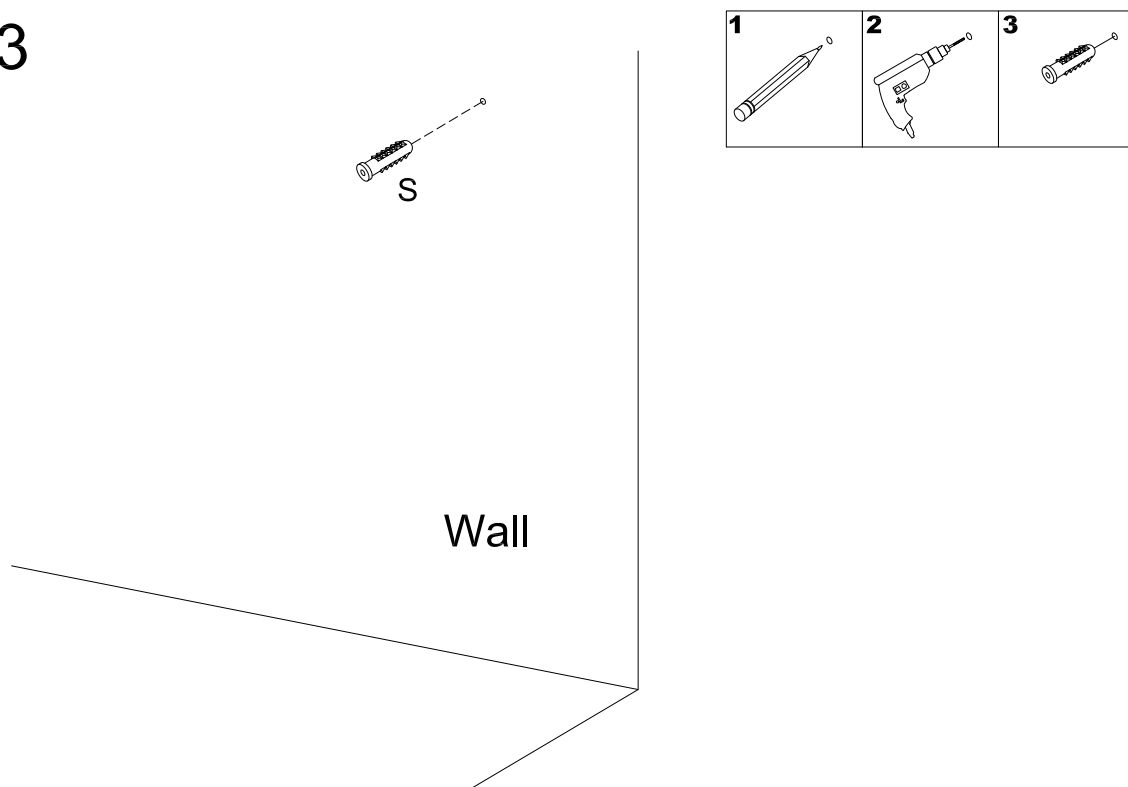


Place unit in desired location and mark the wall for anchor location. Insert plug(S) into wall per per diagram.

Step 14

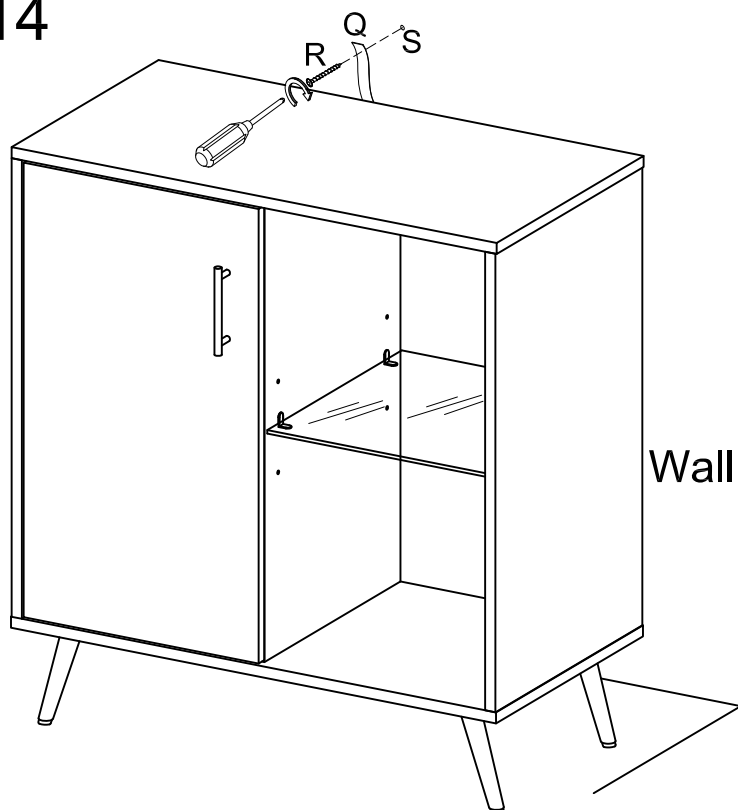

Secure product to wall with screw (R) and velcro strap (Q) to plug (S).

Step 15

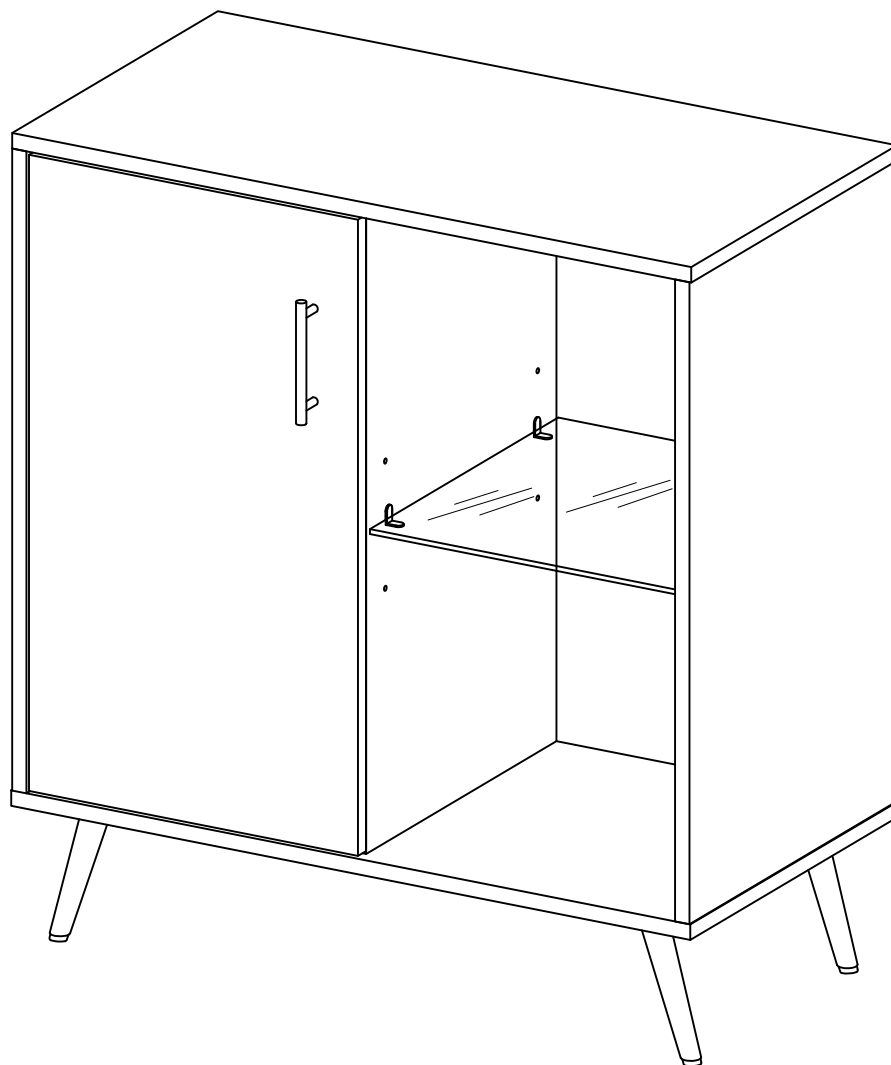

Final Assembly