INSTALLATION INSTRUCTION

LED Smart Recessed

E-R4-0324S

East Grove
• HOME •

CAUTION: To prevent electrical shock, ensure electricity has been turned off at the circuit breaker before beginning.

- Read all instructions before installing.
- System is intended for installation by a licensed electrician in accordance with the National Electrical Code (NEC) and local regulations.
- When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.
- Retain installation instructions for future maintenance reference.

WARNING: All parts must be used as indicated in these instructions. This product is designed for use only with the supplied parts and/or accessories designated for use by **EastGroveHome**. Substitution of parts or accessories not designated for use with this product by **EastGroveHome** could result in personal injury or property damage, and will void the warranty. Contact an authorized dealer or the manufacturer if any parts are damaged or missing.

MAINTENANCE NOTE: Coastal conditions may cause mineral and residue build-up on the fixture. We recommend that customers in coastal areas clean all external surfaces of the fixture once every two weeks with a wet cloth.

MISE EN GARDE: Pour éviter tout choc électrique, assurez-vous que le disjoncteur soit mis hors tension avant de commencer.


- Lisez toutes les instructions avant l'installation.
- Le système doit être installé par un électricien licensié conformément au code national de l'électricité (NEC), et également aux règlements locaux.
- Lors de la manipulation du luminaire, n'appuyez pas sur les LED. Tenez-le uniquement par la base.

ATTENTION: Toutes les pièces doivent être utilisées comme indiqué dans ces instructions. Ce produit est conçu pour être utilisé seulement avec les pièces et/ou accessoires fournis pour être utilisés avec les produits **EastGroveHome**. Remplacer des pièces ou accessoires non conçus pour ce produit **EastGroveHome** pourrait causer des dommages corporels ou matériels et pourrait également causer l'annulation de la garantie. Veuillez contacter un revendeur autorisé ou le fabricant si des pièces manquent ou sont endommagées.

NOTE D'ENTRETIEN: Les conditions côtières peut causer une accumulation de minéraux et de résidue sur le luminaire. Nous recommendons aux clients qui resident dans les zones côtières de nettoyer toutes les surfaces externes du luminaire une fois toutes les deux semaines avec un chiffon humide.

HARDWARE

A



Wire Connector
Qty: 3 pcs

EastGroveHome.com
Phone: 888-602-0990

Corporate Headquarters
1000 N West Street, Suite 1200
Wilmington, DE 19801

*Corporate Address ONLY – Do not send returns here

INSTALLATION INSTRUCTION
LED Smart Recessed
E-R4-0324S

East Grove
• HOME •

INSTALLATION

1. At the point of installation, cut a round hole for the trim (See Fig.1).
   For E-R4-0324 cut the hole Ø4 1/4" diameter (Ø108mm).

2. Ceiling thickness range is ½" to 1½".

3. Take out fixture from packaging box.

4. Pull building supply wires through the ceiling cutout and
   open fixture junction box door(See Fig.2).
   Remove desired housing knockout and feed building wires
   into housing using appropriate connector.

5. Connect fixture wires to building wires (See Fig.3):
   Connect each supply wire with appropriate junction box wire connector.
   This fixture features electronic low voltage ELV or TRIAC dimming capabilities.
   To utilize ELV or TRIAC, wire black (line hot), white (line neutral) and
   green (ground) in accordance to dimmer specifications.
   When not using a dimmer, connect black fixture wire to hot,
   white fixture wire to neutral and green fixture wire to ground.
   Leave all other wires capped individually.


6. Place all wiring and connectors back in driver box and replace the box's cover.

7. Insert driver box through the mounting hole and secure to ceiling joist(See Fig.4).

8. Fold fixture torsion springs inward and insert trim assembly into ceiling cutout.
   Be sure once installed, trim assembly is flush and secure (see Fig.5).
   Press on the front of the rotatable lens and adjust to your desired beam direction.

9. After installation is complete, connect the App and follow the
   "Smart Life App Instruction Manual " to connect and control the device.

FIG. 1

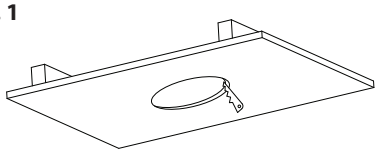

ROUND: CUT OUT
E-R4-0324S: Ø4 1/4" (Ø108mm)

FIG. 2

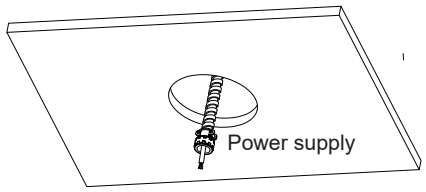


FIG.3

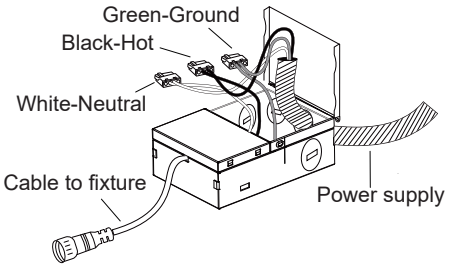


FIG.4


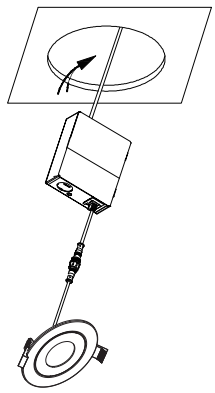


FIG.5



EastGroveHome.com
Phone: 888-602-0990

Corporate Headquarters
1000 N West Street, Suite 1200
Wilmington, DE 19801

*Corporate Address ONLY – Do not send returns here

East Grove

• HOME •

Smart Life - Smart Living

App Instruction Manual

Available at:

Download on the App Store

GET IT ON Google Play

Pairing East Grove Home smart light with mobile device using the Smart Life App

Bluetooth must be enabled on mobile device and connected to WIFI at location of the smart light

East Grove
• HOME •


1 Turn on the lights for the first time and they will flash for 3 minutes.

If it doesn't flicker, you need to cycle turn on and turn off six times, and then the light will flicker.


then go to next step.

Note: Try to keep the number of devices connected to the same WIFI transmitter less than 20pcs. To ensure there is sufficient network signal.


2 Register and sign in your account of Smart Life APP, press "Add Device" button

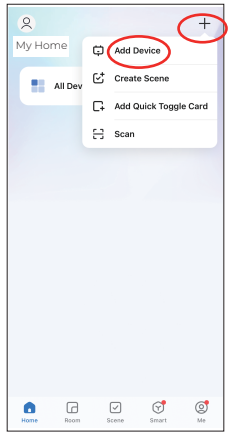

3 Turn on the Bluetooth and Wifi function of the mobile device

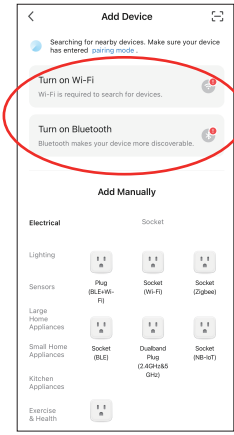


4 Search for the device and add

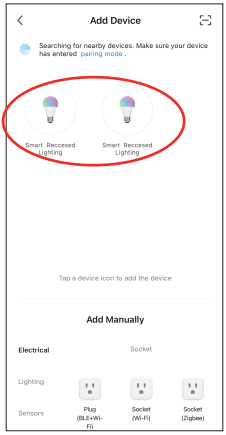

5 Select 2.4G WIFI and enter password. Note: only 2.4G WIFI compatible. The distance between the lamp and the WIFI transmitter is less than 65FT.




6 Confirmation device has been added successfully

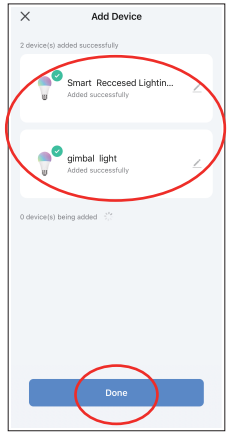


Smart Light Control with Smart Life App

East Grove
• HOME •


1 From home screen, select smart lights to control

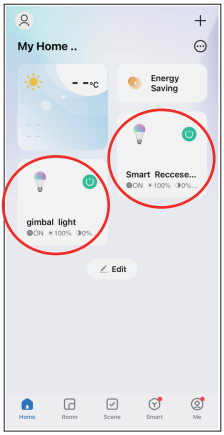


2 White light mode.
Adjust the color and brightness of the white light.

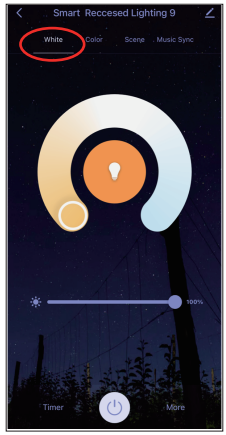


3 Color RGB light mode.
Adjust the color, brightness and saturation of the lights.

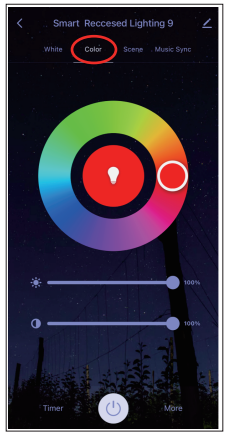


4 Scene mode.
Choose the scene you need.

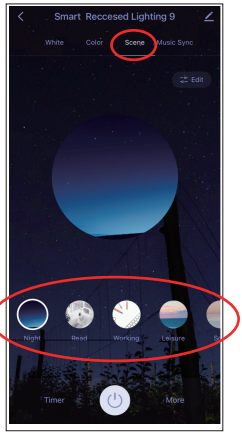


5 Music sync mode.
The lights danced in sync with the rhythm of the music.

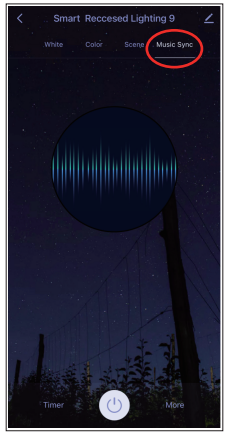


6 Timer Stop, select time for light to shut off.

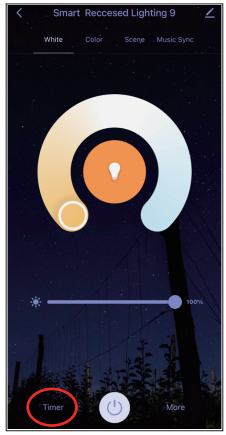


7 More personalized Settings

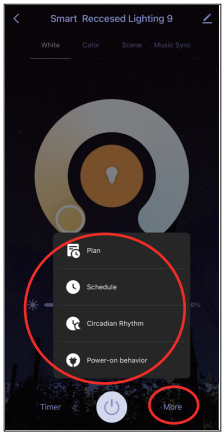


8 Four plan type: Random timing,
Cycle timing , Sleep plan ,
Wake up plan

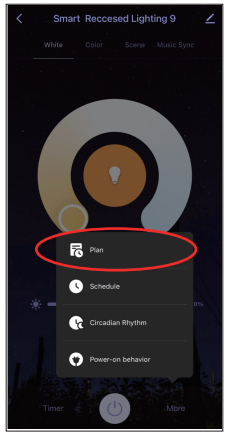


9 Schedule mode.
Set the required schedule.

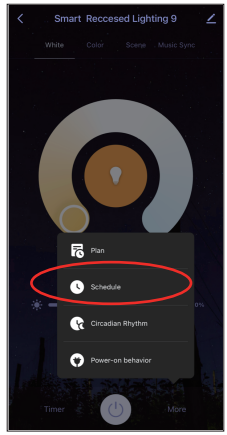

10 Circadian rhythm mode.
Set the biological rhythm mode.

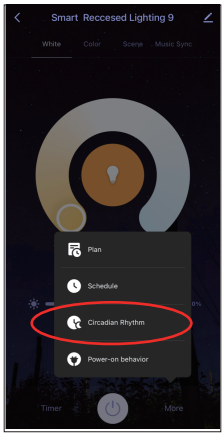


11 Set the Power-on behavior.
Initial mode:It defaults to cold white light each time it is powered on.
Restore memory: Last used color and brightness.
Customized:User-defined.

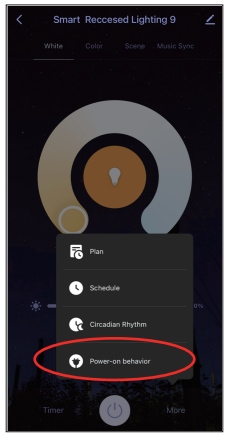

Group Control with Smart Life App

East Grove
• HOME •


1 **Group Control**

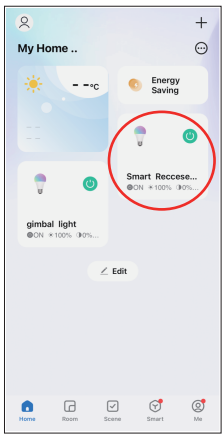


2 Select the edit icon in the upper right corner




3 Click "Create group"

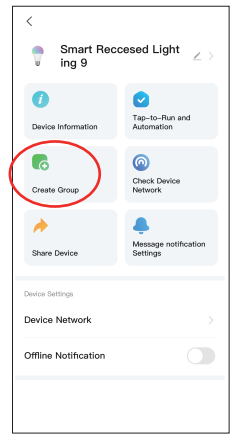


4 Add the smart lights that require group control. Then save.

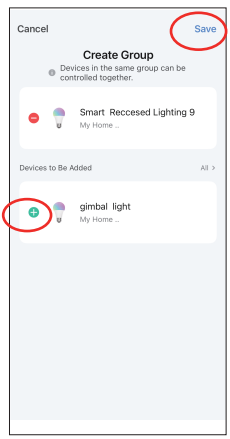

5 Create a group name

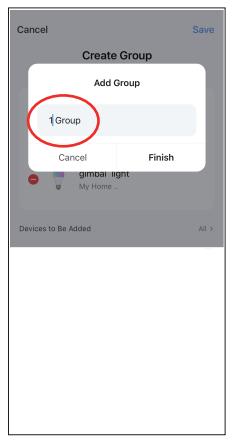

6 Click on the group to control it

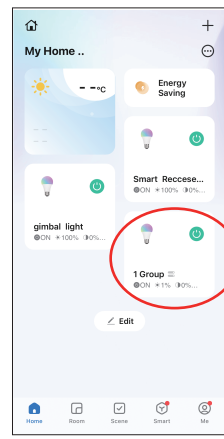


Set up Home in App to enable sharing


Follow steps below to allow multiple users to control light with other mobile devices

East Grove
• HOME •


1 From the home page, select “me” in the bottom right corner

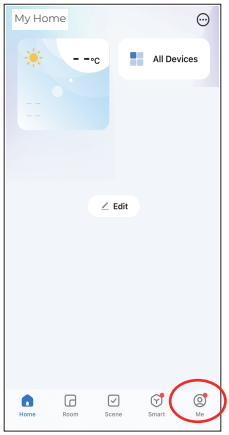


2 Then press “Home Management”

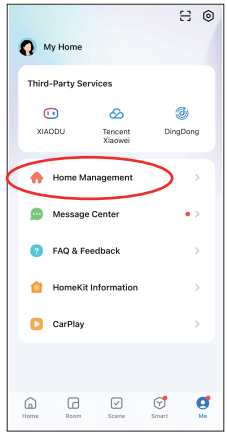


3 Then “Create a home”

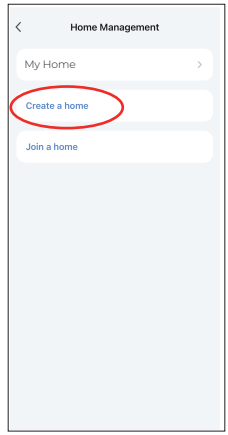


4 Enter a custom “Home name” here

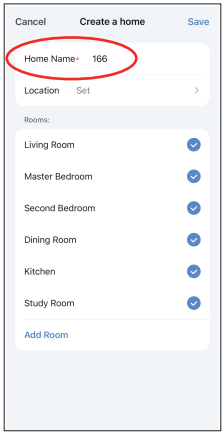

5 When “Home successfully created” appears, press “Done”

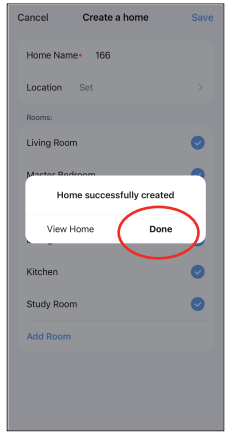

6 From the home page, select “Room” in the bottom

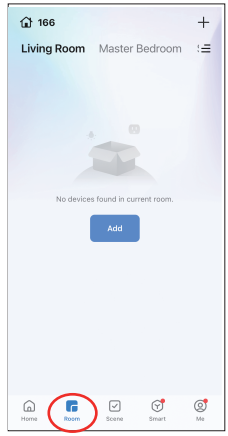


Set up Home in App to enable sharing

Follow steps below to allow multiple users to control light with other mobile devices

East Grove
• HOME •


7 Select a room and add device.

Repeat steps on page 2 to add devices

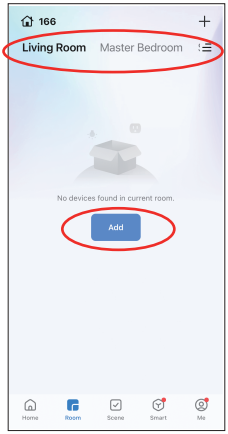


8 **Add Members:**


select “me” in the bottom right corner

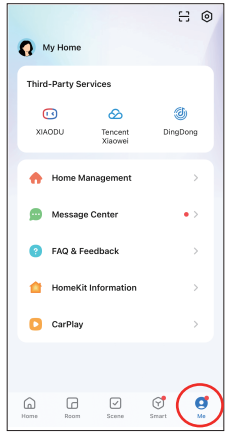


9 Then press “Home Management”

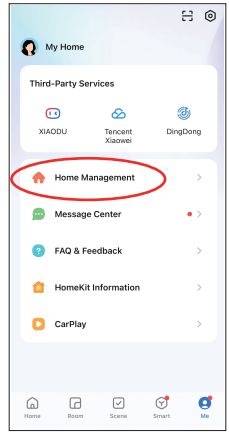


10 Select Home name

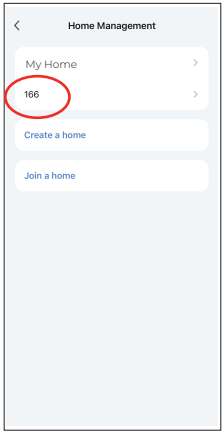

11 Then press “ Add Members ”

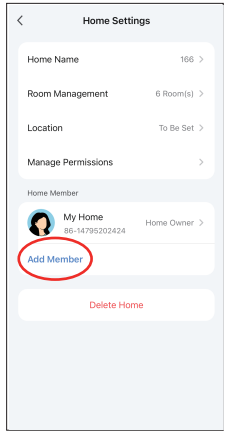

12 Then, Send invitation code

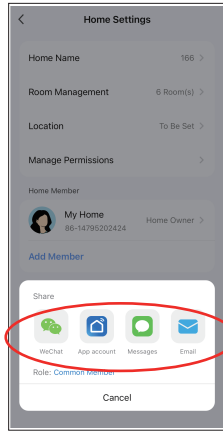


Set up Home in App to enable sharing


Follow steps below to allow multiple users to control light with other mobile devices

East Grove
• HOME •


13 Invited members, open the Smart Life APP select “me” in the bottom right corner

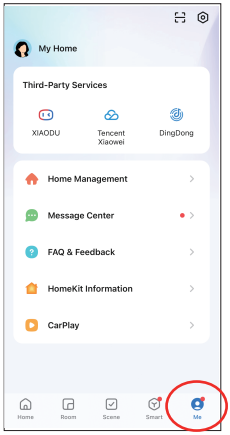


14 Then press “Home Management”

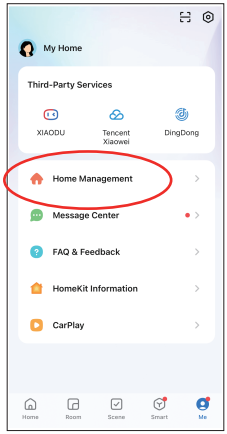

15 Then “Join a home”

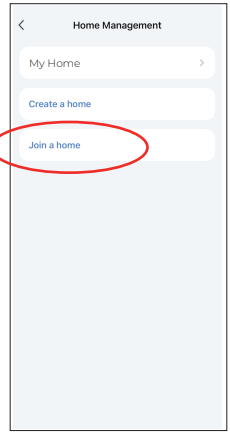


16 Enter invitation code. After joining successfully, members can control all devices in the Home.

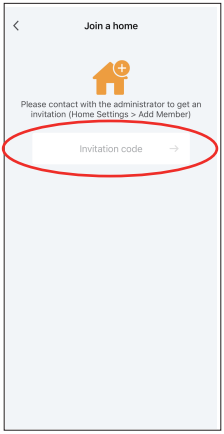

How to Unpair and Remove Your Smart light from the Smart Life App

East Grove
• HOME •


1 From home screen, select smart lights to remove

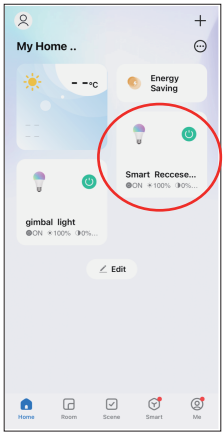


2 Select the edit icon in the upper right corner




3 Select “Remove Device” at the bottom of the screen

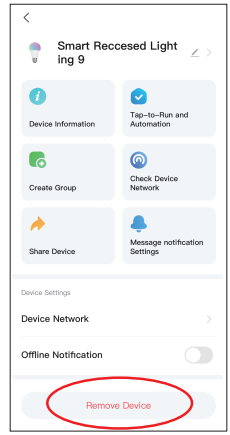

4 Choose “Remove” or “Remove and Clear Data”

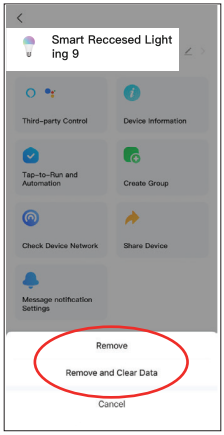

5 Select “Confirm” to complete un-pairing device process

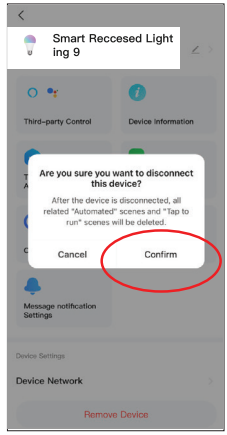

East Grove

• HOME •

eastgrovehome.com