

Installation Instructions

LED CEILING LUMINAIRE

IMPORTANT – READ ALL INSTRUCTIONS BEFORE INSTALLATION

- Installation and maintenance must be performed by licensed electricians only.
- To avoid risk of electric shock, make sure to turn off main power switch prior to installation or maintenance.
- Must be installed in compliance with National Electrical Code (NEC) in the US or Canadian Electrical Code in Canada.
- Ensure input voltage and frequency is compatible with the fixture. Check product manual for power requirements prior to installation.

WARNING: RISK OF ELECTRIC SHOCK. SUITABLE FOR DAMP LOCATIONS.


- Must be grounded.
- Minimum 90 °C / 194°F supply conductors
- Surface-mounted
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved or consult a qualified electrician to ensure correct branch circuit conductor.

ELECTRICAL COMPONENTS AND CHARACTERISTICS

- AC input voltage (120 V)
- 60 Hz
- Nominal power factor: 0.9
- Dimmable: Yes


INCLUDED ACCESSORIES

- A. Wire Connectors (3)
B. Mounting Screws (2)



MOUNTING INSTRUCTIONS: TURN OFF POWER BEFORE INSTALLATION

1. Before beginning assembly, installation or operation of product, make sure all parts are present.
2. Turn off the power before installation. (Fig. 1)
3. Remove the lens from the luminaire by rotating counter clock wise. (fig.2)
4. Insert the screws (B) into the junction box, leaving space to insert the luminaire, with 2/3 inside and 1/3 inside (Fig. 3).
5. Make the electrical connection. Connect the black and white wires of the luminaire to the two wires of the same color from the junction box using wire connectors (A). Connect the ground wire of the luminaire to the ground wire from the junction box (Fig. 4).
6. Place the luminaire plate across the screw of the lock, then rotate the luminaire plate counterclockwise and lock it tightly using the screw lock. (Fig. 5)
7. Secure the luminaire by tightening the mounting screws. (Fig. 6)
8. Reinstall the lens by rotating it clockwise (Fig. 7)
9. Turn on power and turn on the light switch to activate the luminaire. (Fig. 8)

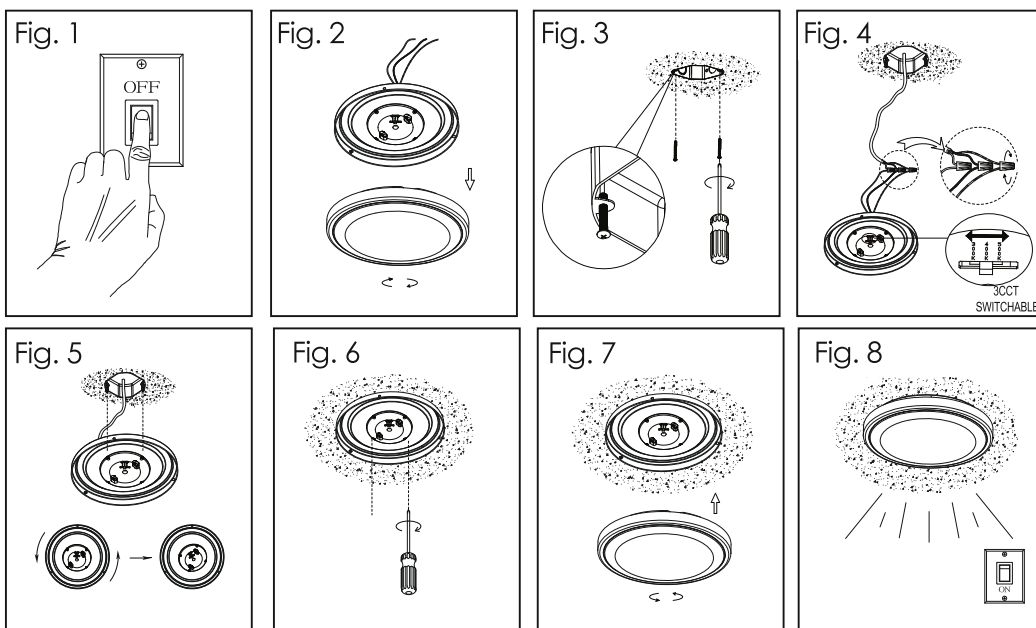

MAINTENANCE:

1. Clean and maintain the luminaire regularly.
2. When cleaning, use a soft cloth with non-abrasive detergent and wipe dry with a clean soft cloth.
3. Do not use any cleaners that contain alcohol, harsh chemicals or pesticides.
4. When cleaning inside the luminaire, turn off the power, and do not spray liquid cleaner directly on the LEDs, LED driver or wiring.