




INSTALLATION INSTRUCTIONS

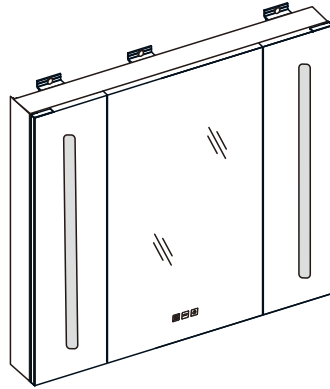

NGA301-3631 36"x31.5"x5"





SMC-M2626 26"x26"x5"
SMC-M2426 24"x26"x5"

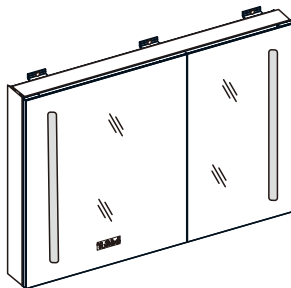

SMC-Z2426 24"x26"x5"







● Before Installation


- Please read these instructions carefully before installation.
 - Installation should be only carried out by a qualified professional.
 - ENSURE THAT ELECTRICAL CONNECTIONS ARE TURNED OFF AT THE CONSUMER UNIT OR FUSE BOARD BEFORE INSTALLING OR CARRYING OUT ANY MAINTENANCE.
 - Please take note of the Tools Required prior to commencement of any installation procedures.
 - Follow the Installation Steps on page 2 to ensure that the correct installation method is adhered to. Please also read all operating and safety instructions before commencing any installation to ensure complete understanding of the installation procedure.
 - All information provided by these guidelines are based on the latest technical product information. We reserve the right to change the product characteristics, packaging or supply without prior notice.
 - These guidelines include maintenance and cleaning advice.
 - THIS PRODUCT IS FOR INDOOR USE ONLY.
- ⚠ WARNING: There may be hidden dangers to people or product during installing. In order to avoid trapping fingers, please pay attention to opening and closing the door position.
- ⚠ WARNING: Do not use any acidic or alkaline cleanser or alcohol on this product. Please clean with a damp soft cloth.
- ⚠ WARNING: Keep away from water and electricity when hanging on wall.
- ⚠ IMPORTANT: This product is a one-way hanging mirror. Please make sure that there are no obstacles (i.e. electrical cable / water pipework) inside the wall before commencing installation procedure.
- ⚠ WARNING: This product is fragile - it should be installed by a professional person with suitable protective equipment, as listed in the Tools Required above.




Ø4.0mm

Ø6mm

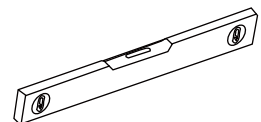

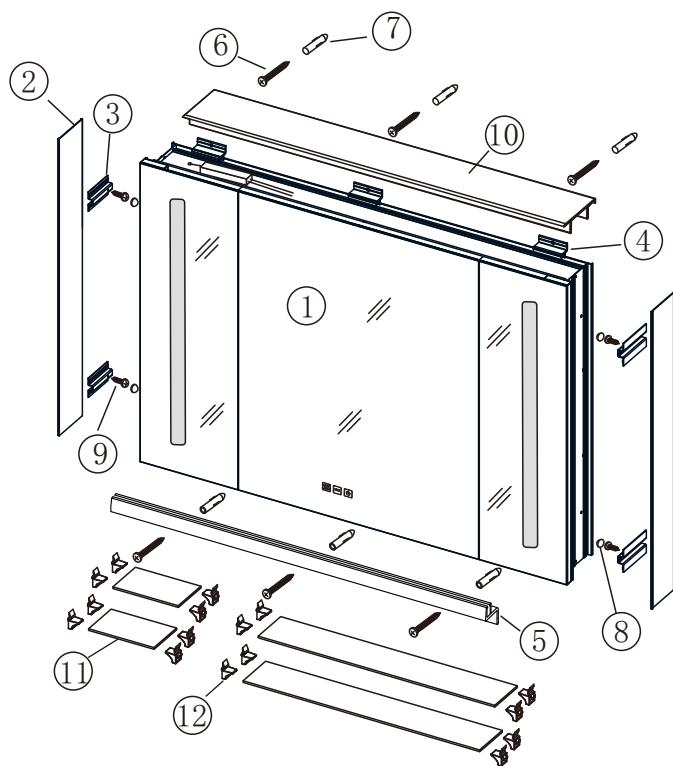

- | | |
|-----------------------------|-------------------------------|
| [1] Mirror cabinet 1pc | [2] Side panel 2pcs |
| [3] Holder 4pcs | [4] Upper bracket 3pcs |
| [5] Bottom bracket 1pc | [6] ST4*35 screw 6pcs |
| [7] Wall plus 6pcs | [8] Screw cap 6pcs |
| [9] M4*10 screw 4pcs | [10] Cover plate 1pc |
| [11] Glass shelf board 4pcs | [12] Shelf board holder 16pcs |

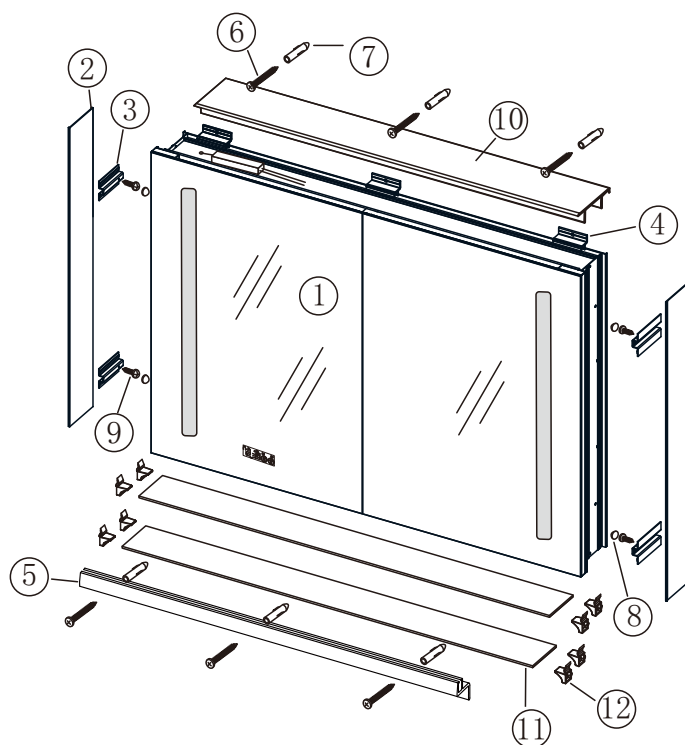


- | | |
|-----------------------------|------------------------------|
| [1] Mirror cabinet 1pc | [2] Side panel 2pcs |
| [3] Holder 4pcs | [4] Upper bracket 3pcs |
| [5] Bottom bracket 1pc | [6] ST4*35 screw 6pcs |
| [7] Wall plus 6pcs | [8] Screw cap 6pcs |
| [9] M4*10 screw 4pcs | [10] Cover plate 1pc |
| [11] Glass shelf board 2pcs | [12] Shelf board holder 8pcs |

[surface mount]




01




[5] Bottom bracket 1pc



[6] ST4*35 screw 3pcs






[7] Wall plus 3pcs

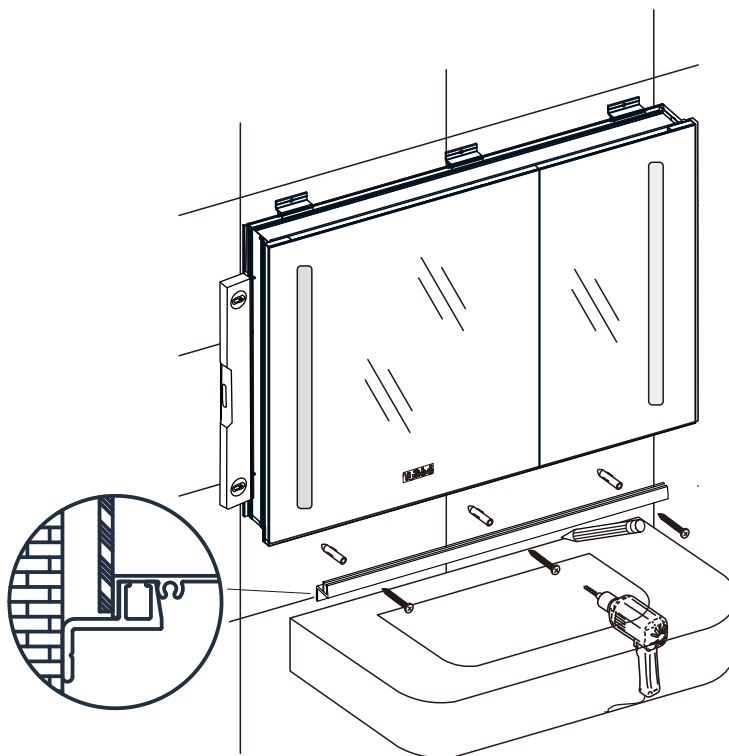


1. Mark the Hole Locations:

Mark the desired hole locations on the wall, ensuring they are level. Use the appropriate drill bit to drill the holes. Then, secure the [5] Bottom bracket to the wall using [6] screws and [7] wall plugs, ensuring it is firmly attached.

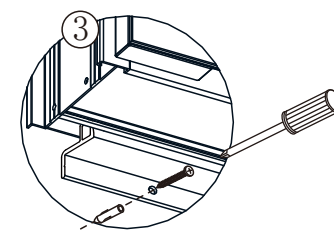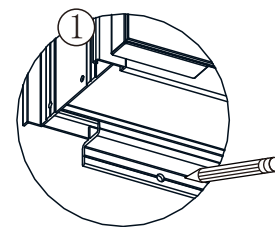


02







[4] Upper bracket 3pcs



[6] ST4*35 screw 3pcs



[7] Wall plus 3pcs

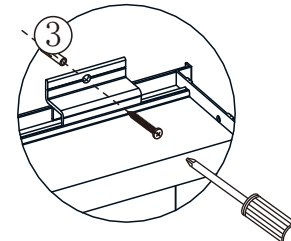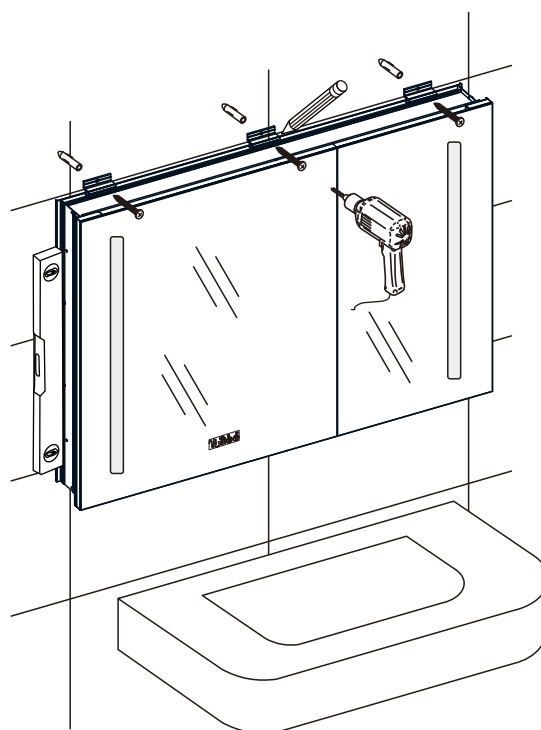


03



[10] Cover plate 1pc




[2] Side panel 2pcs



[11] Glass shelf board 2or4pcs



[12] Shelf board holder 8or16pcs

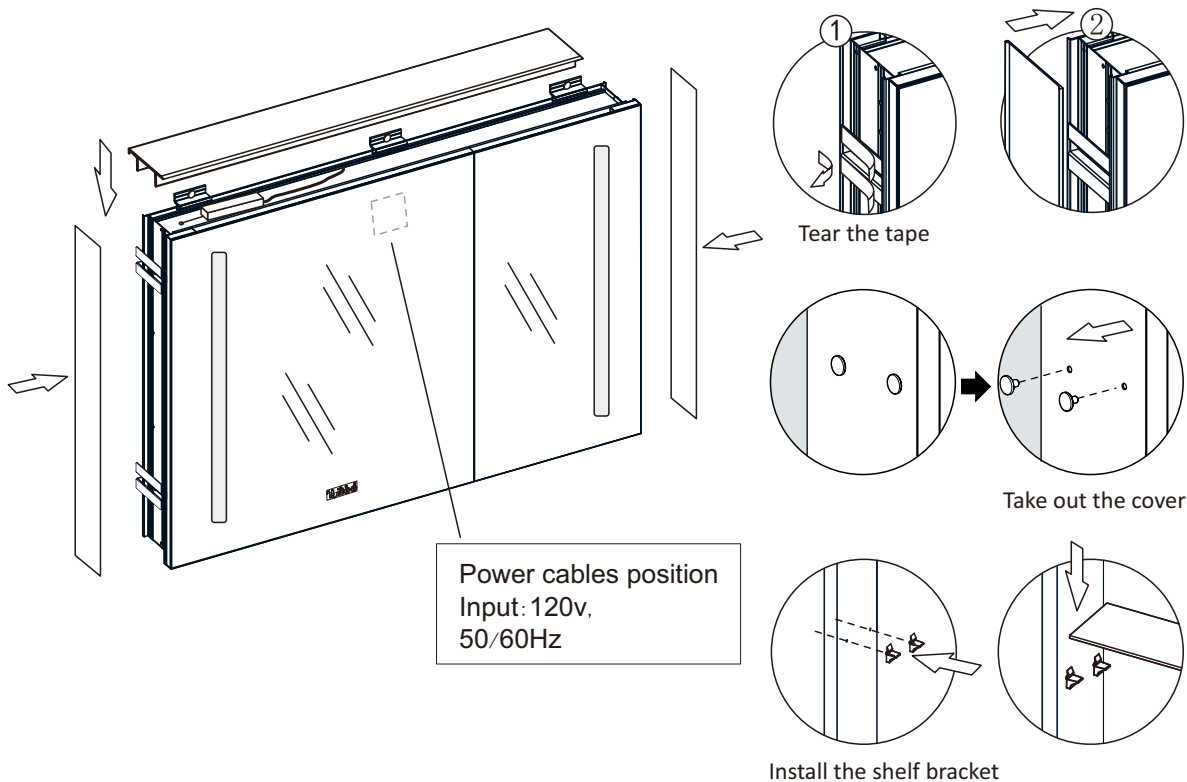


3.Install the Side Mirror and Accessories:

- First, carefully peel off the tear from both sides of the mirror.
- Then, install the [2] side panel securely into place.
- Next, attach the [10] cover plate on top of the cabinet.
- Open the cabinet to locate the positions for the glass shelf. Remove the plugs from the designated spots, then install the [12] shelf board holders. Finally, place the [11] glass shelf board onto the holders, ensuring it is securely seated.

4.Adjust the Door Position:

Adjust the door position as needed, ensuring smooth operation and symmetrical alignment. Make fine adjustments if necessary to achieve a perfect fit between the door and the cabinet.

04

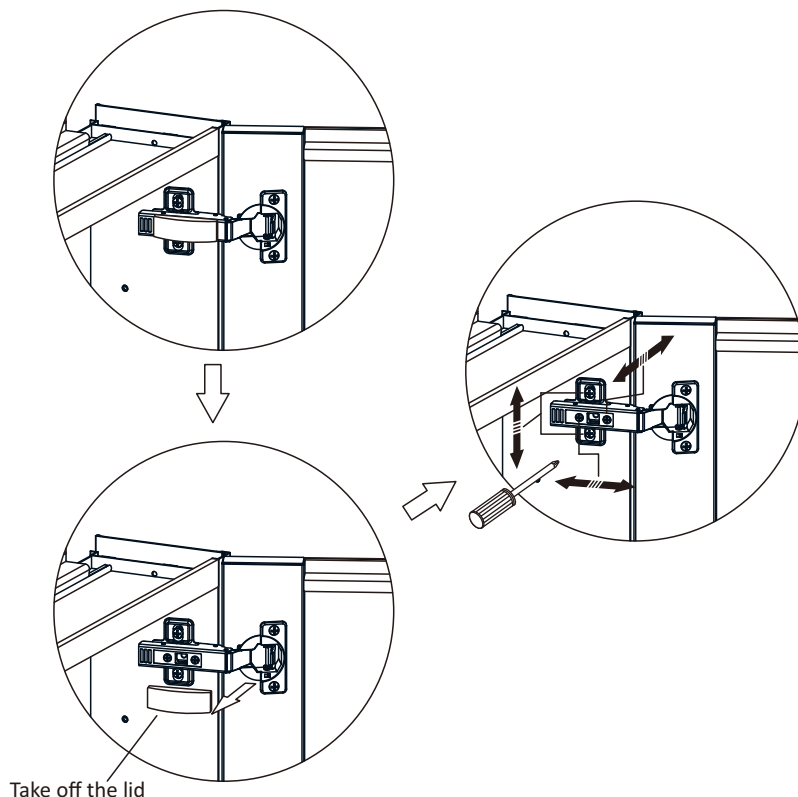


[recessed mount]




SINGLE DOOR MODEL,SIZE SPECIFICATIONS		
MODEL	WIDTH(W)	HEIGHT(H)
A	36"	31.5"
B	26"	26"
C	24"	26"
D	24"	26"

*** FORMULA TO CALCULATE THE CUT OUT FOR RECESSED INSTALLATION**

CUTOUT WIDTH =WIDTH-5/8" CUTOUT HEIGHT =HEIGHT-5/8"

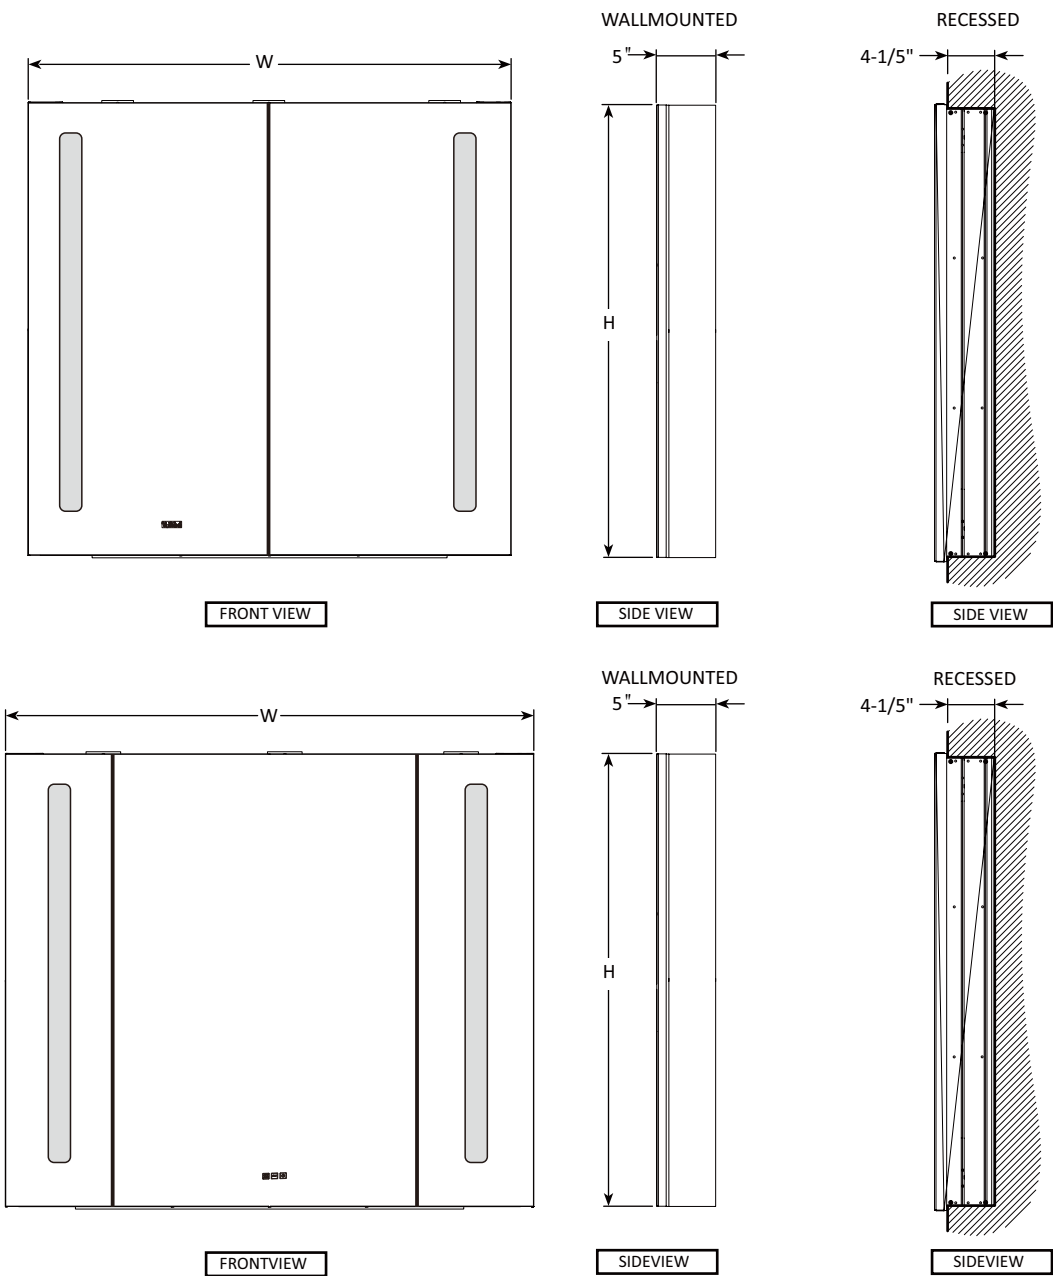







01



[11] Glass shelf board 2or4pcs







[12] Shelf board holder 8or16pcs

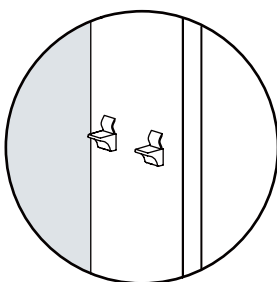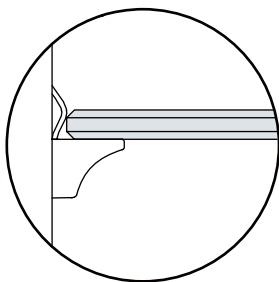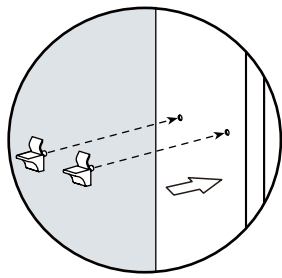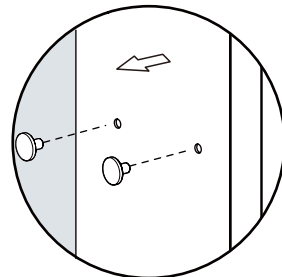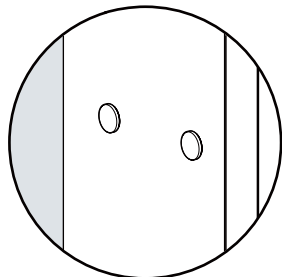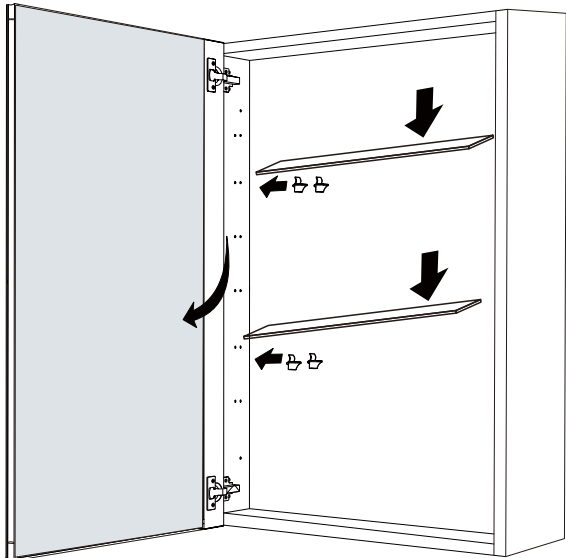


1. Install the Shelving Boards: Securely place the shelving boards inside the cabinet.
2. Adjust the Door Position: Adjust the door alignment as needed to ensure smooth operation and proper positioning.


02

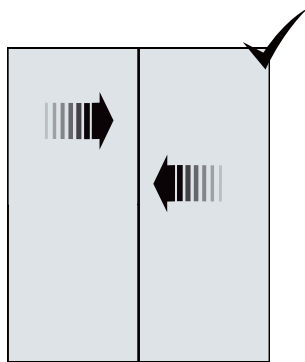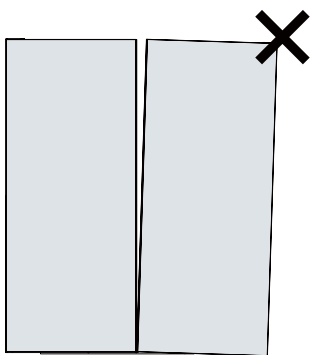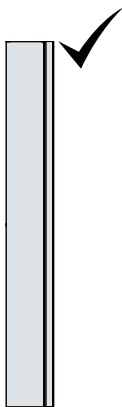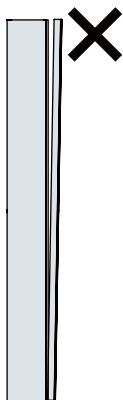


A SIDE VIEW

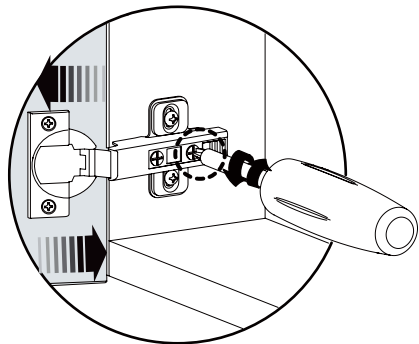

B FRONT VIEW

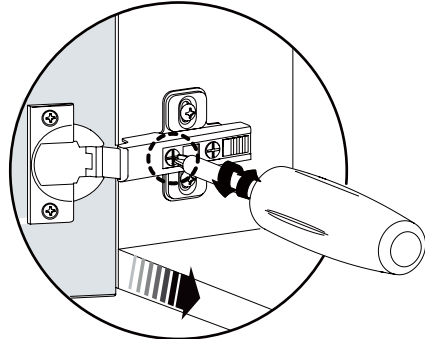


03

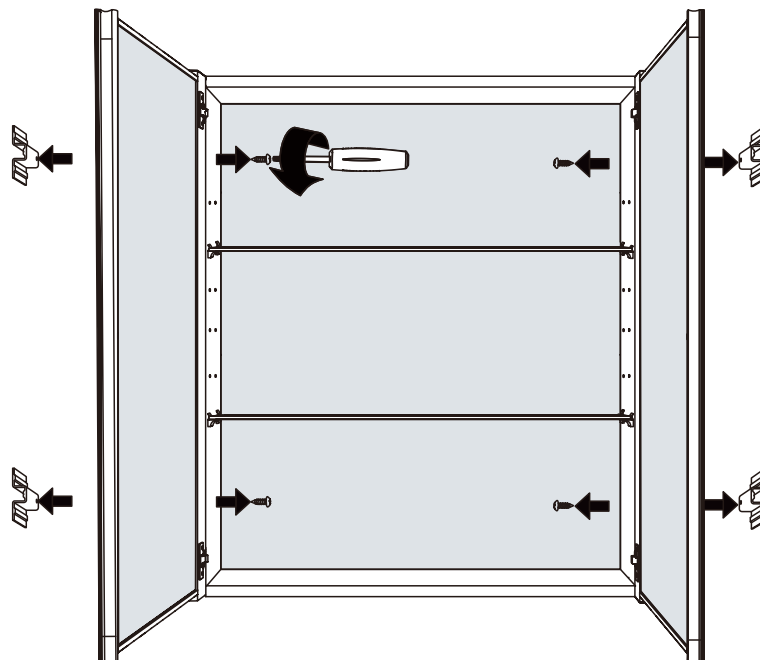


3. Remove the Side-Mounted Bracket: Loosen the screws and carefully remove the side-mounted bracket.

4. Prepare for Wall Drilling: Please refer to page 5 for the size to prepare for drilling the wall.
(For best results, this step is recommended to be performed by a professional.)

04

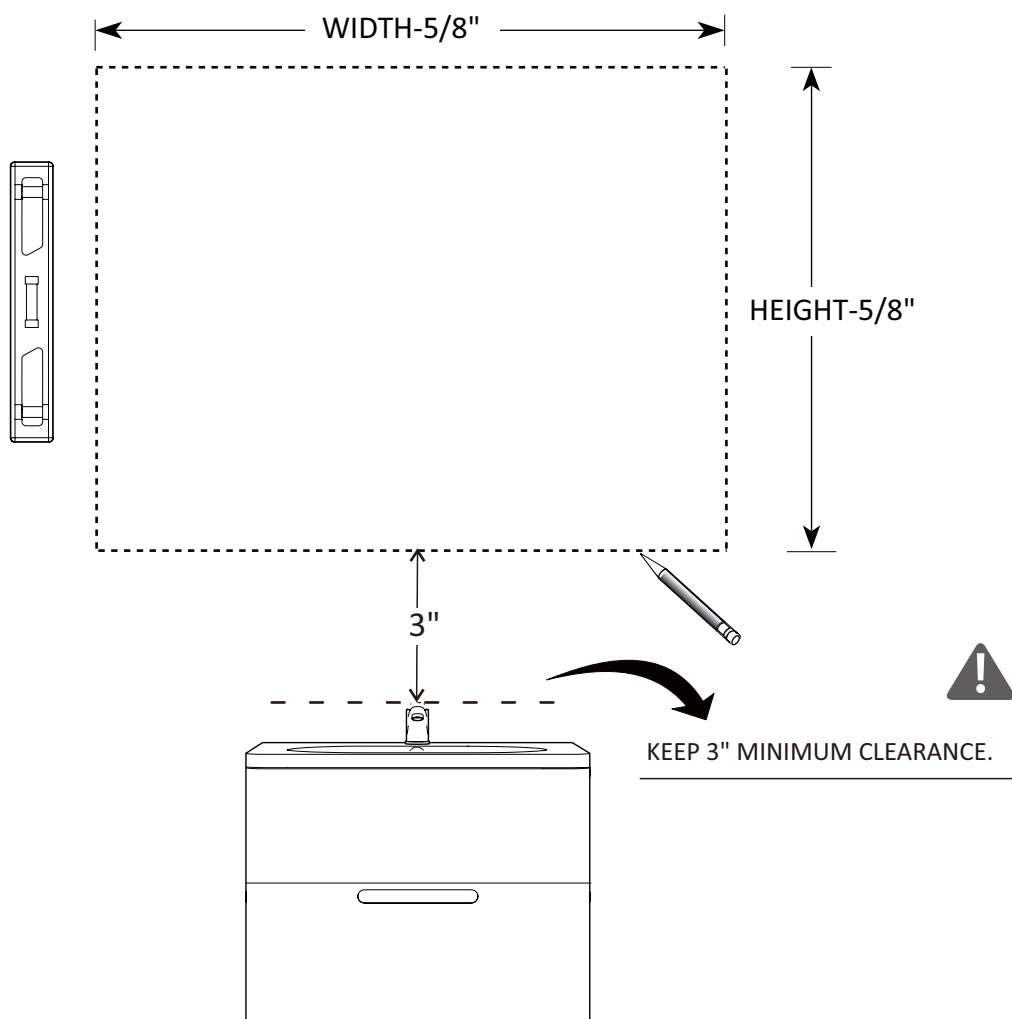


05

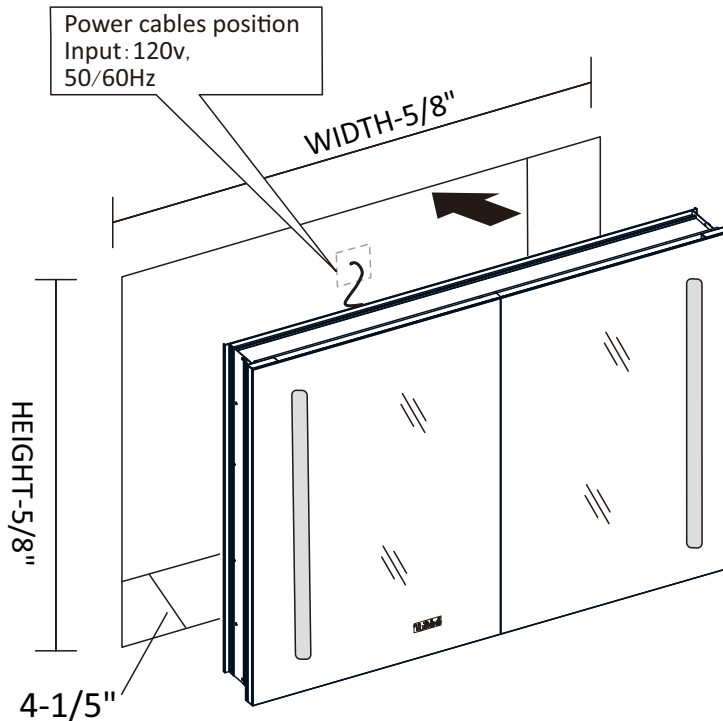

5. Insert the Cabinet into the Wall: Place the mirror cabinet into the wall cavity as illustrated in the provided diagram.

6. Secure with Corner Screws: Use screws to secure the cabinet by locking it at all four corners.



06



[6] ST4*35 screw 4pcs




[8] Screw cap 4pcs

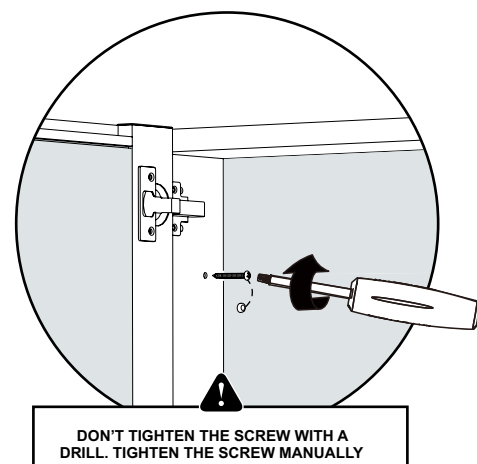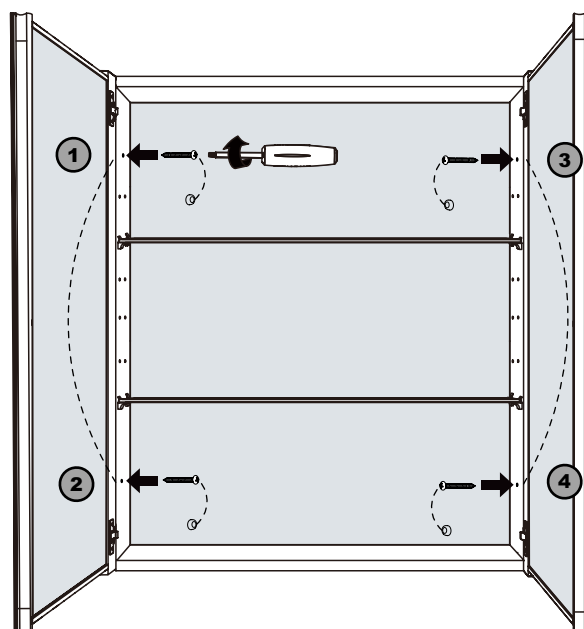

7. Switch User Guide.

Time adjustment:

When the lights are turned off, press the LED key for a long time. When the key starts to beat, press the antiog key for a short time to select the items to be adjusted. After selecting them, press the LED switch for addition and subtraction. When the key does not beat, the adjustment is completed.

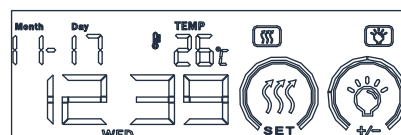

Antiog film switch

LED switch

Press short as the light switch.

(Press the first button to turn on the LED, the first button to the third button to change three colors, and the fourth button to turn off) Long press for brightness level.