


Please consult your electrician for hanging fixture and wiring.

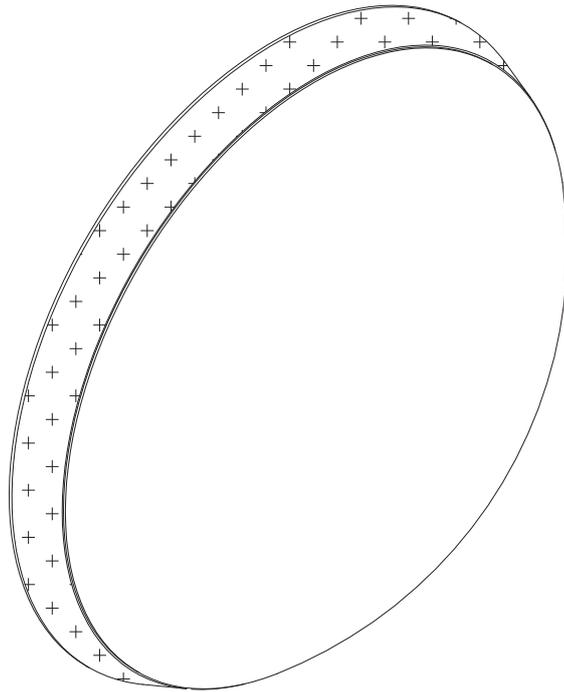

This fixture is designed to dim with an Electronic Low Voltage dimmer. Dimming levels will vary by dimmer.

Below is a List of Recommended Dimmers:

- Lutron DVLEV-330P
- Lutron MAELV-600M
- Lutron SAELV-153P
- Leviton IPL06-10Z
- Leviton 6674-POW
- Legrand Tru-Universal ADTP703TUW4

Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

To prevent water intrusion, caulk around back-plate where fixture meets the wall using outdoor silicone sealant. Leave a small gap at the bottom to allow moisture to exit.

LED 12W

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation




(A)

Mounting bracket



(B)

Backplate



(C)

Shade



(D)



Wire Nuts (x3)



(E)


Mounting screws (x2)

Locate all hardware & components before discarding packaging

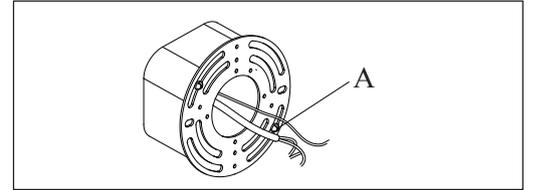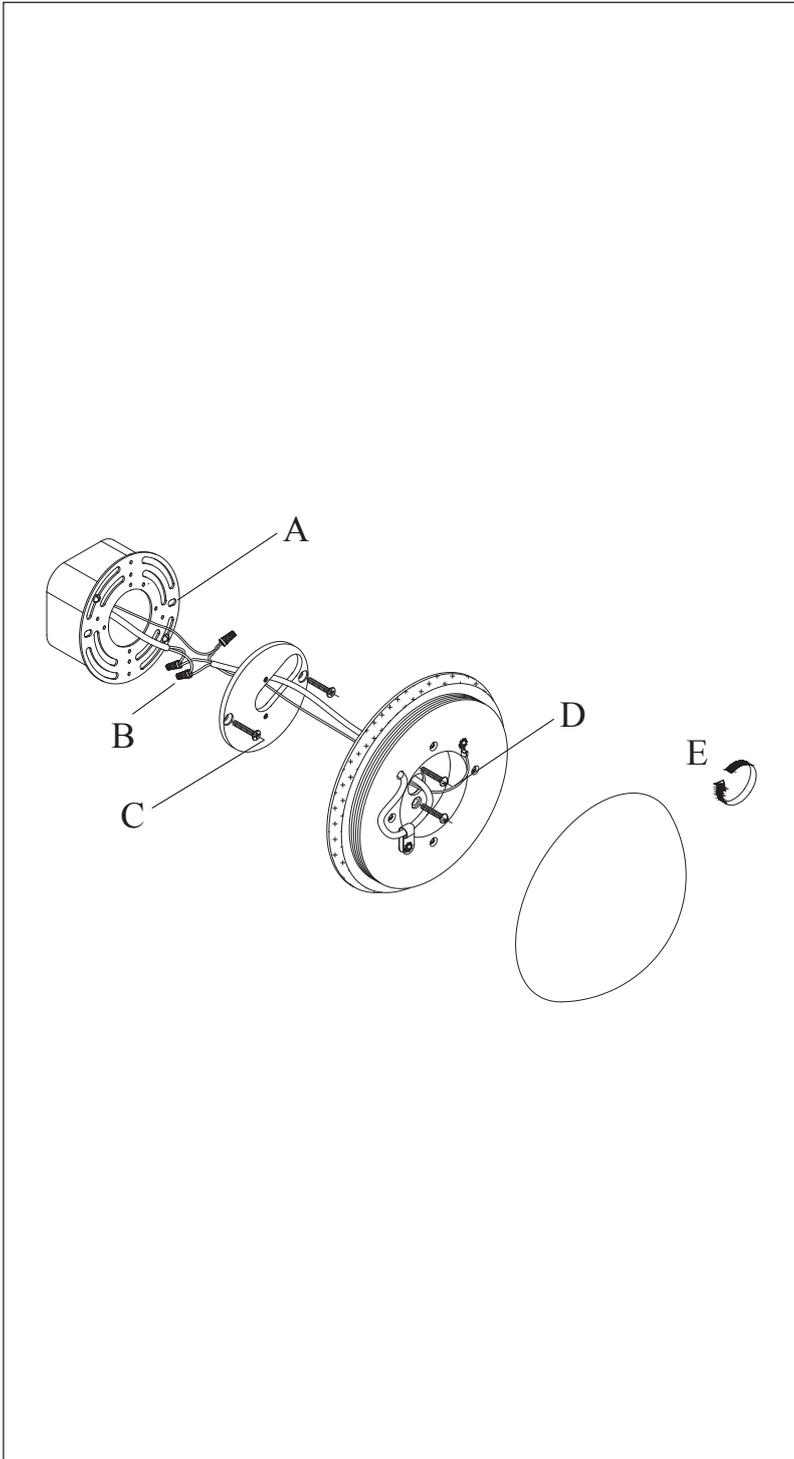


1.)

Step.1: Install Mounting bracket(A) to outlet box.

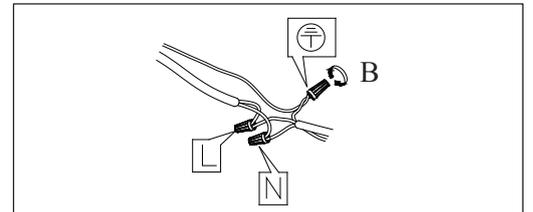


2.)

Step.2: Wire fixture to wires in outlet box.
Green/Copper wire is for Ground.

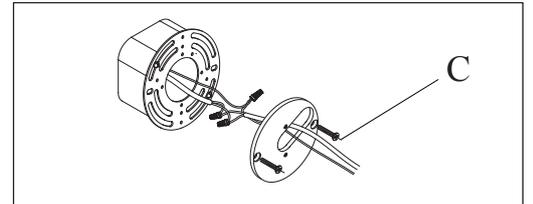


3.)

Step.3: Install Backplate(B) to Mounting bracket(A) with Mounting screws(E).

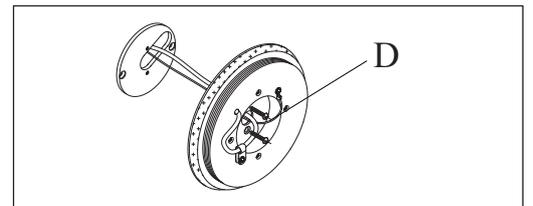

4.)

Step.4: Install fixture to backplate (B)

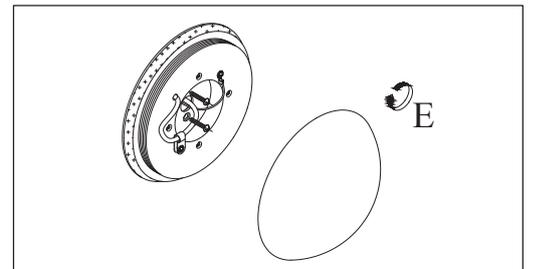

5.)

Step.5: Caulk around fixture with outdoor silicone sealant to prevent water intrusion. Leave a small gap at the bottom to allow moisture to escape. Install Shade(B) to fixture

Cleaning & Care:

Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.