



Scan for more help!

Security is just a touch away



Simplified, for peace of mind!

User Manual : UF-SP



Discover our Range of Products:

Simplified is a London-based tech company rolling out innovative IoT devices to elevate the smart home experience. Control your home with a range of smart security devices from Simplified. Whether it's a Smart Door Lock, a Camera Doorbell, Simplified put you in control of your home security.

Thank you for choosing the Simplified Slim Door Lock. Please

1. Read this manual completely before using the Simplified Slim Door Lock.
2. Alkaline Batteries are recommended.
3. Replace the battery when you notice the low-battery alarm.
4. Keep the Emergency keys outside the house.


Table of Contents:

Product Overview	1
What's Included	2
Specification	3
Factory reset	3
Installation	
Opening direction	4
Step1 Install Mortise	5
Step2 Screw the Stubs and fit the rubber gasket to the panel	5
Step3 Install front Panel	5
Step4 Fit the rubber gasket to the panel	5
Step5 Connecting front and back panels	5
Step6 Fixed back Panel	5
Step7 Install Batteries	5
Step8 Close the battery cover	5
Operation	
Setting up the Smart App	6
Bluetooth Unlock	7
Add fingerprint	8
Add passcodes	9
Passcode Management	10
Create and Send e-Keys	10
e-Key Management	10
Add Fobs/Tags/Stickers	11
Unlocking Records	11
Gateway Pairing	12
FAQ	14
Contact Us	15

For more information and support on Simplified Slim Door Lock, feel free to contact us:
support@simplified.tech



Product Overview

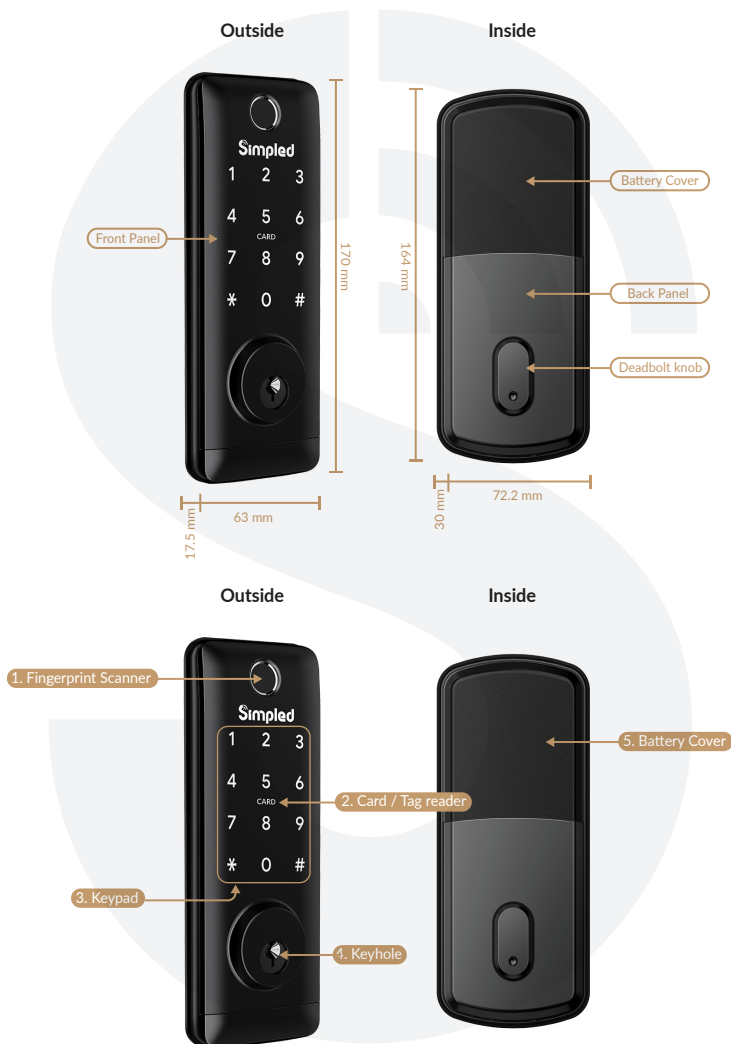

Simplified®

What's Included?

No	Name	QTY	No	Name	QTY
1	Front Panel	1	9	M4x30 mm Screw Stubs: for front Panel lower (Need 2)	3
2	Back Panel	1	10	M4x30 mm Screw Stubs: for front Panel upper (Need 1)	3
3	Mortise: Latch Type	1	11	Mortise Screws: 25x4 mm (For Wooden Door)	4
4	Proxy Fobs / Stickers	3	12	Mortise Screws: 10x5 mm (For Aluminium Door)	4
5	Emergency Key	2	13	M4x12 mm Screw for fixing back Panel	2
6	Waterproof Rubber	2	14	M4x30 mm Screw for Door thickness 35-50 mm	3
7	User Manual	1	15	M4x50 mm Screw for Door thickness 50-65 mm	2
8	Strike	1			

Specifications

Model	UF-SP	Doors Applicable	Aluminium Door Wooden Door
Materials	Zinc Alloy	Working Voltage	6V/4 x AA Batteries
Lock Weight	2.0 KG	Door Thickness to Fit	35-60 mm
Unlocking Way	Bluetooth Fingerprint Password Proxy Fob / Stickers Emergency Key Alexa (Bridge needed) Google Home (Bridge needed)	Data Capacity	Fingerprint: 200 Password: 150 Fob: 200
Colour	Silver - Black	Working Temperature	-10°C-55°C
Low Battery Alarm	Less than 4.8 v	Working Humidity	0-95%

Factory reset

Open the cover and long-press the "reset" button for 3 sec. Then key in "000#". It short beeps twice to show it is successfully reset.













Activate Privacy Mode

Long press the button shown in the figure. Once you hear "Operation Successful", it means the door can only be unlocked by the administrator app, or emergency keys. The other unlocking methods will be deactivated.

Installation

Opening direction

	Left open	Right open	
1			Spindle should always remain horizontally
2			Make sure the latch is inside
3			Left/Right Open
4			Switch to "L" for Left Open and "R" for Right Open Doors. It's in the PCB inside the back panel
5			Deadbolt knob

These details are critical. Please make sure all are correct or the lock will not function properly.

Step1 Install Mortise



Step3 Install front Panel


Spindle should always remain horizontally




Make sure the latch is inside




Step5 Connecting front and back panels




Step 7 Install Batteries



Step2 Screw the Stubs and fit the rubber gasket to the panel



Step4 Fit the rubber gasket to the panel



Step6 Fixed back Panel




Step8 Close the battery cover



Operation

Setting up the Smart App

1. Download the “TTlock App” from the App Store or Google Play by either
 - Scanning the QR code
 - Searching the “TTLock” app
2. Sign up for a TTlock account, and add the smart lock to the device list

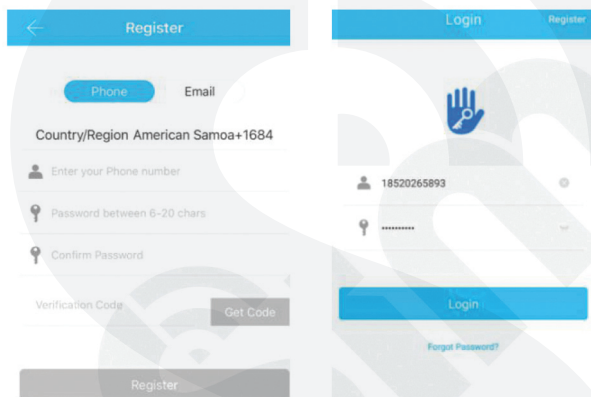

The image displays two screenshots of the TTlock mobile application. The left screenshot shows the 'Register' screen with a blue header bar containing a back arrow and the title 'Register'. Below the header, there are two tabs: 'Phone' (selected) and 'Email'. The 'Country/Region' is set to 'American Samoa+1684'. There are input fields for 'Enter your Phone number', 'Password between 6-20 chars', and 'Confirm Password'. A 'Verification Code' field is at the bottom with a 'Get Code' button. A 'Register' button is at the very bottom. The right screenshot shows the 'Login' screen with a blue header bar containing the title 'Login' and a 'Register' link. Below the header, there is a blue hand icon with a keyhole. There are input fields for a phone number (18520265893) and a password (masked with dots). A 'Login' button is at the bottom, and a 'Forgot Password?' link is below it.




Scan for more help!

You can register an account by your email address or mobile number that is available in 200 countries around the world.

Operation

3. Activate the lock's Bluetooth by touching the Lock's keypad
4. Tap on "+ Add Lock" and select your lock type. Press on "All Locks" if you are not sure.
5. In the "Nearby Locks" list, select the appeared lock. Please make sure you are near the lock in the Bluetooth range.
6. Rename the Lock "Sweet Home, Spain Villa, London Office, ..."

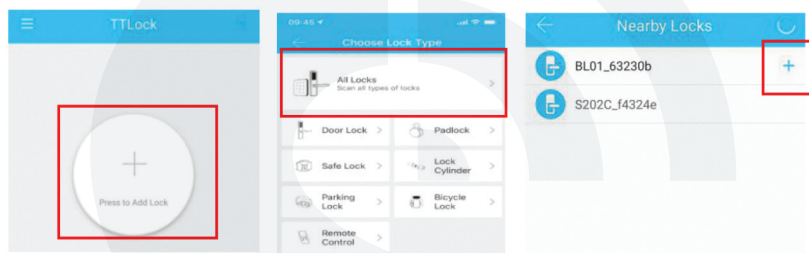

Notice: Generally, the password for a lock that has not yet been added is 123456





Bluetooth Unlock

Try to open the lock by tapping on the "Lock Icon". Please ensure there is no problem with Bluetooth communication, and the phone is within the 5-meter range of the Simplified Slim Smart Lock.

Add Fingerprints

For adding a new fingerprint,

1. Select Fingerprint from the lock screen in the app
2. Tap on the three dots
3. Select Add Fingerprint
4. Choose a name for later reference “ It helps you to recognise the fingerprint in the unlocking reports”.
5. Choose whether you want to create limited-time or permanent access.
6. Then start and press your fingerprint 4 times on the fingerprint sensor
7. You should see it is done successfully.
8. Test the fingerprint.




Add Passcodes

You can create different passcodes types to open the Simplified slim lock: permanent, time-limited, OTP(one-time passcode), cycle or custom. You can easily share the passcode with other users via SMS, Email, WhatsApp.

You can create, limit, share and delete a passcode without a bridge using the app when you are near the lock.

But for example, If you want to eliminate a passcode remotely, you need a Bridge. You can learn more about Bridge features in its section.

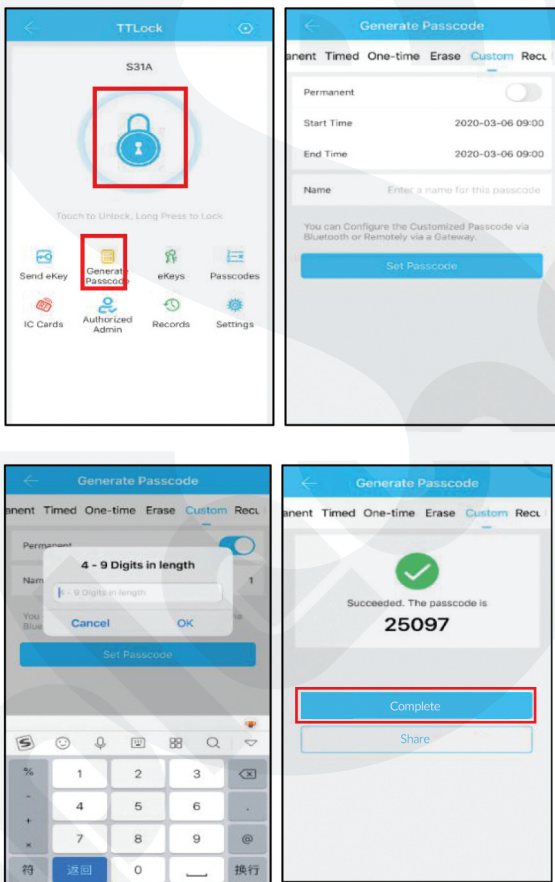

Passcode Management

Click on "Passcodes". In this section, the Admin user can

1. Change, delete or reset passcodes.
2. Review the unlock records of passcodes.

Create and Send e-Keys

By selecting the "Send eKey" as shown in the figure, you can create and share an electronic key with your friends, family, maid, dog walker or your Airbnb guests. For using the eKey, they need to download and sign up for a new account. This will also help you find out about the time they opened the lock.

E-Keys are also available in different types: Permanent, Time-Limited, One-time and recurring.

You can authorise a user as Admin in the Authorised Admin section




e-Key Management

Click on eKeys. In this section, the Admin user can

1. reset or delete eKeys.
2. review the access records.


Add Fobs/Tags/Stickers:

Before a proxy fob or sticker can open the lock, it is required to be added first. Fobs/Stickers can also be Permanent or Limited by time

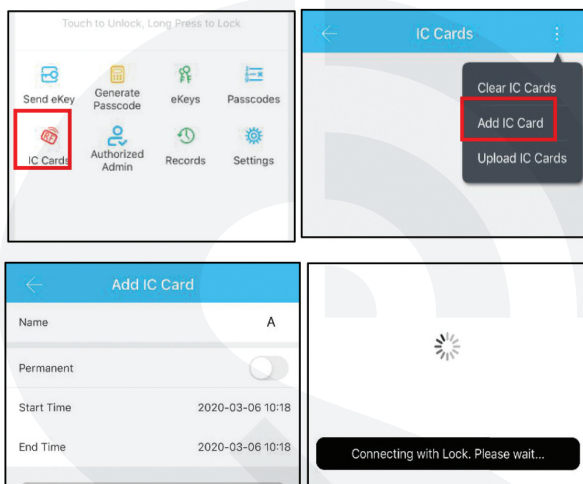

Unlocking Records

Tap on "records". In this part, you can review all the unlock records

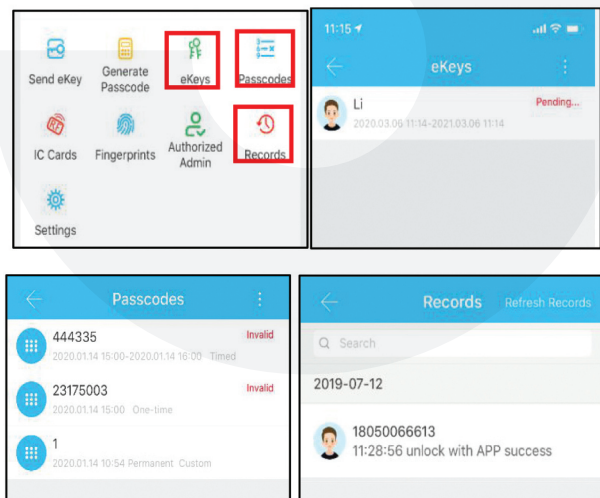

Gateway Pairing

The Simplified Smart Gateway is a bridge between Simplified Smart locks and WiFi. With the Gateway, you can

- open your lock from anywhere
- remotely read the lock operation records, including, fingerprint, passcodes
- calibrate the lock clock remotely
- remotely delete and modify passcodes
- use the Simplified lock with your Alexa
- use the Simplified lock with your Google home

Light Status




When the Gateway is powered on:

- Light Flashes alternately in Red and Blue:
Stand-by mode, ready for pairing
- Blue light: Working mode
- Red Light: Network failure

Pair the Gateway with APP

1 Activate the APP




2 Pres "≡"



3 Select (Gateway)




4 Select (G2)



Simplified

Pair the Gateway with APP

- 5 Plug in the Gateway and power it on, while the light Flashes alternately in red and blue



- 6 Press “+” sign



- 7 Add (Gateway)



- 8 Select the network and fill in the password



- 9 Add complete

Notice:
If times out,
please off and
try it again.

Activate Passage Mode

1. Choose the lock
2. Tap on “Setting”
3. Select “Passage Mode”
4. Turn on this mode and press Save

FAQ

1. How can I read the operation records?

1. Open the app 2. Select your lock 3. Select "Records"

2. Why can't I unlock the lock after activating the passage mode?

The lock needs to be unlocked once, and only then, the passage mode will be activated.

3. I cannot change the passcode. It says Operation failed.

First, ensure your smartphone is within 2 meters of the cylinder when setting the passcode. If it is, turn off your smartphone's Bluetooth for 10 seconds and turn it on again.

4. After installation, I touched the keypad, but there was no response. What is the reason?

A) Check if the battery is placed correctly and if it has enough power. New Alkaline Batteries are recommended.

B) Remove the back panel and check if the cable is connected properly.

C) Unmount the lock and make sure the cables are not squeezed or damaged.

5. What's the purpose of the Auto-Lock?

To set a timer for the Smart lock to be automatically locked after each time you unlock it.

6. I had a problem registering my fingerprint.

Check if your fingerprints are clean without any dirt or wear. Clean the sensor with a soft cloth making sure there's no oil, stains, etc.

7. What is the reason the batteries ran out?

It can be due to long standby or a Short Circuit caused by a damaged cable.

8. Although the lock recognises my fingerprint, it doesn't function properly?

There are important considerations in the installation section:

1. The spindle should always remain horizontally.

2. Make sure the latch is inside 3. Ensure the Left/Right direction is set correctly on the PCB inside the back panel.

9. What happens if you enter the wrong password into the lock too many times?

After five failed attempts to enter your passcode, your lock will be disabled for 5 minutes. You can try other unlocking methods.

Note:



Note:



Contact us:



SimplifiedTech



simplified.tech



simplified.tech



simplified-tech

Note:

1. We provide you with a two-year warranty from the date of purchase.
2. This warranty service is valid for customers in any country in the world.
3. For more help please scan the QR code, or contact us:
support@simplified.tech



Scan for more help!

**WOW!**

If you are happy with your purchase, please feel free to share your new-found happiness.

1. Go to Amazon > Your Account > Your Orders.
2. Locate your Simplified purchases.
3. Click "Write a product review".

OR**MEH.**

If you have any question, concerns or complaints about your Simplified purchase, please contact us at:

Email: support@simplified.tech

We will get back to you within 24 hours, Promise.

Simplified®