


Assembling Instruction

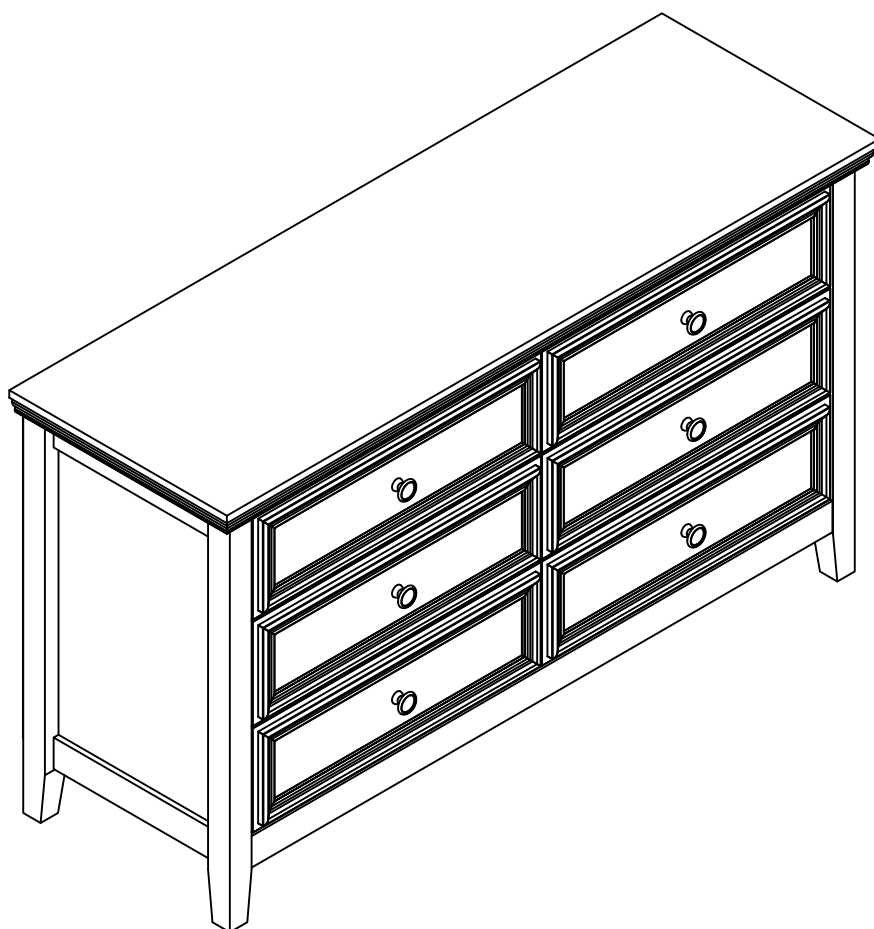

ATTENTION

We are concerned about each customer's experience, so if there is any loss or damage, feel free to contact us and provide the name of the missing or damaged parts regarding to the P.3 page of the instructions at any time please. We will send replacement to you asap.




Customer service email: ServiceSupportAMZ@126.com

Please attach your order ID so that we can assist you better.



General Assembly Guidelines


- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are: wood dowels, screws and bolts.
- VI. A Phillips head screwdriver is required for the assembly of this product.

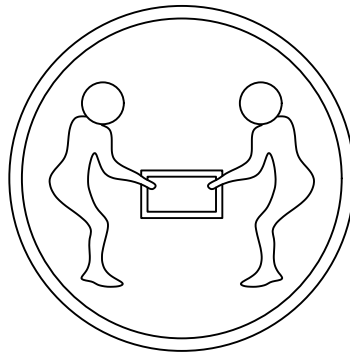


We recommend that two people install this dresser.

Parts List

Chest

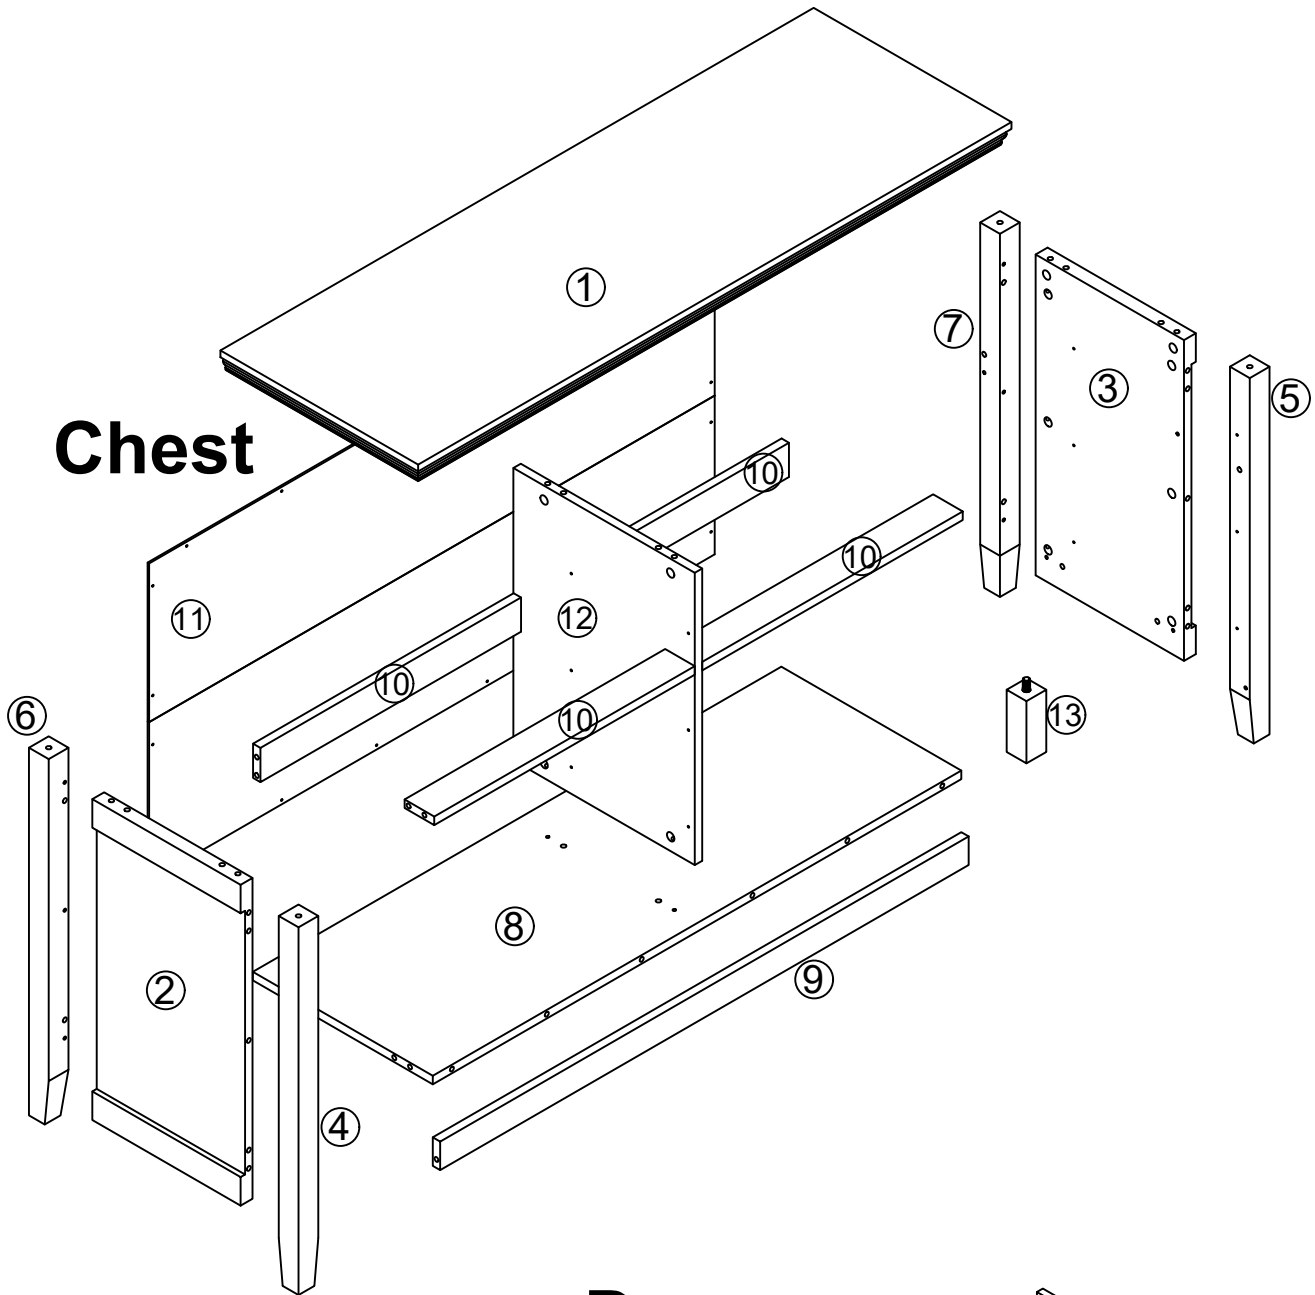


Drawer

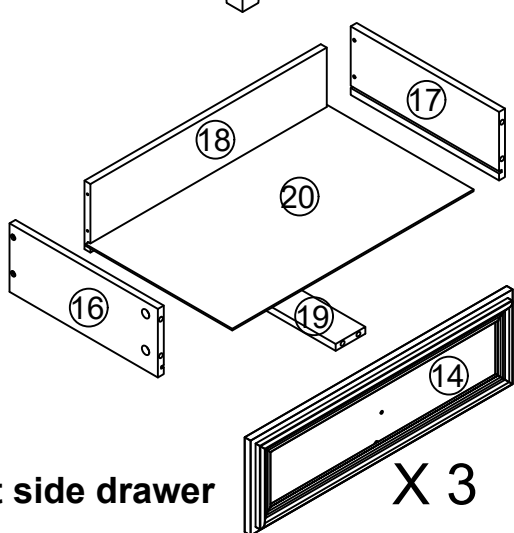

Left side drawer


X 3

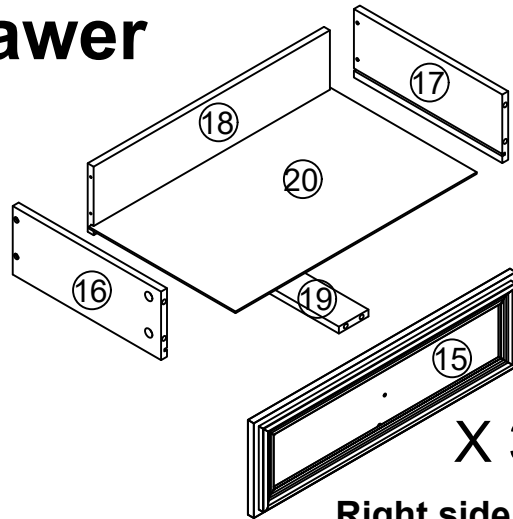


Right side drawer

X 3


Components

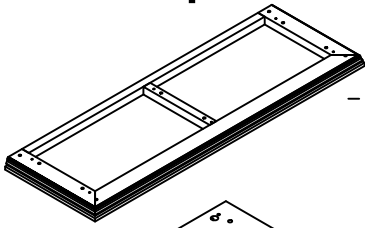


① x1




② x1




③ x1




④ x1




⑤ x1




⑥ x1




⑦ x1

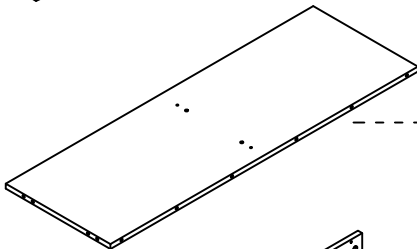


⑧ x1




⑨ x1



⑩ x4




⑪ x1




⑫ x1




⑬ x1




⑭ x3




⑮ x3




⑯ x6




⑰ x6



⑱ x6




⑲ x6



⑳ x6

HARDWARE PACK CONTENT

A



Ø6x32mm

68+3

B



Ø15x10mm

68+3

C



20x20x3mm

4

D



Ø3.5*12mm

21+1


E



Ø8x30mm

46+2


F



Ø4x30mm

30+2

G



M4x16mm


6

H



6

I



6

J




Ø3.5*12mm

72+3

K



2







not included

If you have a Phillips screwdriver at home, it will make the installation easier.

The hardware quantities listed above are required for proper assembly. Some extra hardware may also have been included.

CAM LOCK/BOLT FASTENING INTRODUCTION

(You will use it during assembly)


1 	2 	3 	4 
<p>1. Screw cam bolt into the threaded anchor gently. (Attention: don't screw cam bolt too deep or too shallow.)</p>	<p>2. Please connect the 2 boards you want connect by inserting cam bolt.</p>	<p>3. Insert the cam lock into the round hole of the board. (Attention: point the arrow on the top of the cam lock to the outer edge.)</p>	<p>4. Turn the cam lock clockwise until it is firmly tightened.</p>

Please use [A] cam bolts and [B] cam locks as shown in the illustrations.


Step 1

-Attach (A) to ②, ③, ④, ⑤, ⑥ and ⑦

A



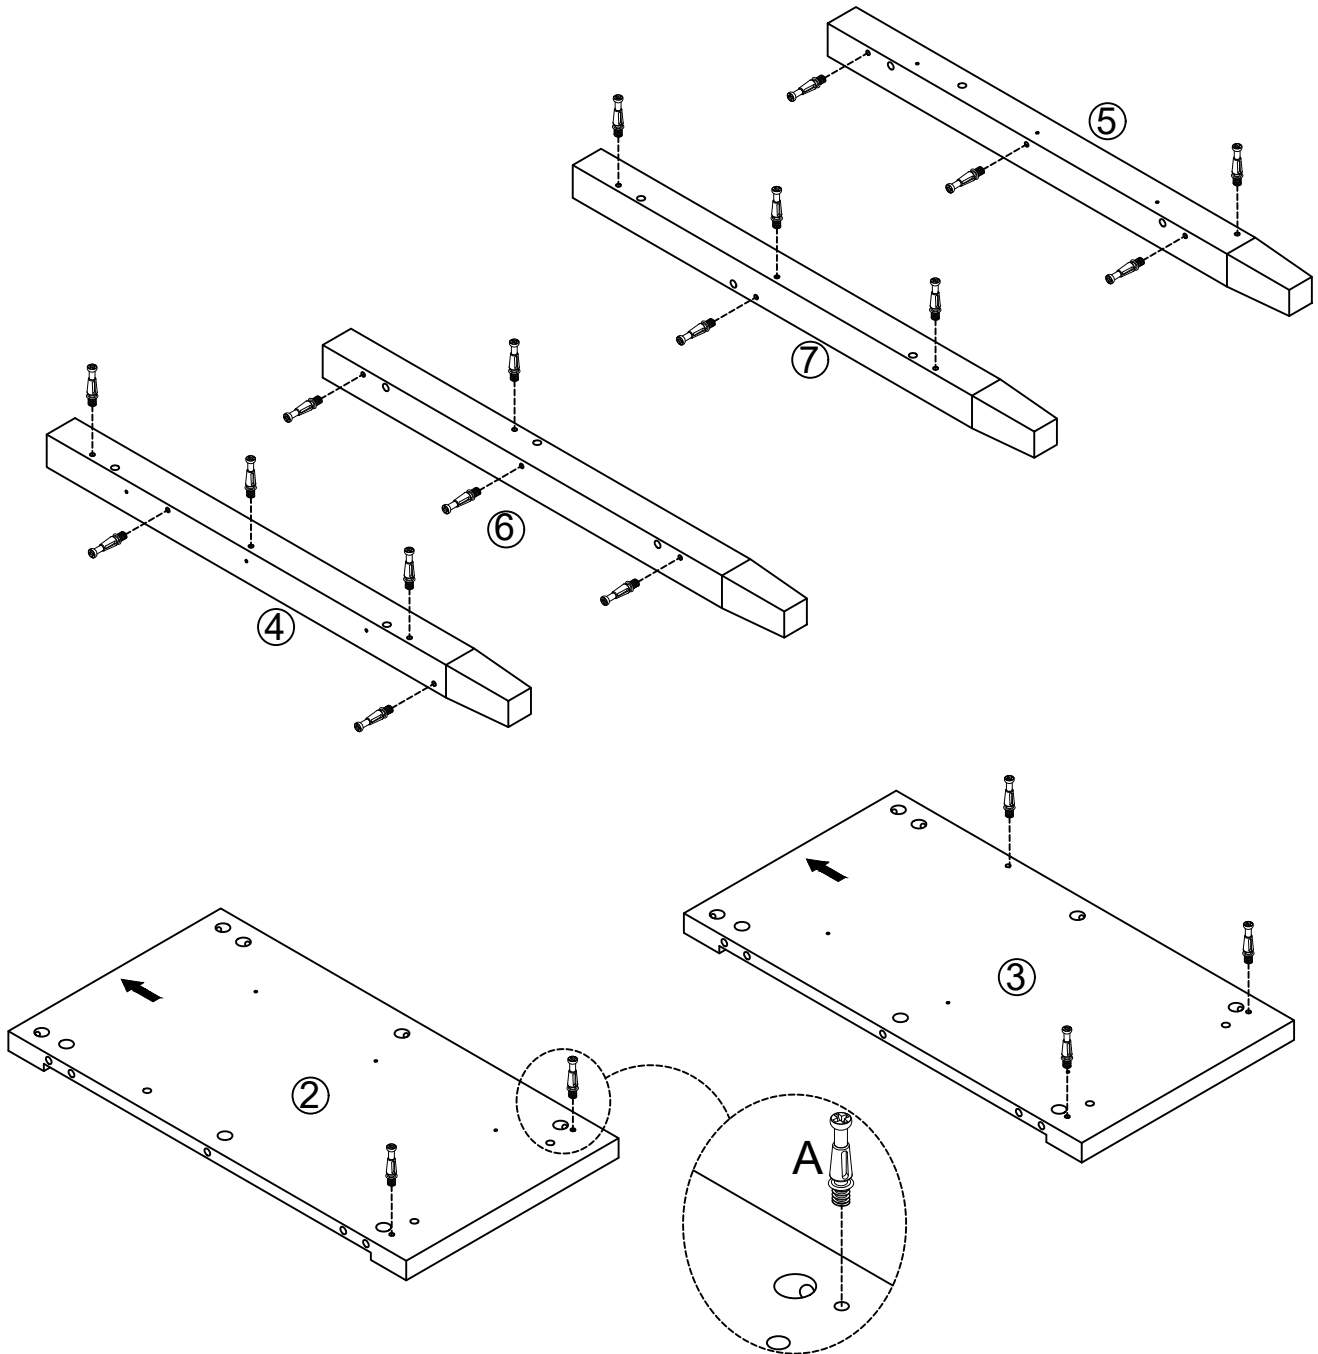

X22



(A) should be screw to the small holes as shown.


Step 2

- Attach (E) to ② and ③
- Attach ④ and ⑥ to ② as below shown
- Attach ⑤ and ⑦ to ③ as below shown
- Screw (B) to lock the ② and ③ as below shown

B	E
	
X12	X8


Warm tips:

Make sure the 4 large pre-drilled holes on ②, are on the upside as shown. And also, holes on ④ and ⑥ should be on the same side as shown.

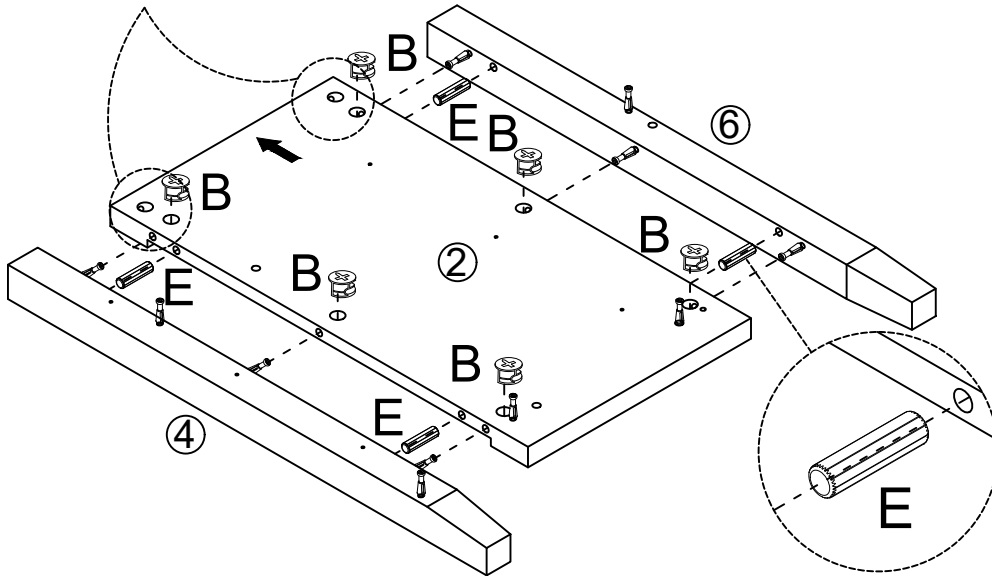

Warm tips:

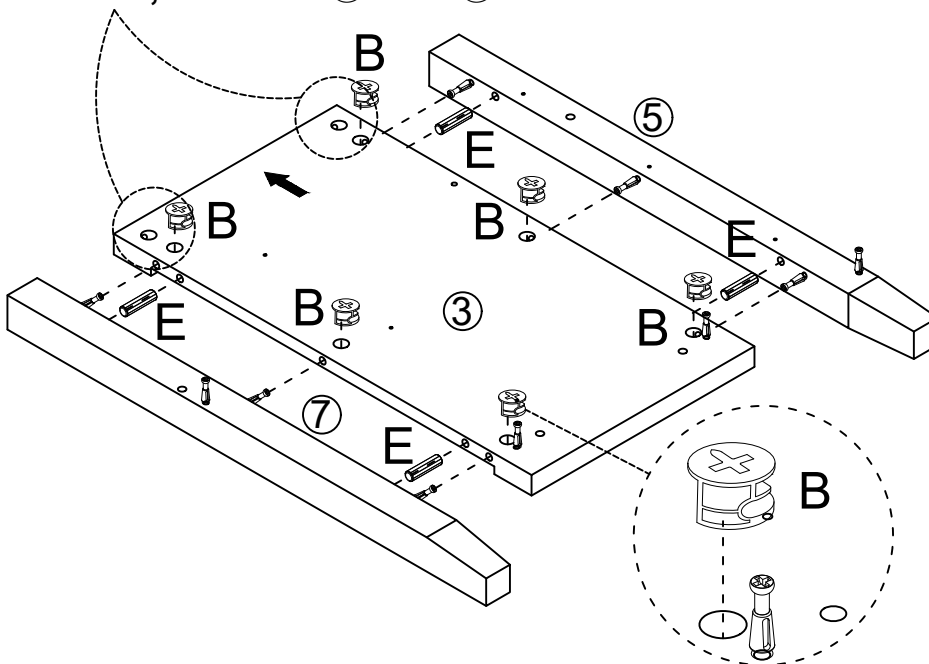

Make sure the 4 large pre-drilled holes on ③, are on the upside as shown. And also, holes on ⑤ and ⑦ should be on the same side as shown.



Warm Tips:


Refer to page 4: Cam lock system operation

Step 3


I	J
	
L	X9
X3	X9

The slide (I) includes 4 parts and there is a sign on each part: L, R, DL and DR. We should take notes of this and install the correct part to the panel to make sure the dresser works.

- Install the part (L) of the drawer slide (I) on the left panel ②
- Repeat to install the other 2 parts (L) on the panel ② as below shown

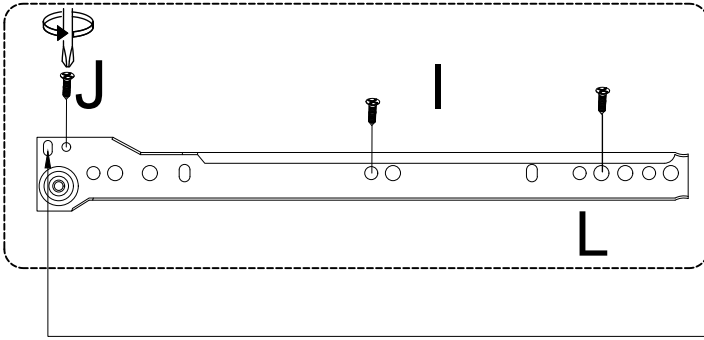

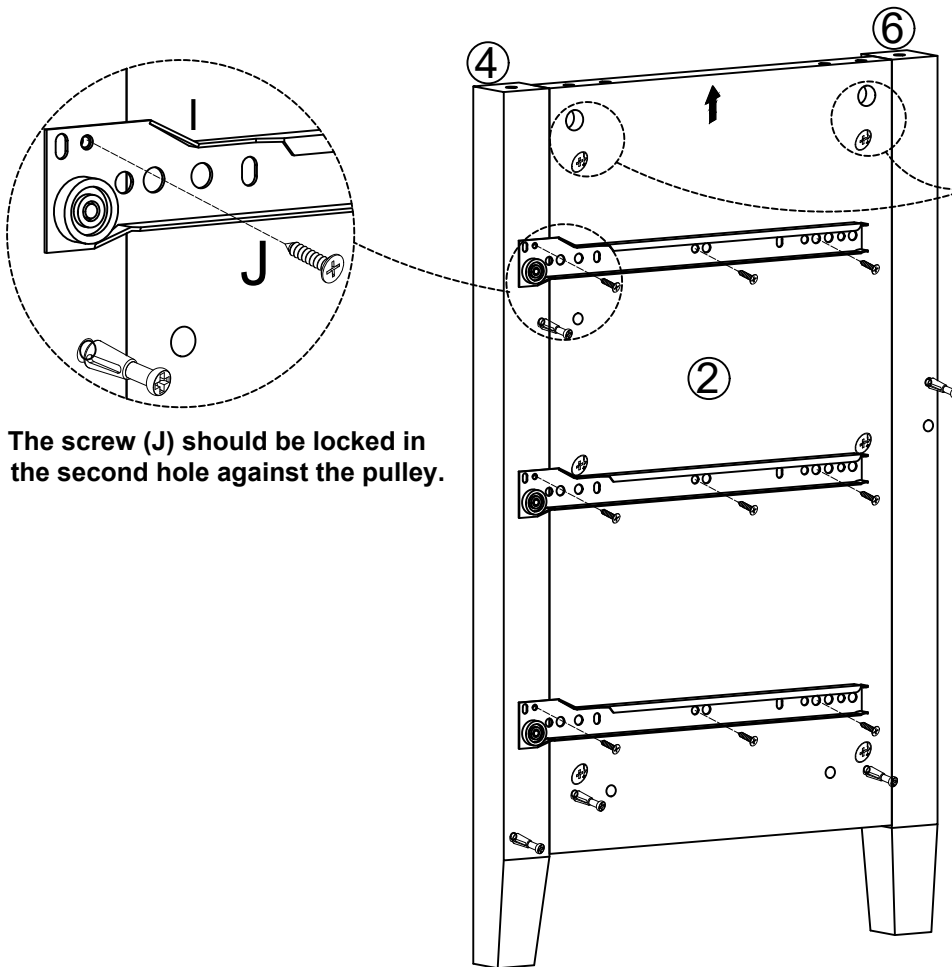

The first hole in the UPPER row holes of the slide is without the corresponding pre-drilled hole, after fix the position of the slide and then screw on.



Make sure the 4 large pre-drilled holes are on the upside.

NOTE: When you screw the screws, please refer to the illustration carefully to make sure that the slide screws correspond to the position.



Step 4

I	J
	
R	
X3	X9

The slide (I) includes 4 parts and there is a sign on each part: L, R, DL and DR. We should take notes of this and install the correct part to the panel to make sure the dresser works.

- Install the part (R) of the drawer slide (I) on the left panel ③
- Repeat to install the other 2 parts (R) on the panel ③ as below shown

The first hole in the UPPER row holes of the slide is without the corresponding pre-drilled hole, after fix the position of the slide and then screw on.

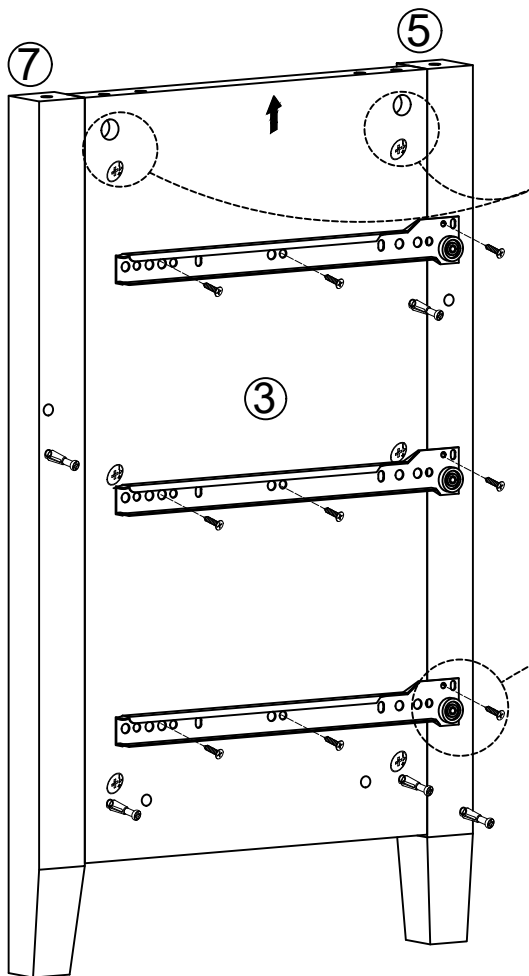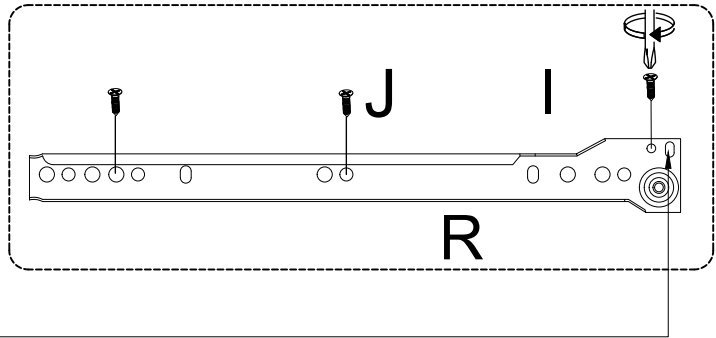




Make sure the 4 large pre-drilled holes are on the upside.


The screw (J) should be locked in the second hole against the pulley.

NOTE: When you screw the screws, please refer to the illustration carefully to make sure that the slide screws correspond to the position.

Step 5

-Install the drawer slides(I) on the panel ⑫


I	I	J
		
R	L	
X3	X3	X18

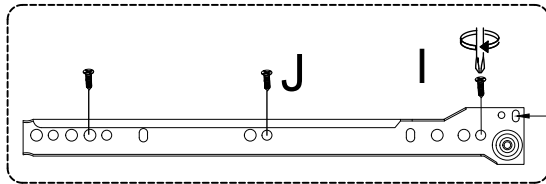

The first hole in the UPPER row holes of the slide is without the corresponding pre-drilled hole, after fix the position of the slide and then screw on.

-Install the slide (R) of the (I) on one side of the panel ⑫. We should pay attention to the position of the panel ⑫ as below shown.

-Repeat to install the other 2 (R) as below shown

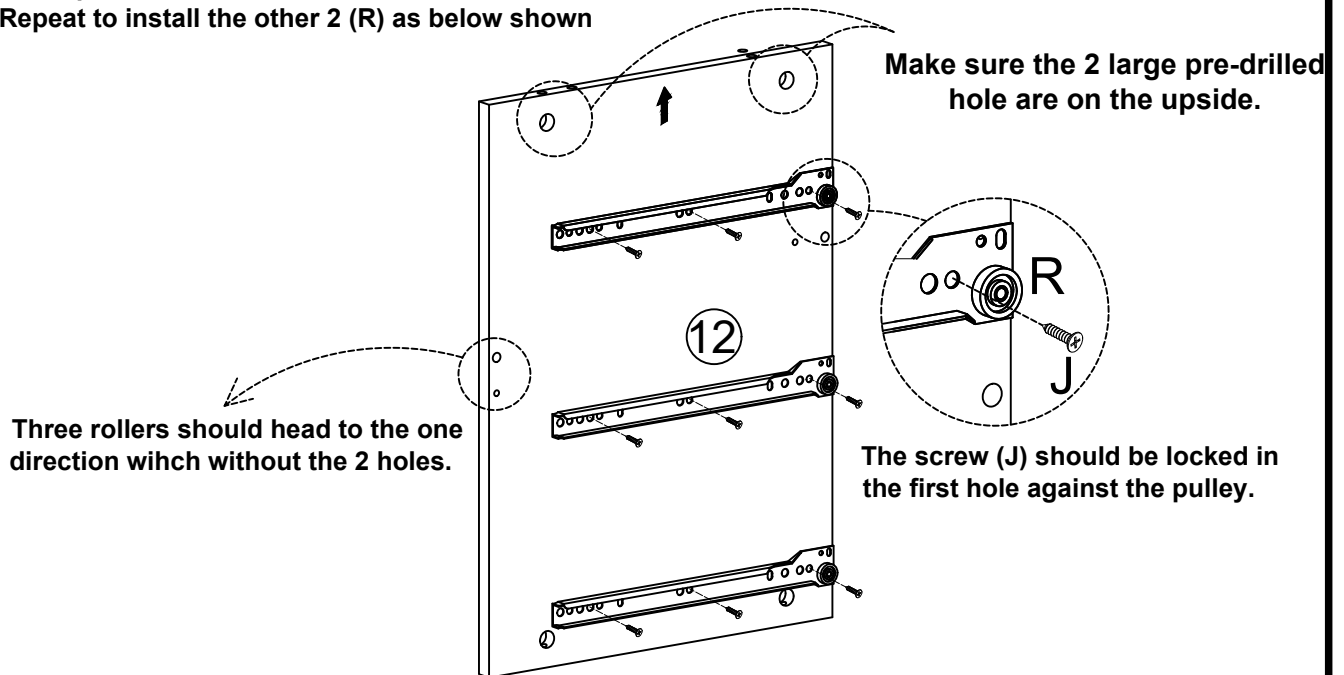


-Install the slide (L) of the (I) on another side of the panel ⑫. We should pay attention to the position of the panel ⑫ as below shown.

-Repeat to install the other 2 (L) as below shown

ATTENTION:

We should make sure that 6 rollers of both sides head to one direction after finish this step.

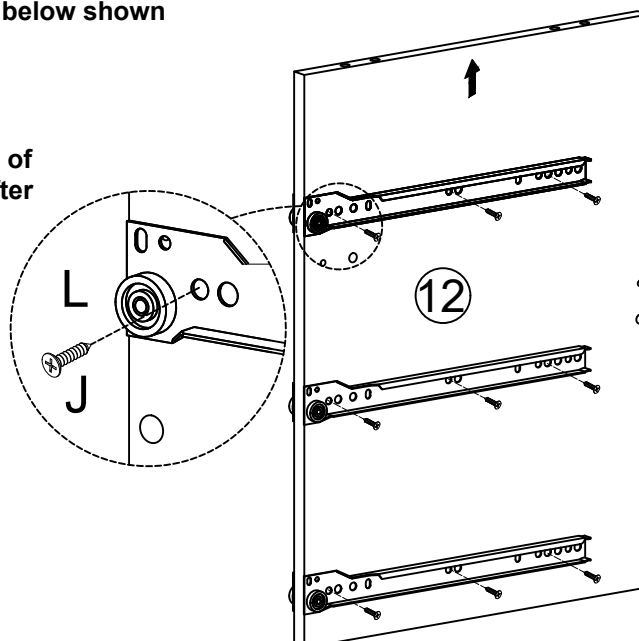

NOTE: When you screw the screws, please refer to the illustration carefully to make sure that the slide screws correspond to the position.


Step 6

-Screw (A) to both sides of the panel ⑫ as below shown


Warm tips :

We need to confirm the 6 rollers of the slides on both sides of the panel ⑫ are head to the same direction.

A




X4

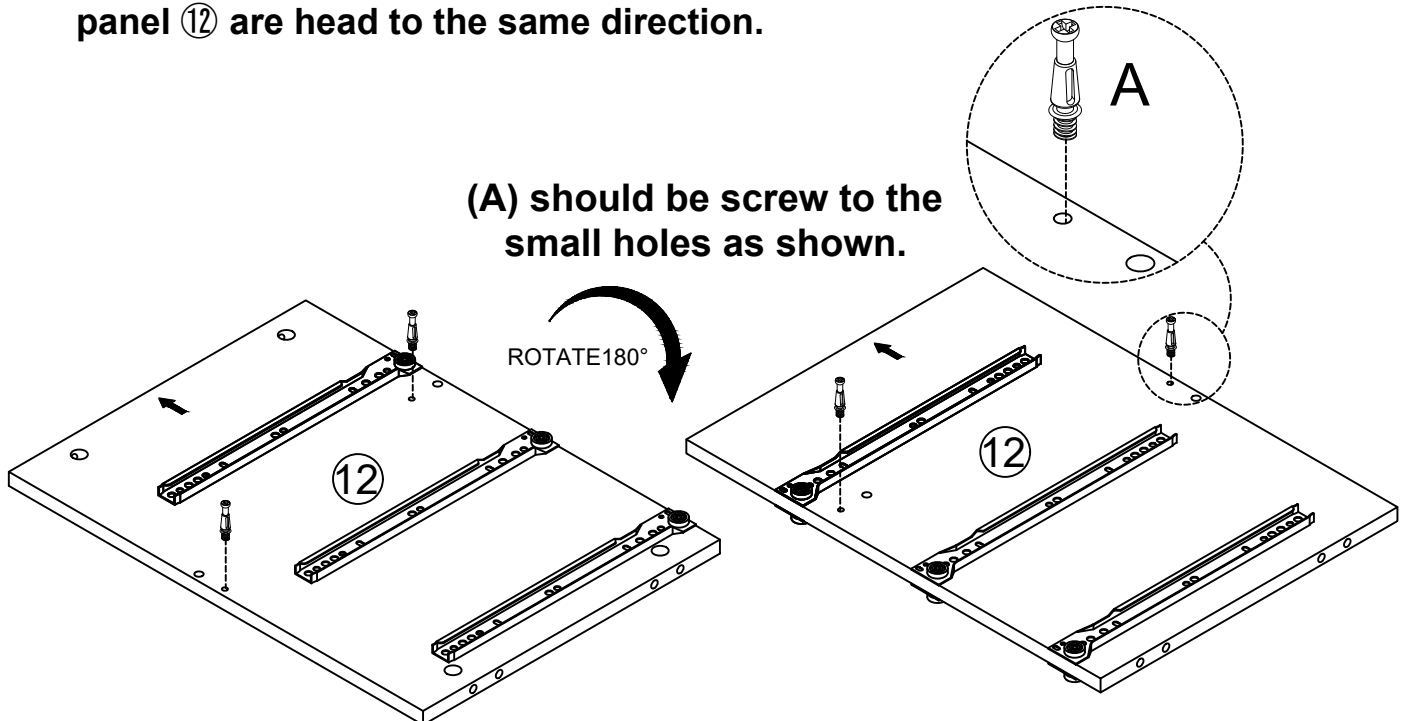


Step 7

-Screw (A) to ⑨ as below shown




A

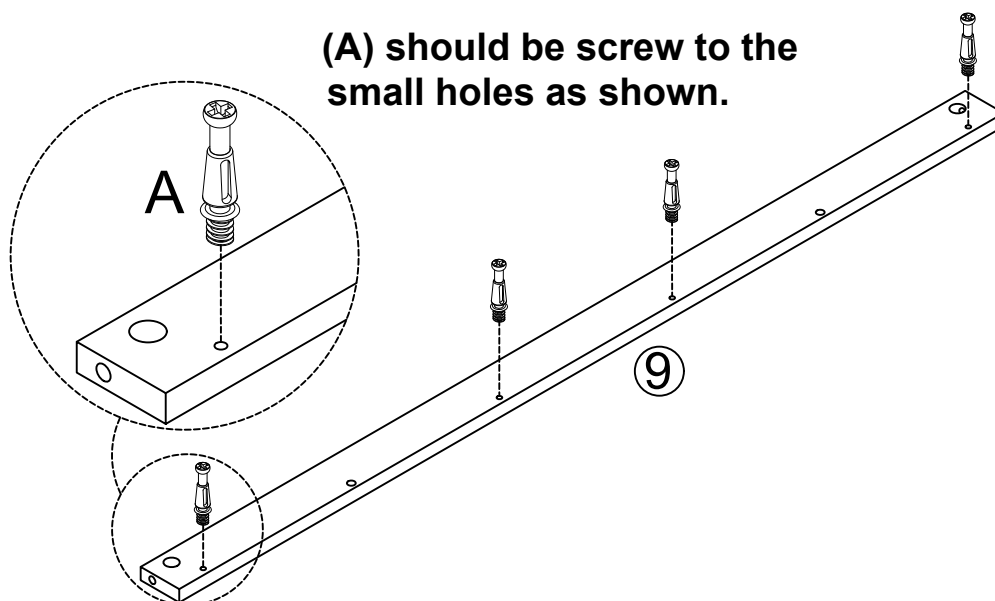

X4




Step 8

A	B	E
		
X2	X4	X2

-Install (E) to ⑨ as below shown


-Rotate the panel ⑨ as shown, and attach ⑨ to ⑧, then screw (B) to lock the panel ⑨ and ⑧ as below shown

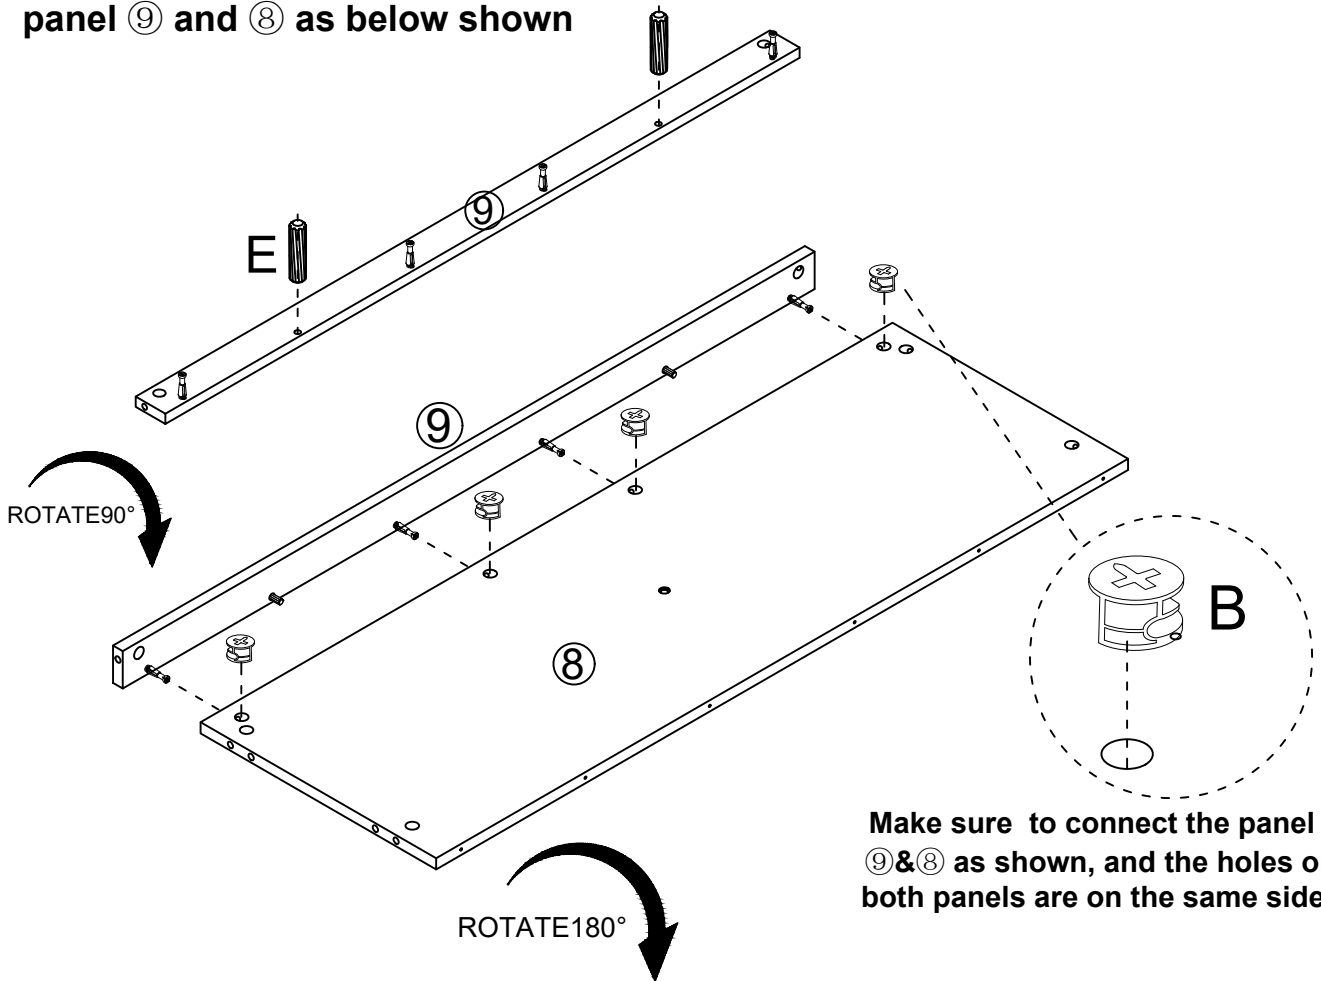

Make sure to connect the panel ⑨&⑧ as shown, and the holes on both panels are on the same side.



-Rotate the board combination as shown

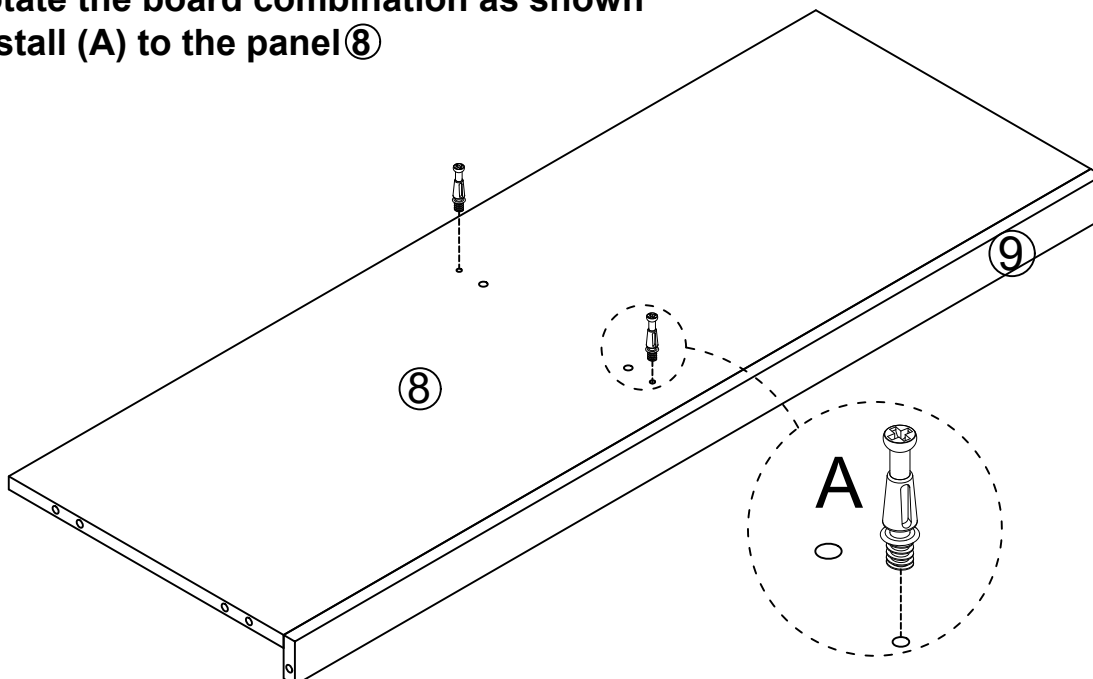
-Install (A) to the panel ⑧



Step 9

- Install (E) to ⑫ as below shown
- Attach ⑫ to ⑧ as below shown
- Screw (B) to lock the ⑫ with ⑧ as below shown

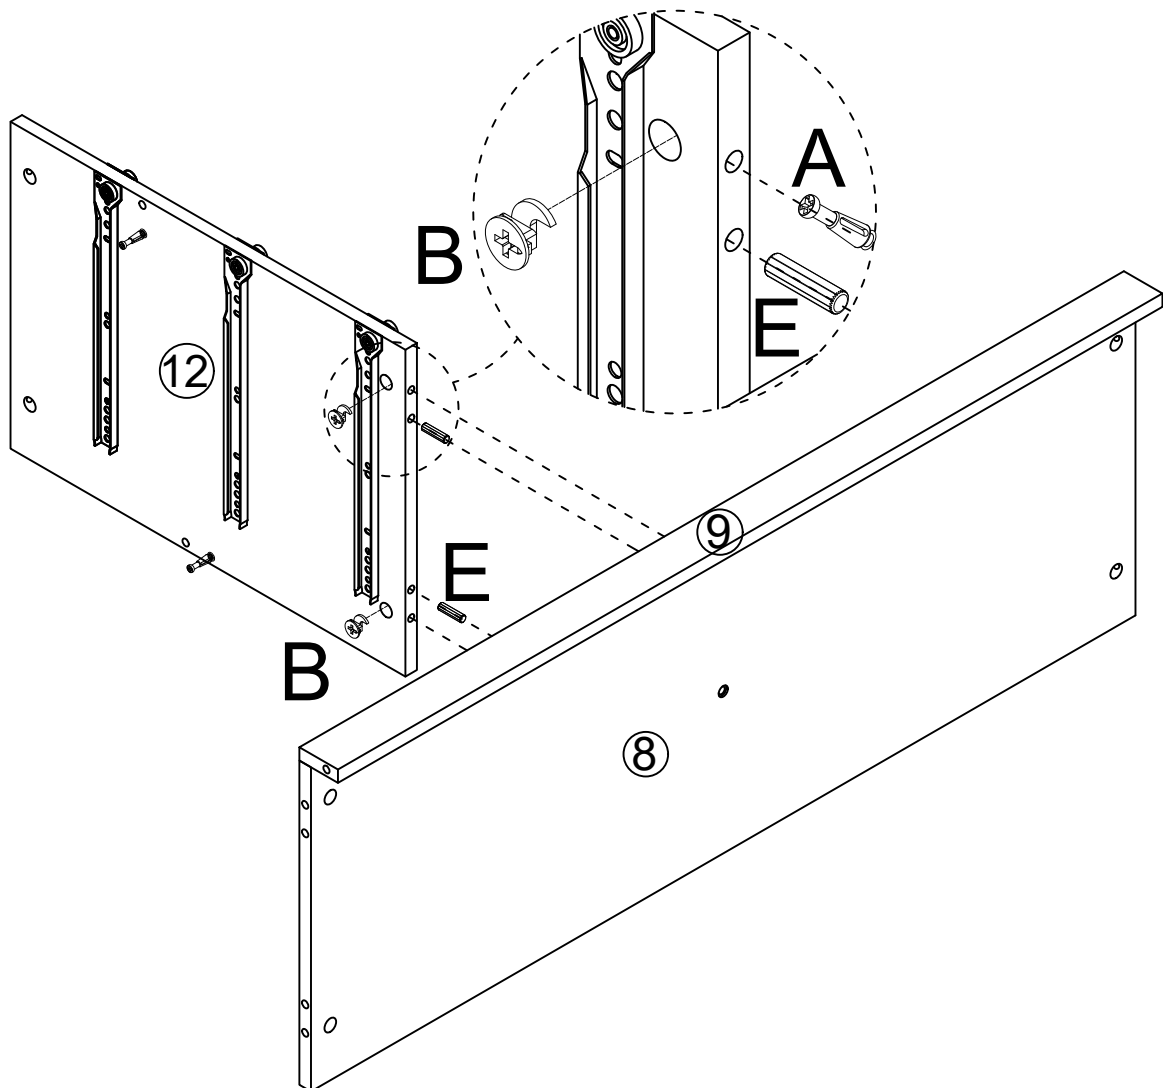

B	E
	
X2	X2




Attention: We should make sure that rollers of the slides head to the same direction of the panel ⑨ as shown.

Step 10

- Screw (E) to ⑫ as below shown
- Attach ⑩ to ⑫ as below shown
- Screw (B) to lock the ⑩ with ⑫ as below shown

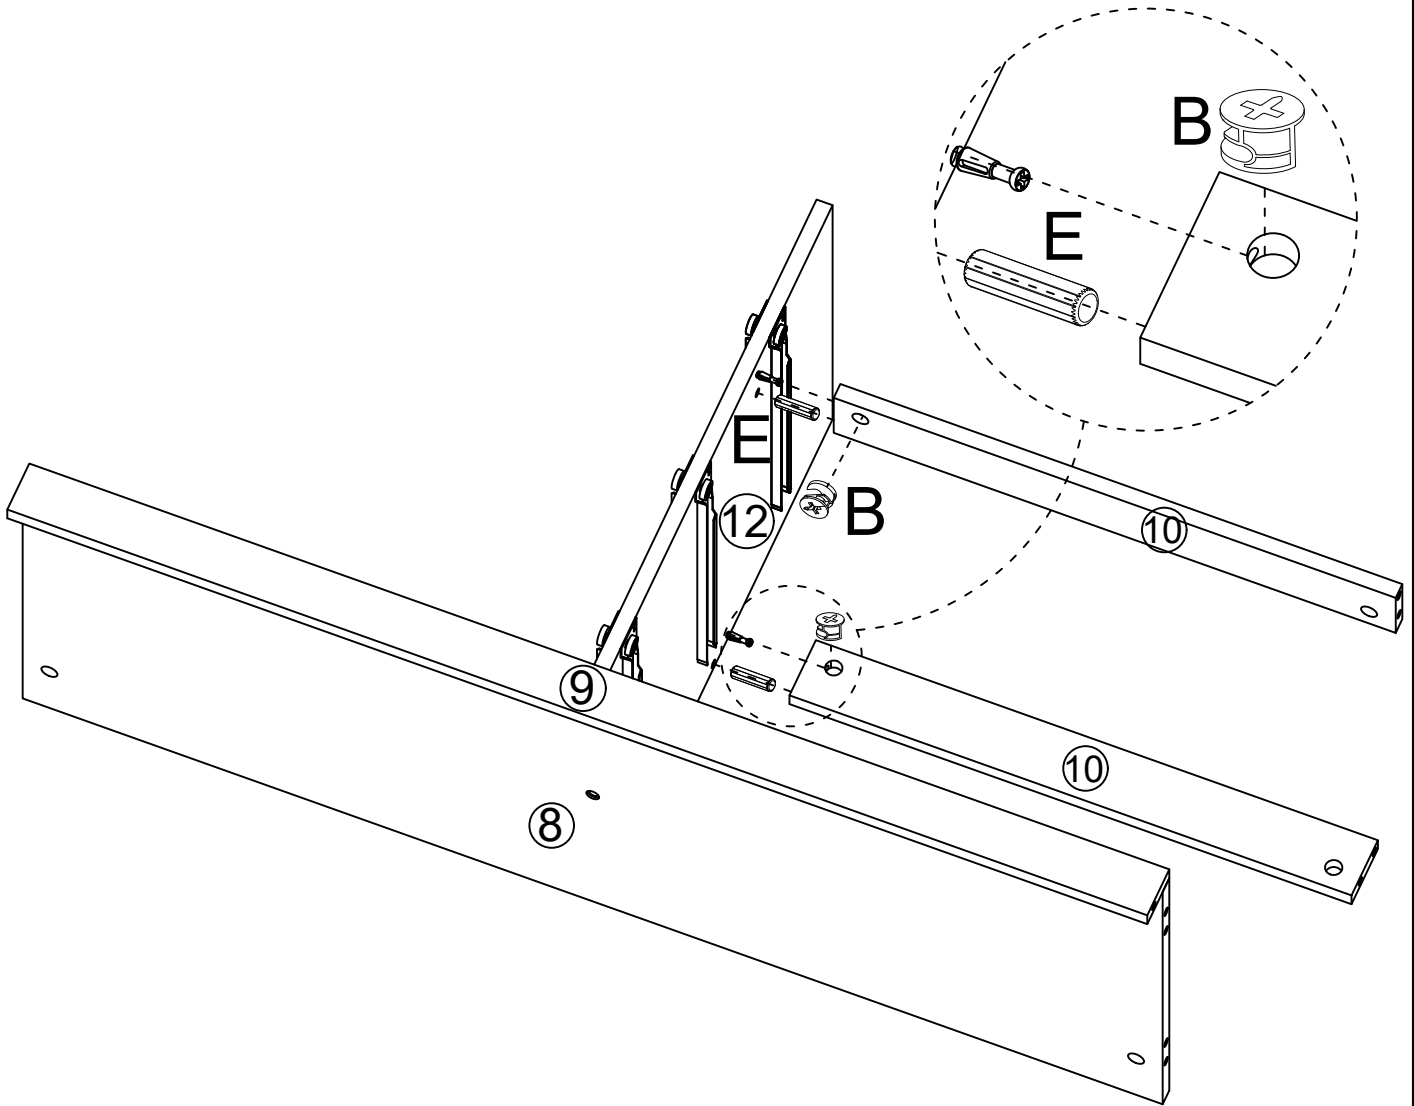

B	E
	
X2	X2




Note: Do not forget to lock (B) on this position of panel ⑧. Or it may cause unstable.

Step 11

- Screw (E) to ③ as below shown
- Attach ③ to ⑧, ⑨, ⑩ as below shown
- Screw (B) to lock the ⑧, ⑨, ⑩ with ③ as below shown

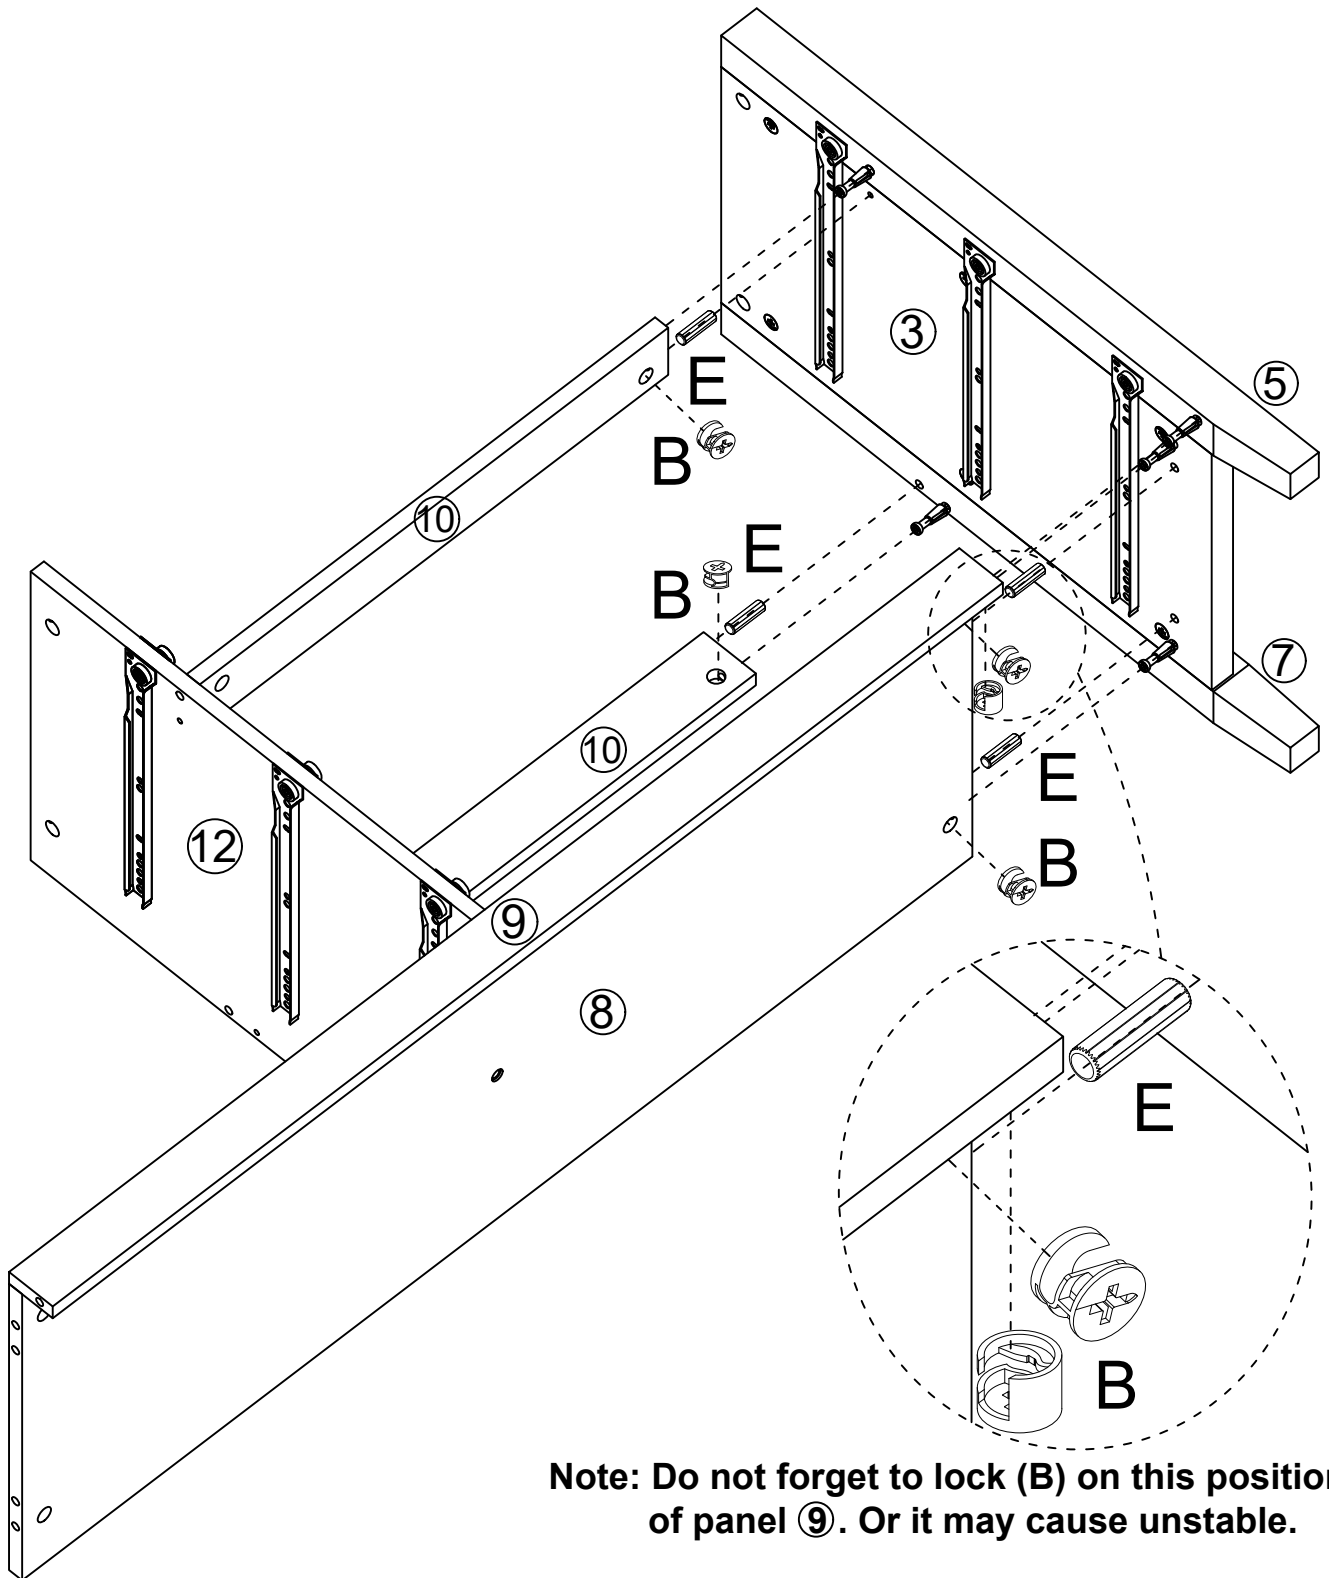

B	E
	
X5	X4




Note: Do not forget to lock (B) on this position of panel ⑨. Or it may cause unstable.



Step 12

- Screw (E) to ⑫ as below shown
- Attach ⑩ to ⑫ as below shown
- Screw (B) to lock the ⑩ with ⑫ as below shown

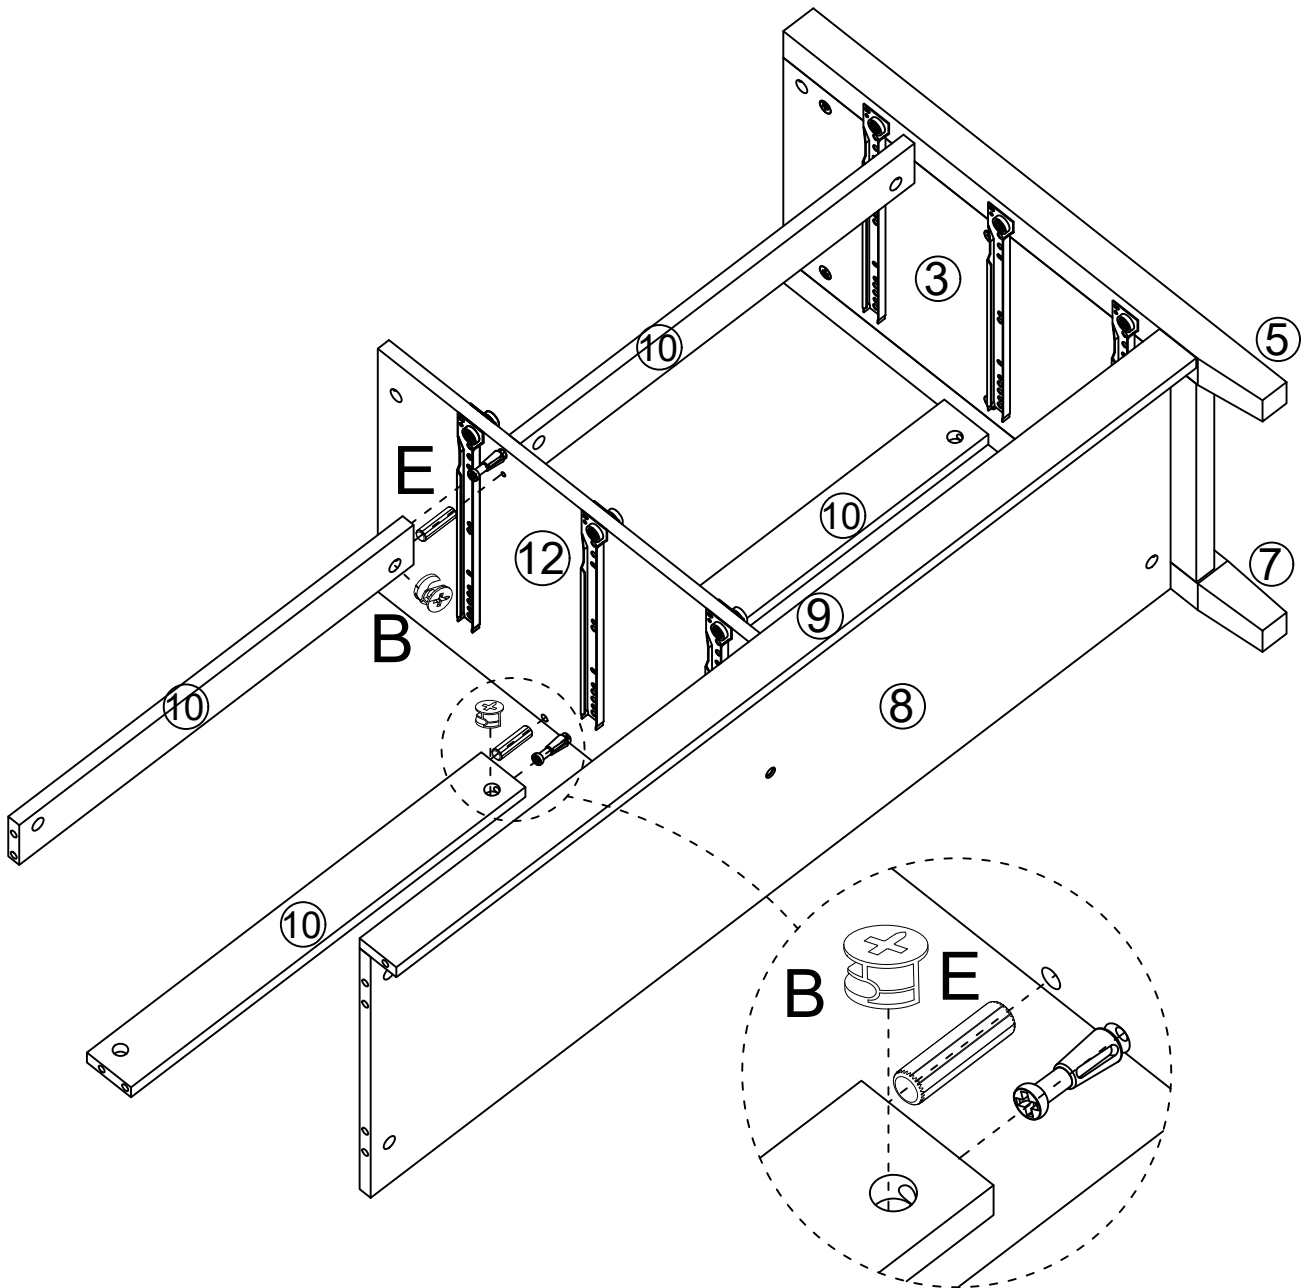
B	E
	
X2	X2



Step 13

B	E
	
X5	X4

- Screw (E) to ② as below shown
- Connect ⑧ & ⑨ & ⑩ with ② as below shown
- Screw (B) to lock the ⑧ & ⑨ & ⑩ with the panel ② as below shown

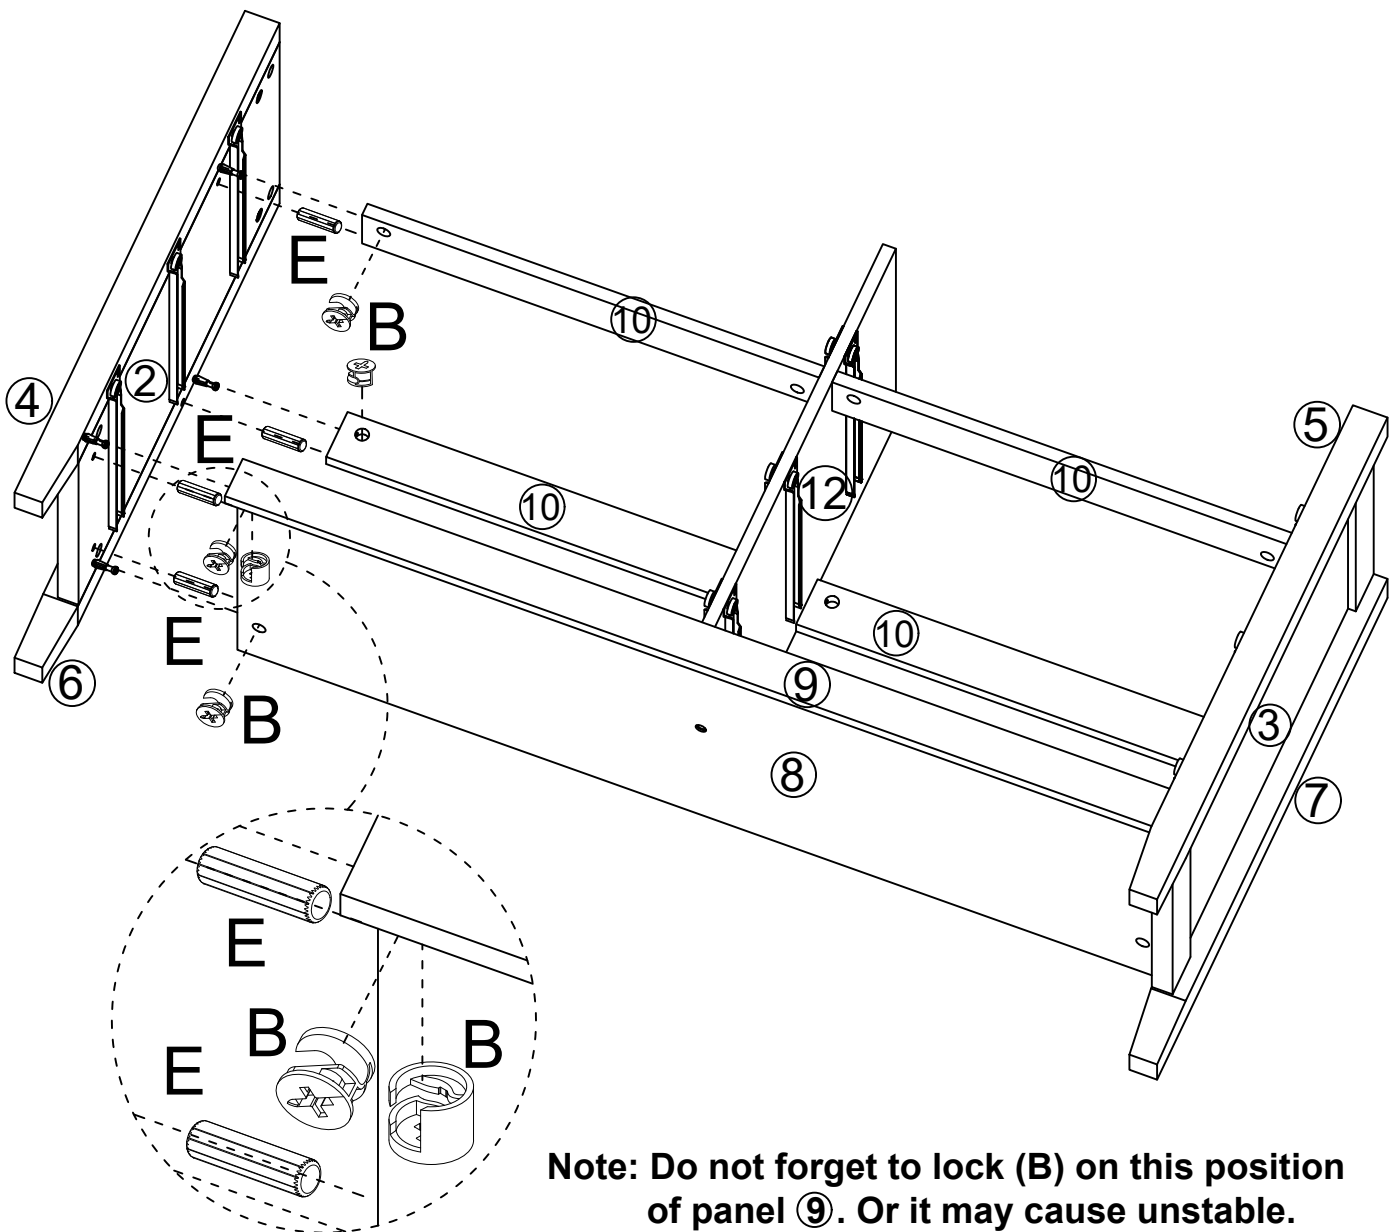


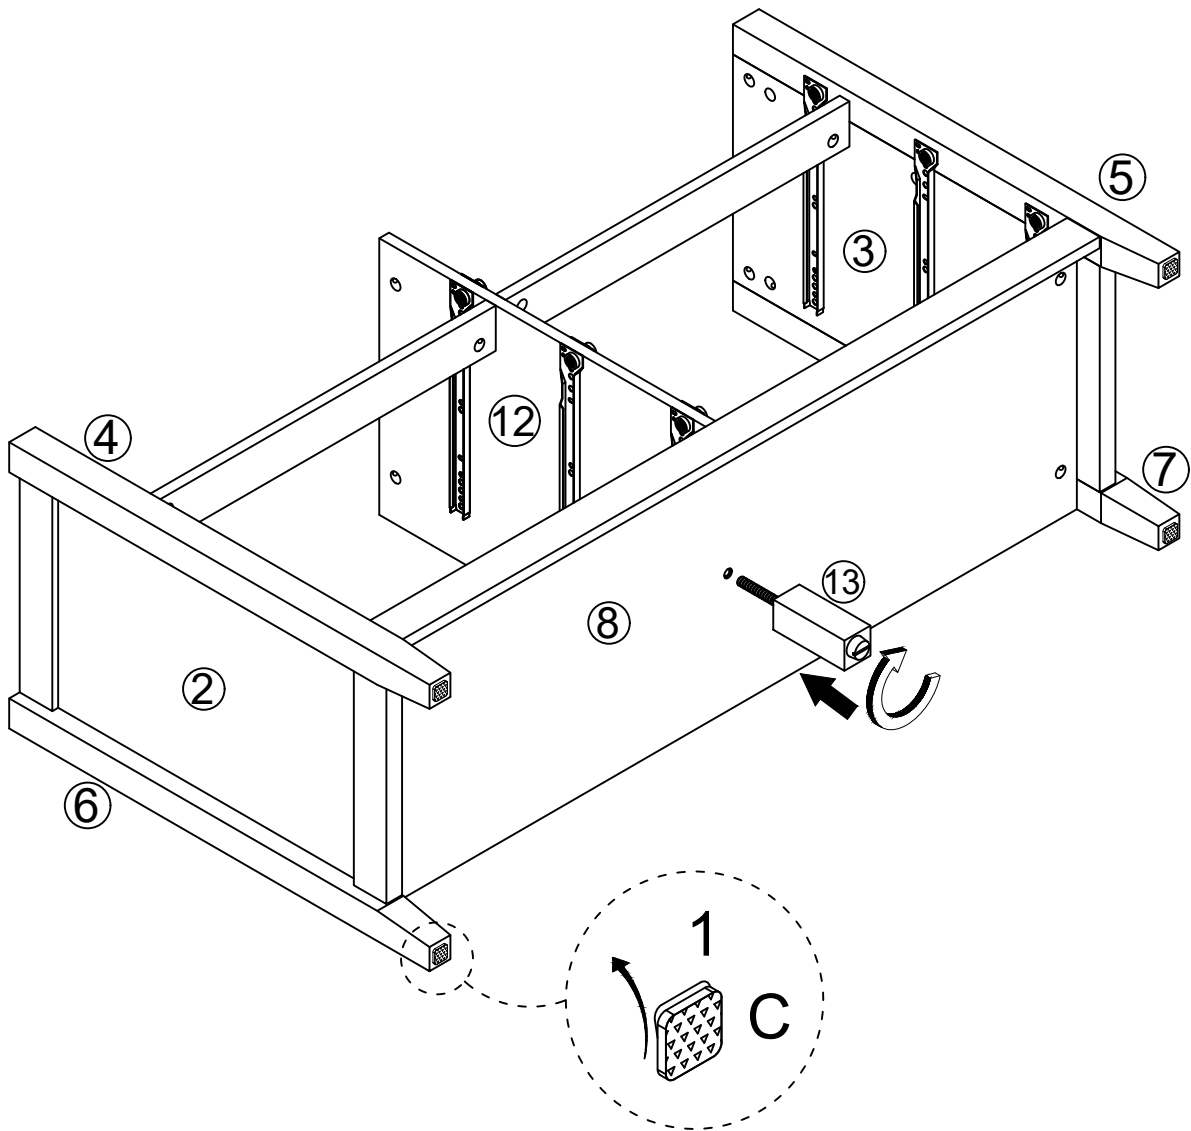
Note: Do not forget to lock (B) on this position of panel ⑨. Or it may cause unstable.

When assembling ② board, insert (E) sticks in the ② board first, then align all the pre-drilled holes and put them together gently. Finally use the (B) nut to tighten with (A).




Step 14

- Screw ⑬ to ⑧ as below shown
- Stick (C) to ④, ⑤, ⑥ and ⑦


C

X4



Step 15

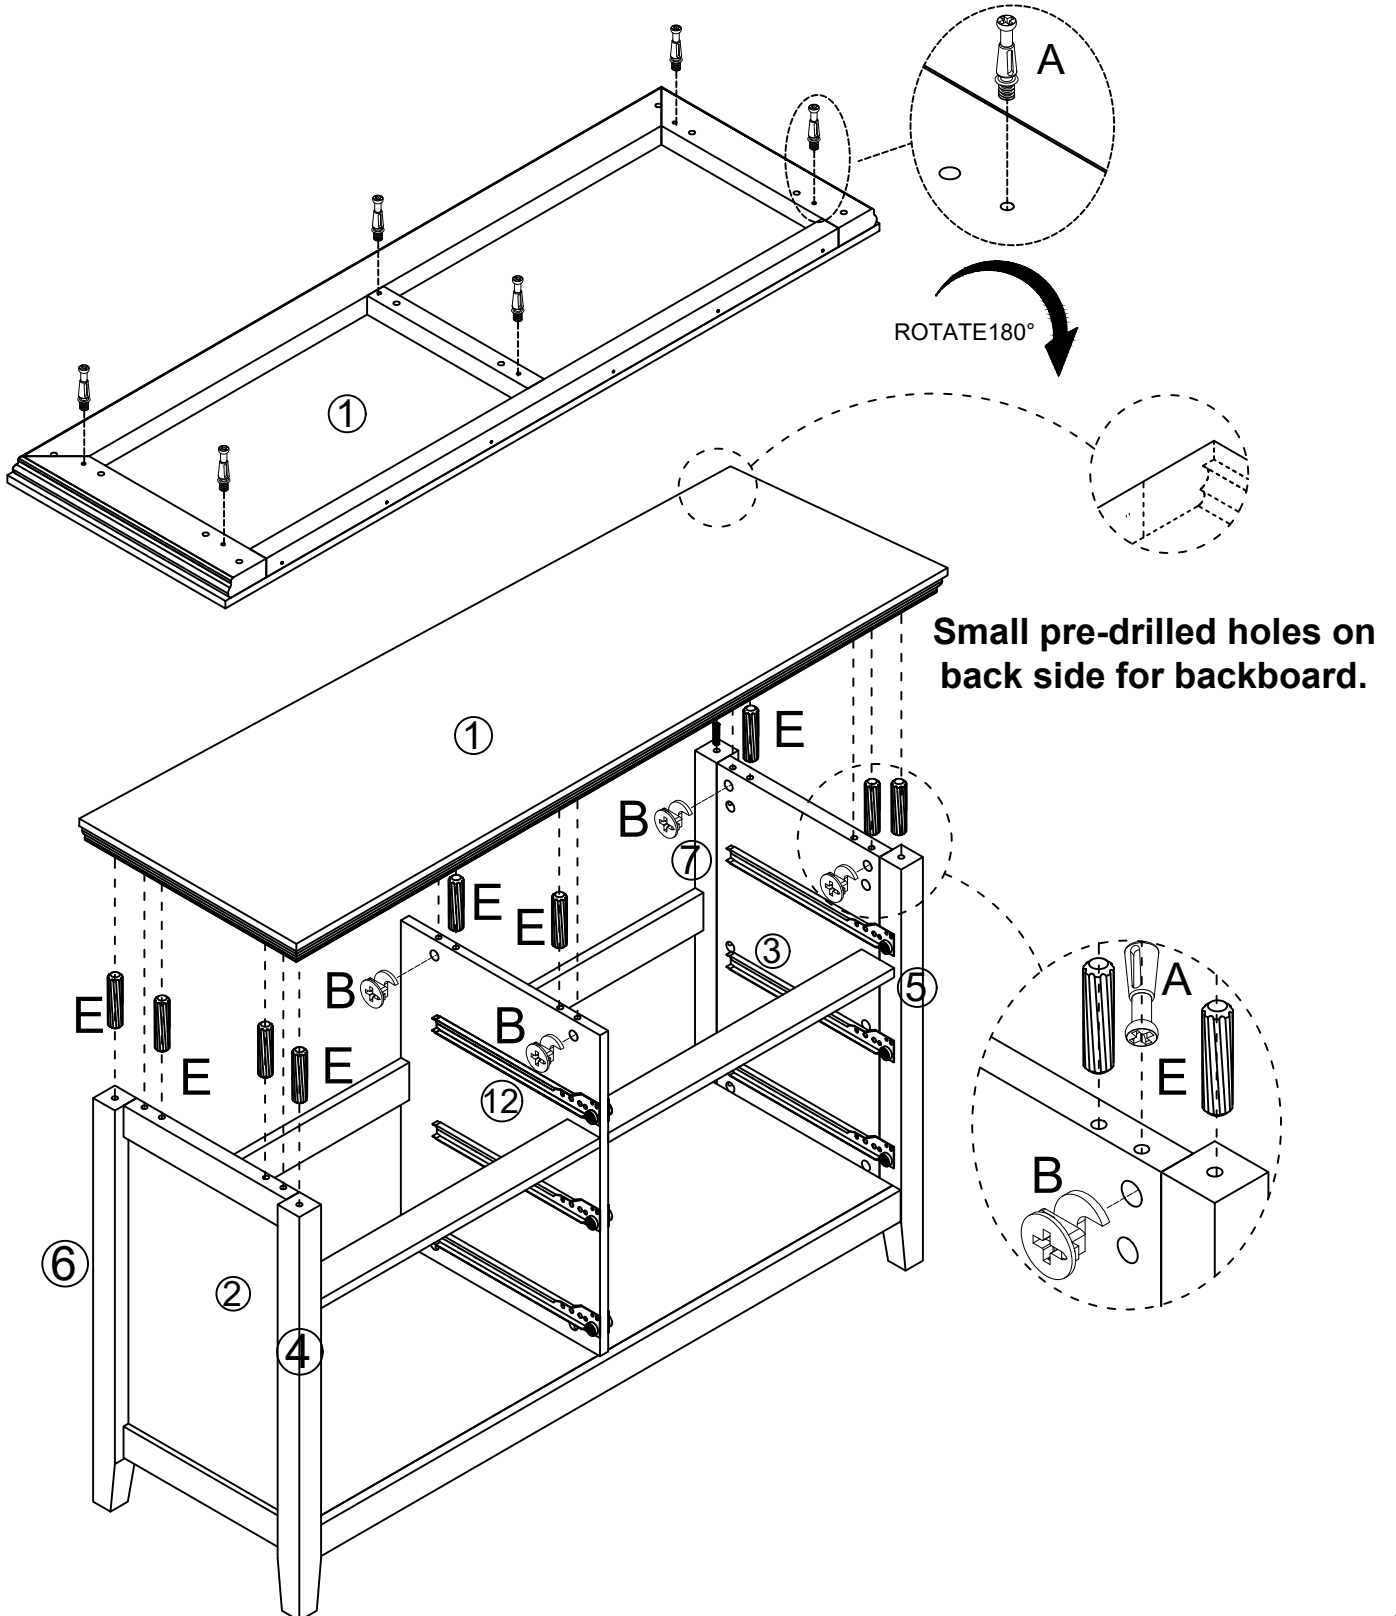

A	B	E
		
X6	X6	X10


- Screw (A) to ① as below shown
- Screw (E) to ②, ③ and ⑫ as below shown
- Attach top panel ① to side boards ②&③& ⑫ as below shown
- Screw (B) to lock the ②&③& ⑫ with the top panel ① as below shown



Step 16

- Screw (D) to install the back panel ⑪ as below shown
- Install the (K) as shown and lock it with (D)

D	K
	
X21	X2

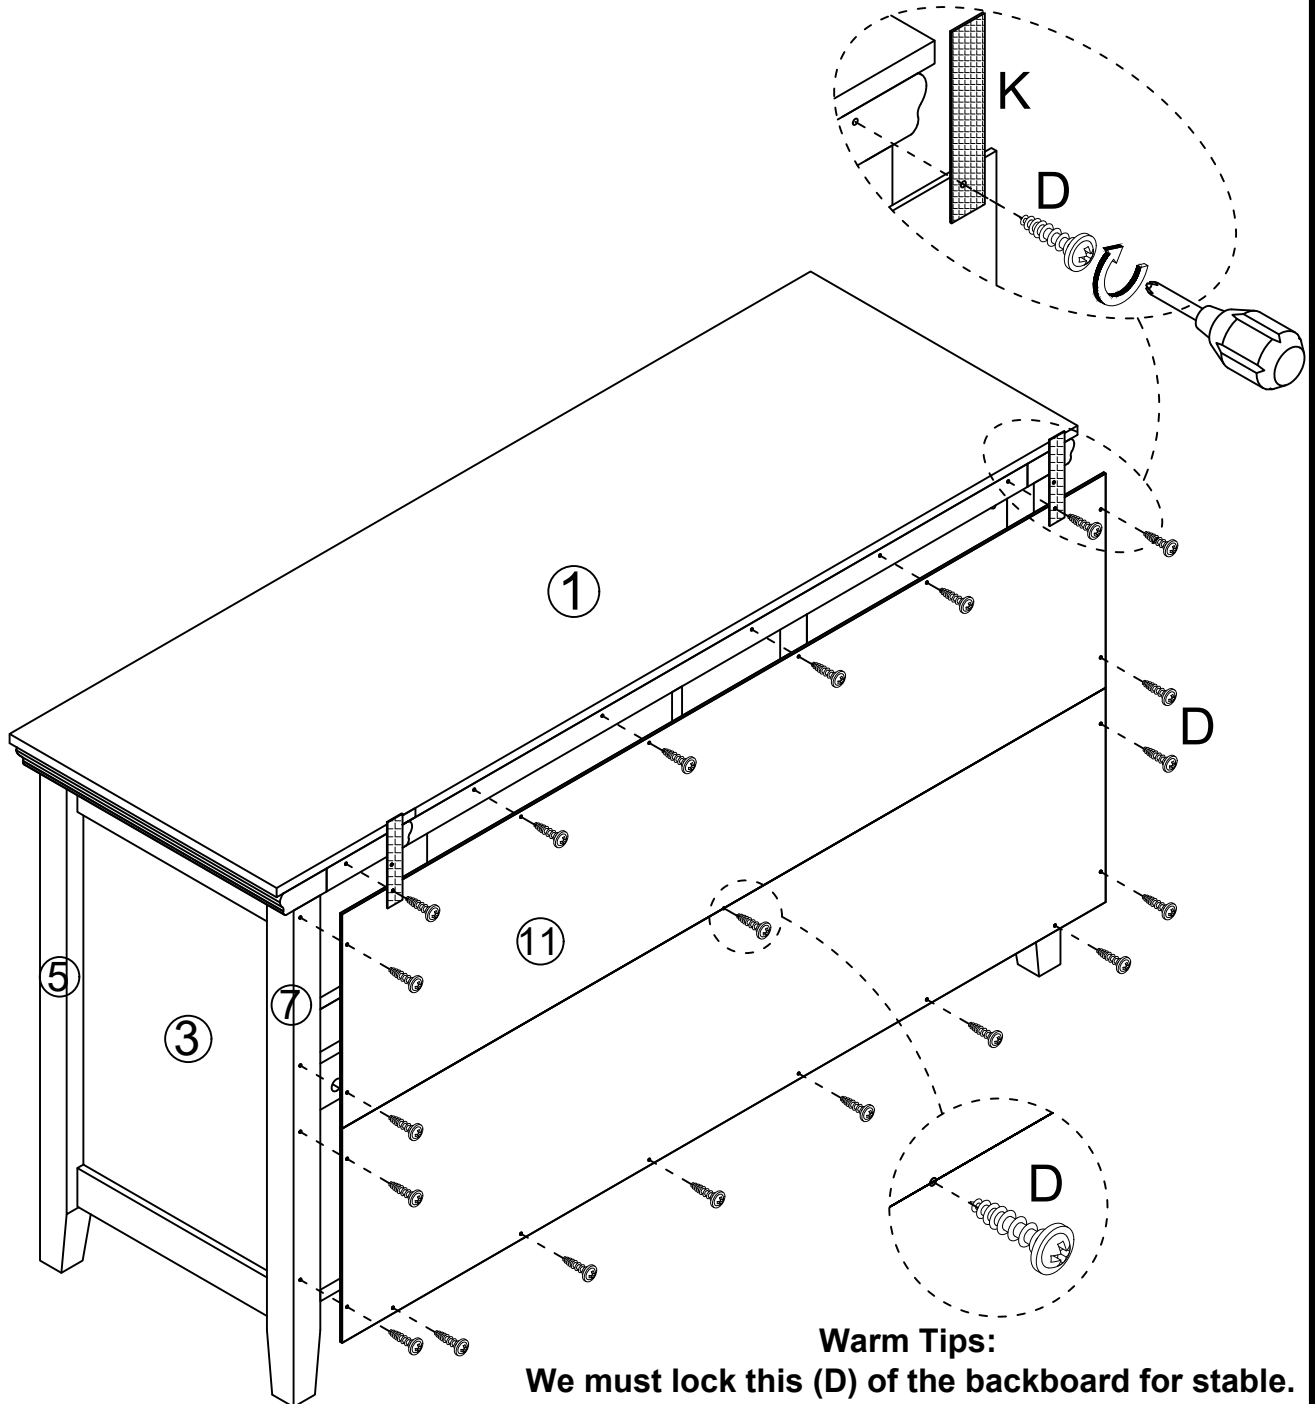




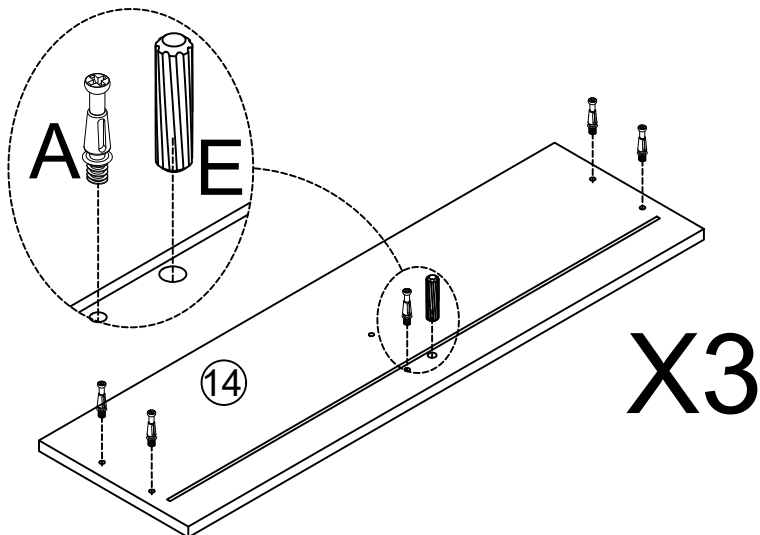
Warm Tips:

We recommend that to put the product upside down when you install the back panel, for screw the (D) easier.


Step 17

- Screw (A), (E) to 14 as below shown
- Attach 16, 17, 19 to 14 as below shown
- Screw (B) to lock the 16, 17 and 19 with the panel 14

A	B	E
		
X15	X15	X3



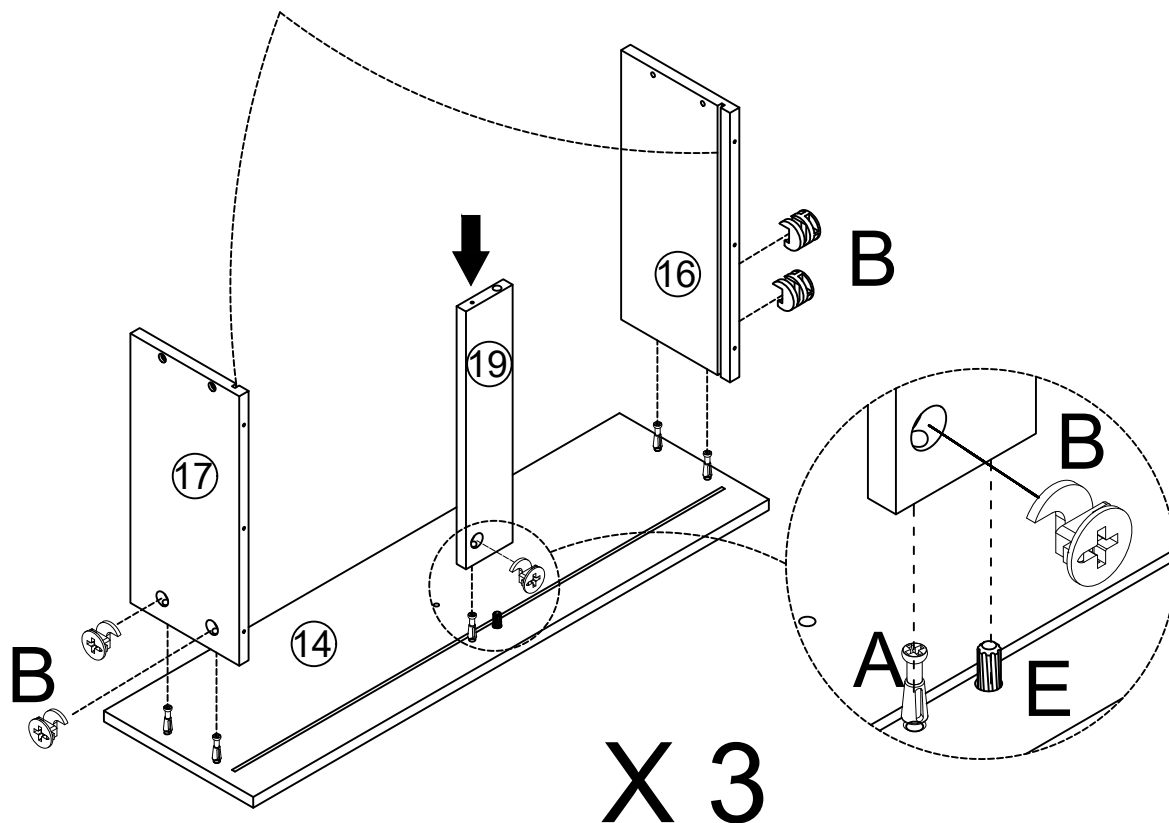


The long groove is used to install the bottom plate, make sure to take note of installing the grooves of these boards on the same side.



Step 18



- Insert the drawer bottom panel (20) as below shown
- Screw (E) to (19) as below shown
- Attach (18) as below shown
- Screw (F) to lock (16), (17), (19) with (18) as below shown

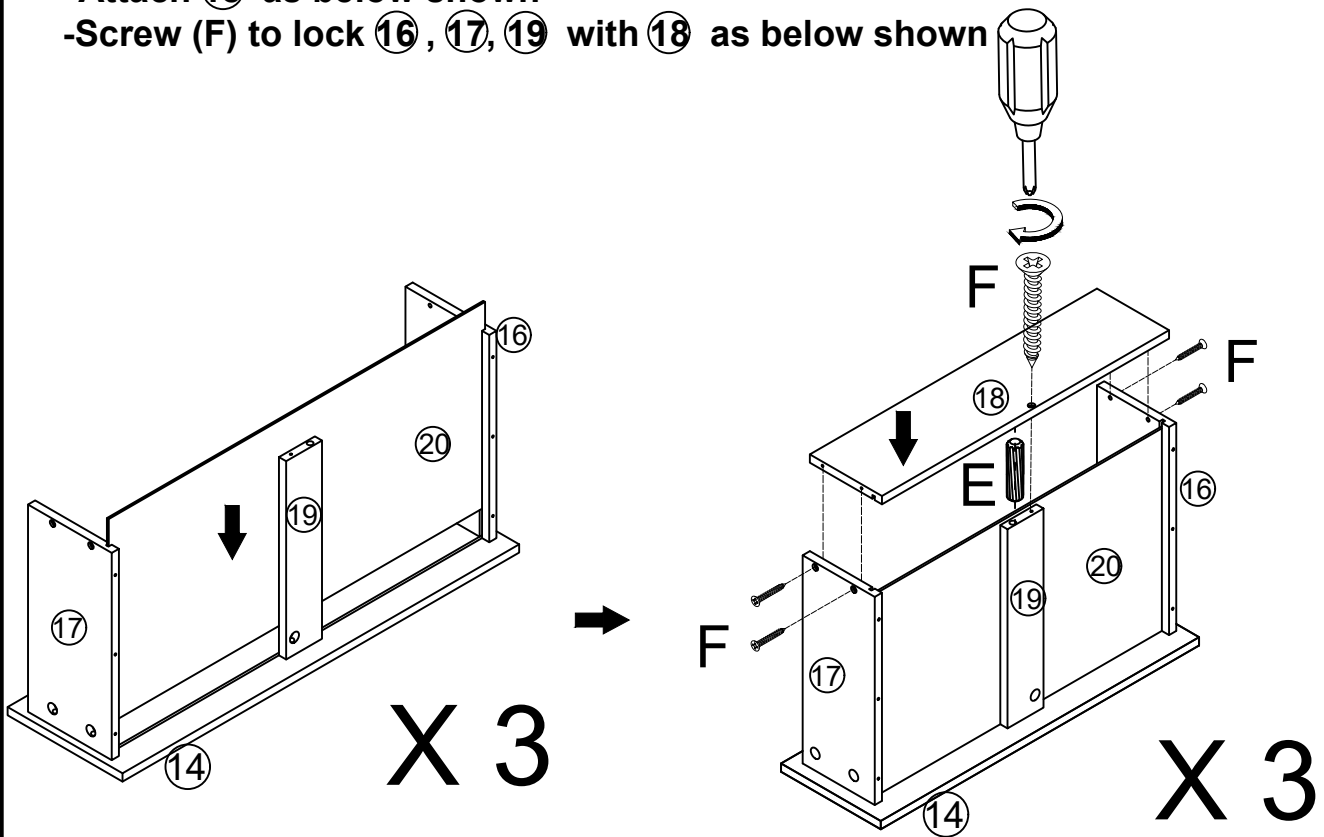
E	F
	
X3	X15






Step 19

- Use (G) to lock the drawer knob (H) to (14) as below shown

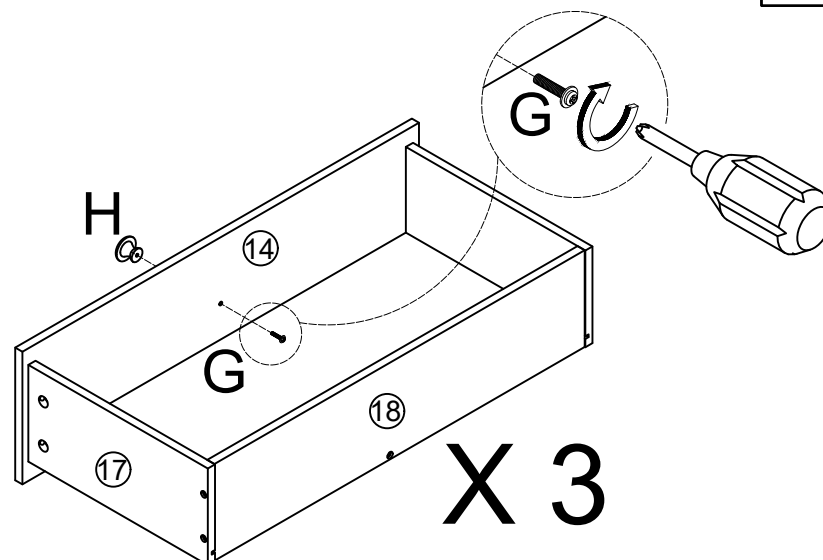G	H
	
X3	X3





Step 20

I	I	J
 DL	 DR	
X3	X3	X18


-There is a sign on each slide like DL or DR. We mark them as below shown and we suggest you check it carefully to avoid installing in a wrong way.

-Install the drawer slides (I) on the drawer sidepanels (16) & (17) as below shown

If necessary, install another screw in the middle of the drawer slide.

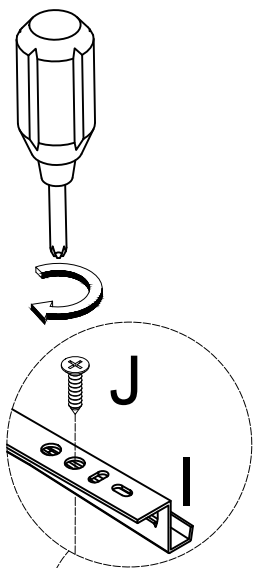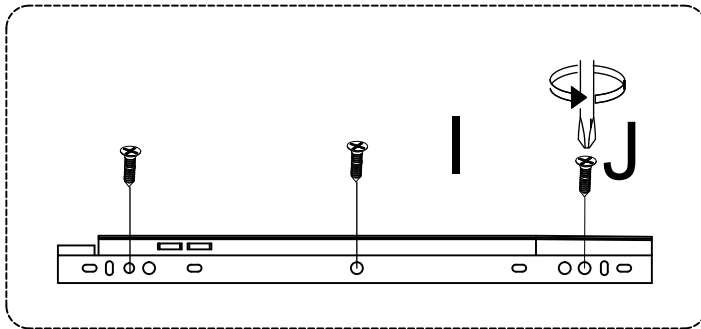

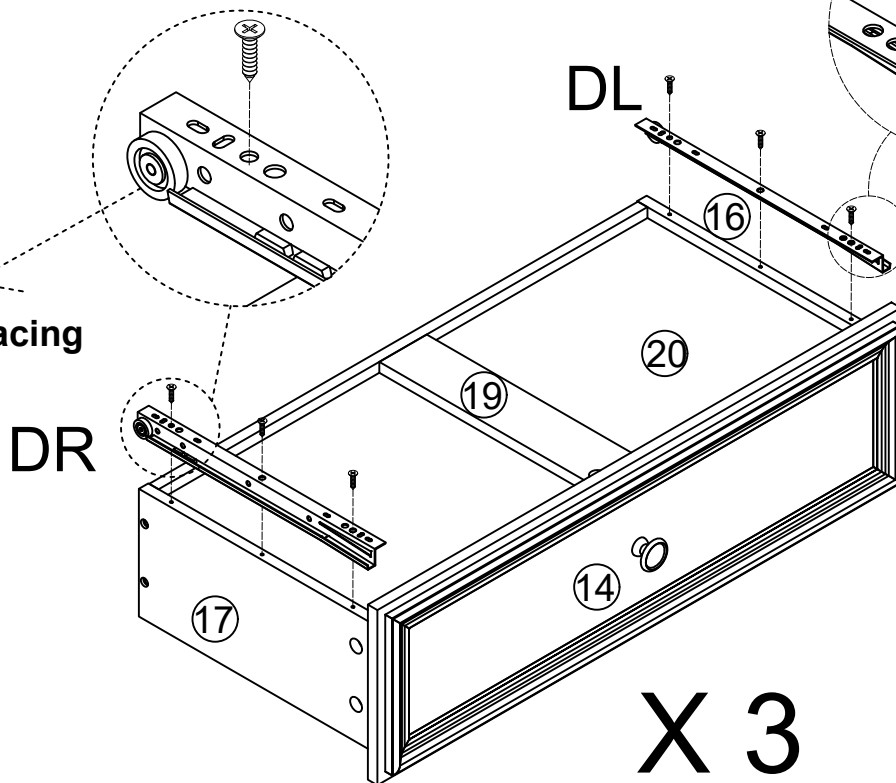


Warning:
The roller is facing
back ward




Repeat the previous step to install the remaining drawers.


Step 21

- Screw (A), (E) to 15 as below shown
- Attach 16, 17, 19 to 15 as below shown
- Screw (B) to lock the 16, 17 and 19 with the panel 15

A	B	E
		
X15	X15	X3

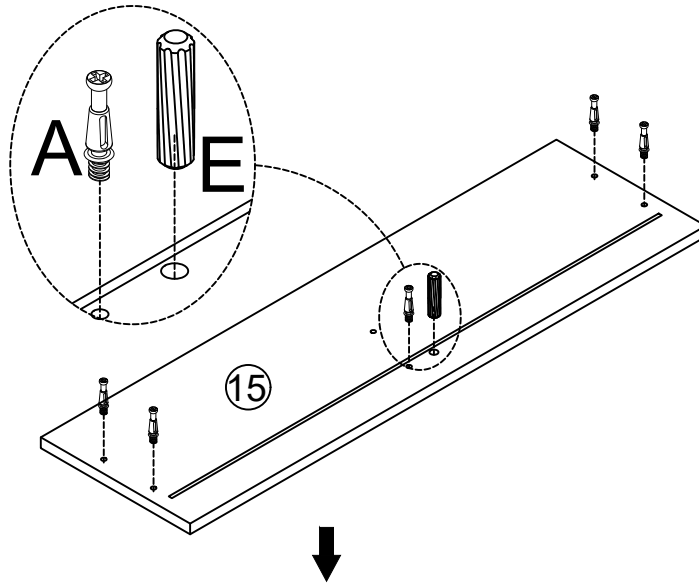

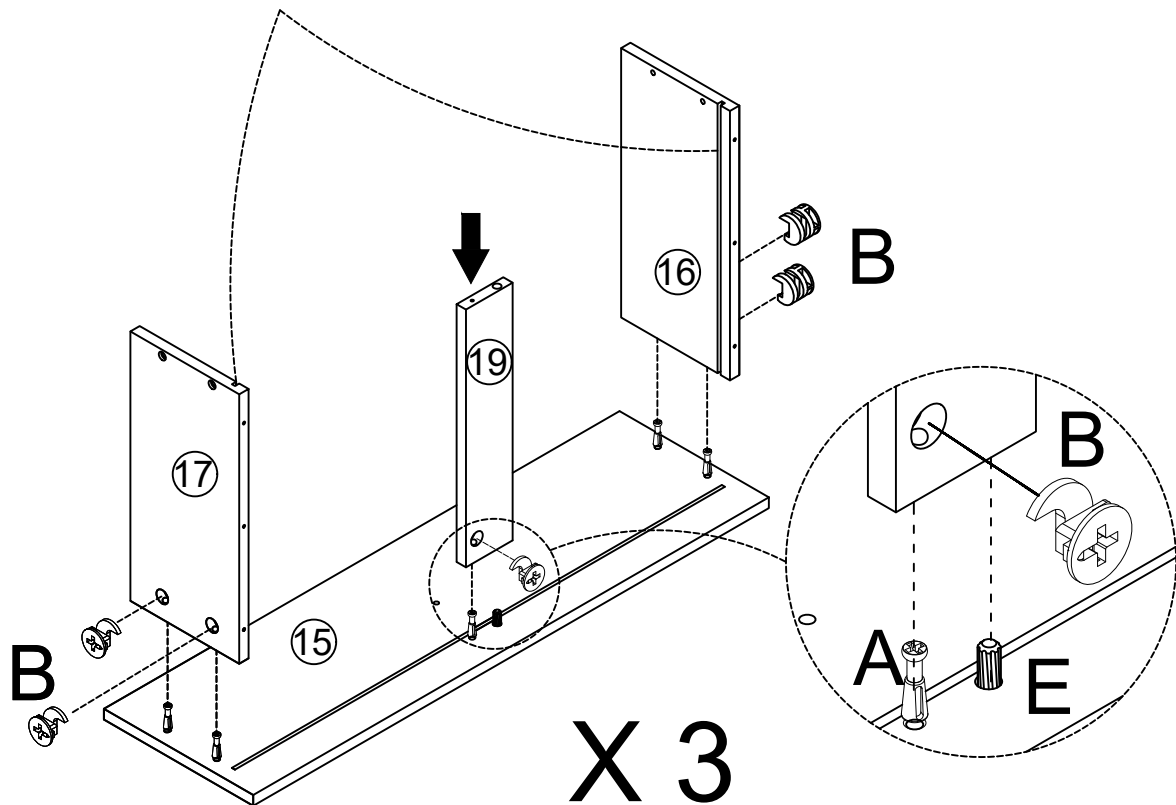


The long groove is used to install the bottom plate, make sure to take note of installing the grooves of these boards on the same side.



Step 22



- Insert the drawer bottom panel (20) as below shown
- Screw (E) to (19) as below shown
- Attach (18) as below shown
- Screw (F) to lock (16), (17), (19) with (18) as below shown

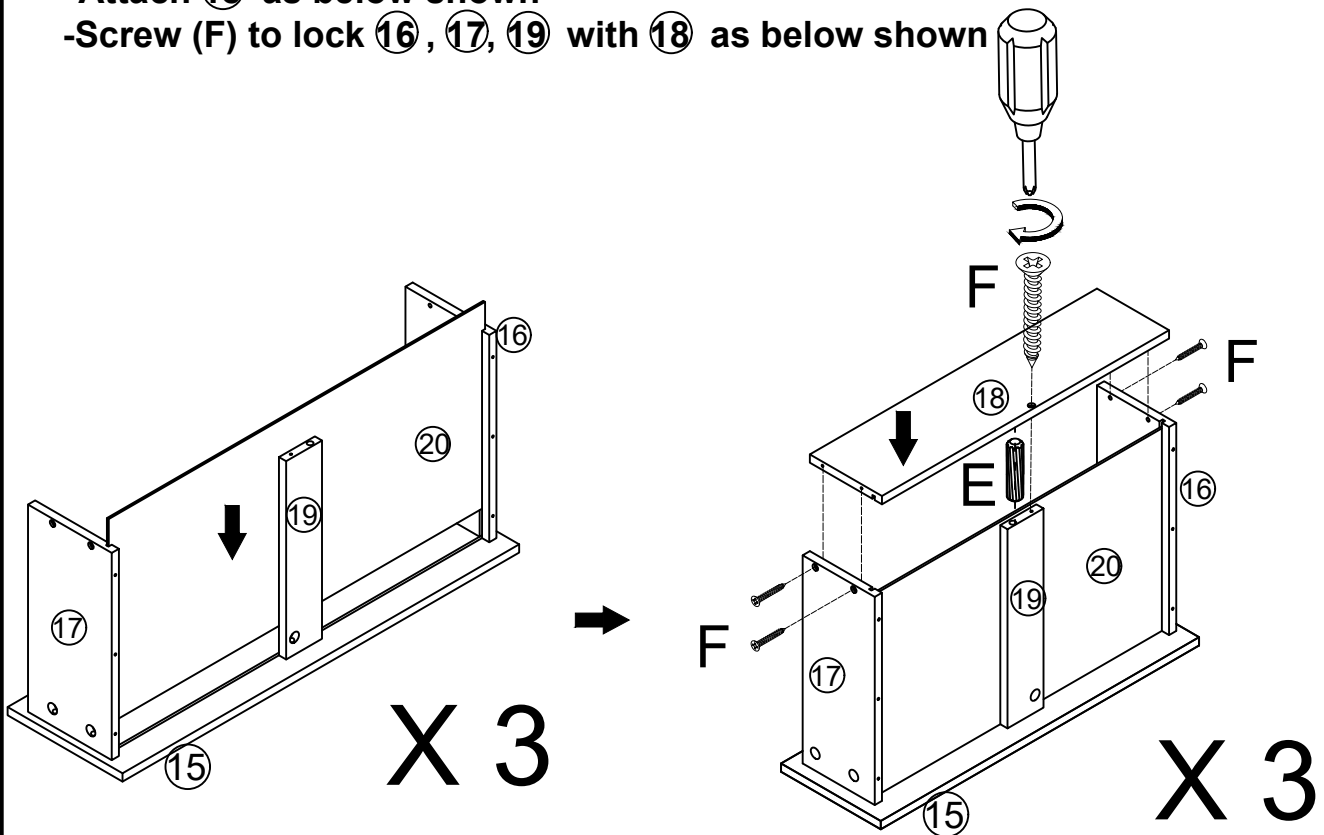
E	F
	
X3	X15






Step 23

- Use (G) to lock the drawer knob (H) to (15) as below shown

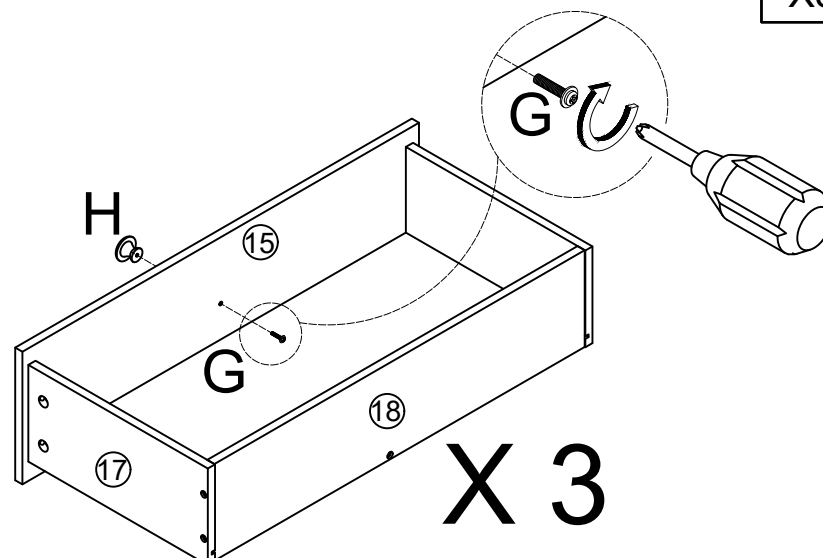G	H
	
X3	X3





Step 24

I	I	J
 DL	 DR	
X3	X3	X18


-There is a sign on each slide like DL or DR. We mark them as below shown and we suggest you check it carefully to avoid installing in a wrong way.

-Install the drawer slides (I) on the drawer sidepanels (16) & (17) as below shown

If necessary, install another screw in the middle of the drawer slide.


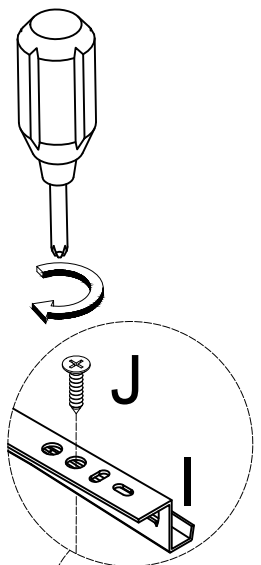
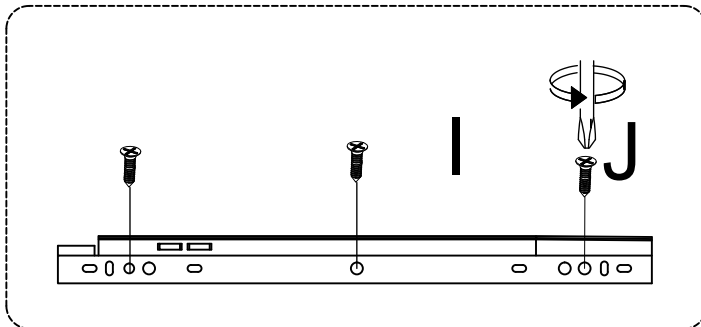


Warning:
The roller is facing
back ward

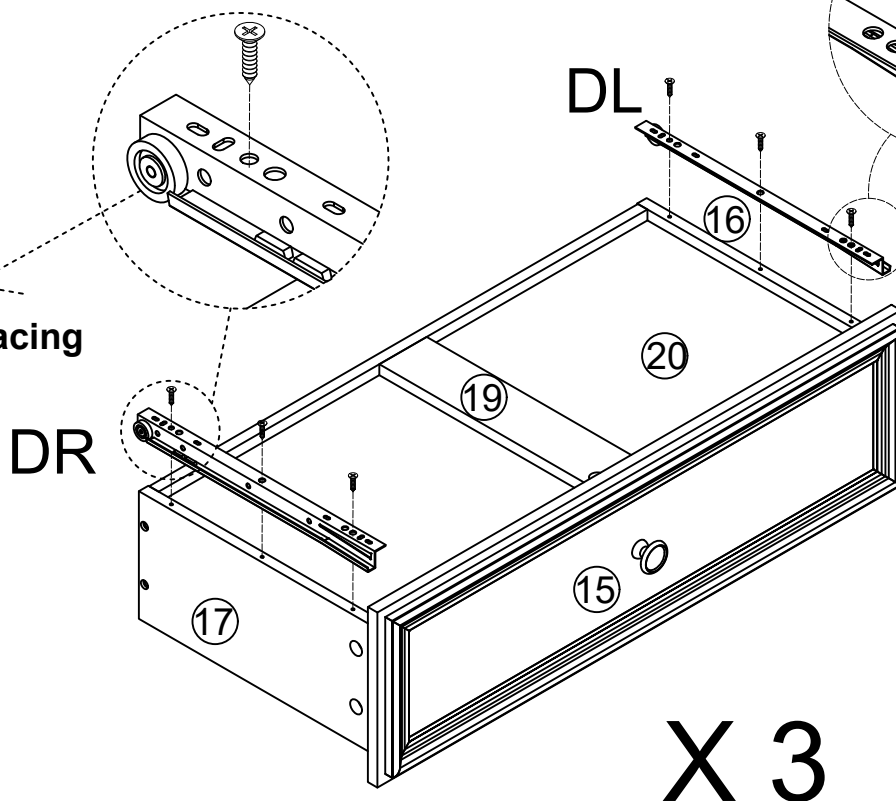


Repeat the previous step to install the remaining drawers.


Step 25

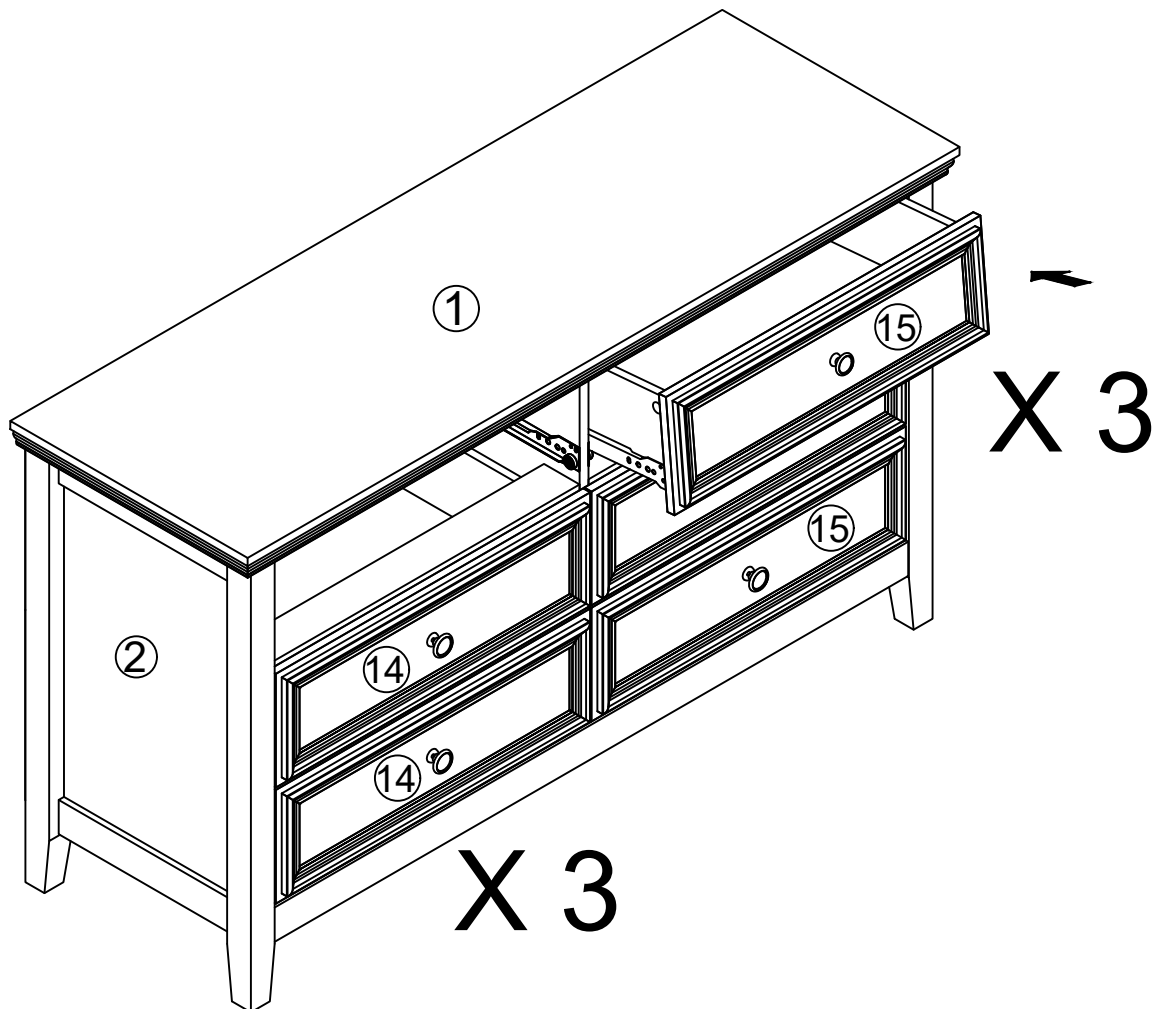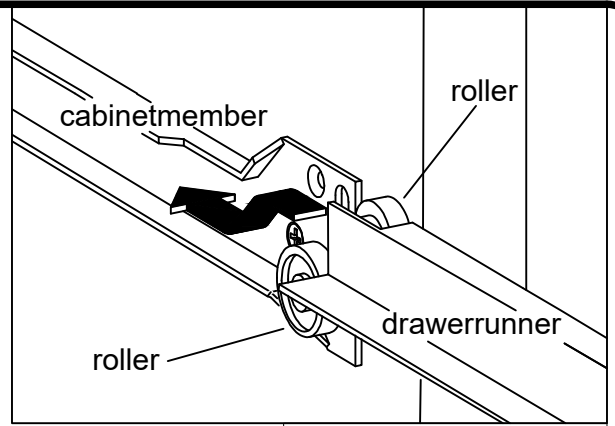

Step 26



Wall

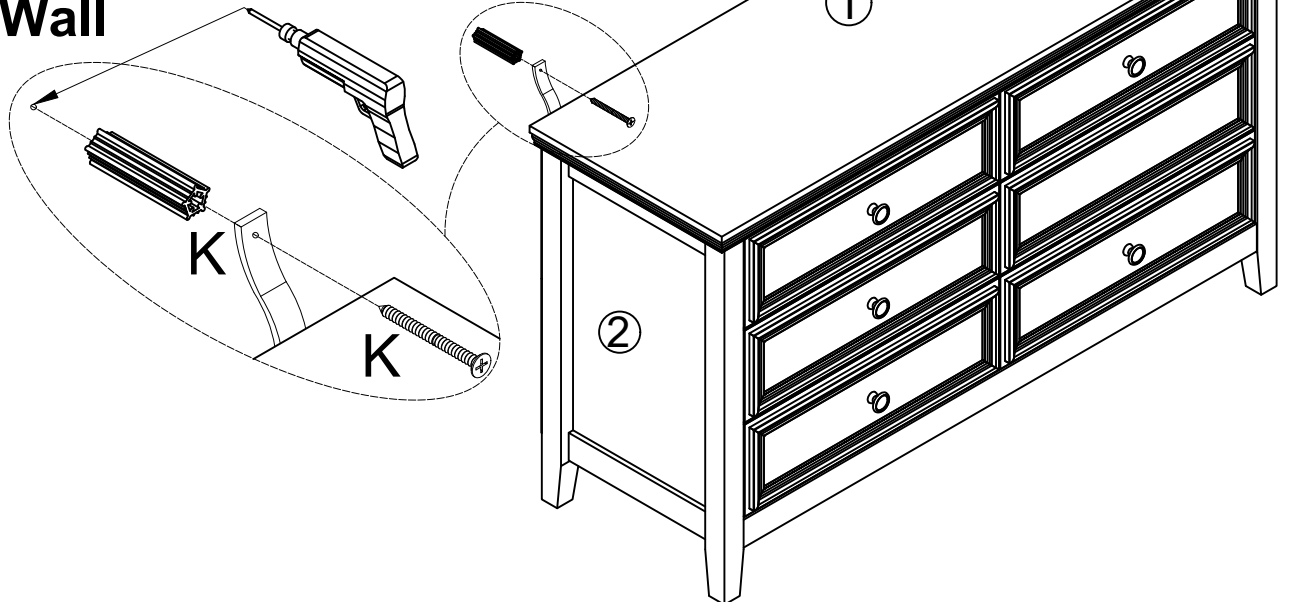

Tools required (not included): phillips screwdriver, stud finder, tape measure, pencil, power drill and 3/16" drill bit.

Now, follow the instructions printed on the plastic bag containing the tipping restraint hardware to attach the tip-over restraints to the unit and the wall.

NOTE: The tipping restraint hardware included is for wooden stud wall construction. It must be attached to a wall stud depending upon your wall construction, and different anchor hardware maybe required. Please contact your local hardware store for assistance.

Young children can be seriously injured by tipping furniture, so you must install the tipping restraint hardware with the unit to prevent the unit from tipping, in case of causing any accidents or damage.

The tipping restraints are intended only as a deterrent, they are not a substitute for proper adult supervision.

The tipping restraints are not earthquake restraints. if you wish to add the extra security of earthquake restraints, they must be purchased and installed separately.