DREAMSIDEA

INSTRUCTION MANUAL



NO:14571


DREAMSIDEA

Tel.+1-562-510-9089


E-mail:support@dreamsidea.com

https://www.dreamsidea.com

EXPLODED VIEW

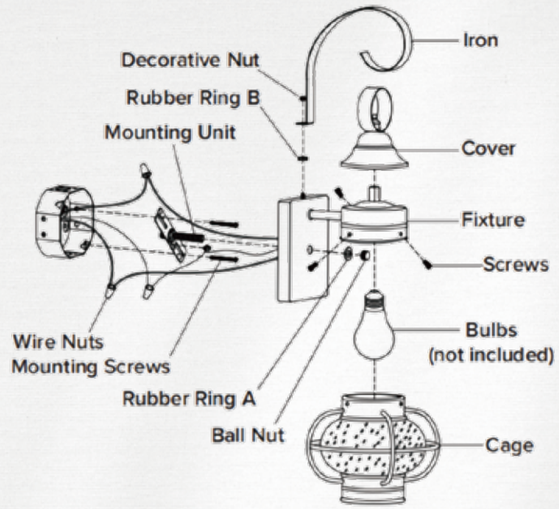


PARTS


Fixture


Cover


Iron


Cage


Mounting unit


Screws

Rubber ring B

Decorative Nut


Rubber ring A


Ball Nut


Mounting screws


Wire nuts

ATTENTION

Please inspect the wires before installation, if the wireshows any cut or abrasion,or has exposed copper wires,

DO NOT use the fixture,it might be caused during transportation or defect product.

Before starting installation of the fixture, please remove the previous fixture (if any).Disconnect the power by turning off the electric break for your property(Please ask for professionalhelp if reeded).

MAINTENANCE AND WARNING

- Verify the lamp model suits the environmentindoor/outdoor, IP rating) and check all accessories(body, screws, cord, manual).
- Only use with bulbs of the recommended type andwattage. Exceeding the maximum wattage maycause overheating or fire.
- Do not install the fixture if any part is damaged or missing.
- The fixture may become hot during use. Allow to cool before handling
- Clean dust accumulation in recessed lamps regularly(to prevent overheating), but only when powered off; never rinse with water.
- If the fixture includes a dimmer switch, ensure it is compatible with the fixture before installation.
- Do not modify the fixture in any way; tampering with electrical components can result in malfunction or risk of fire

TOOLS REQUIRED


Ladder


Safety glasses


Electrical tap


Phillips screwdriver



Flat blade screwdriver


Pliers


Wire strippers


STEP 1

Unscrew the ball nut from the mounting unit.
Use the mounting screws to attach the mounting unit to the junction box.

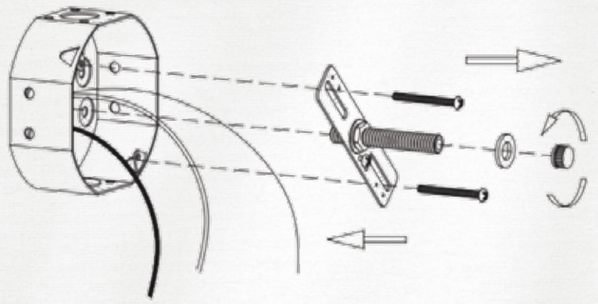


STEP 2

Make the electrical connection from the junction box to the fixture.Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape.

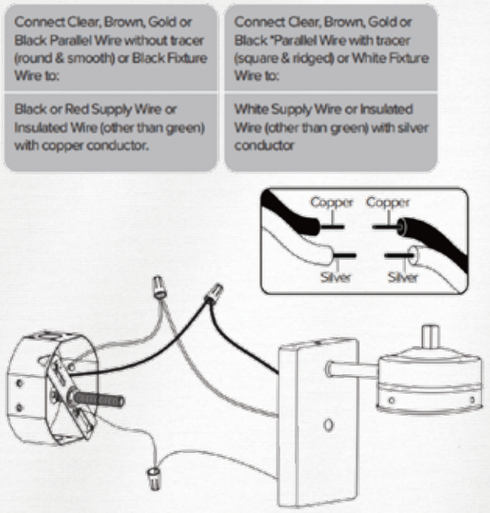


STEP 3

Attach the fixture to the mounting unit through screw holes as shown, and secure it with rubber ring A and ball nut.

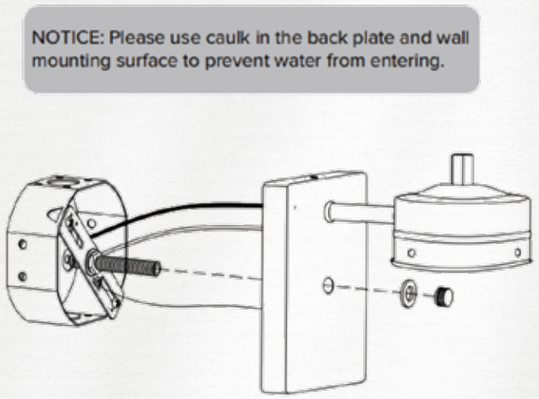


STEP 4

Attach the cover to the fixture through as shown.

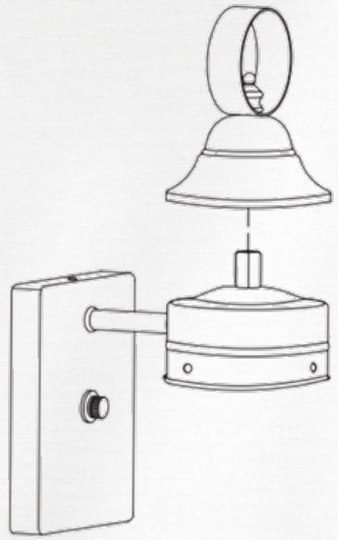


STEP 5

Attach the iron to the fixture through screw holes as shown, and secure it with rubber ring B and decorative nut.

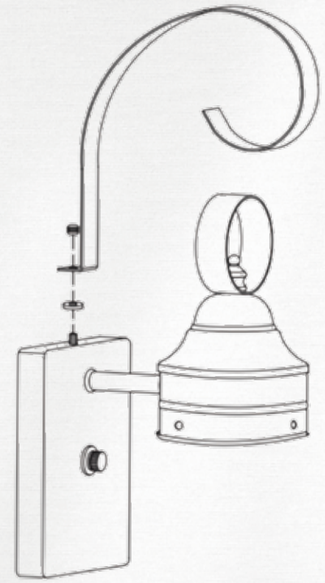

STEP 6

Install bulbs (not included)

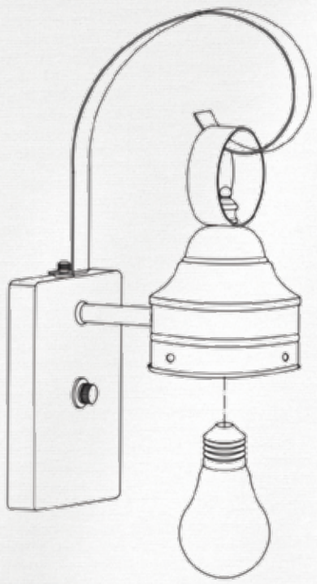

STEP 7

Attach the cage onto fixture using screws.

