

USE & INSTALLATION GUIDE

Ceiling Fan



IMPORTANT SAFETY INSTRUCTIONS

WARNING:

1. Read your owner's manual and safety information before installing your new fan.
2. Do not insert anything into the fan blades while the fan is operating.
3. Follow the recommended instructions for the proper method of wiring your ceiling fan. If you do not have adequate electrical knowledge or experience, have your fan installed by licensed electrician.
4. To reduce the risk of electric shock, turn off the electricity to the fan at the main fuse box or circuit panel before wiring.
5. This fan is to be used in indoor dry location only.
6. All wiring must be in accordance with the local electrical codes or National Electrical Code.
7. To avoid personal injury, the use of gloves may be necessary while handling fan parts with sharp edges.
8. Make sure the installation site you choose allows clear space for the blades to rotate and at least 6.5 feet of clearance between the floor and the fan blade tips.
9. To reduce the risk of fire, electric shock, or personal injury, mount fan only to an outlet box marked acceptable for fan support and use mounting screws provided with the outlet box. Most outlet boxes commonly used for the support of lighting fixtures are not acceptable for fan support and may need to be replaced. Consult a qualified electrician if in doubt.
10. The outlet box and ceiling support structure must be securely mounted and capable of supporting at least 10 KGS.
11. Do not use water or detergents when cleaning the fan or fan blades. A dry dust cloth or lightly dampened cloth will be suitable for most cleaning.
12. Before servicing or cleaning unit, switch power off at service panel and lock service panel disconnecting means to prevent power from being switched on accidentally.
13. After making electrical connections, spliced conductors should be turned upward and pushed carefully up into the outlet box. The wires should be spread apart with the grounded conductor and the equipment-grounding conductor on one side of the outlet box.
14. Electrical diagrams are for reference only.
15. The fan is more suitable for indoor use.

TOOLS REQUIRED



The owner manual is designed to make it as easy as possible for you to assemble, install, operate and maintain your ceiling fan

1. Check to see that you have received the following parts:



4 Wood screws and 4 Anchors (Ceiling Fan)



Hanger assembly



2 Wood screws and 2 Anchors (Remote Control)




Decor



Remote Control (Battery not included)


2. Installation Diagram

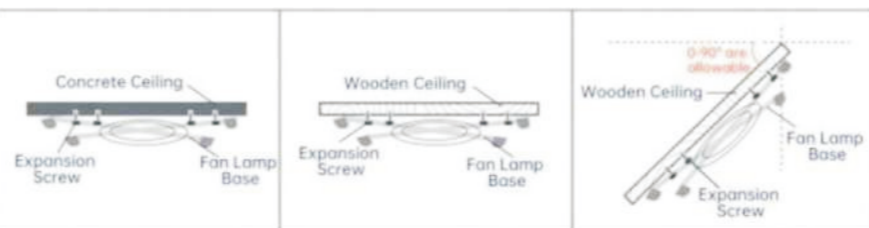

Standard Ceiling Installation	Decorative Ceiling Installation	Sloped Ceiling Installation
General guideline is available for concrete ceiling.	The decorative ceiling must be reinforced to be able to bear the weight of 10KG. And the thickness of the board shall be less than 1.18 inches. Please reinforce it in advance before installation.	No angle limited. If you want to enjoy downward airflow, angle ranging from 0-2 angle is recommended.

Live Wire (Black)
Neutral Wire (White)
Earth Wire (Yellow)

Note: The black wire and white wire can be interchangeably connected to the junction box which does not affect the performance of fan/light. And it is also safe. Only fan/light powered Remote control available when on from wall switch.

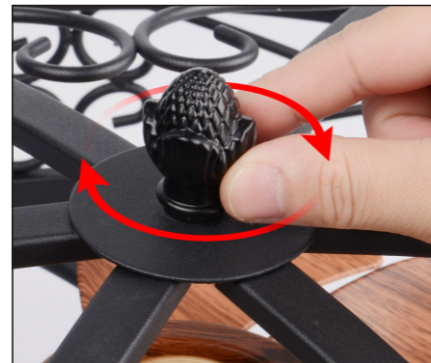

1. Screw it on



3. Secure each arm of the hanger by fixing them to the ceiling with the help of the wood screws.




2. Install light bulbs into sockets by threading in a clockwise direction.




4. Loosen the four remaining screws from the "L-shaped" holes on each side of the canopy.

3. How to Operate Your Ceiling Fan

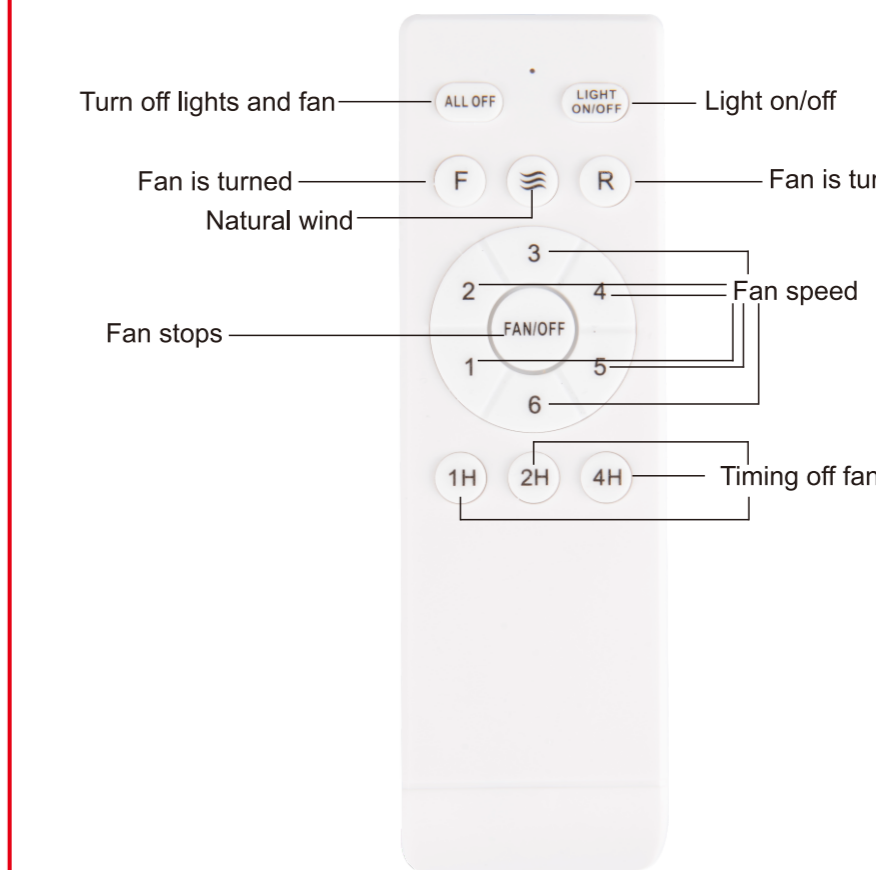

- a. Code pairing: Turn on the power and immediately press the three keys of "Fan stops - Light on/off - Fan stops", after hearing the sound of "Drip" (three keys are completed within 5 seconds). When the two sounds of "Drip, drip" are heard, the code matching is successful.
- b. If the remote control cannot be effectively controlled: please check the battery, and remove the battery if it is not in use for a long time.

4. How to Install Your Remote Control

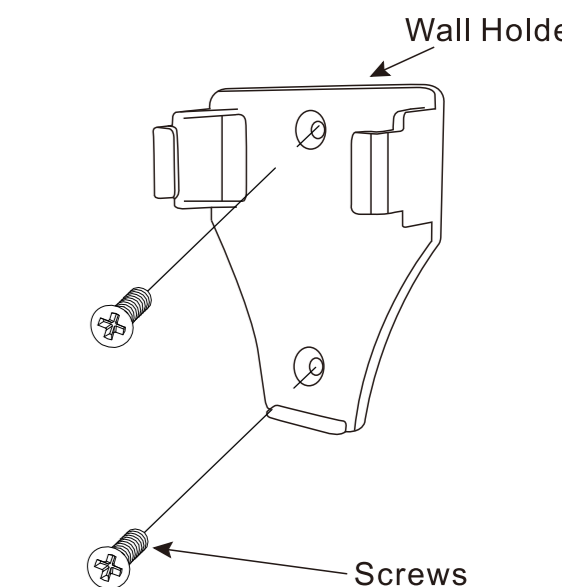

Attach wall holder using the two provided screws

Maintenance

Periodic cleaning of your new ceiling fan is the only maintenance that is needed. When cleaning, use only a soft brush or lint free cloth to avoid scratching the finish. Abrasive cleaning agents are not required and should be avoided to prevent damage to finish.