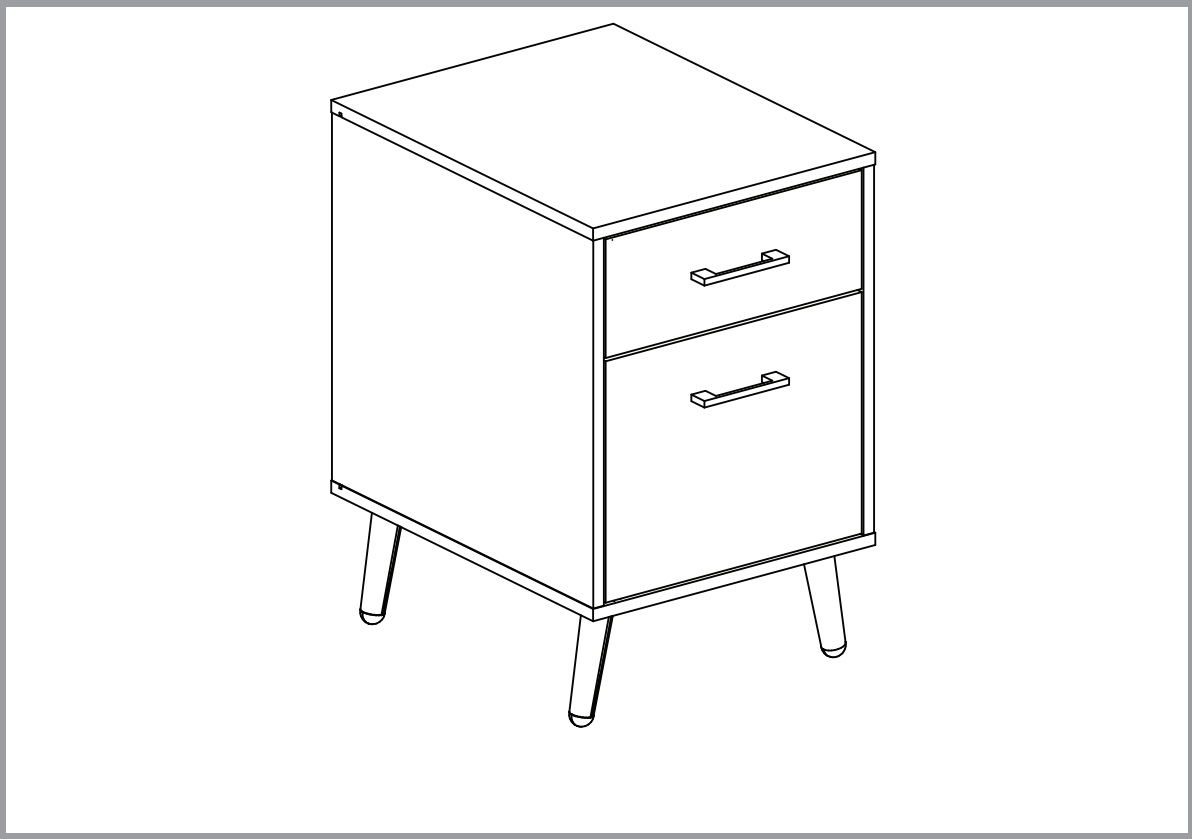


2 Drawer Wood Filing Cabinet

Assembly Instructions

Save these instructions.

A buddy is helpful for assembly.

50 minutes

Phillips Screwdriver needed.Not Included.

Thank You for your Purchase

- This user manual contains important and useful information to accompany your purchase. This product is intended for indoor, household use only. Failure to follow the instructions outlined may result in personal injury or damage to the product which the manufacturer or vendor cannot be held responsible.
- Please ensure you keep the instruction manual in a safe place so you can refer to the instructions at any time in the future. Adult assembly required. During assembly, children should always be kept away due to possible risk of injury. Please use caution and care when lifting the product to avoid personal injury and/or damage. Please ensure that you have enough space and people to assemble your product safely. Do not stand on the product or use as a stepladder.
- For ease and speed of assembly, we recommend that you identify all parts required for that step before begin. All items are to be assembled near the area which they will be placed in use to avoid moving the product unnecessary once assembled.
- For the protection of your furniture, we recommend that the product be assembled on a protected surface to prevent any damage. During assembly please take care not to over-tighten any fittings, as this may damage the product. Always place the product on a flat and stable surface.

Safety Precautions
















- **READ ALL INSTRUCTIONS BEFORE ASSEMBLING PRODUCT FOR INDOOR, RESIDENTIAL USE ONLY ADULT ASSEMBLY REQUIRED**
- **DO NOT** throw away packaging material before you finish assembling to ensure that parts are not thrown out by mistake
- **DO NOT** use accessories or attachments that are not provided or recommended by manufacturer.
- **NEVER** force any parts or hardware into place when assembling.
- **KEEP CHILDREN** well away from plastic bags and packing materials this item was shipped in.
- **SAVE** these instructions for future reference.
- **DO** anchor product on the wall with at least 1 anchor in contact with stud
- **DO** not place items, such as toys and remote controls on top of dressers,TVs and other large furniture. Also, make sure that all cords are out of the reach of children. Visit https://www.anchorit.gov/ for more information.

Save these instructions.










Parts

Removing your **File Cabinet** from the carton is best accomplished with help from a friend.Gently lay the cart on on its side, preferably on a carpeted floor. Remove all packaging material and set aside. Make sure all parts and hardware are present before assembly . 2 person assembly is recommended.

PART	NAME	Q'TY	PART IMAGE	PART	NAME	Q'TY	PART IMAGE
A	LEFT PANEL	1		P	FRONT DRAWER PANEL	1	
B	RIGHT PANEL	1		R	BACK DRAWER PANEL	1	
C	TOP SHELF	1		Z	DRAWER BOTTOM	2	
D	BOTTOM SHELF	1					
Y	BACK PANEL	1					
G	FRONT DRAWER PANEL	1					
H	LEFT DRAWER PANEL	1					
I	RIGHT DRAWER PANEL	1					
J	BACK DRAWER PANEL	1					
K	DRAWER SUPPORT BAR	2					
M	LEFT DRAWER PANEL	1					
N	RIGHT DRAWER PANEL	1					

Save these instructions.




Hardware

PACKAGE	NAME	Q'TY	IMAGE	PACKAGE	NAME	Q'TY	IMAGE
1	CAM BOLT	10		12	METAL DRAWER SLIDE DL (400MM)	2	
2	CAM LOCK	10			METAL DRAWER SLIDE DR (400MM)		
3	SCREW M5 X 40MM	16		13	ALUMINIUM ROD Ø8 X 400MM	2	
4	SCREW M3.5 X 12MM	8		14	BACKPLY	6	
5	EURO SCREW M5 X 8MM	8					
6	SCREW M4 X 16MM	22					
7	WOOD DOWEL M6 X 30MM	10					
8	HANDLE (GOLD)	2					
9	HANDLE SCREW M3.6 X 19MM	4					
10	WOOD LEG 150MM	4					
11	METAL DRAWER SLIDE CL (400MM)	2					
	METAL DRAWER SLIDE CR (400MM)						


We have included extra piece of Part type of screws

Save these instructions.

Safety Precautions

	Step 1	Step 2	Step 3
Risk of damage or injury. Cam Lock and Bolt system is a multi steps process. Please follow these directions closely. Hidden Cams must be completely tightened. Hidden Cams that are not completely tightened may loosen and parts may separate.			
	Gently screw Cam Bolt into the threaded anchor at the specified location. Tighten with a Phillips screwdriver until threads are not visible	Gently insert Cam Lock in the pre-drill holes at the specified location with arrow pointing toward the receiving hole or toward the closest edge. Use a Phillips screwdriver to turn as needed.Make sure Cam Lock is flushed with the board	Insert Cam Bolt into the predrilled hole on the side of the Cam Lock board.Turn Cam Lock to engage the locking system

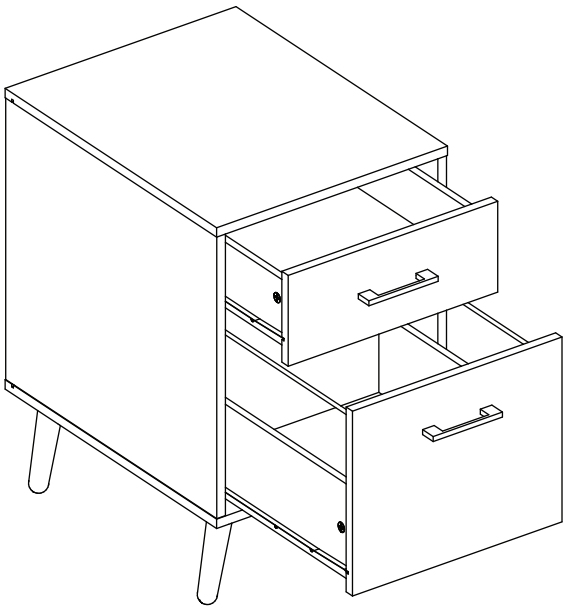Specifications




Maximum load capacity as follows:

PART	NAME	Maximum Weight Capacity
C	TOP SHELF	50 lbs
Z	DRAWER BOTTOM	30 lbs

Save these instructions.

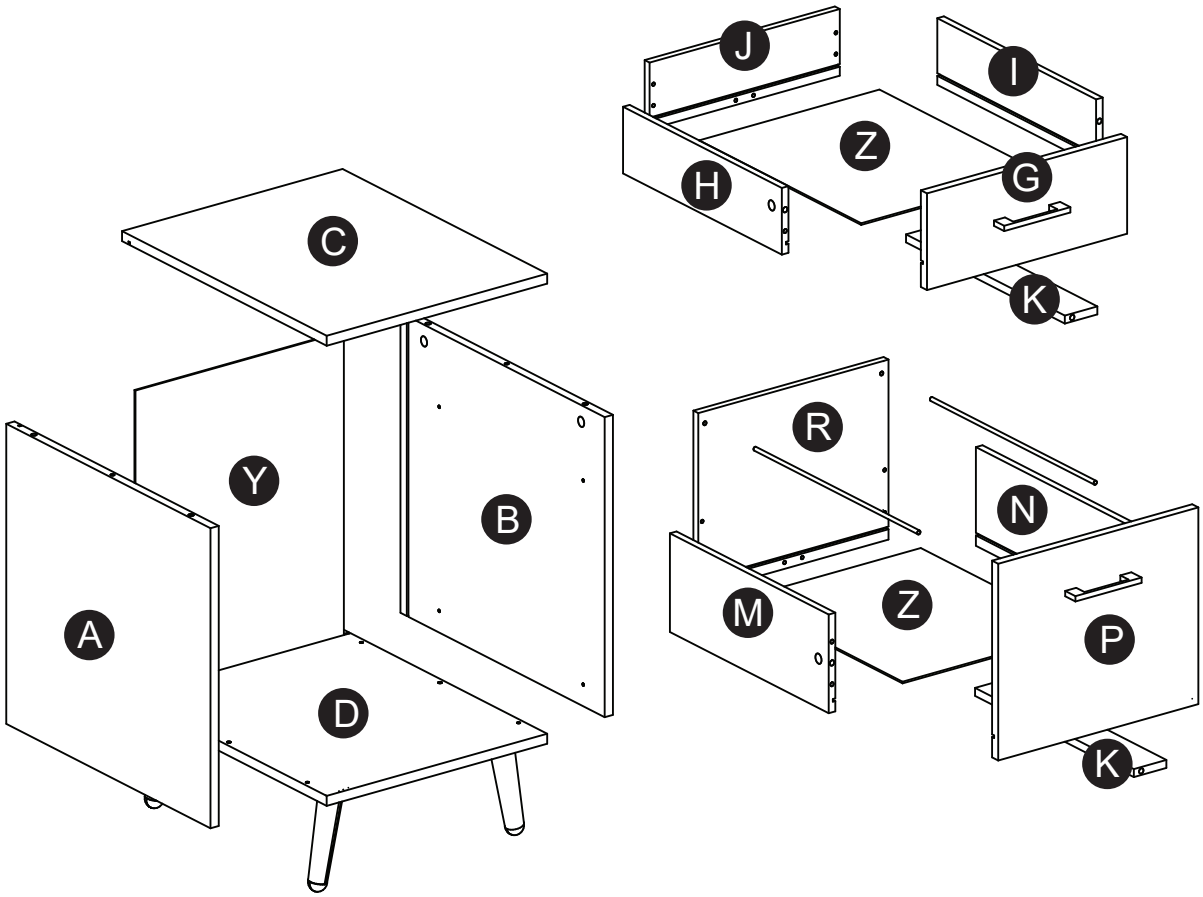Parts



Save these instructions.

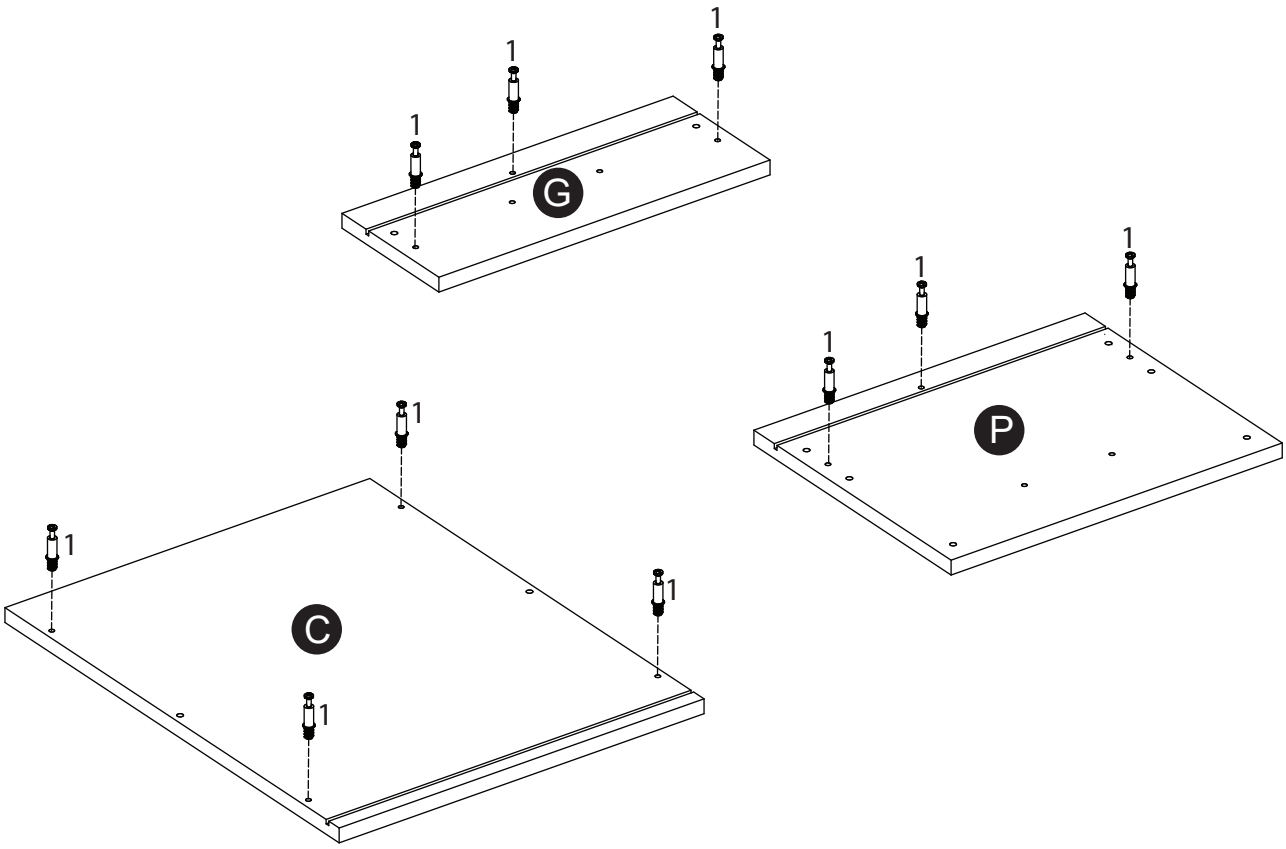
Assembly Instructions

ASSEMBLY TIPS:

1. Remove hardware from box and make sure all your parts are there, prior to assembly.
2. To avoid damage to parts and components, layout and assembly should be done on a flat surface.
3. Please check and distinguish each part before assembly.
4. This product is intended for home use only and not intended for commercial establishments.
5. **DO NOT** attempt to repair or modify parts that are broken or defective. Please contact customer service immediately


Step 1 Build Cam Bolts

- Tighten 10x Cam Bolts (1)to top shelf Ⓒ,front drawer panel Ⓖand front drawer panel Ⓟat the specified locatons using a screwdriver.





Phillips Screwdriver needed.Not Included.








Save these instructions.


Step 2 Assemble Drawer Slide

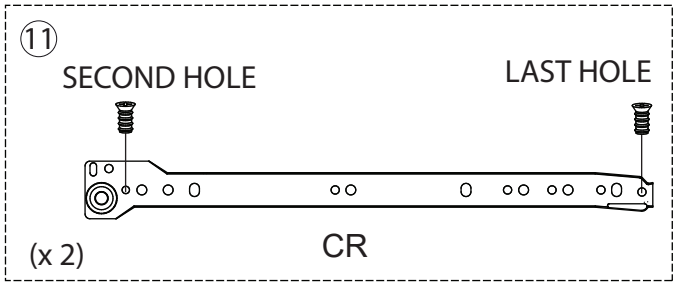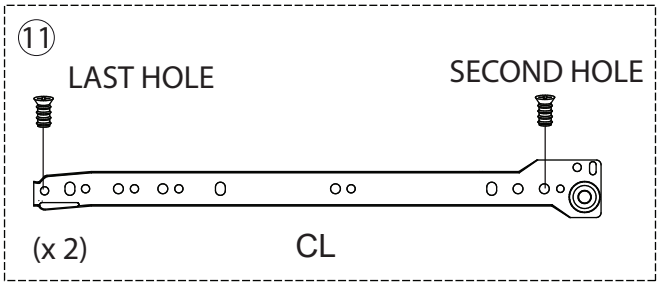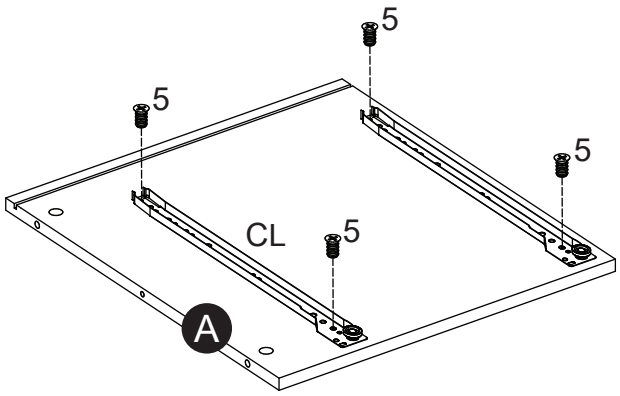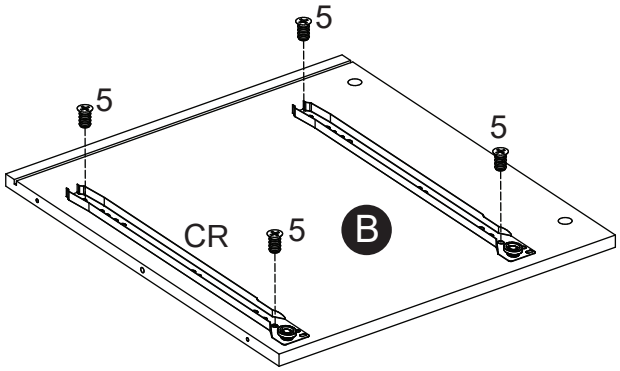- Identify left drawer slide (CL) and right drawer slide (CR) following below diagram.
- Fasten left drawer slide (CL) to left panel Ⓐ with 4x Screws (5) and tighten with a Phillips screwdriver.
- Fasten right drawer slide (CR) to right panel Ⓑ with 4x Screws (5) and tighten with a Phillips screwdriver.












Phillips Screwdriver needed.Not Included.

11 X2	5 X8
	

Save these instructions.

Step 3 Assemble Bottom Shelf

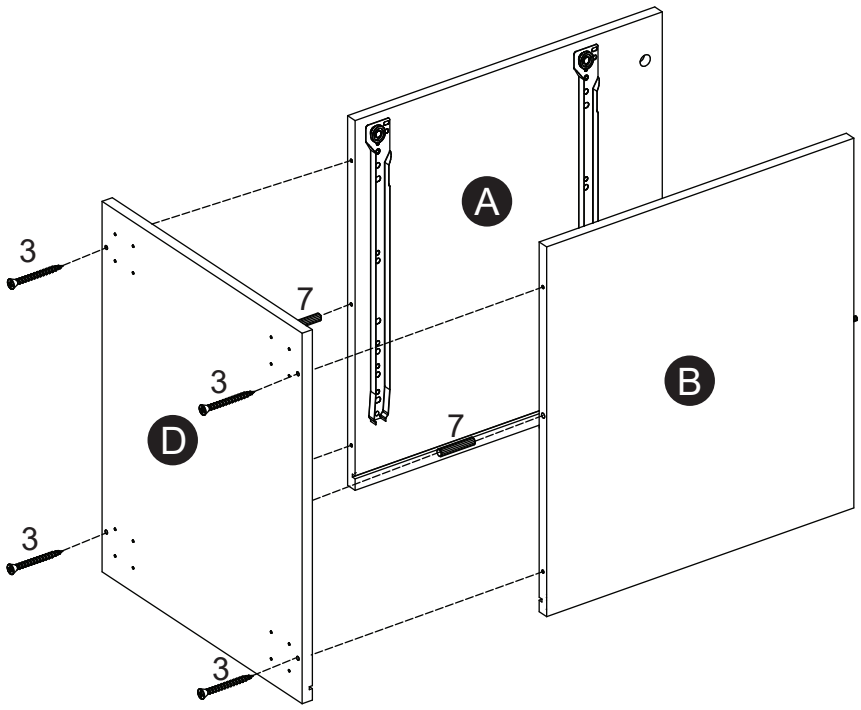- Insert 2x wood dowels (7) to left panel Ⓐ and right panel Ⓑ at specied locations.
- Fasten bottom shelf Ⓓ to left panel Ⓐ and right panel Ⓑ with 4x Screws (3) and tighten with a screwdriver.





Phillips Screwdriver needed.Not Included.


7 X2	3 X4



Save these instructions.

Step 4 Build Back Panel

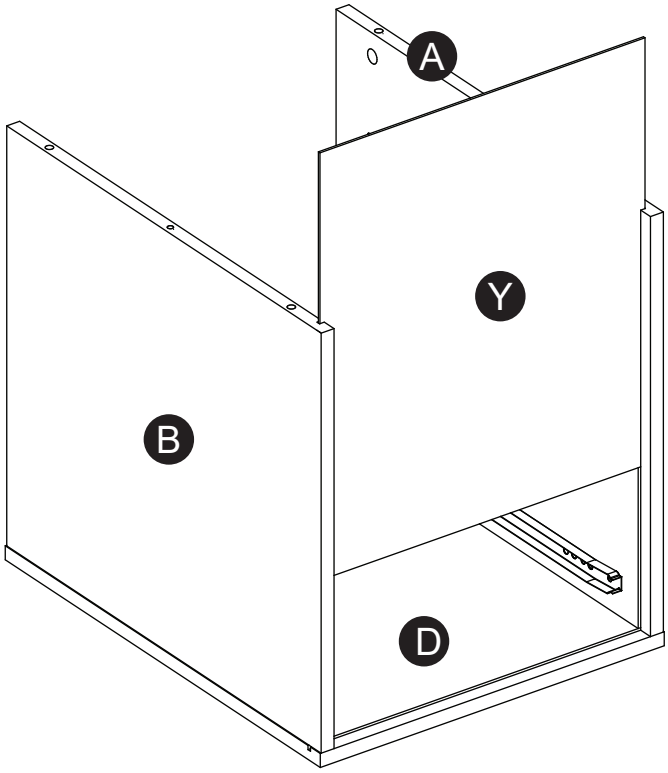
• Insert 1x back panel Ⓨ to the grooves at left panel Ⓐ and right panel Ⓑ .



Save these instructions.

Step 5 Connect Top Shelf

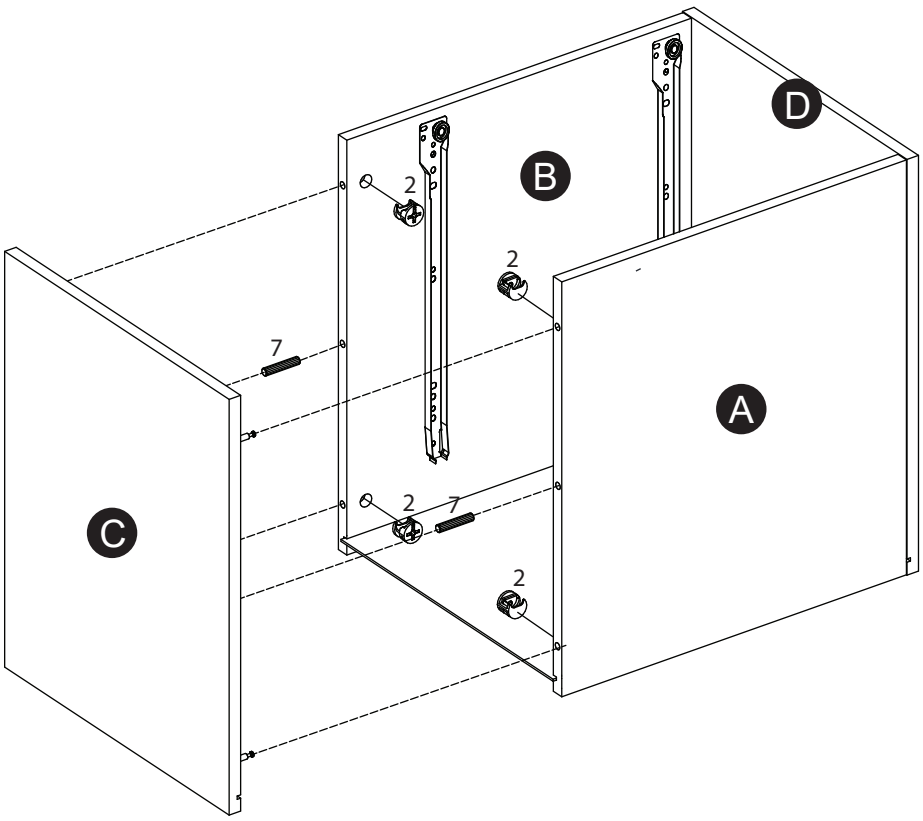- Insert 2x wood dowel (7) to left panel Ⓐ and right panel Ⓑ at the specified location.
- Insert 4x cam locks (2) to left panel Ⓐ and right panel Ⓑ at the specified location.
- Carefully align wood dowel (7) to pre-drill holes,cam bolt (1) to cam lock (2).
- Attach top panel Ⓒ to left panel Ⓐ and right panel Ⓑ by turning all cam lock to engage. Following cam lock safety precautions.



Phillips Screwdriver needed.Not Included.


Follow the Cam Lock safety precautions


7 X2	2 X4

Save these instructions.

Step 6 Fasten Bsckply

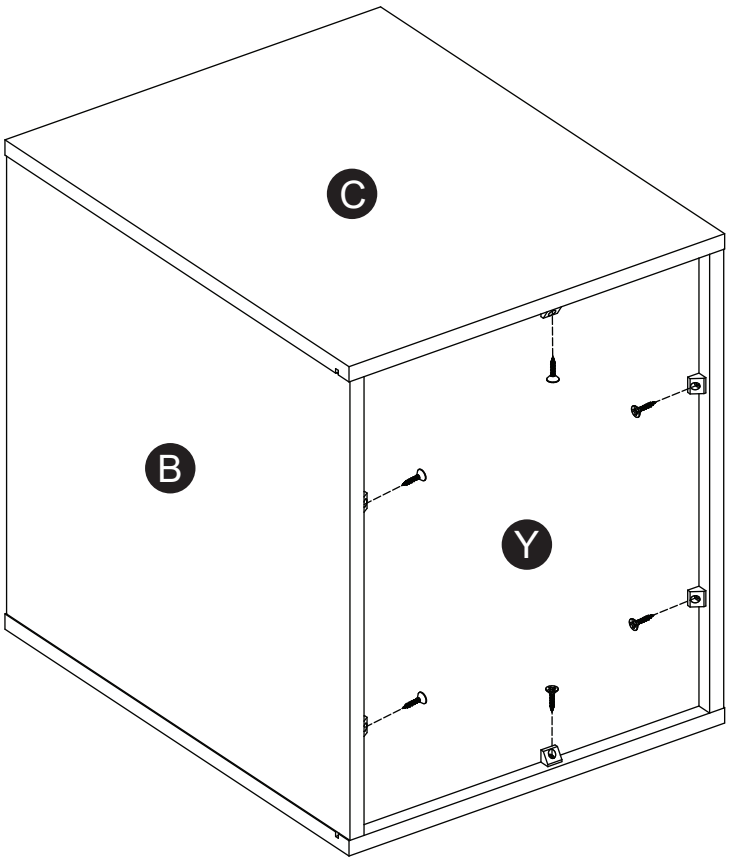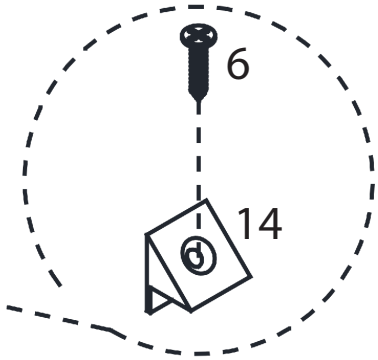• Fasten 6x Backply (14) to cabinet back with 6x screws (6) and tighten with a Phillips screwdriver.








Phillips Screwdriver needed.Not Included.

6 X6	14 X6
	

Save these instructions.

Step 7 Build Wood Leg

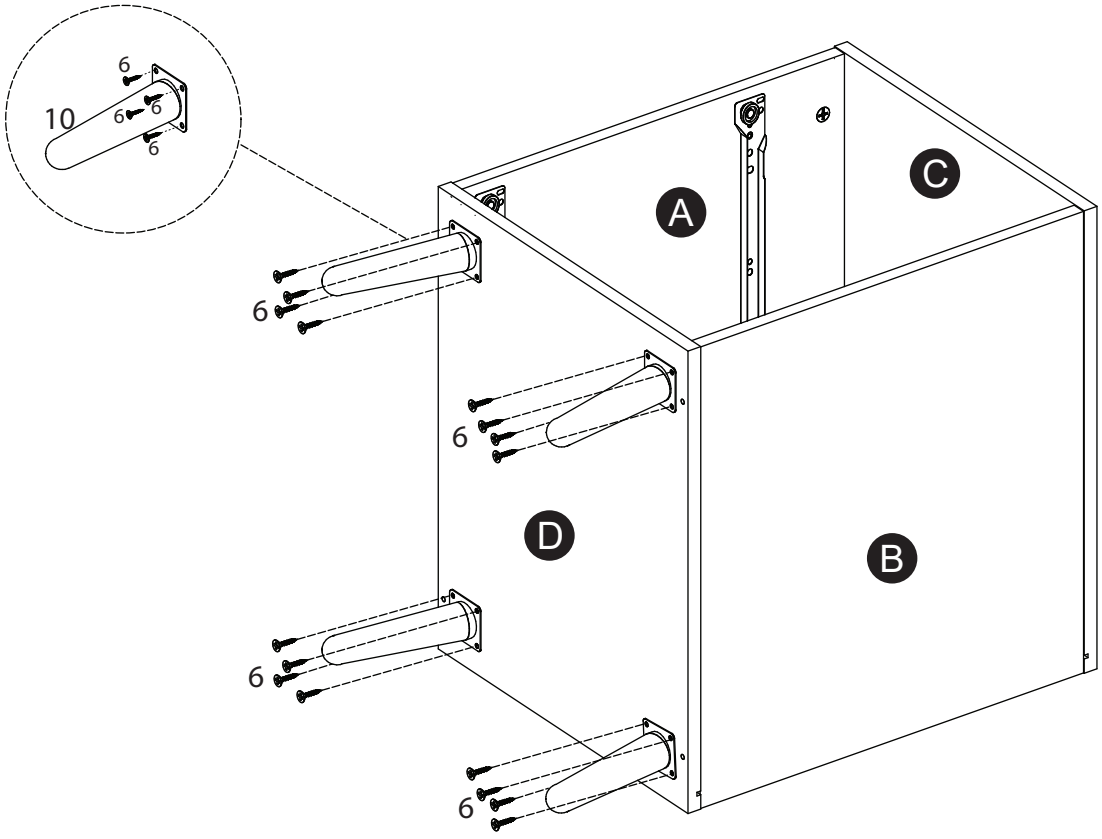• Fasten 4x Woodleg (10) to bottom shelf Ⓓ with 16x screw (6) and tighten with a Phillips screwdriver.




Phillips Screwdriver needed.Not Included.

10 X4	6 X16

Save these instructions.

Step 8 Build Drawer

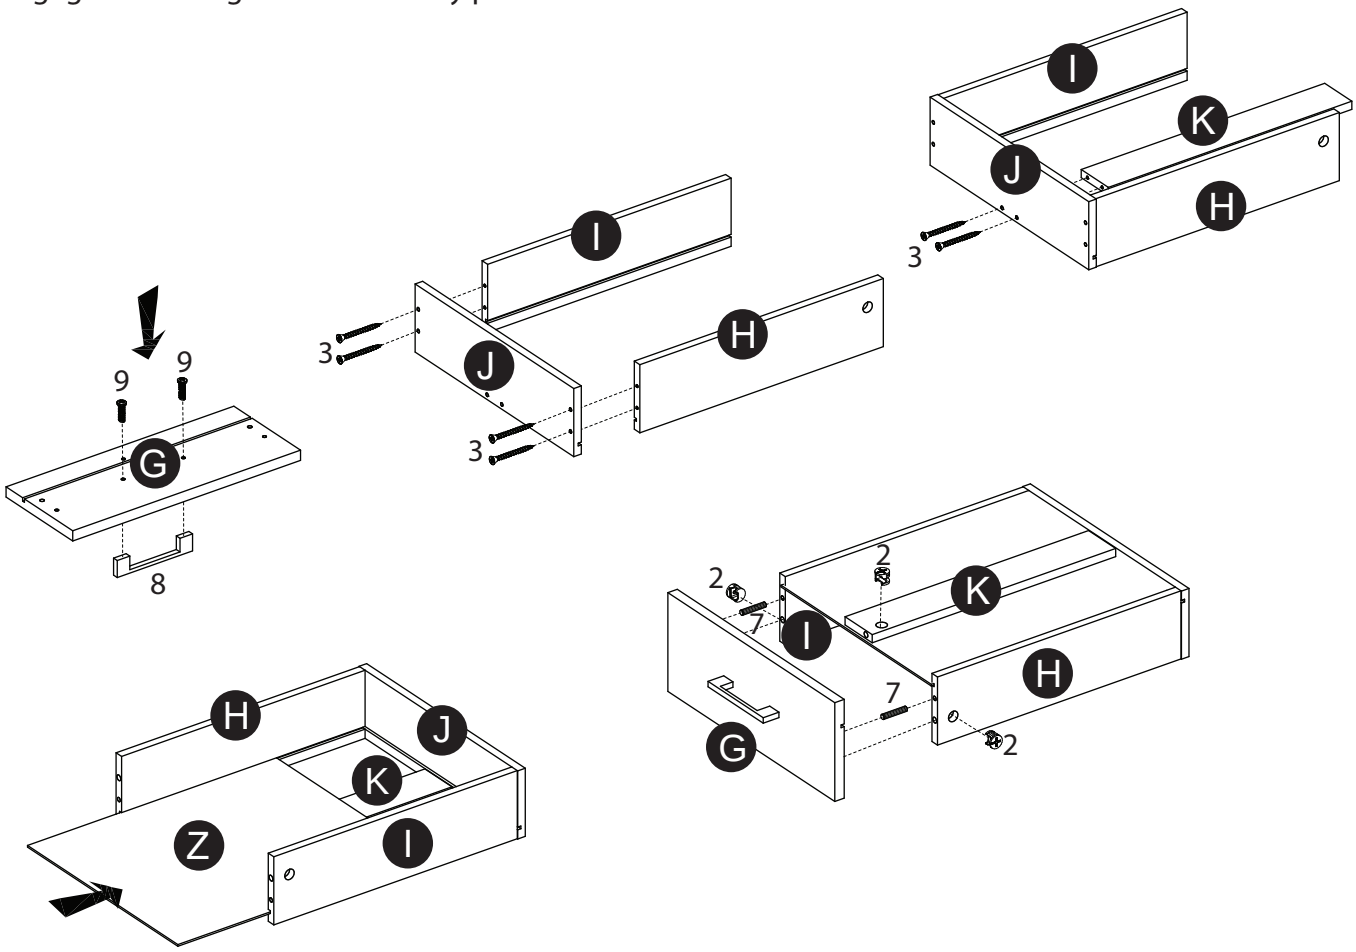- Fasten handle (8) to front drawer panel Ⓖ with 2x screws (9) and tighten with a Phillips screwdriver.
- Fasten left drawer panel Ⓗ and right drawer panel Ⓘ to back drawer panel Ⓙ with 4x screws (3) and tighten with a Phillips screwdriver
- Fasten 1x drawer support bar Ⓚ to back drawer panel Ⓙ with 2x screws (3) and tighten with a Phillips screwdriver.Insert drawer bottom Ⓩ to the grooves at back drawer panel Ⓙ ,left drawer panel Ⓗ and right drawer panel Ⓘ.
- Insert 3x cam locks (2) to left drawer panel Ⓗ , right drawer panel Ⓘ and 1x drawer support bar Ⓚ at the specified locations.
- Insert 2x wood dowels (7) to left drawer panel Ⓗ and right drawer panel Ⓘ at specified locations.
- Connect front drawer panel Ⓖ to left drawer panel Ⓗ and right drawer panel Ⓘ by turning all cam locks (2) to engage. Following Cam Lock safety precautions.



Phillips Screwdriver needed.Not Included.


Follow the Cam Lock safety precautions

8 X1	9 X2	3 X6	7 X2	2 X3

Save these instructions.

Step 9 Build Drawer

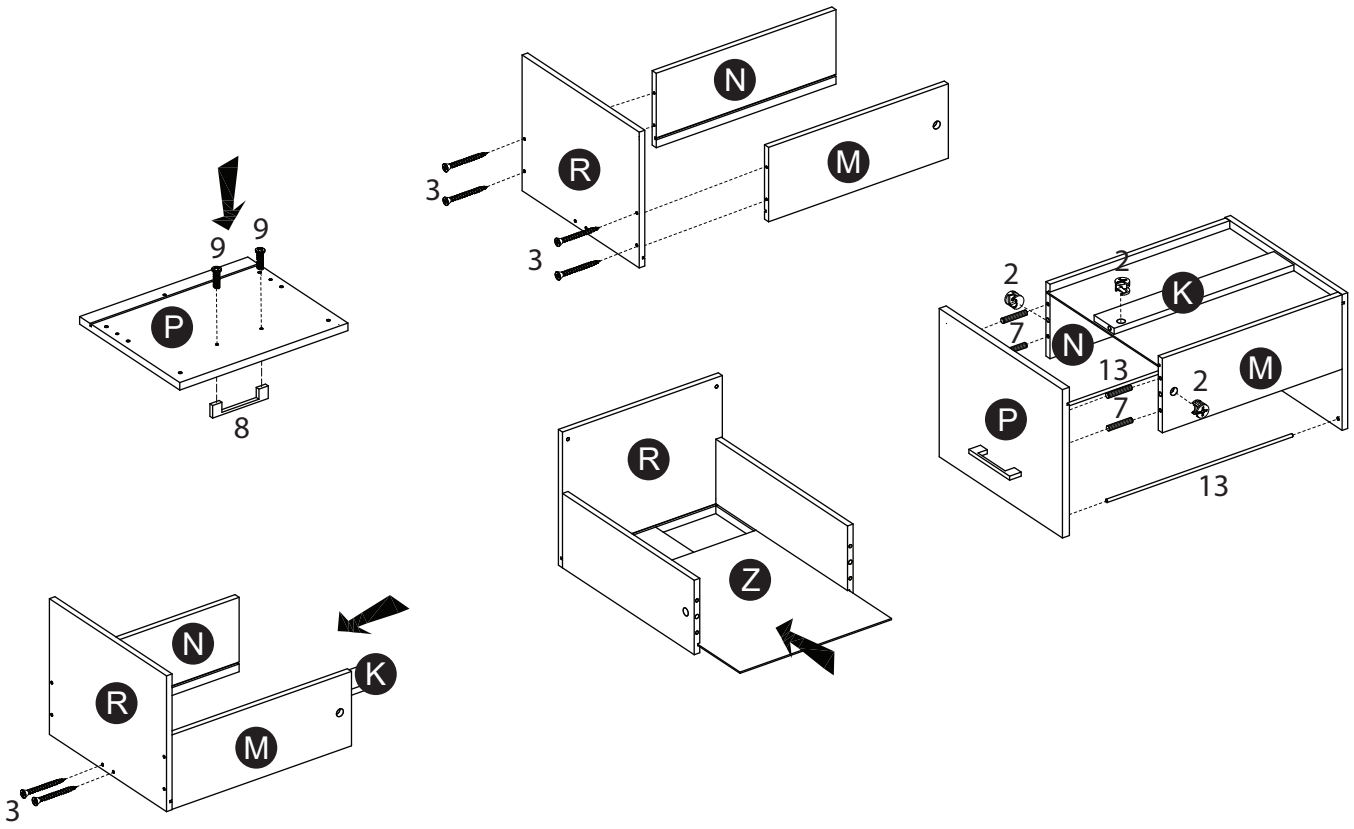- Fasten handle (8) to front drawer panel Ⓟ with 2x screws (9) and tighten with a Phillips screwdriver.
- Fasten left drawer panel Ⓜ and right drawer panel Ⓝ to back drawer panel Ⓡ with 4x screws (3) and tighten with a Phillips screwdriver
- Fasten 1x drawer support bar Ⓚ to back drawer panel Ⓡ with 2x screws (3) and tighten with a Phillips screwdriver.Insert drawer bottom Ⓩ to the grooves at back drawer panel Ⓡ ,left drawer panel Ⓜ and right drawer panel Ⓝ .
- Insert 3x cam locks (2) to left drawer panel Ⓜ , right drawer panel Ⓝ and 1x drawer support bar Ⓚ at the specified locations.
- Insert 2x wood dowels (7) to left drawer panel Ⓗ and right drawer panel Ⓘ at specified locations.
- Carefully align aluminium rod (13) to the hole on front drawer panel Ⓟ ,left drawer panel Ⓜ and right drawer panel Ⓝ at the specified location.
- Connect front drawer panel Ⓟ to left drawer panel Ⓜ and right drawer panel Ⓝ by turning all cam locks(2) to engage. Following Cam Lock safety precautions.



Phillips Screwdriver needed.Not Included.


Follow the Cam Lock safety precautions

13 X2	8 X1	9 X2	3 X6	7 X4	2 X3

Save these instructions.

Step 10 Build Drawer Slide

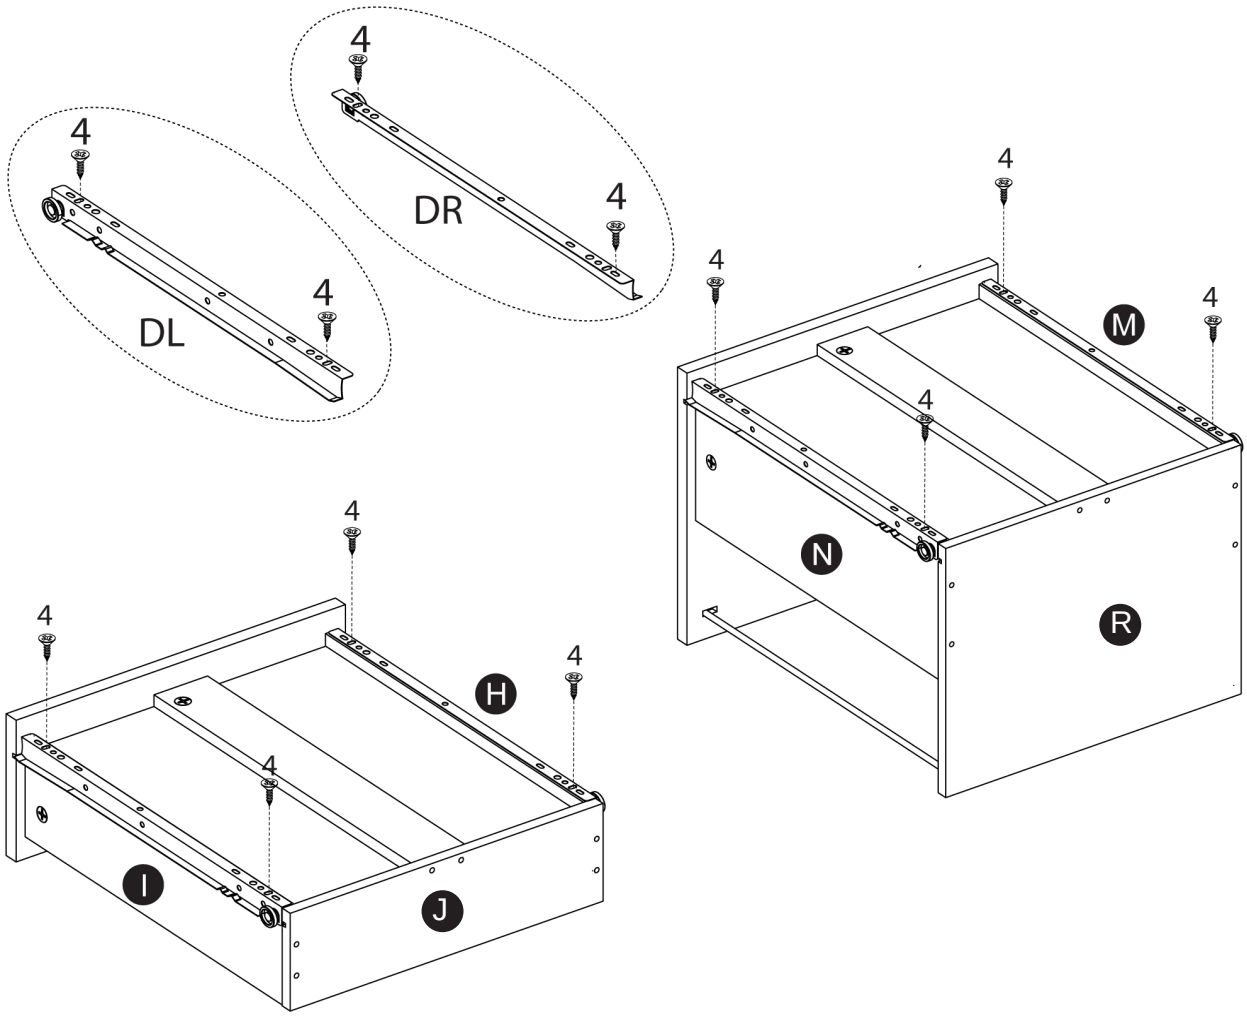- Identify Left drawer slide(DL) and Right drawer slide(DR) following below diagram.
- Fasten Left drawer slide(DL) to left drwer panel Ⓗ & Ⓜ , right drawer slide(DR) to right drawer panel Ⓘ & Ⓝ with 8x screws (4) and tighten with a Phillips screwdriver.





Phillips Screwdriver needed.Not Included.


4 X8	12 X2
	


Save these instructions.

Step 11 Assemble Drawer

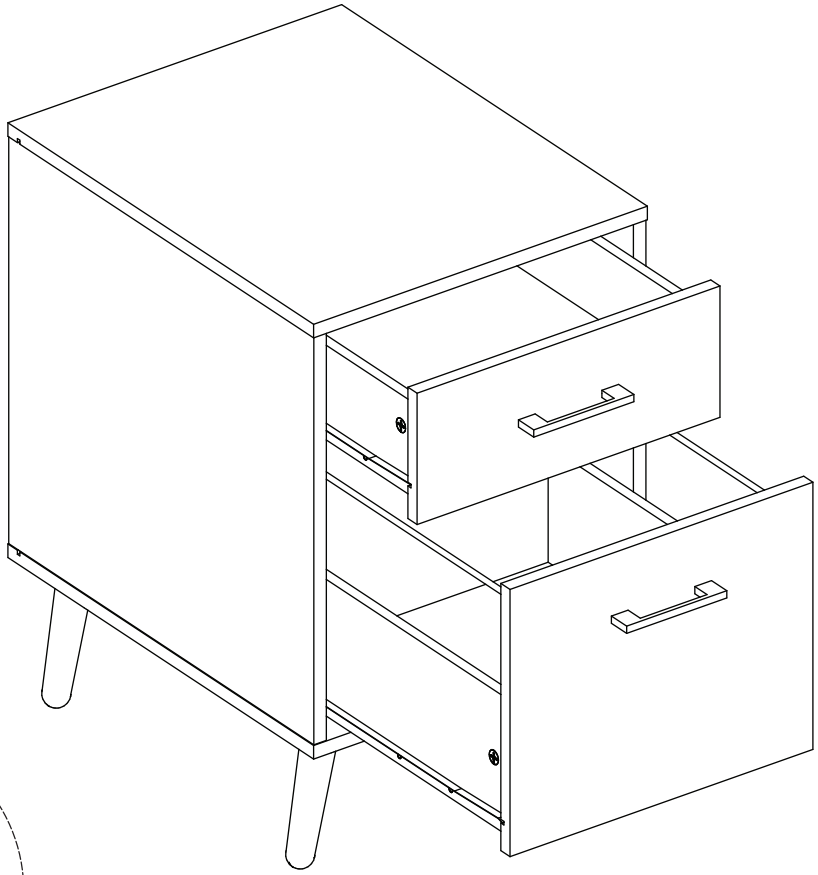• Insert the drawer into assembled unit, lifT the front of the drawer up and slide it into the unit.





Save these instructions.

Care & Maintenance

- Regularly check all fastenings to ensure that they are properly tightened.
- Clean with a damp soft cloth, then use a soft lint free cloth to dry.
- Hot or wet items should not be placed directly on the furniture surface.
- Do not clean furniture with harsh cleaners or polish.
- Do not place furniture in direct sunlight or near heating/cooling vents.
- To protect the surface, use a pad when writing on top of the furniture.
- For indoor residential use, do not place furniture outside.
- Do not stand on the product or use as a step ladder.
- Children should not climb on furniture.

Save these instructions.