



Lumary


USER MANUAL

What's in the Box

User manual

- Lumary Smart Landscape Soptlight

Product

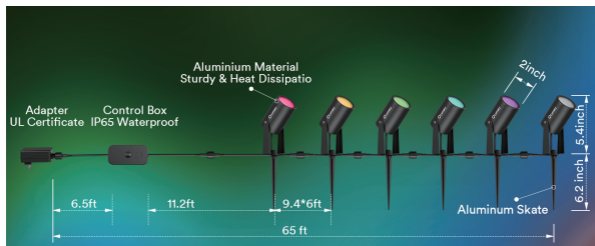

Button Functions:

1. Hold down the button for 5 seconds to enter network configuration mode. Upon powering up, the factory-set light will automatically make the lights flash.
2. A single press changes the mode, which varies with each press.
3. Pressing the button twice quickly will turn the device off. It will remember the color or the state from before the last time it was turned off.

(Note: A long press of 5 seconds, in any mode, will initiate the network configuration mode.)

NOTE:

- Make sure your mobile device meets the following requirements:
For iOS: Ensure your device is running iOS 17 or higher.
For Android: Ensure your device is running Android 12 or higher.
- Ensure that you are connecting to a 2.4GHz Wi-Fi network as Lumary devices are not compatible with 5GHz networks.

Pairing Your Device with Lumary App

What You Need:

- A Wi-Fi router supporting the 2.4GHz and 802.11b/g/n bands. **5GHz is not supported.**
- A smartphone running iOS or Android.



1. Download the "Lumary" App from the App Store or Google Play.
2. Register a Lumary account.

Note: Please select your region and country.

3. Connect

NOTE: Lumary's products can't connect to 5GHz networks.

Steps:

1. Turn on your smartphone's Bluetooth;
2. Open the Lumary App, In the top corner of the Devices screen, click "+" and select "Add Device" to confirm that the device is paired.
3. Each time the device without distribution network is powered on, confirm the light is breathing or blinking pairing mode;
If not, you need press and hold the controller for 5 seconds, and the light will enter a breathing state.;
4. Find the device, choose Wi-Fi and enter password, press "Next".
Click "Add", and wait patiently. After that, click "Done", and the device is successfully added to the App.

If you have any questions. You can contact us via our after-sales email: support@lumary.tech or leave a message on our official social media account.

Parameter Information


| | |
|-------------------|----------------------------|
| Name | Lumary Landscape Spotlight |
| Model | L-OSL6D1 |
| Input Voltage | 120VAC,60Hz |
| Wattage | Max.36W |
| Color Temperature | RGBAI +2200K-6500K |
| Lights Qty | 6PCS |
| Beam Angle | 60° |
| Rated Life | 15000h |



Contains FCC ID:2ANDL-CBU

Made in China

Remote controller paired device

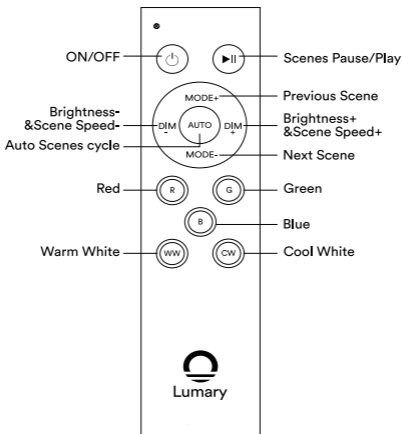

Steps to pair the remote with the device(lights):

- First, the light needs to be bound to the Lumary App.
- Next, unplug the power plug and then plug it back in.
- Then, press and hold the "●" on the remote for 5 seconds.
The lights will turn on and off once, indicating a successful pairing.
- If pairing fails, you need to repeat the above steps.

1. Can't connect the light to Lumary App.

- Check whether the light is powered on.
- Check whether your smartphone Wi-Fi is enabled.
Please make sure Wi-Fi connected to your phone is 2.4GHz (5GHz brand is not supported).
- Make sure your smartphone is close to the device when connecting for the first time.
- Check if you have entered the correct Wi-Fi password during Wi-Fi setup.
- Make sure the distance between the bulb and router is less than 25ft.
- If you fail to bind, you will need two phones, one to set the hotspot and the other to connect the hotspot and add the device through the app. If the device is successfully added, the device is normal. The problem may be in the router, you need to check your router Settings to see if there are MAC and DHCP restrictions.

2. Can I group multiple Lumary devices together?

- Yes, you can group multiple lights and other Lumary devices by Schemes, Same model, General (Wi-Fi or Bluetooth devices). It depends on the function of different devices.

If you have any questions. You can contact us via our after-sales email: support@lumary.tech or leave a message on our official social media account.

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Voice Control Quick Guide for Amazon Alexa

1. Log in to Lumary App, tap the smart device and enter into, click "✎" in the top right corner.
2. Tap "Alexa" in Third-party Control.
3. Tap "Sign In With Amazon".
4. Tap "Allow".
5. Linked successfully, when add new device, there is no need to link again, just discover new device in Alexa.

Name and Control Each Device by Voice

To control your Lumary smart device, just ask Alexa. Make sure your devices are already set up using the Lumary app.

Things you can say*:

"Alexa, discover my devices."

"Alexa, turn on the light."

"Alexa, set the bedroom light to orange."

"Alexa, turn off the light."


"Alexa, set the living room to 50%."

"Alexa, dim porch light."

*Some commands require compatible devices.



Voice Control Quick Guide for Google Assistant

1. Log in to Lumary App, tap the smart device and enter into, click " " in the top right corner.
2. Tap "Google Assistant" in Third-party Control.
3. Tap "Link with Google Assistant".
4. Click "Agree and link".
5. Linked successfully, when add new device, there is no need to link again, just discover new device in Google Home.

Name and Control Each Device by Voice

To control your Lumary smart device, just say "Hey Google", and ask.

Make sure your devices are already set up using the Lumary app.

Things you can say*:

"Hey Google, turn on the light."

"Hey Google, turn off the light."

"Hey Google, set the bedroom light to orange."

"Hey Google, set the living room to 50%."

"Hey Google, dim porch light."

*Some commands require compatible devices.

24 HOURS
Quick Response

Quick Response

If there is any problem please check the Troubleshooting page . When you could not fix this, please contact us after-sale email, we will respond within 24 hours. The fastest way to help us confirm the problem is to send us a video of the problematic light to our official email box. support@lumary.tech
WhatsApp:+86 188 2656 6792

30 DAYS
MONEY-BACK

MONEY-BACK

For **30 days** after the date of purchase, return your Lumary product and receive a full refund for **ANY reason**.

2-YEAR WARRANTY



Free Replacement No Repair

After the buyer purchases the product, if the product has a quality problem within the scope of the seller's warranty service within the service validity period, the seller will replace the buyer with a **product for free**.



Friendly Reminder

We do not recommend you to leave a product review first, as we cannot get in touch with you through reviews/feedback to solve any product usage problems. Please contact us through the after-sales email. We sincerely hope to solve your problem every time and provide the best after-sales service.

Please rest assured that our service aim is to make customers 100% satisfied. If there is any problem, please contact us as soon as possible, we will not let you down.

Can't connect? Need help?



HAVING AN EASY TALK TO US BEFORE YOU RETURN
THE PRODUCT WILL FIX A PROBLEM MORE QUICKLY

Lumary support:

support@lumary.tech

Visit us at:

www.lumary.tech

www.lumarysmart.com