




DELPHINE

Office Desk

Assembly Guide

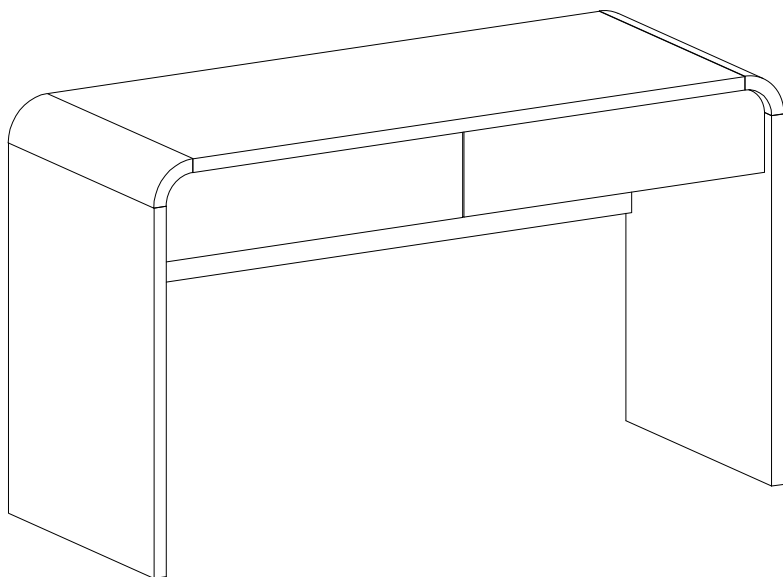

EasyBuild Design, powered by owvo. Less assembling, more living.

IMPORTANT: please read these instructions
fully before starting assembly



**SAFETY AND
CARE ADVICE**



NO POWER TOOLS

- Check you have all the components and tools listed
- Remove all fittings from their bags and separate into groups
- We do not recommend use of power tools - this could damage the unit. Only use hand screwdrivers and Allen keys
- Keep children and animals away from the work area, small parts could cause choking if swallowed
- Make sure you have enough space to lay out the parts before starting
- Assemble the item as close to its final position (same room) as possible
- Do not over tighten the nuts to avoid damage to the threads
- Only clean using a damp cloth and mild detergent. Do not use bleach or abrasive cleaners
- Do not allow children to climb or play on this product. From time to time, check there are no loose screws in this unit
- This product should not be discarded with household waste. Take to your local authority waste disposal centre
- Unless otherwise stated, this product is designed for domestic use and is not certified for commercial or contract settings

IMPORTANT INFORMATION



60 Minute
Build



Two Person
Build




Max Weight
Capacity
40kg

Note: Assembly estimates are approximate and can differ based on the specific environment and user experience.

WHAT'S IN THE BOX

Note: the quantities are the correct amount to complete the assembly. In some cases more fixings may be supplied than are required.





Getting to know your product:

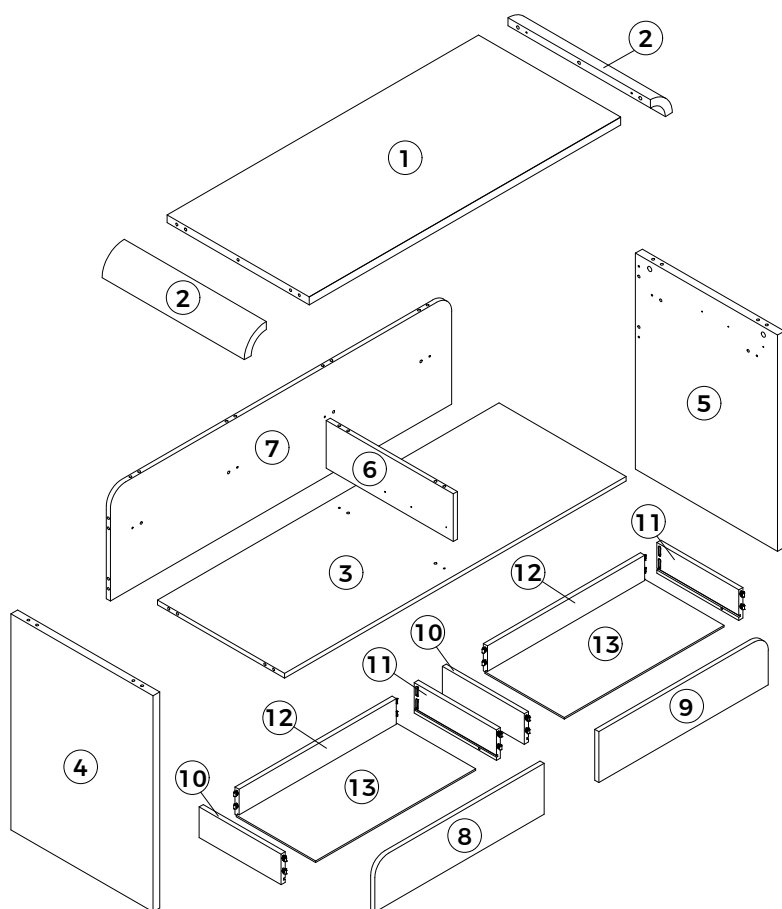

WHAT'S IN THE BOX

Note: the quantities are the correct amount to complete the assembly. In some cases more fixings may be supplied than are required.

Parts Key:

Label	Part Name	Image / Drawing	Quantity	Label	Part Name	Image / Drawing	Quantity
1	Top Panel		1	9	Right Drawer Front		1
2	Corner Panel		2	10	Drawer Left Side		2
3	Bottom Panel		1	11	Drawer Right Side		2
4	Left Side Panel		1	12	Drawer Back		2
5	Right Side Panel		1	13	Drawer Base		2
6	Divider Panel		1				
7	Back Panel		1				
8	Left Drawer Front		1				

WHAT'S IN THE BOX

Note: the quantities are the correct amount to complete the assembly. In some cases more fixings may be supplied than are required.

Hardware Key:


Label	Hardware Description	Image / Drawing	Size(mm)	Quantity
A	Cam Bolt		ø7x34mm	28
B	Cam Nut		ø15x12mm	28
C	Small Dowel		ø8x30mm	24
D	Large Dowel		ø10x40mm	6
E	Left Slide		310mm	2
F	Right Slide		310mm	2
G	Screw		ø5x15mm	12
K	Metal Plate		35x18x2mm	4
L	Screw		ø3.5x15mm	8
M	Felt Pad		ø20x5mm	4
Z	Cap		ø25mm	8

Note:


- Use a clear, flat surface to avoid bumps or scratches before assembling.
- Insert all fixings loosely at first to allow for alignment; only tighten them once everything is properly positioned, as some adjustment may be required.
- Avoid over-tightening, as this may damage the parts.
- Seek assistance when moving large or heavy parts

Fitting Assembly Instructions


Assembly





Push connector into housing to join.



Make sure there is no gap between the panels.





Disassembly





STEP 1

Attach 2 x Drawer left sides [10] and 2 x Drawer right sides [11] to drawer fronts [8] & [9] as shown.

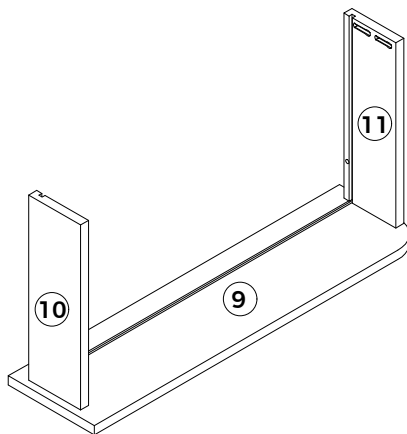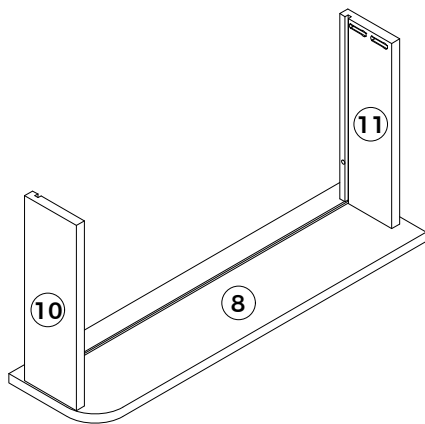


STEP 2

Slide 2 x Drawer bases [13] into the grooves on drawer sides and drawer front panels as shown.

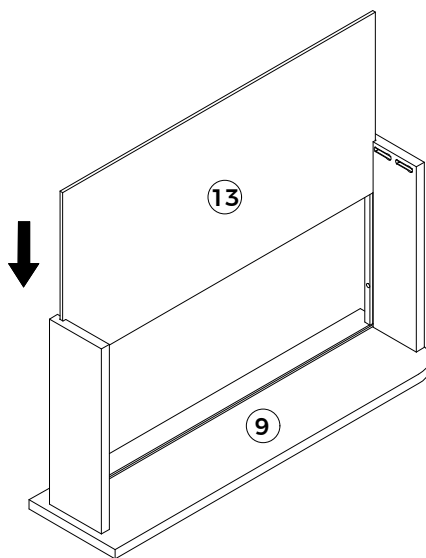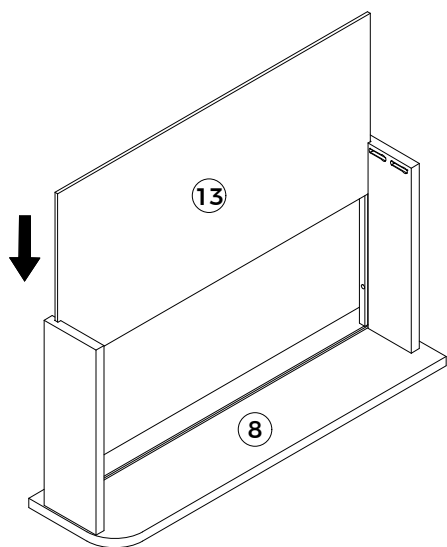

STEP 3

Attach Drawer back [12] to drawer side panels as shown.
Ensure drawer base panel is fully slotted into the grooves.

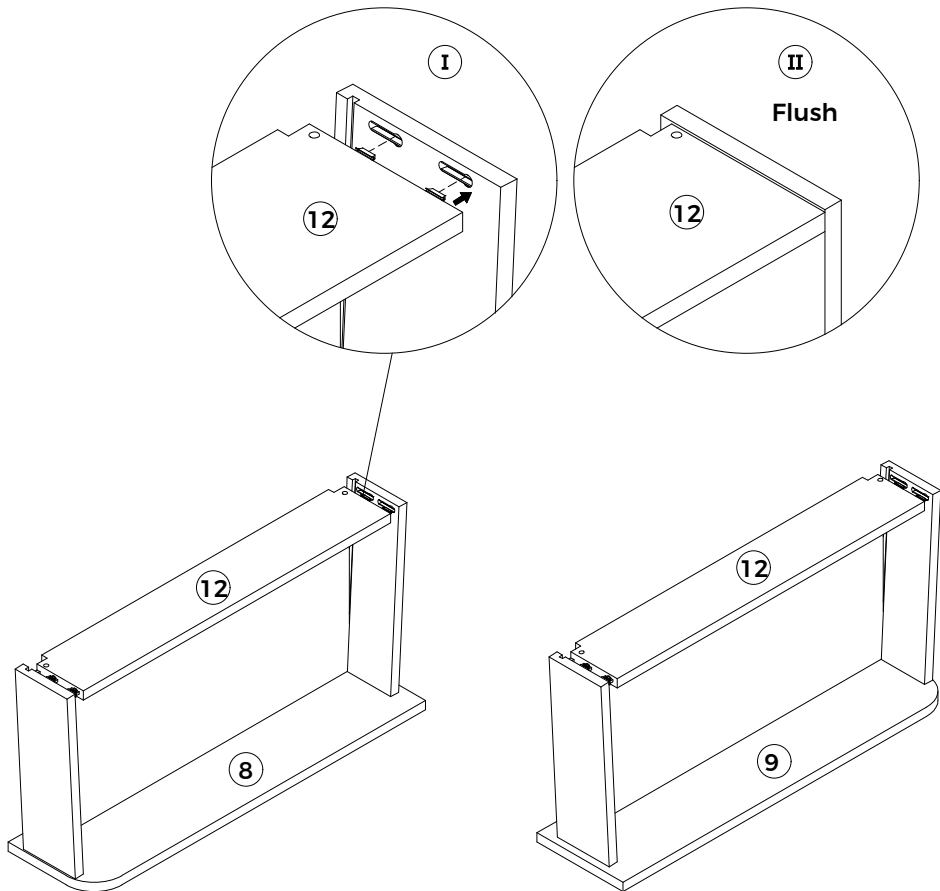


STEP 4

Insert 12 x small dowels [C] into Bottom panel [3] and Divider panel [6].



If needed use a mallet to gently tap the dowels into place.

Screw 2 x cam bolts [A] into Bottom panel [3] as shown.

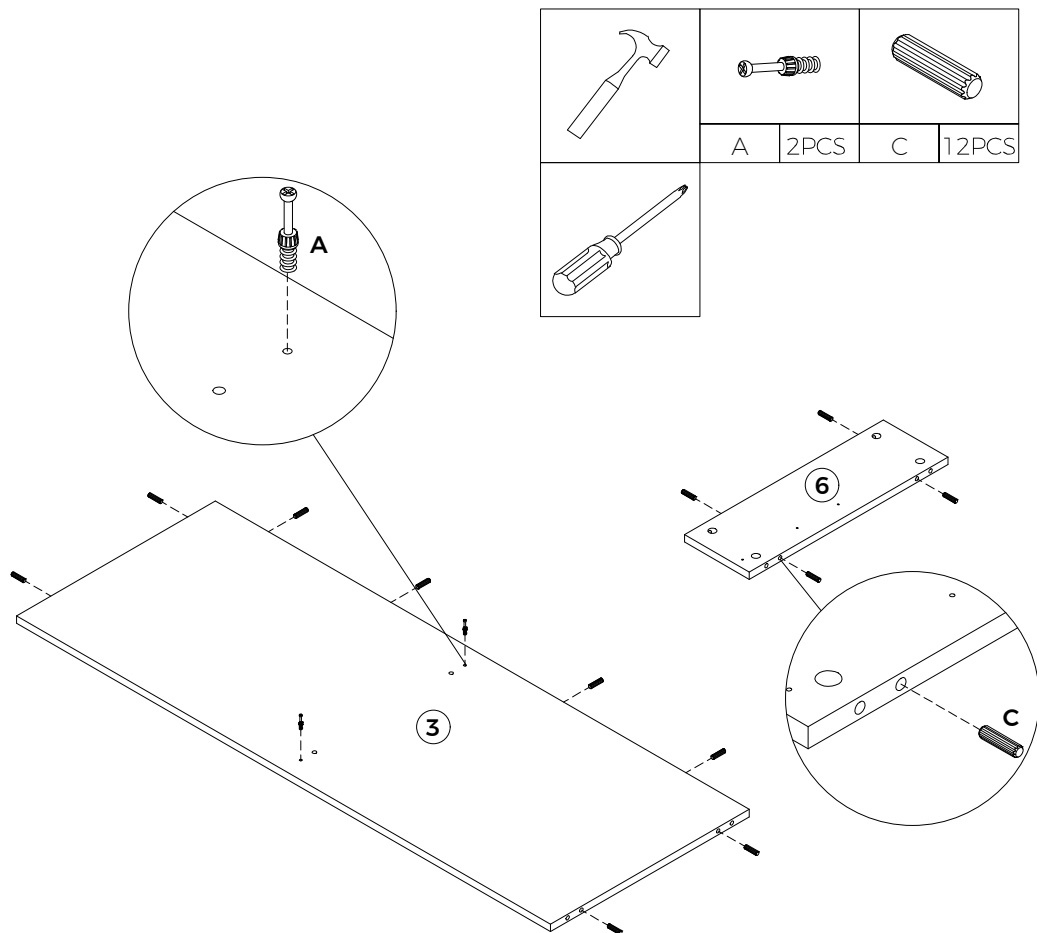




STEP 5

Attach Divider panel [6] to Bottom panel [3] as shown.
Insert 2 x cam nuts [B] into Divider panel [6]. Turn cam nuts clockwise to lock using a flat head screwdriver.

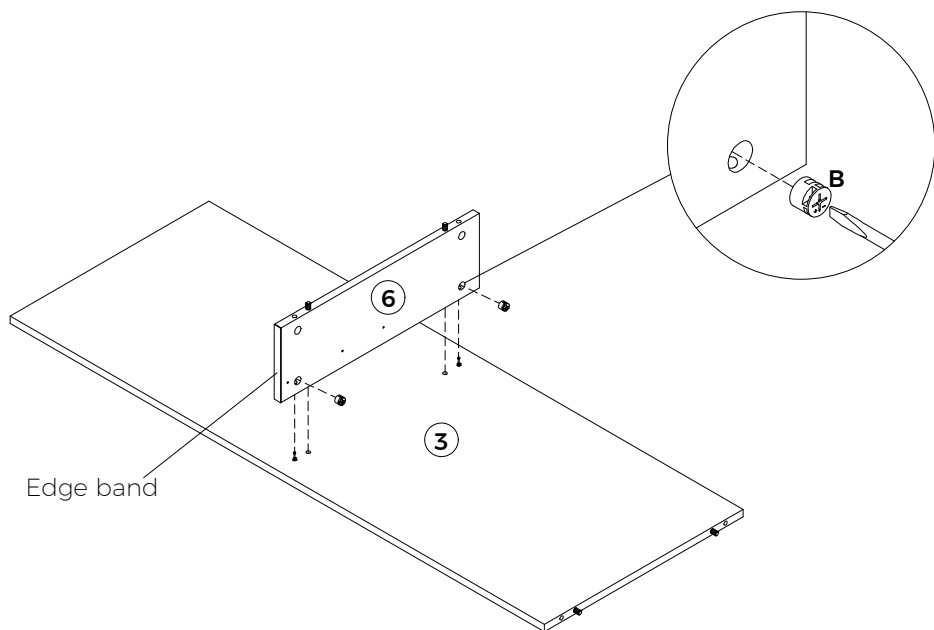




STEP 6

Attach 1 x Right slide [F] to Divider panel [6] with 3 x screws [G] as shown, by tightening with the Phillips head screwdriver.

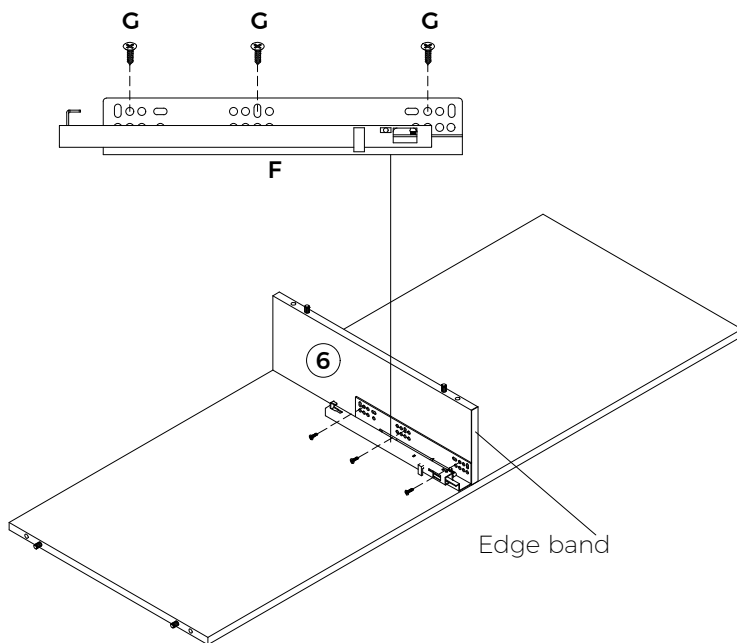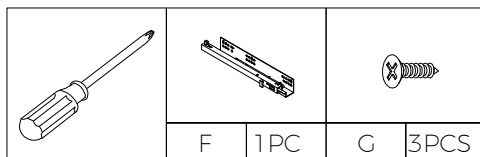


STEP 7


Attach 1 x left slide [E] to Divider panel [6] with 3 x screws [G] as shown, by tightening with the Phillips head screwdriver.

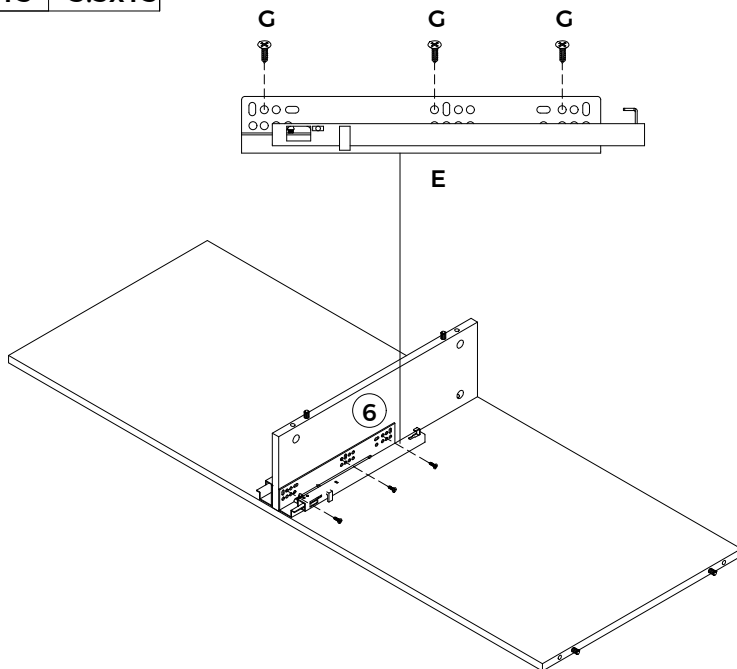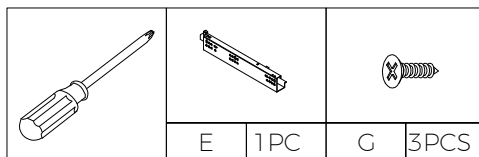

STEP 8



Insert 8 x small dowels [C] into Back panel [7] as shown.
Screw 4 x cam bolts [A] into Back panel [7] as shown.

				
	A	4PCS	C	8PCS
				

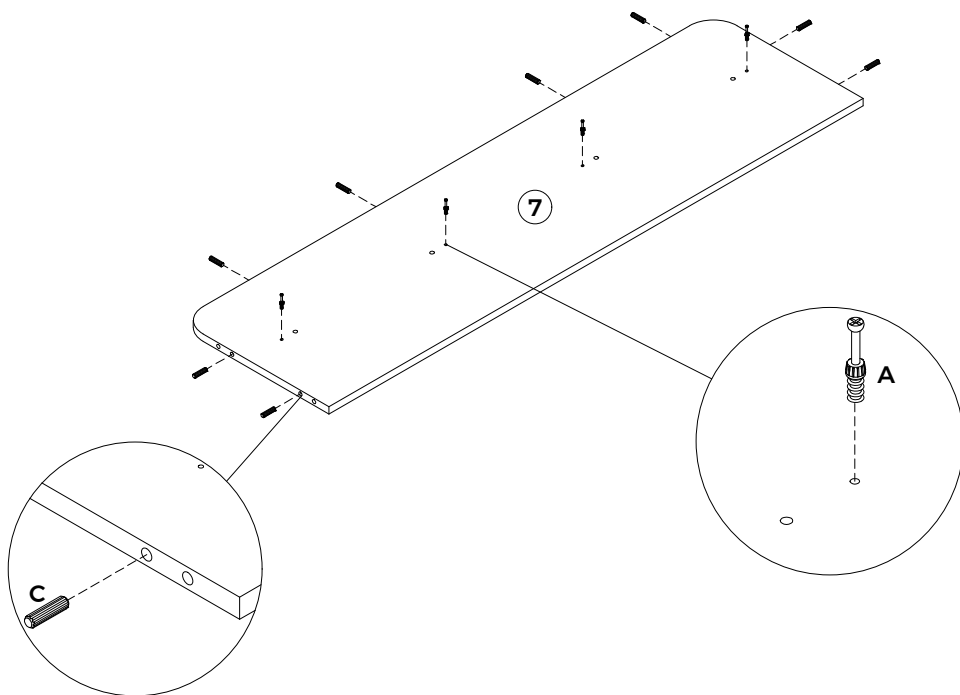

STEP 9

Attach Divider panel [6] and Bottom panel [3] to Back panel [7].
Insert 4 x cam nuts [B] into Bottom panel [3],
tighten with a flat head screwdriver.

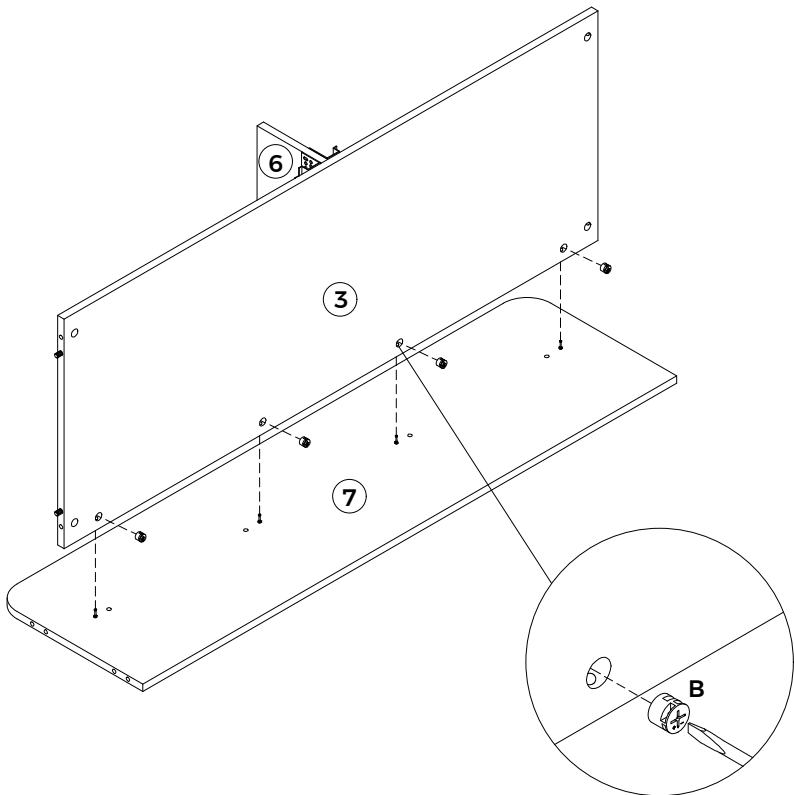



STEP 10



Attach 1 x left slide [E] to Left side panel [4] with 3 x screws [G] by tightening with the Phillips head screwdriver.

Attach 1 x right slide [F] to right side panel [5] with 3 x screws [G] tightening with the Phillips head screwdriver.

Screw 8 x cam bolts [A] into Left side panel [4] and Right side panel [5] as shown, using a Phillips head screwdriver




				
	A	8PCS	G	6PCS
				
	E	1PC	F	1PC

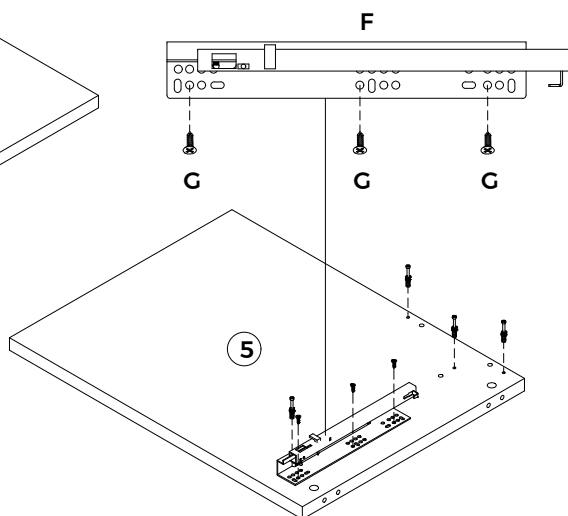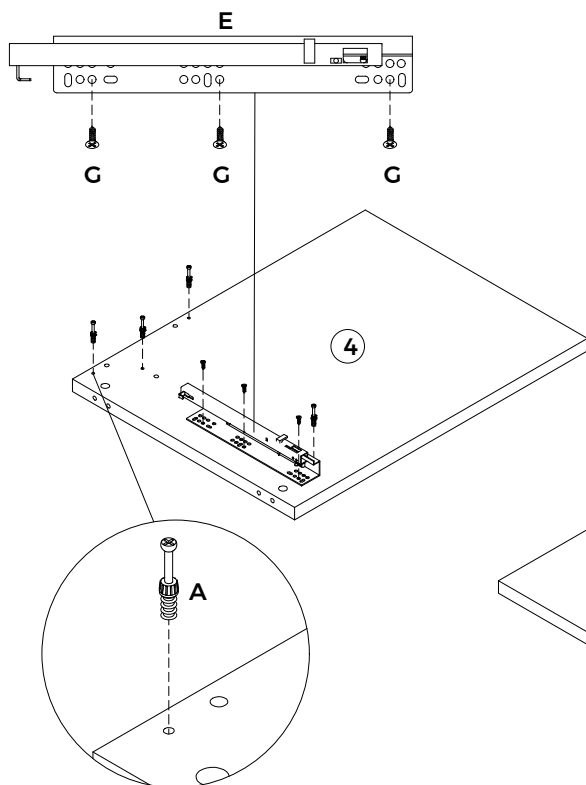

STEP 11



Insert 4 x small dowels [C] into Side panels [4]&[5] as shown.
Attach 4 x felt pads [M] to Side panels [4]&[5] as shown.

					
C		4PCS		M	

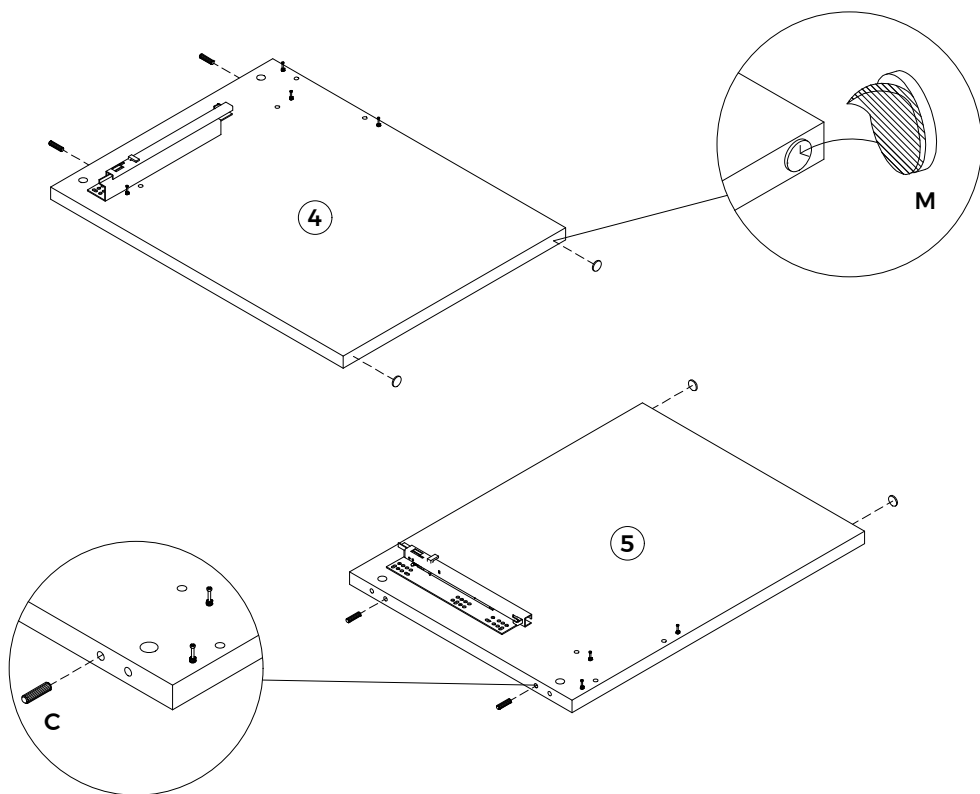



STEP 12

Attach Bottom panel [3] and Back panel [7] to Left side panel [4] as shown. Insert [4] x cam nuts [B] into Back panel [7] and Bottom panel [3], tighten with a flat head screwdriver.

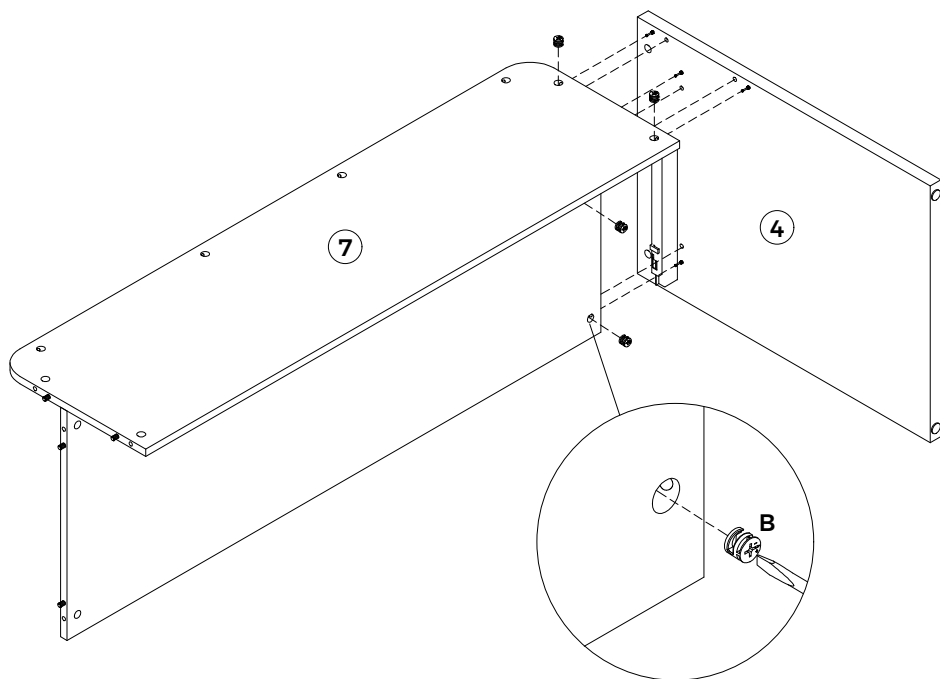

STEP 13

Attach Right side panel [5] to Bottom panel [3] and Back panel [7] as shown. Insert 4 x cam nuts [B] into Back panel [7] and Bottom panel [3], tighten with a flat head screwdriver.

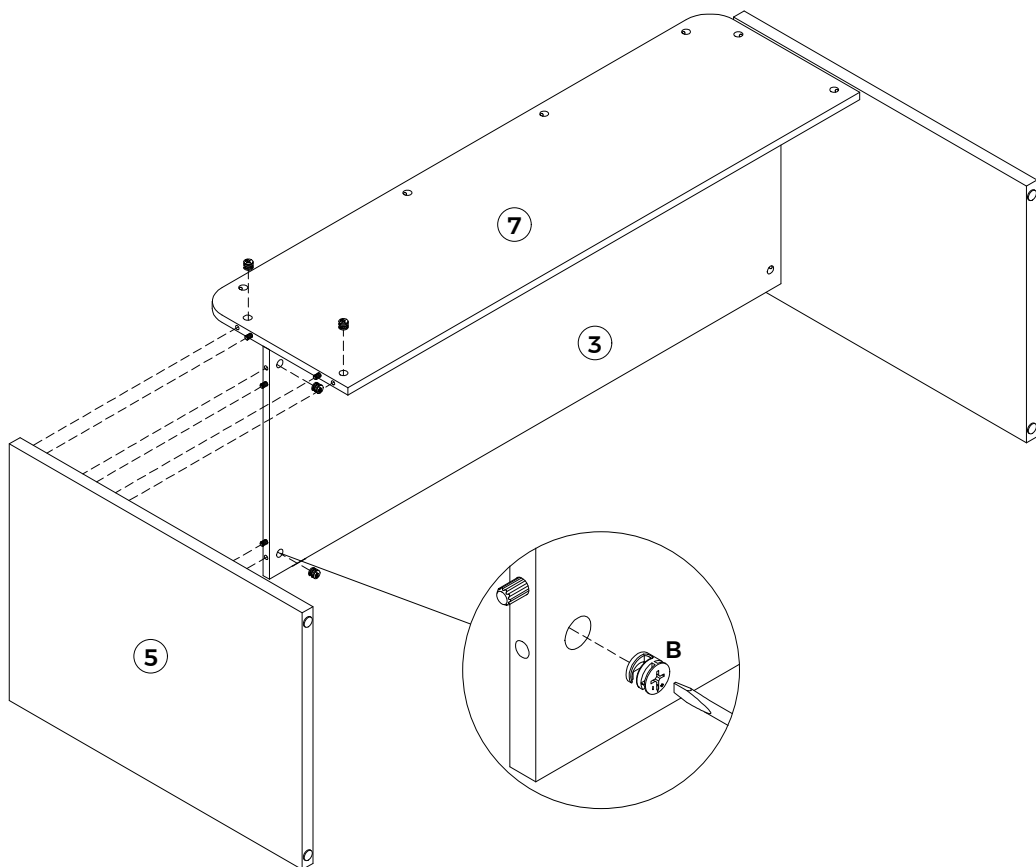



STEP 14

Insert 6 x large dowels [D] into Top panel [1] as shown.

If needed, use a mallet to gently tap the dowels into place.



Screw 6 x cam bolts [A] into Top panel [1], using a Phillips head screwdriver.

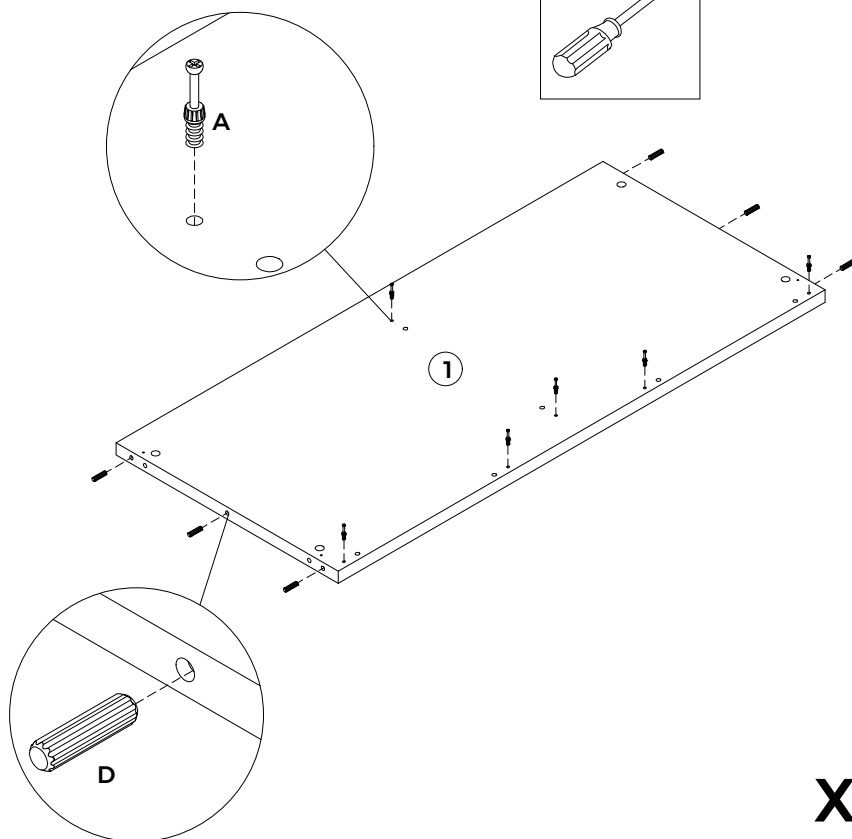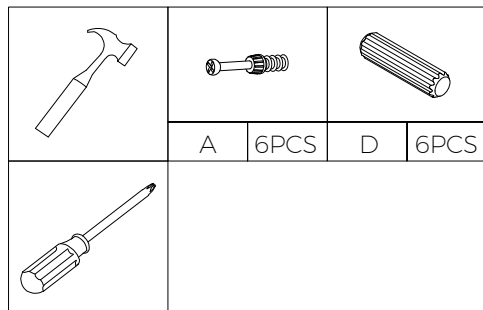

x2

STEP 15

Screw 8 x cam bolts [A] into 2 x Corner rails [2], using a Phillips head screwdriver.

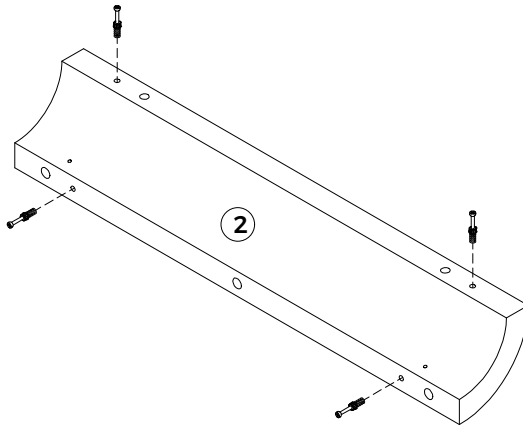



x2

STEP 16


Attach 2 x Corner rails [2] to Top panel [1] as shown.


Insert 4 x cam nuts [B] into Top panel [1], tighten with a flat head screwdriver.

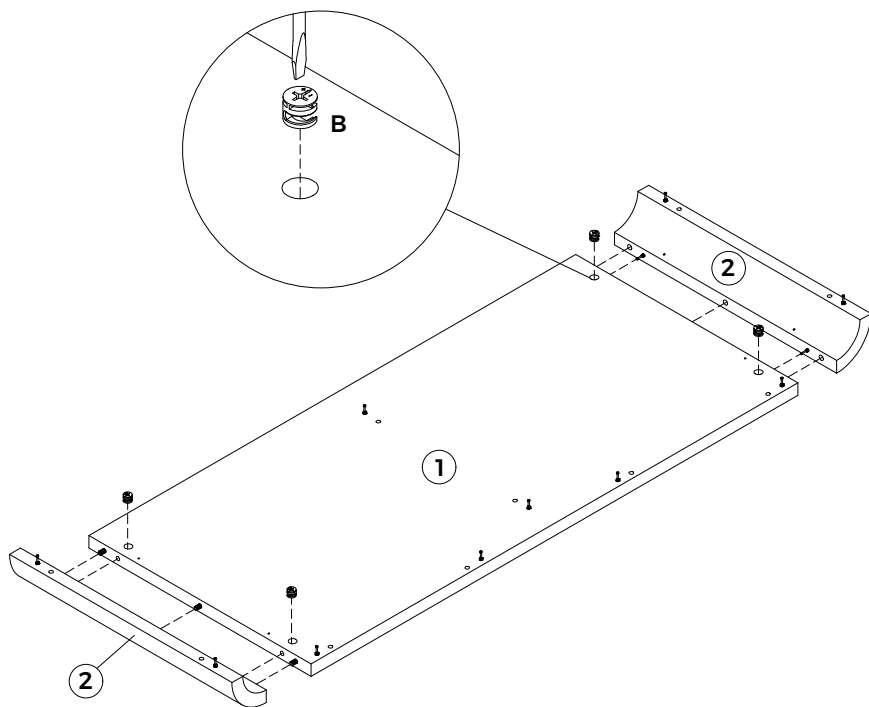

STEP 17



Attach 4 x metal plates [K] to Top panel [1] and Corner rails [2] with 8 x screws [L] as shown, tighten with a Phillips head screwdriver.

				
	K	4PCS	L	8PCS

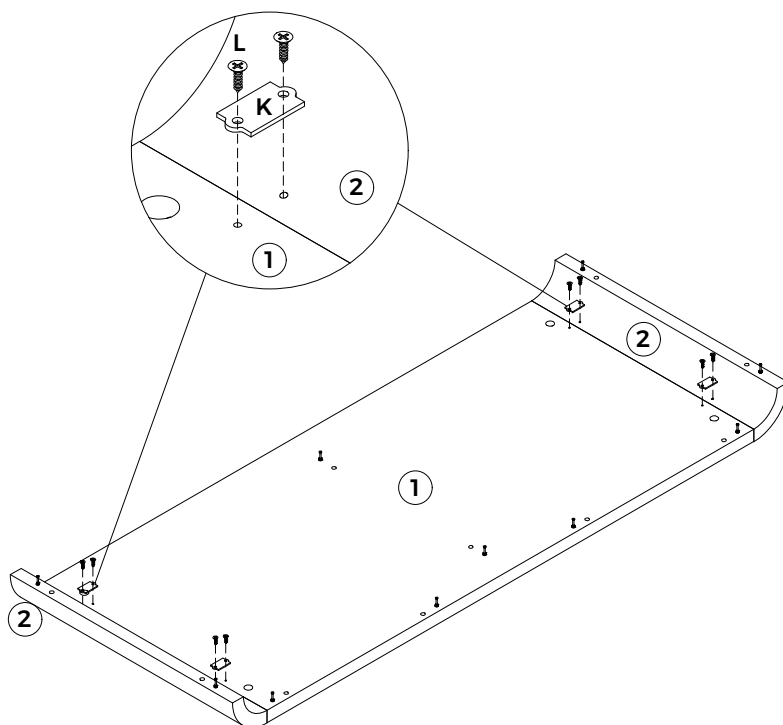


STEP 18

Attach assembled top panel to assembled frame as shown.
Insert 10 x cam nuts [B] into Side panels [4] & [5], Back panel [7] and Divider panel [6] as shown, tighten with a flat head screwdriver.

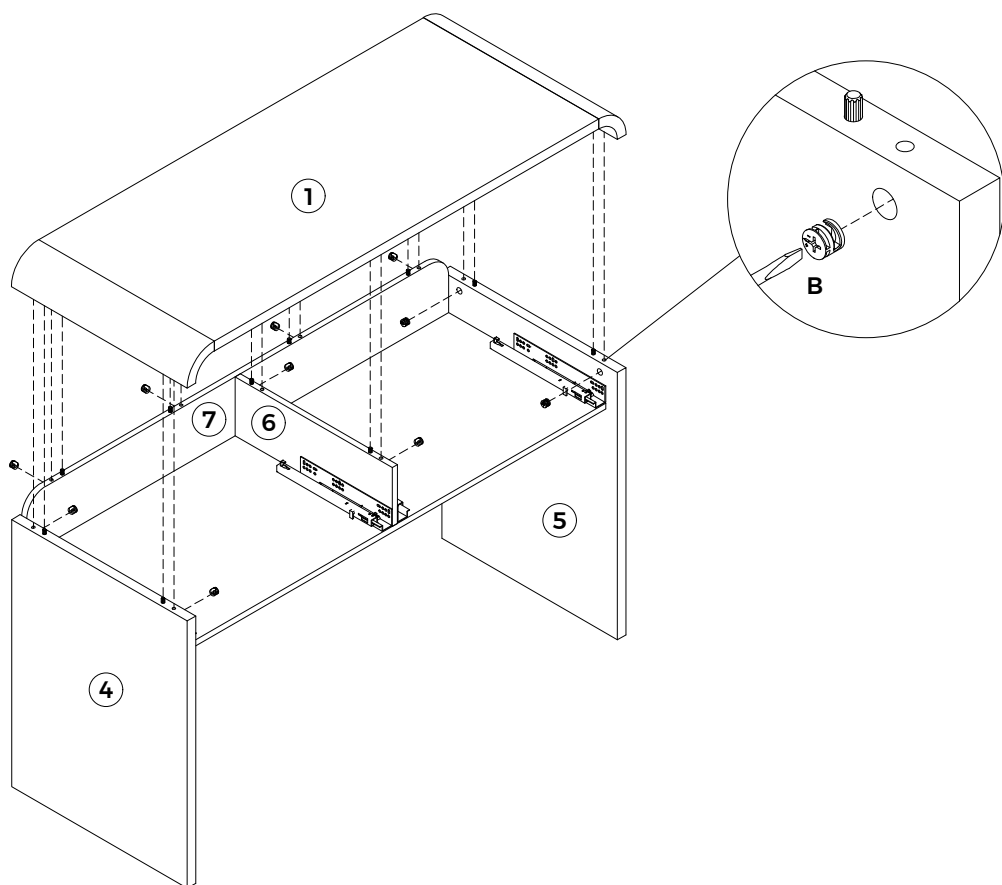







STEP 19

Insert the drawers into desk carefully as shown.

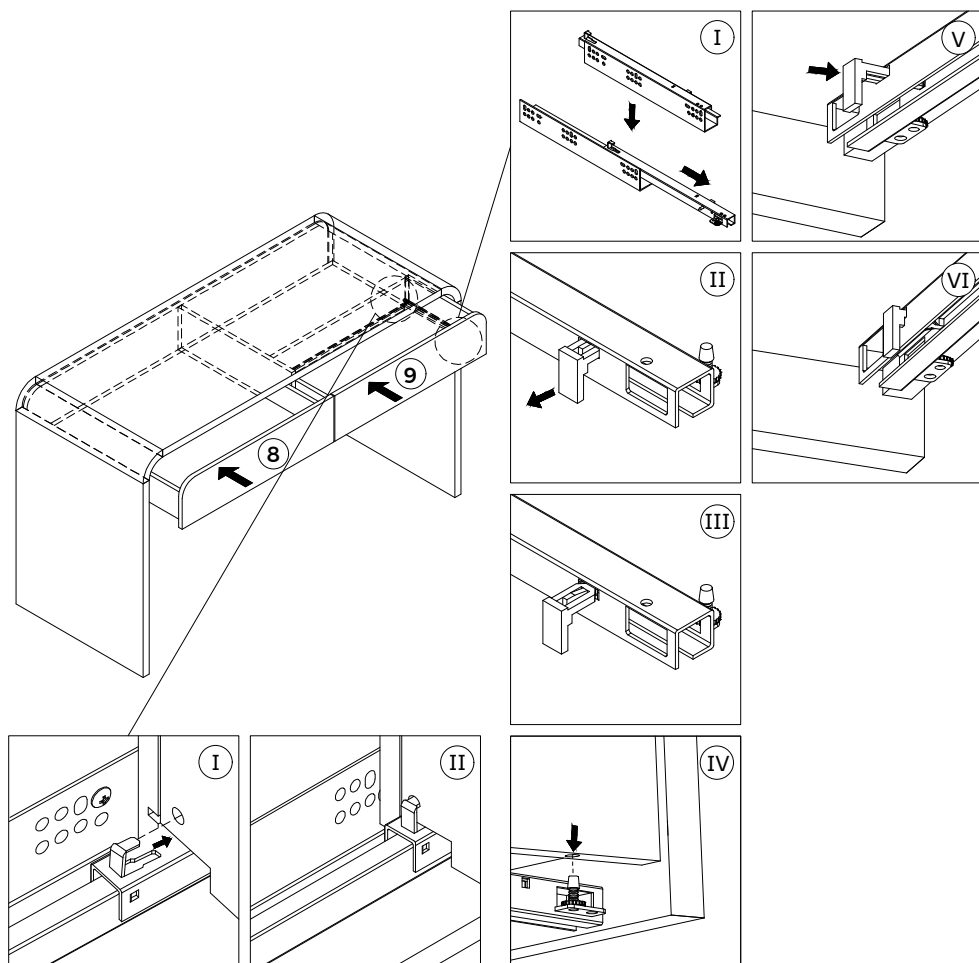



STEP 20

If needed, adjust the drawer slide as shown.

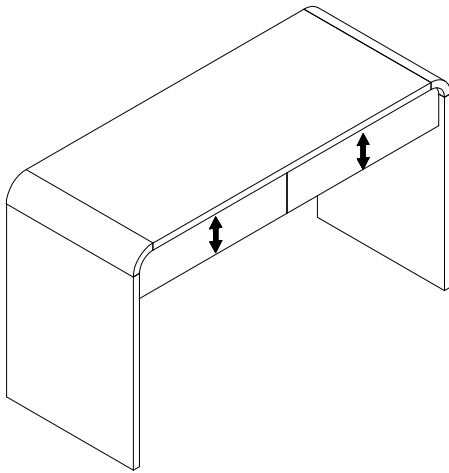


STEP 21

If needed, use the cap [Z] to cover the cam nuts holes as shown.

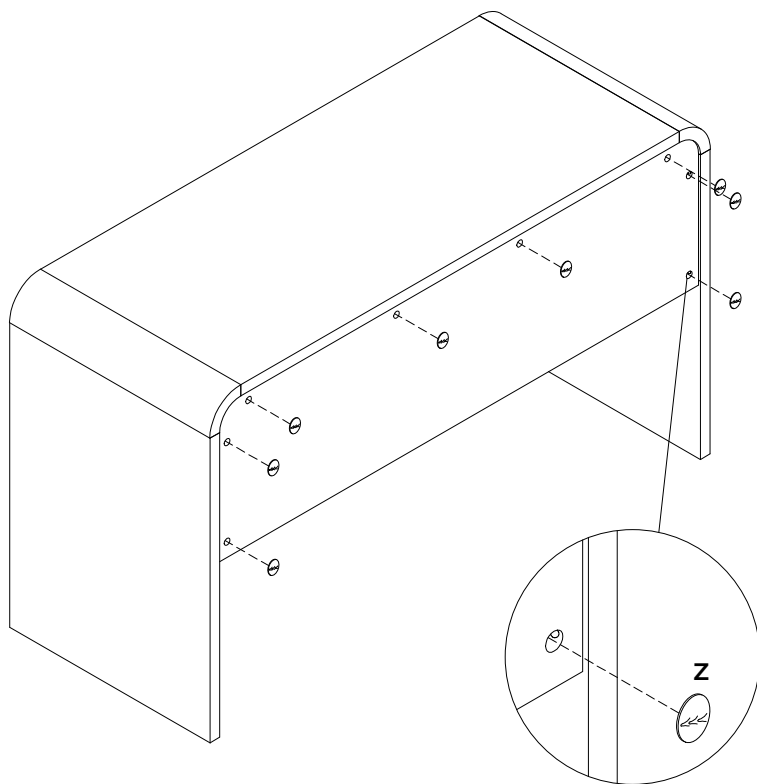

STEP 22

To open the drawer, push the center of the drawer front inward as shown.

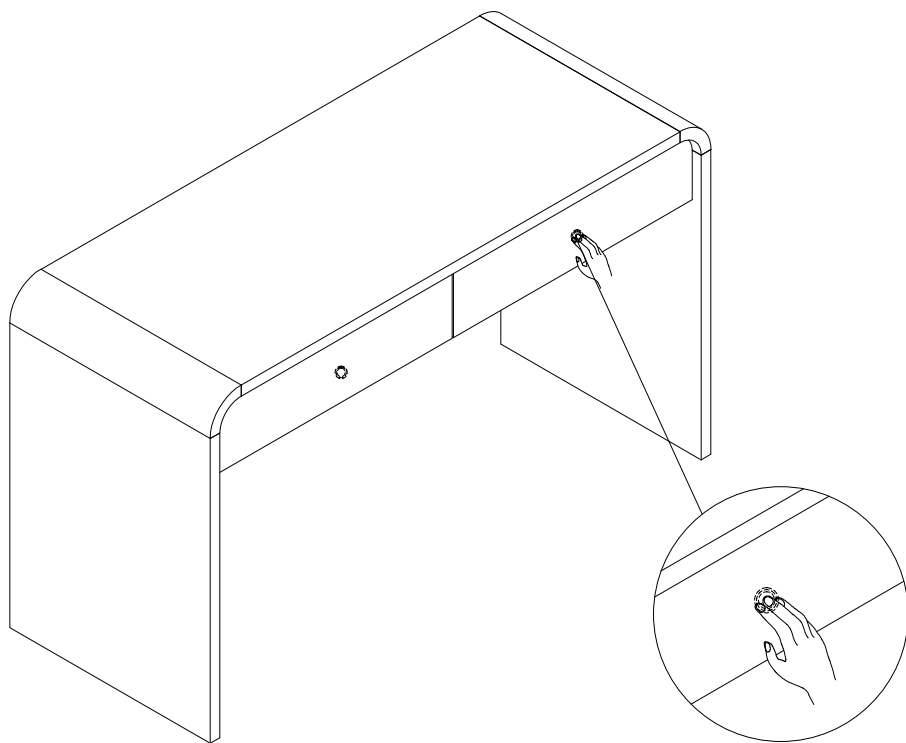

Looking Good!

Now you've assembled your furniture, find out how to care for your item and keep it looking brand new.

Product Care Guide



Product Care Handbook A Guide to Protecting Your Product

Caring for PUX LEATHER

To preserve and maintain the appearance of your faux leather, apply a "little and often" approach to cleaning.

Stain marks can accumulate through regular use. We recommend using a soft, clean cloth with water and a small amount of gentle washing up liquid to remove any marks.

Before using the cloth, be sure to avoid soaking the surface. Follow up by thoroughly drying the surface with a dry cloth.

Always use a soft, circular motion when cleaning your product. Aggressive scrubbing can cause surface damage.

Avoid the use of harsh detergents such as bleach as these can cause cracking or discolouring.



To preserve the appearance of the velvet, gently vacuum the product with an upholstery attachment once a week.

Alternatively, carefully use a soft-bristled fabric or clothes brush to gently smooth the fabric and remove surface dust. Take care to only brush in the direction of the nap of the fabric.

Velvet can be prone to marking, so be sure to avoid placing anything heavy or hard-edged onto your product for prolonged periods of time. Should

caring for VELVET

your velvet product start to show pressure marks, these can easily be removed through lightly steaming or brushing the affected area.

Take extra care to prevent your velvet product from coming into contact with any liquids. In the event of spillages, gently blot the liquid away with a soft, clean cloth. Do not rub the affected area or you risk damaging the appearance of the velvet.




Follow us on    

www.furniturebox.co.uk

Look for your care guide in the box or visit:
www.furniturebox.co.uk/club/care-guide

let's stay IN TOUCH

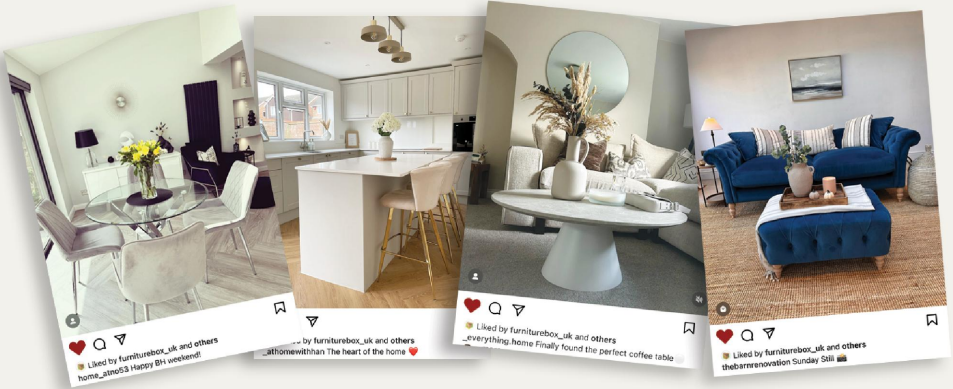

WE **LOVE** INTERIORS! SHARE YOURS WITH US ON SOCIAL MEDIA

1. Follow us on our socials
2. Post your snap or video
3. Tag us so we can see (and for a chance to be featured!)



@furnitureboxUK



@furniturebox_uk



@furnitureboxuk



@furniturebox_uk

We're proud of our service
and product reviews



Trustpilot



RATED EXCELLENT based on thousands of Trustpilot reviews

www.furniturebox.co.uk



our 2 year GUARANTEE

Our products come with a 2 year guarantee, giving you extra peace of mind when shopping with us!

What the guarantee covers



PRE-INSERTED FIXINGS
e.g. loose metal threads



FAULTY JOINTS
e.g. legs bending



EXTERNAL FIXING FAULTS
e.g. metal discs removing
from table top



STRUCTURAL INTEGRITY
e.g. the frame of the
product

Activate your Guarantee

Scan the QR code to read the full guarantee online and register your product. It only takes a moment to fill out.

Or visit: furniturebox.co.uk/our-guarantee

