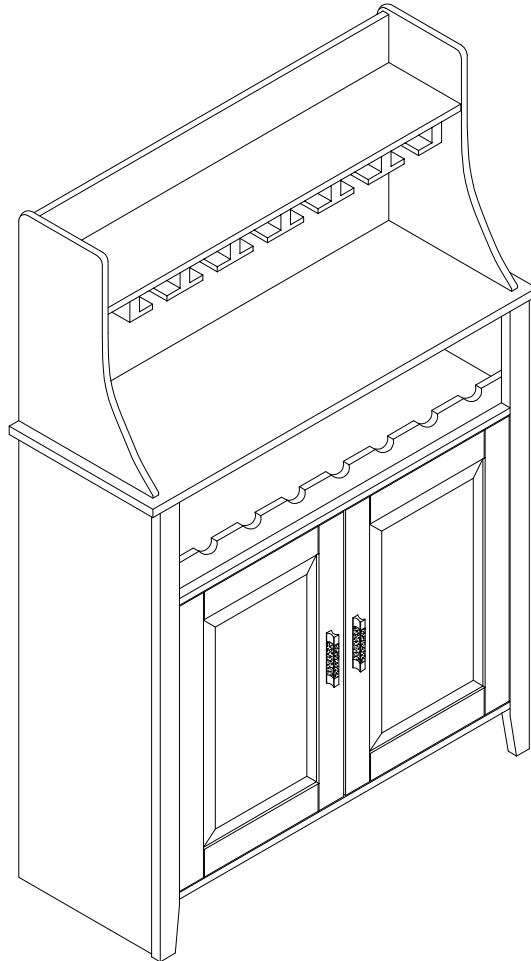


ASSEMBLY INSTRUCTIONS
















Wine Rack







NOTE TO CUSTOMERS







- For ease and speed of assembly we recommend that before you commence each step of the assembly that you identify all the parts required to complete that step.
- We recommend that where possible you allow sufficient space to assemble the item as close as possible to the place where it will be once assembled.
- For the protection of your furniture we recommend that the product is placed on protected surfaces during assembly to prevent any damage.
- During assembly do not over tighten, as this may damage the product.
- Please ensure you retain all the product packaging until the item completely assembled.
- Please periodically check all fittings and re-tighten as necessary.
- Please never allow any liquids to remain on your furniture as absorption can cause the wood to warp or finish to de-laminate.
- It is recommended that this item should be assembled by two adults.

Part List

<p>A. Quantity of 1</p>  <p>Top Panel</p>	<p>B. Quantity of 1</p>  <p>Lower Side Panel (Left)</p>	<p>C. Quantity of 1</p>  <p>Lower Side Panel (Right)</p>	<p>D. Quantity of 1</p>  <p>Divider</p>
<p>E. Quantity of 1</p>  <p>Front Connect Bar</p>	<p>F. Quantity of 1</p>  <p>Back Connect Bar</p>	<p>G. Quantity of 1</p>  <p>Bottom Panel</p>	<p>H. Quantity of 1</p>  <p>Upper Side Panel (Left)</p>
<p>I. Quantity of 1</p>  <p>Upper Side Panel (Right)</p>	<p>J. Quantity of 1</p>  <p>Glass Holder</p>	<p>K. Quantity of 1</p>  <p>Upper Back Panel</p>	<p>L. Quantity of 1</p>  <p>Lower Back Panel</p>
<p>M. Quantity of 1</p>  <p>Door (Left)</p>	<p>N. Quantity of 1</p>  <p>Door (Right)</p>	<p>O. Quantity of 1</p>  <p>Adjustable Shelf</p>	

Hardware List

<p>(1) Quantity of 20</p>  <p>Wood Dowel</p>	<p>(2) Quantity of 22</p>  <p>Cam-bolt</p>	<p>(3) Quantity of 22</p>  <p>Cam-Lock</p>	<p>(4) Quantity of 16</p>  <p>Screw</p>
---	---	---	--

(5)	Quantity of 4	(6)	Quantity of 18	(7)	Quantity of 2	(8)	Quantity of 4
							
Shelf Support		Screw		Handle		Bolt	
(9)	Quantity of 1	(10)	Quantity of 1				
							
Magnet		Glue					





Note:

- Read these instructions carefully before assembling.
- Tools required : Phillips screwdriver, flat screwdriver.
- Find a clean, smooth area on which to work , such as a carpet, in order to avoid scratching the wood surfaces.
- Wait to dispose of the packing material until assembly is complete and all parts and hardware are accounted for.
- Two or more people might be required for assembly.

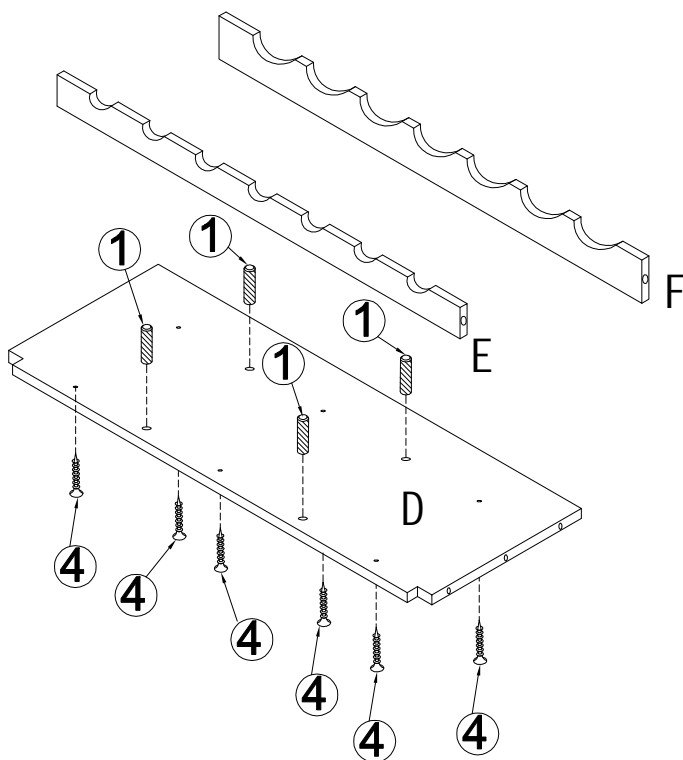
To use Dowels:

1. Add glue (about $\frac{1}{4}$ full) in the hole(s) of each board to be joined.
2. Insert the Dowel(s) and join boards.
3. Wipe excess glue with a damp paper towel.

To use Cam Locks:

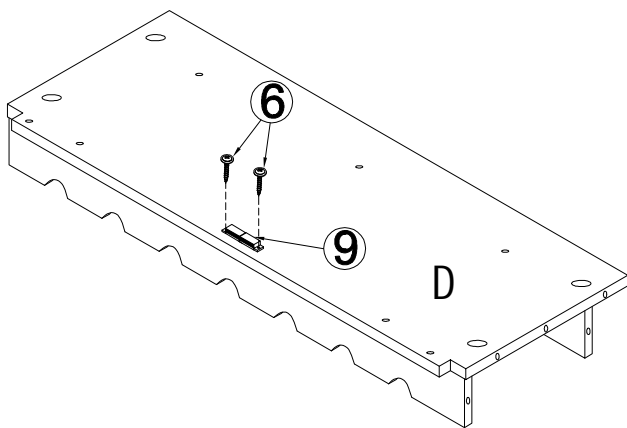
1. Insert Cam Pin until snug 	2. Set boards together 	3. Insert Cam Lock 	4. Turn Cam Lock clockwise (half a turn)  <p>if it won't turn halfway, back out the Cam Pin $\frac{1}{4}$ turn and try Cam Lock again.</p>
---	--	---	--

Step 1: Assemble Front Cross Bar (E) and Back Cross Bar(F) to Divider (D) using Screws (4) and Wood Dowels(1).



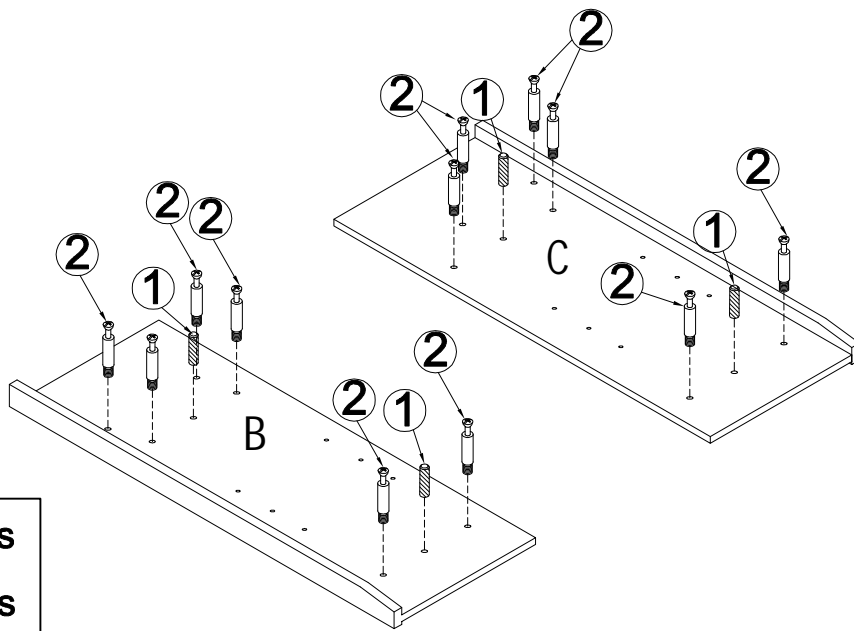
1		4pcs
4		6pcs



Step 2: Attach Magnet (9) to the bottom of Divider (D) using Screws (6), please note the holes are pre-drilled.



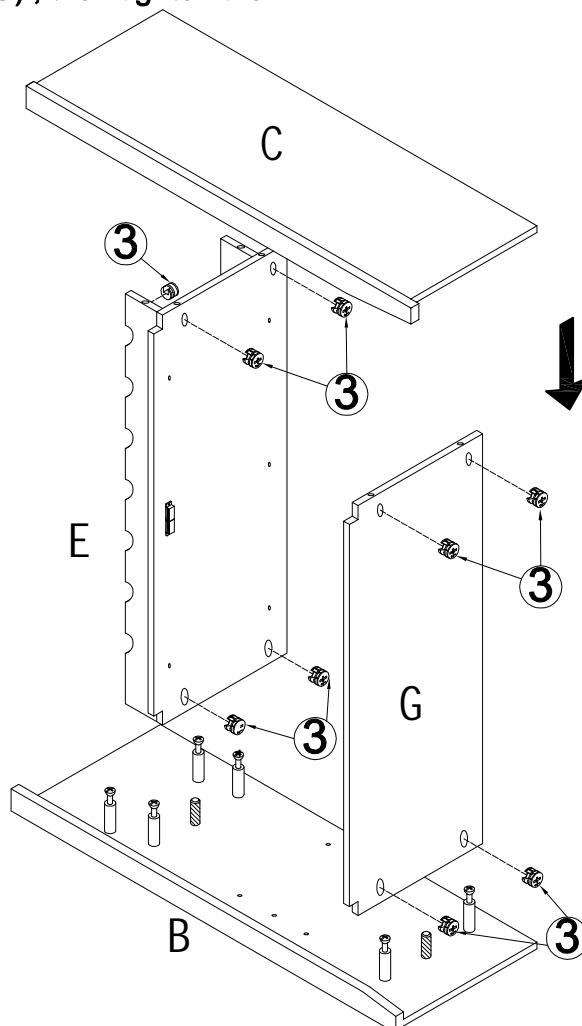
6		2pcs
9		1pcs

Step 3: Insert Wood Dowels (1) to the holes on Lower Side Panels (B) &(C). Then tighten Cam-bolts (2) to Side Panels (B) & (C). Please note holes are pre-drilled.



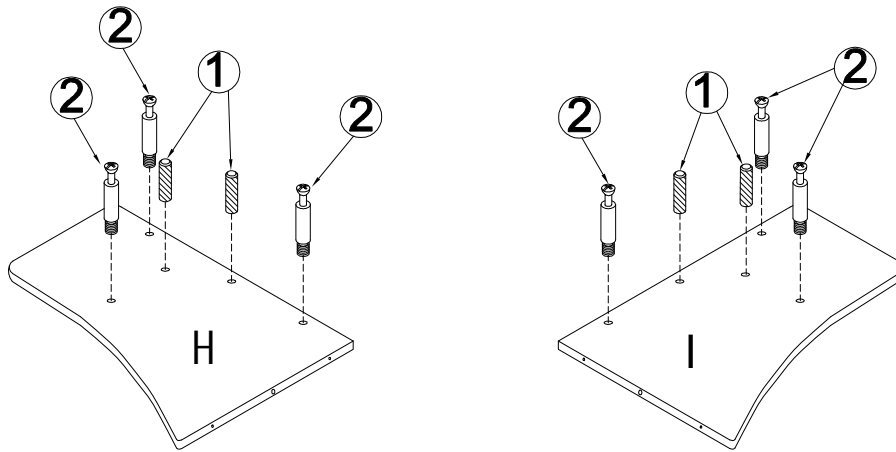
- | | | |
|---|---|-------|
| 1 |  | 4pcs |
| 2 |  | 12pcs |



Step 4: Assemble Lower Side Panels (B&C) to Divider (D) and Bottom Panel (G) by inserting Cam Bolts (2) & Wood Dowels (1), insert Cam Locks (3) into holes on the bottom of Divider (D) & Bottom Panel (G) , then tighten them.



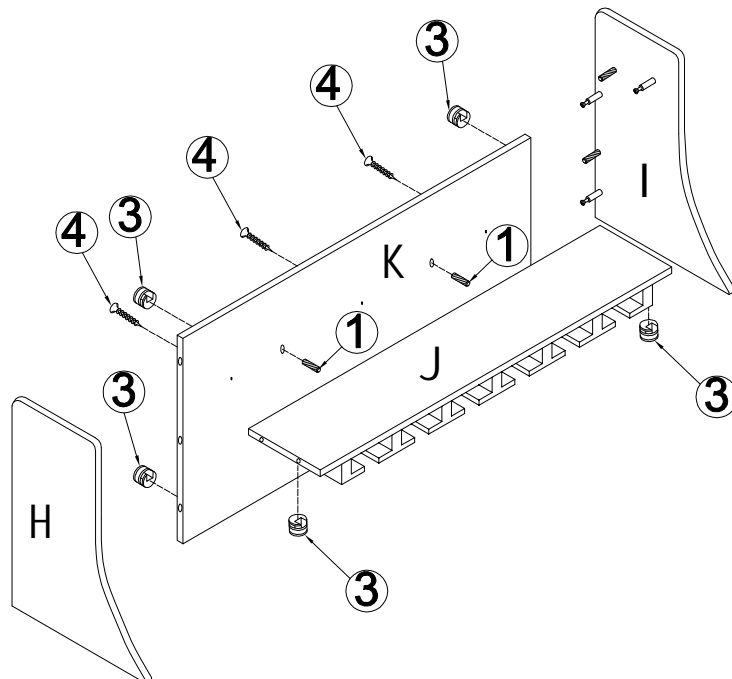
- | | | |
|---|---|-------|
| 3 |  | 12pcs |
|---|---|-------|




Step 5: Insert Wood Dowels (1) to the holes on Upper Side Panels (H) &(I). Then tighten Cam-bolts (2) to Upper Side Panels (H) & (I). Please note holes are pre-drilled.



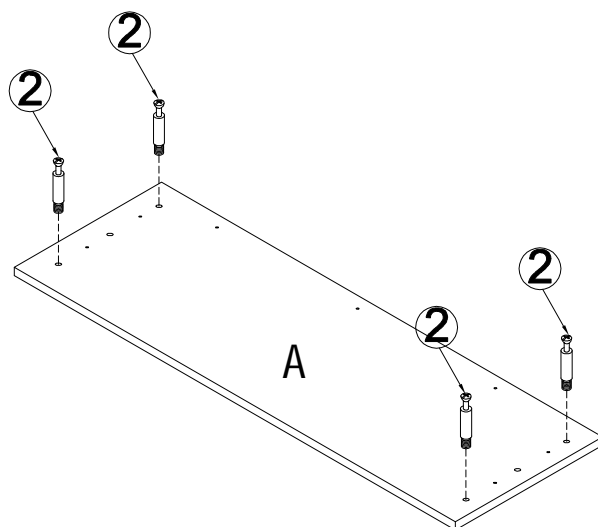
- | | | |
|---|---|------|
| 1 |  | 4pcs |
| 2 |  | 6pcs |

Step 6: Assemble Glass Holder (J) to Upper Back Panel (K) using Wood Dowels (1) and Screws (4).
Step 7: Attach Upper Side Panel (H)&(I) to Upper Back Panel (K) by inserting Cam-bolts (2) and Wood Dowels (1).
Step 8: Insert Cam-locks (3) into the holes on Upper Back Panel (K) & Glass Holder (J) ,then tighten them.



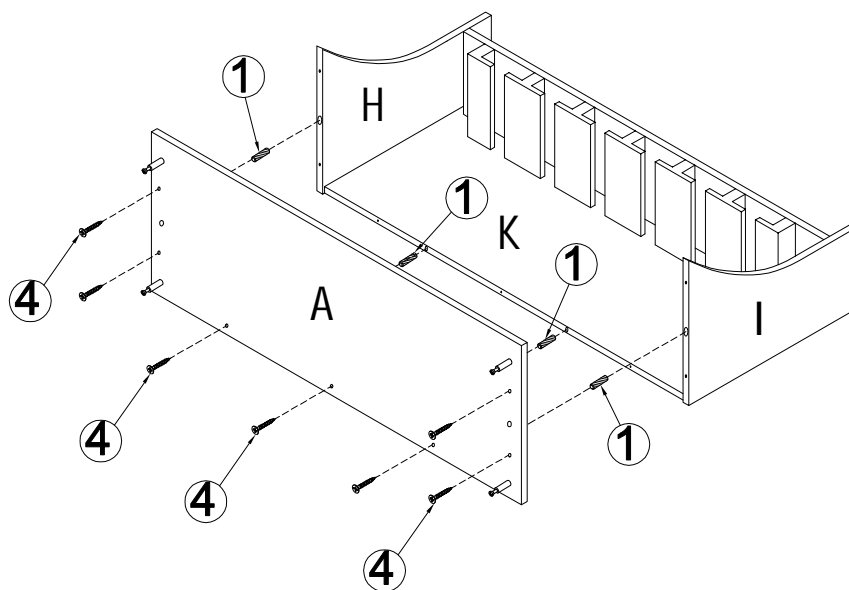
- | | | |
|---|---|------|
| 1 |  | 2pcs |
| 3 |  | 6pcs |
| 4 |  | 3pcs |

Step 9: Insert Cam-bolts (2) to holes on Top Panel (A), then tighten them.



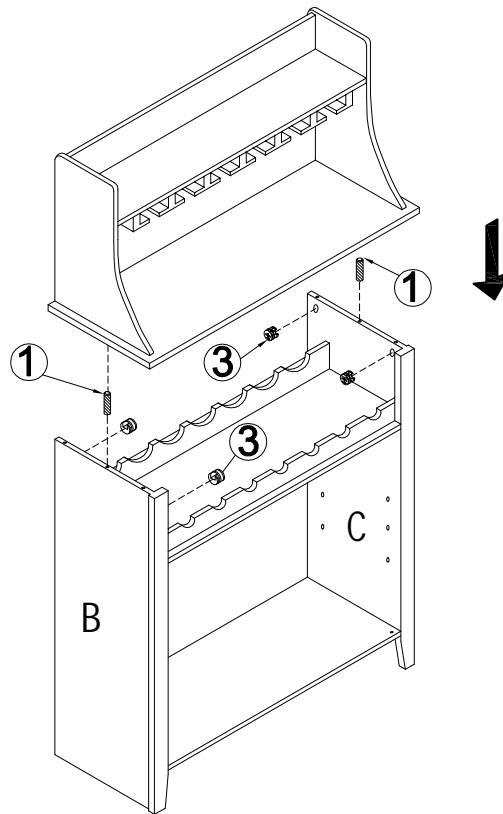
2  **4pcs**

Step 10: Assemble Top Panel (A) to Upper Side Panels (H) & (I) and Upper Back Panel (K) using Wood Dowels (1) and Screws (4) .



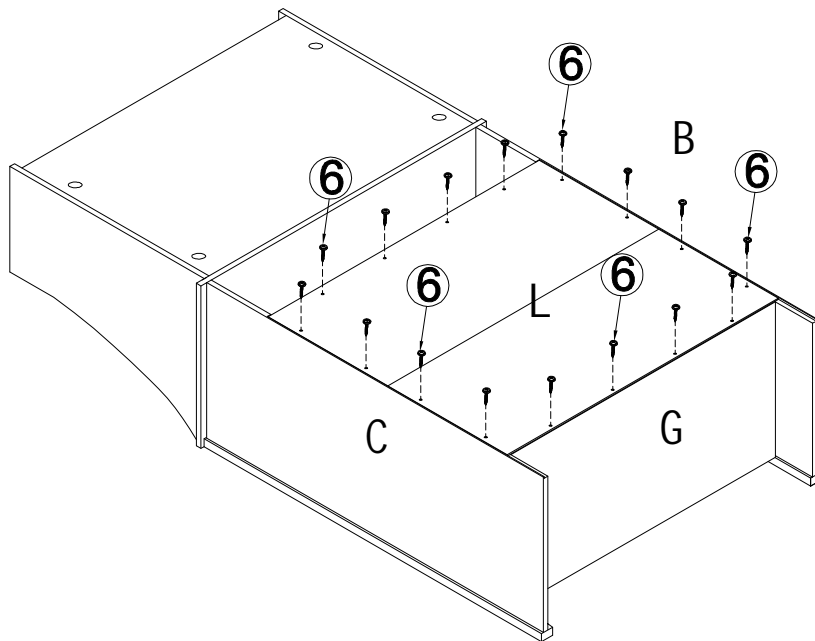
1  **4pcs**
4  **7pcs**

Step 11: Assemble Top Panel (A) to Lower Side Panels (B) & (C) by inserting Cam-bolts and using Wood Dowels (1). Insert Cam Locks (3) into holes on the Side panels (B) & (C) , then tighten them.



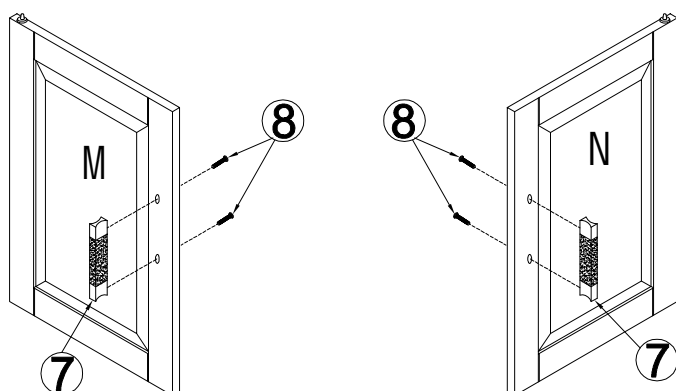
- | | | |
|---|--|------|
| 1 | | 2pcs |
| 3 | | 4pcs |



Step 12: Attach Lower Back Panels (L) to Lower Side Panels (B) & (C), Divider (D) and Bottom Panel (G) using Screws (6).



- | | | |
|---|--|-------|
| 6 | | 16pcs |
|---|--|-------|

Step 13: Attach Handles (7) to Doors (M) & (N) using Bolts (8).

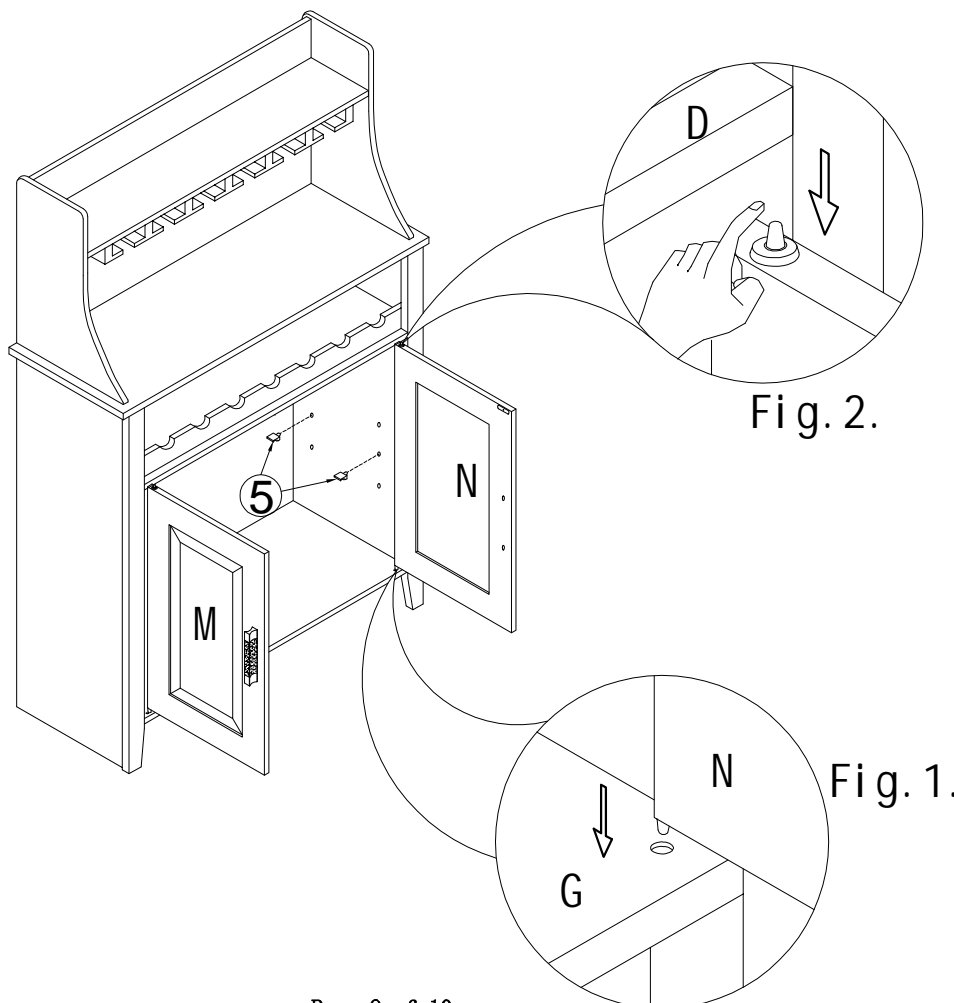


7		2pcs
8		4pcs

Step 14: Connect Door (N) to Bottom Panel (G) as below Fig.1.

Step 15: Press the upper pin on Door (N) see Fig 2. and insert Door (N) carefully into the cabinet with the upper pin popping up into the holes of Divider (D).

Step 16: Insert Shelf Support (5) into the holes on Side Panels (B) & (C).



5		4pcs
---	---	------

Step 17: Attach Adjustable Shelf (O) on Shelf Supports (5).

