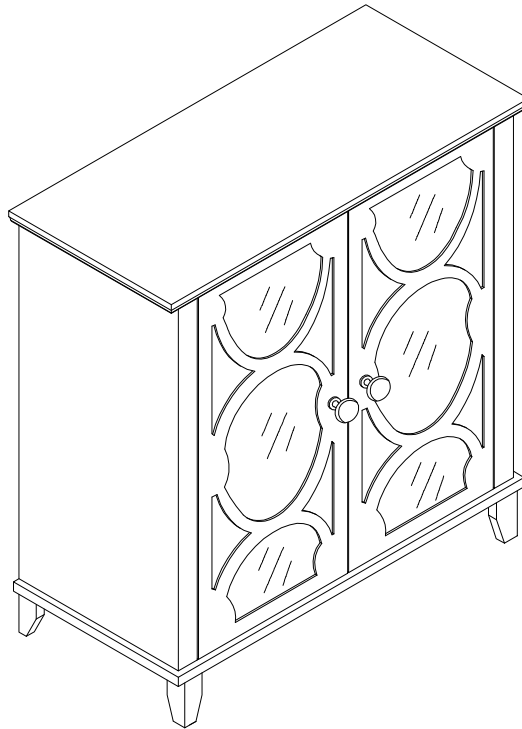


# ASSEMBLY INSTRUCTIONS

## Console Table



### NOTE TO CUSTOMERS:

- For ease and speed of assembly we recommend that before you commence each step of the assembly that you identify all the parts required to complete that step.
- We recommend that where possible you allow sufficient space to assemble the item as close as possible to the place where it will be once assembled.
- For the protection of your furniture we recommend that the product is placed on protected surfaces during assembly to prevent any damage.
- During assembly do not over tighten, as this may damage the product.
- Please ensure you retain all the product packaging until the item completely assembled.
- Please periodically check all fittings and re-tighten as necessary.
- Please never allow any liquids to remain on your furniture as absorption can cause the wood to warp or finish to de-laminate.

To insert a cam lock: (Please read below instructions before assembling)






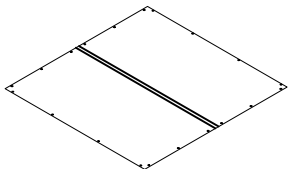



	<p>Diagram A</p>	<p>1. Insert cam screw into hole as shown in diagram A .</p>
	<p>Diagram B</p>	<p>Make sure not to insert the cam screw: Too deep as shown in figure B as this will cause the cam screw to be misaligned and unable to interlock properly.</p>
	<p>Diagram C</p>	<p>Also avoid inserting the cam screw too close to the surface of the hole as shown in figure C, as this will cause the cam lock to be too loose, and not interlock properly.</p>

	<p>2. Connect the panels together.</p>
	<p>3. When inserting the cam lock make sure the arrow of the cam lock faces the cam screw.</p>
	<p>4. To tighten the cam lock turn the cam lock clockwise 90-180 degree or until the arrow is facing opposite the place cam lock was inserted.</p> <p><b>NOTE: DO NOT USE AN AUTOMATIC SCREWDRIVER TO TIGHTEN CAM LOCKS.</b></p>









**Note:**

- Read these instructions carefully before assembling.
- Tools required : Phillips screwdriver, flat screwdriver.
- Find a clean, smooth area on which to work , such as a carpet, in order to avoid scratching the wood surfaces.
- Wait to dispose of the packing material until assembly is complete and all parts and hardware are accounted for.
- Two or more people might be required for assembly.

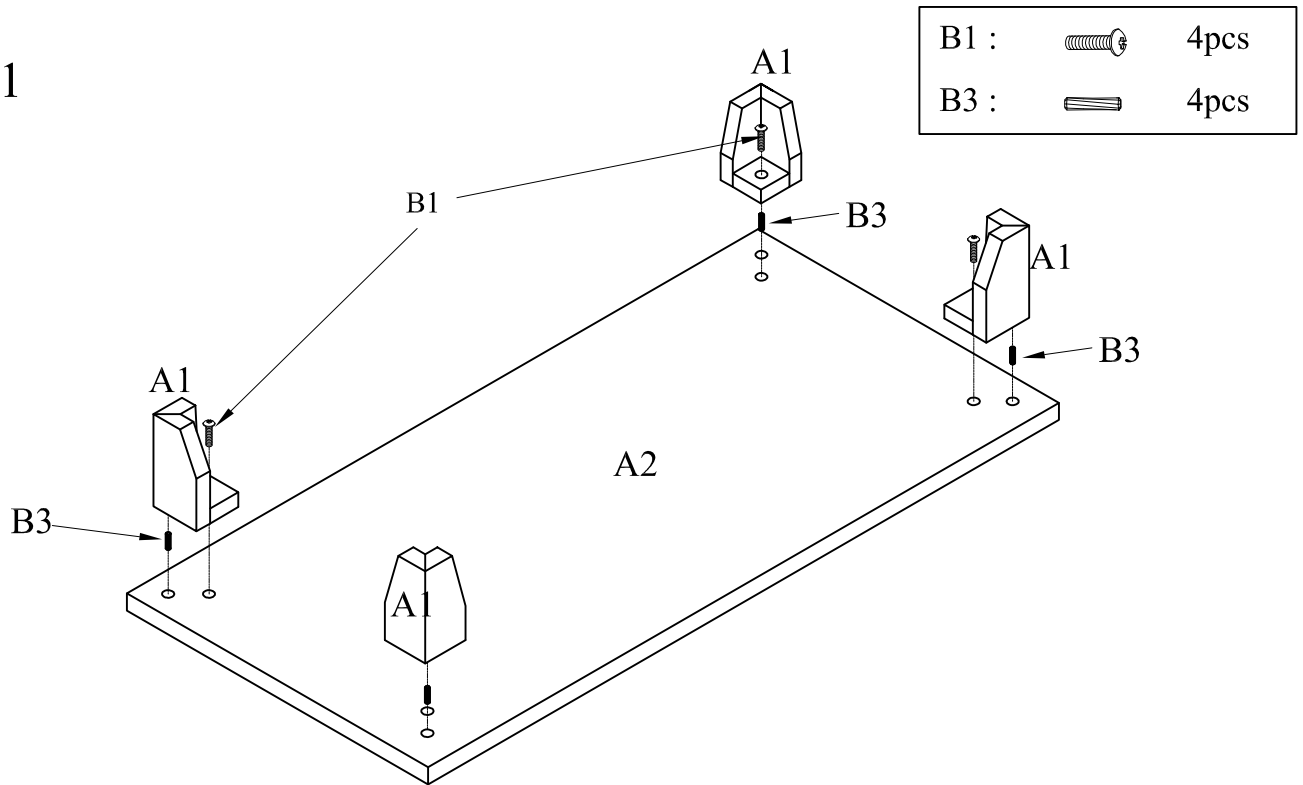
# Part List

<p>A1 .                      Quantity                                  of 4</p> <div style="text-align: center;"></div> <p style="text-align: center;">Leg</p>	<p>A2 .                      Quantity                                  of 1</p> <div style="text-align: center;"></div> <p style="text-align: center;">Bottom Panel</p>	<p>A3 .                      Quantity                                  of 1</p> <div style="text-align: center;"></div> <p style="text-align: center;">Top Panel</p>	<p>A4 .                      Quantity                                  of 1</p> <div style="text-align: center;"></div> <p style="text-align: center;">Left Side Panel</p>
<p>A5 .                      Quantity                                  of 1</p> <div style="text-align: center;"></div> <p style="text-align: center;">Right Side Panel</p>	<p>A6 .                      Quantity                                  of 1</p> <div style="text-align: center;"></div> <p style="text-align: center;">Back Panel</p>	<p>A7 .                      Quantity                                  of 1</p> <div style="text-align: center;"></div> <p style="text-align: center;">Left Door</p>	<p>A8 .                      Quantity                                  of 1</p> <div style="text-align: center;"></div> <p style="text-align: center;">Right Door</p>
<p>A9 .                      Quantity                                  of 1</p> <div style="text-align: center;"></div> <p style="text-align: center;">Shelf Panel</p>			

# Hardware List

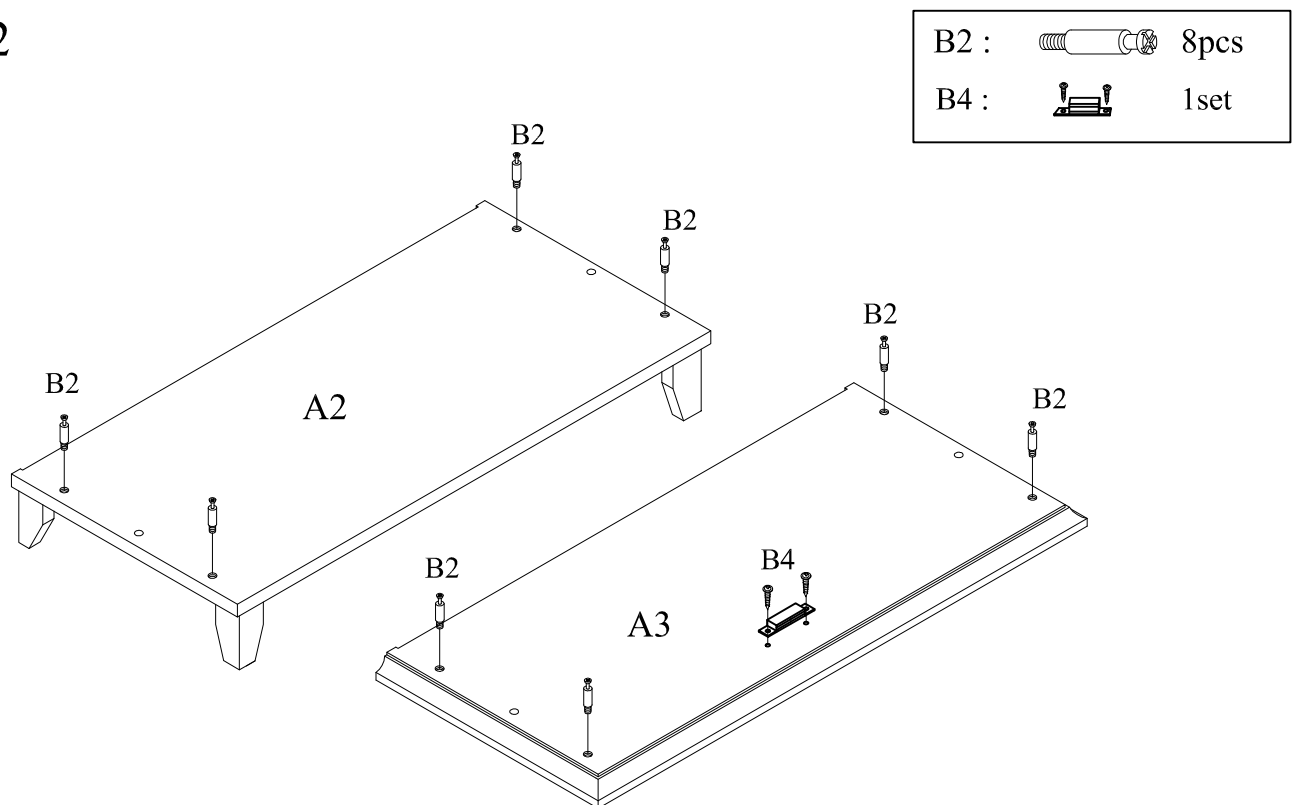
<p>B1                              Quantity                                  of 4</p> <div style="text-align: center;"></div> <p style="text-align: center;">Bolt</p>	<p>B2                              Quantity                                  of 8</p> <div style="text-align: center;"></div> <p style="text-align: center;">Cambolt &amp; Camlock</p>	<p>B3                              Quantity                                  of 8</p> <div style="text-align: center;"></div> <p style="text-align: center;">Wood Dowel</p>	<p>B4                              Quantity                                  of 1</p> <div style="text-align: center;"></div> <p style="text-align: center;">Magnet with screw</p>
<p>B5                              Quantity                                  of 20</p> <div style="text-align: center;"></div> <p style="text-align: center;">Screw</p>	<p>B6                              Quantity                                  of 4</p> <div style="text-align: center;"></div> <p style="text-align: center;">Shelf Support</p>	<p>B7                              Quantity                                  of 2</p> <div style="text-align: center;"></div> <p style="text-align: center;">Knob with bolt</p>	<p>B8                              Quantity                                  of 8</p> <div style="text-align: center;"></div> <p style="text-align: center;">Screw</p>

## Step 1



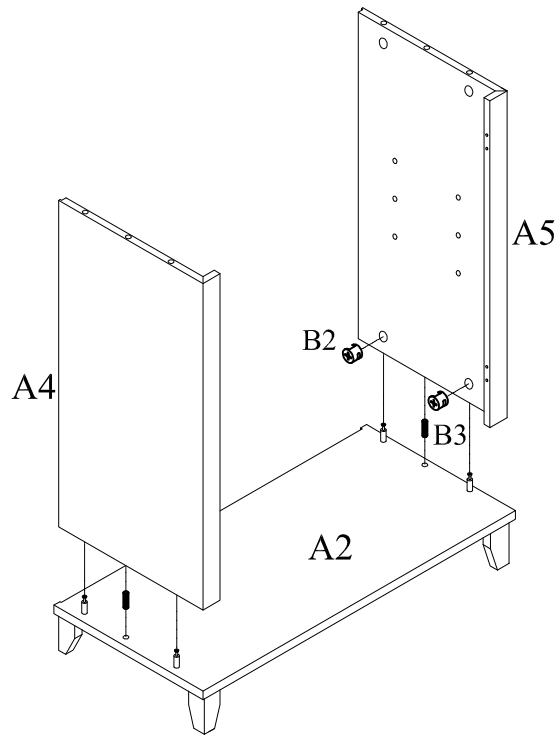
Attach Legs A1 to Bottom Panel A2 using Bolts B1 and Wood Dowels B3 as shown above.



## Step 2



Attach Cambolts B2 and Magnet with Screws B4 to Bottom Panel A2 and Top Panel A3.

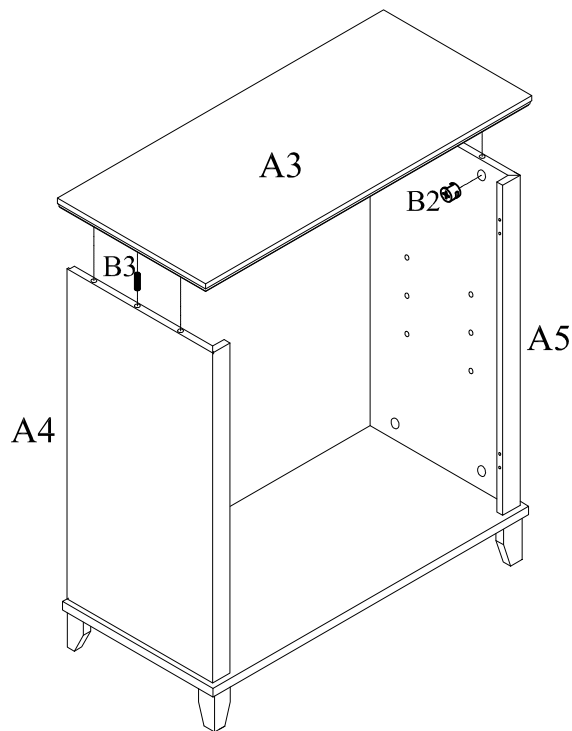
## Step 3





B2 :		4pcs
B3 :		2pcs

Assemble Side Panels A4&A5 (L&R) to Bottom Panel A2 using Camlocks B2 and Wood Dowels B3.

## Step 4

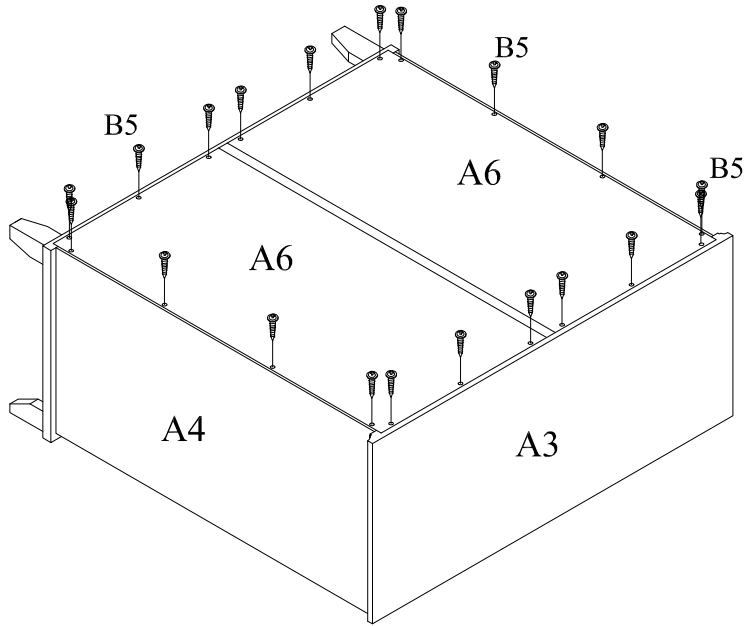


B2 :		4pcs
B3 :		2pcs

Attach Top Panel A3 to Side Panels A4 & A5 (L&R) using Camlocks B2 and Wood Dowels B3.




## Step 5

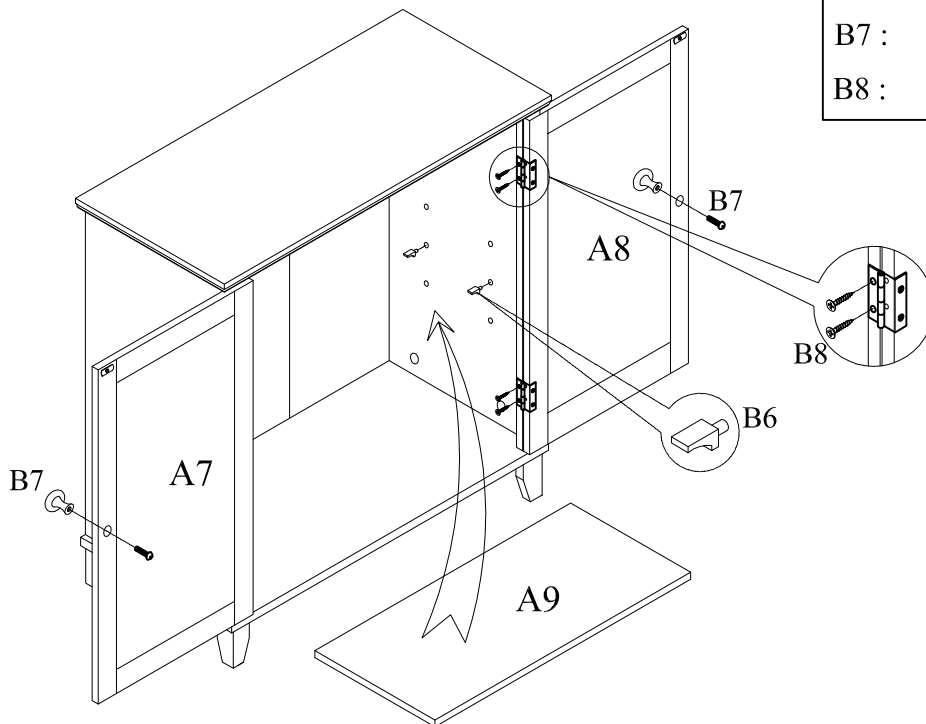
B5:  20pcs



Attach Back Panel A6 to the back of the unit using Screws B5.

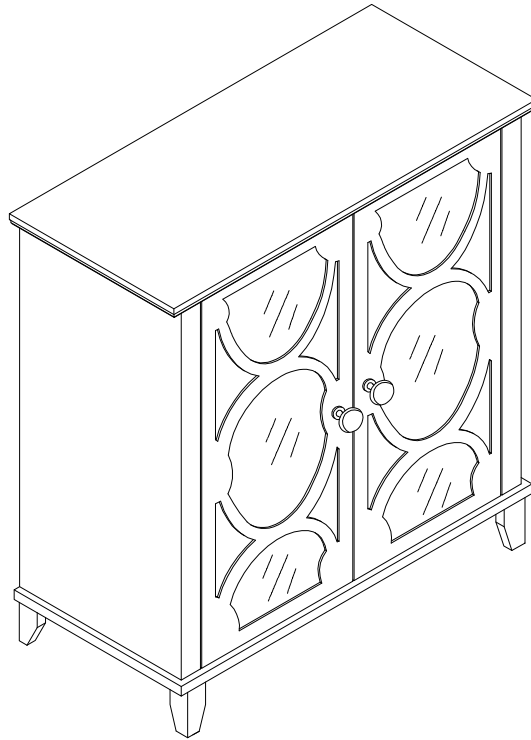
## Step 6

B6 :  4pcs  
B7 :  2pcs  
B8 :  8pcs


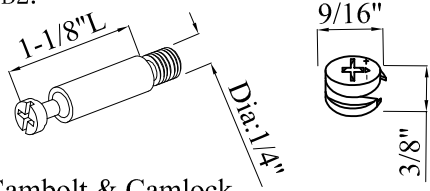



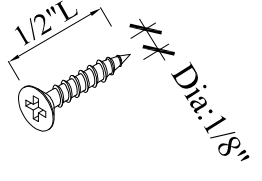


- 1). Assemble Doors A7&A8 (L&R) to Side Panels A4&A5 (L&R) using Screws B 8 .
- 2). Attach Knobs B7 to Doors A7&A8 (L&R) using included bolts.
- 3). Insert Shelf Supports B6 into the holes on the Side Panels A4&A5 (L&R), then put Shelf Panel A9 onto Shelf Supports B6.

# Step 7



## APPENDIX: Dimension of Hardwares in this AI.

<p>B1.</p>  <p>Bolt</p>	<p>B2.</p>  <p>Cam bolt &amp; Camlock</p>	<p>B3.</p>  <p>Wood Dowel</p>
<p>B4&amp;B5.</p>  <p>Screw</p>	<p>B7.</p>  <p>Bolt for knob</p>	<p>B8.</p>  <p>Screw</p>