
Installation Instructions


♦ Before beginning installation or maintenance, ensure electricity is turned off.




Step 1: Mark on the wall the position of the screw holes for the back plate and install screws in the wall using proper anchor or support for type of wall.




Step 2: Make sure the screws are locked firmly and plug in, then hook the mirror onto the base plate.




Step 3: Install back plate to screws on wall, make sure to bring MC cable in through the wall and into the chassis knockout. Insert ground wire in the grounded connector. Insert power and neutral wires into the luminaire disconnect. The power wire is inserted into the black port (L) and the neutral wire is inserted into the white port (N).



Luminaire Disconnect

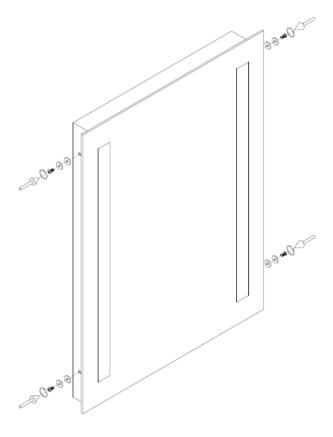

Step 4: Place mirror onto back plate, secure with 4 screws on sides.



Step 5: Test to ensure fixture is functioning properly then remove protective covering from mirror.