



70 Inch Ceiling Fan BAP

Project Name: _____
Location: _____
Type: _____
Qty: _____
Comments: _____

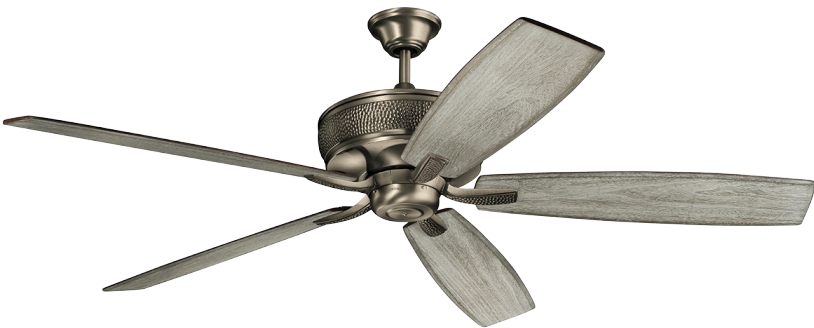

Dimensions

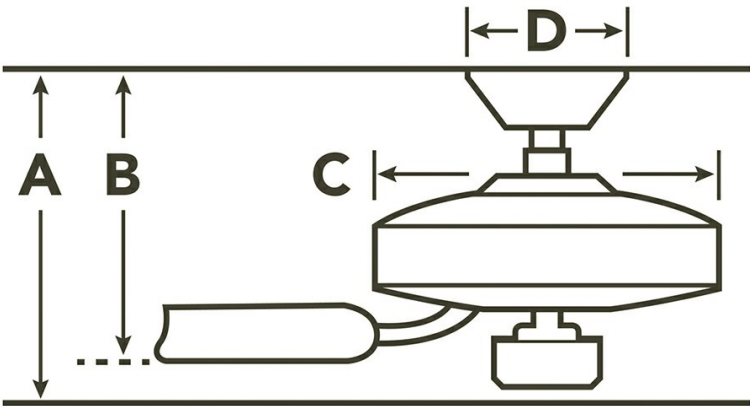

Downrod	A	B	C	D
1.00 OD X 8	20.00	18.25	15.00	6.75

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
Oil Brushed Bronze			CHERRY	WALNUT

Product Information

Blade Finish	Cherry/Weathered White Walnut
--------------	-------------------------------

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	16 Degrees
Blade Sweep	70"
Blades Reversible	No
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 8.00
Primary Control System	3 Speed Wall Control Full Function
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	212MM X 25MM
Motor Type	AC

Downlight

Watts	97/21
Optional Light Kit Available	No

Safety Listings & Certifications

Safety Rated	Dry
--------------	-----

Installation

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120v 60Hz ac
Hanging Weight	30.80 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7 feet

Notes:
1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

70 Inch Ceiling Fan BAP

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Finish	Fixture	Glass	Blade 1	Blade 2
Tannery Bronze			TEAK	CHERRY
White			WHITE	
Burnished Antique Pewter			CHERRY	WTHRD WHT WLNUT

Notes:
1) Information provided is subject to change without notice.
All values are design or typical values when measured under laboratory conditions.
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.