


USER MANUAL

Smart Ceiling Fan Light

Welcome to the smart lighting system!

Thank you for choosing us. Are you ready to explore the world of smart lighting? Your gateway to effortlessly controlling your lighting devices from any location. Enabling you to manage multiple devices simply by touching your smartphone or tablet.

We are committed to delivering exceptional service and continuously improving our app and lighting solutions to meet and exceed your expectations. Why wait? Illuminate your surroundings with the elegance and convenience of company today. Let's brighten your space and enhance your smart living experience.

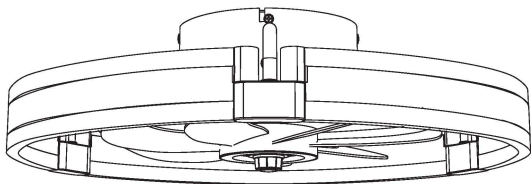

1.Power Safety: Before starting any wiring, ensure power is completely disconnected at the circuit breaker or fuse. Simply switching off the wall light switch is insufficient to prevent electrical shock.

2.Professional Installation: A qualified, licensed electrician must perform the installation.

3.Mounting Requirements:

>> The outlet box and mounting structure must be securely attached and capable of supporting at least 50 lbs.

>> Use only UL-listed (or CUL-listed for Canadian installations) outlet boxes labeled “FOR FAN SUPPORT.”

4.Clearance: The fan blades must be installed with at least 7 feet of clearance from the floor to the blade tips.

5.Reversing Fan Direction: Do not engage the reversing switch while the fan blades are moving. Turn off the fan and wait until the blades have fully stopped before changing the direction (if applicable).

6.Blade Safety: Keep all objects and body parts clear of the fan blades’ path to prevent injury or damage.

7.Caution When Cleaning: Exercise care when working near or cleaning the fan to avoid injury or damage.

8.Cleaning Instructions: Do not use water or detergents. Clean blades with a dry dust cloth or a lightly dampened soft cloth only

9.Wiring Guidance:

>> After making electrical connections, gently push and arrange the wires upward into the outlet box.

>> Grounded conductors should be separated on one side of the outlet box.

10.Electrical Diagrams: Any provided electrical diagrams are for reference only, as light fixtures may vary.

11.Use Approved Replacement Parts: Use only approved replacement parts. This equipment complies with FCC Class B digital device regulations to reduce harmful interference.

Warning:

>> To reduce the risk of fire, electric shock, or personal injury, mount the fan only to an outlet box marked “Acceptable for Fan Support.”

>> If the existing outlet box is not rated for fan support, it must be replaced.

>> Do not bend blade brackets (flanges) during assembly or after installation.

>> Do not insert objects into the blade path.

>> If uncertain about any aspect of the installation, consult a qualified electrician.



Mounting plate x1



Lamp holder x3



Cover cap x1



Expansion rubber plug x4



M4*5 Screw x4



wrenchx1



M5*7 Screw x4



Ceiling plate x1



Motor x1



Controller x1



ST4*34 Screw x4



Nut x4



Zip tie x3



Washer x3



Wiring rod x3



Fan blade x1



Remote and holder



Nuts Cap x4



5/32-32*L25 x4




Flange nut x3




⚠ WARNING: To avoid possible electrical shock, before installing your Smart Ceiling Fan Light, disconnect the power by turning off the circuit breakers to the outlet box associated with the wall switch location.

STEP 1




1. Remove the mounting plate.
2. Unscrew the side screws.

STEP 2



Insert the motor.


STEP 3

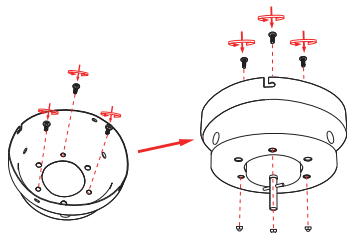

Align the motor with the 3 small holes and insert the screws to secure it.


Note: These are 3 relatively small round holes. Install and tighten the motor screws and the small nut.

STEP 4

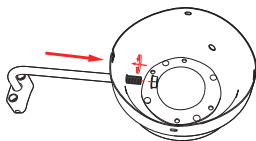


Insert into the corresponding hole and tighten the nut.

STEP 5

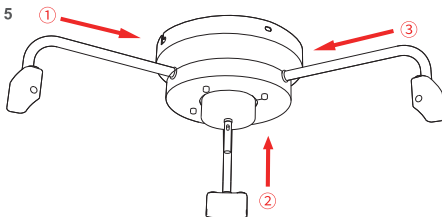


Tighten them in sequence.

STEP 6

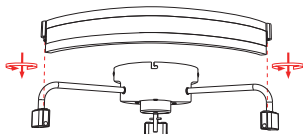


Insert into the corresponding slot and snap it into place.

STEP 7

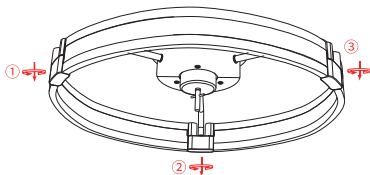


Tighten them in sequence.

STEP 8

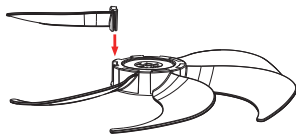


Snap into the slot.

STEP 9




Snap the assembled fan blades onto the motor shaft and tighten the protective cap.

STEP 10




Install a J-BOX Compatible with the Chassis: 2 1/2" — 3 3/4" Screw the hanging plate to the J-box.

STEP 11




Connect the wires with Terminal Cap.

STEP 12

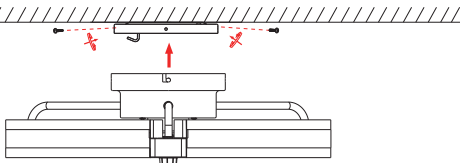


Tighten the fixing screws at the four corners to make sure the mounting plate is firmly fixed.

STEP 13

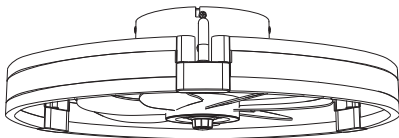

Installation completed.

STEP 14

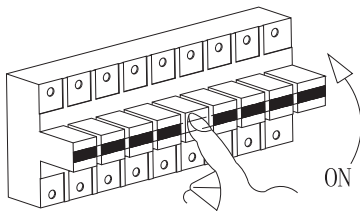

Turn on the power switch.



Install the App What You Need:

- A smartphone running iOS or Android.
- The mobile phone network is normal.

1.Download the App from the App Store or Google Play.


2.Connect

Steps:

- a. Turn on your smart phone's Bluetooth;
- b. Open the app, Power on the fan light and follow the app's instructions to add it.



If you have any questions.You can contact us or leave a message on our official social media account.

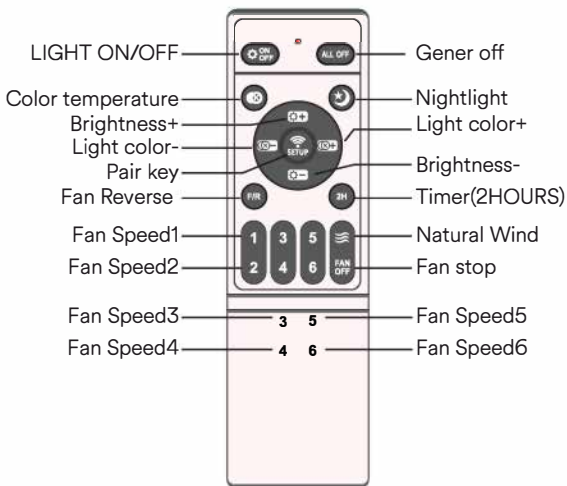

The remote control and the fan light are paired by default at the factory, so there is no need to pair them.

If the remote control doesn't work, please re-pair it as below.

1. Connect the fan light to the power supply and make sure the fan light works normally;
2. Turn the fan light off for 5~10 seconds and then turn it back on by physical switch;
3. Press and hold the button "  " until the fan light blinks rapidly and then release it;
4. Remote control pairing is successful, at this time you can press the button to control the fan light.

How does the fan light get to the Networking state?

Reset the fan light three times via a physical switch:

On-Off-On-Off-On.

Name	Smart Ceiling Fan Light
Model	A
Input Voltage	120VAC,60Hz
Power	Fan 15W Light 23W
Color Temperature	2700K-6500K
CRI	Ra>80
Lumens	2600lm
Beam Angle	120°
Rated Life	25000h



Contains FCC ID:2BF9Q-YKA8

Made in China