



Assembly Instructions

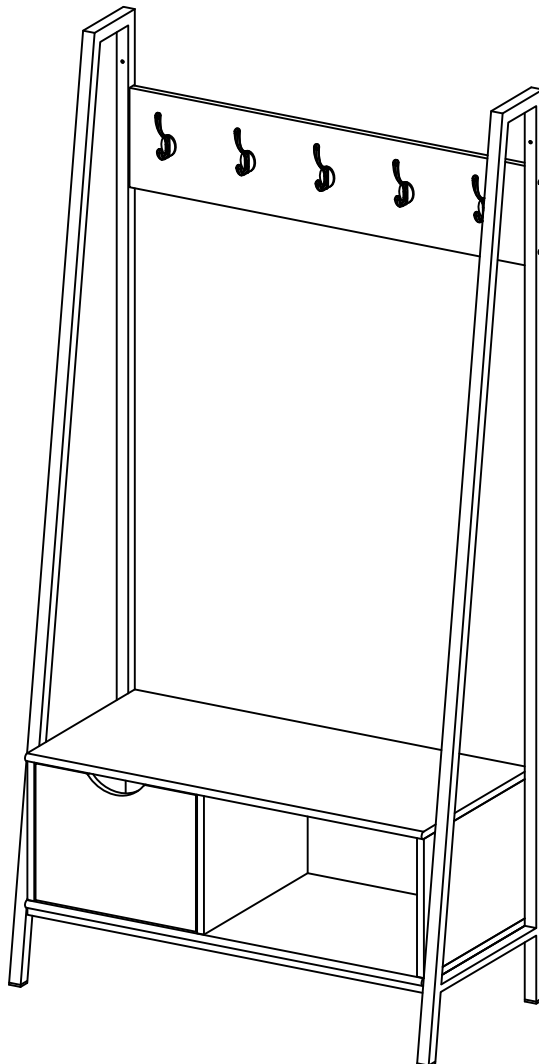


General Assembly Guidelines


- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are : wood dowels , screws and bolts.
- V. The provided glue is to secure wood dowels in place . When first inserting dowels , locate the appropriate hole for the dowel , place a small amount of glue in the hole and insert the dowel . Wipe away excess glue immediately.

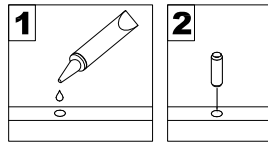


In future assembly steps when dowels are necessary to attach assembly parts together , place a small amount of glue on the end of the dowel before attaching parts together . Wipe away excess glue immediately.




- VI. A Phillips head screwdriver is required for the assembly of this product .













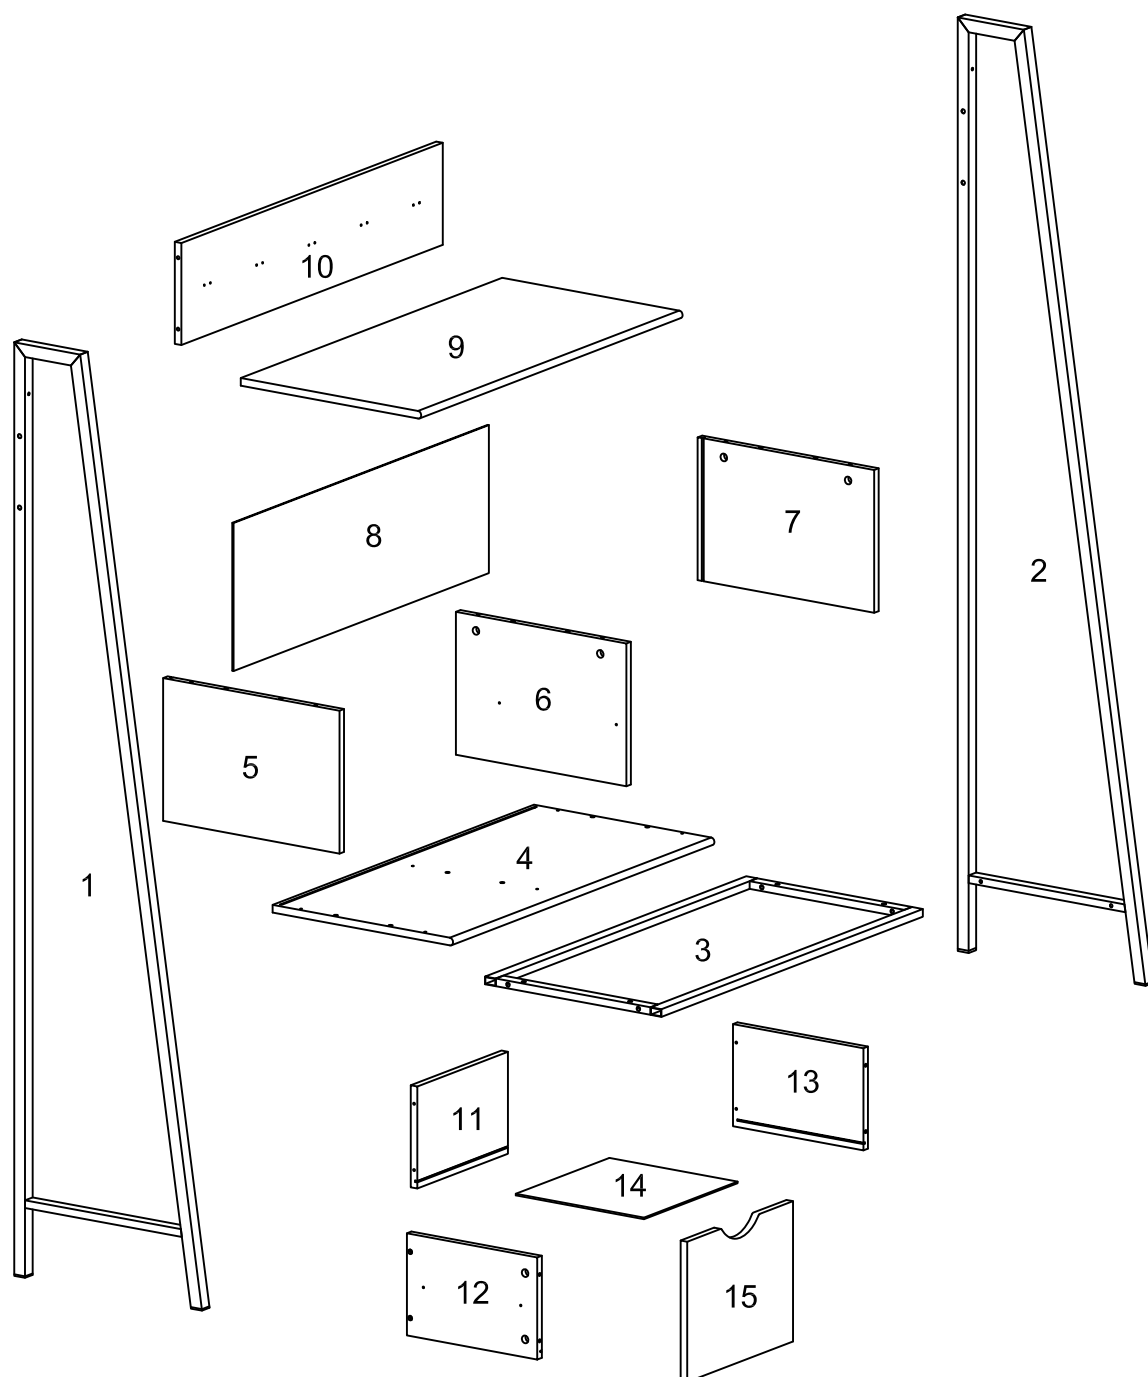









- VII. Power tools should not be used to assemble this product .




Parts List



Hardware List

A		Ø8x30mm	Wooden dowel	12 pcs
B		Ø6x35mm	Cam bolt	10 pcs
C		Ø15x11mm	Cam lock	10 pcs
D		Ø30mm	Sticker	10 pcs
E		Ø6x50mm	Bolt	6 pcs
F		Ø3x17mm	Screw	6 pcs
G			Plastic wedge	6 pcs
H		Ø1/4"x25mm	Bolt	4 pcs
I		Ø1/4"x35mm	Bolt	4 pcs
J		Ø1/4"x50mm	Bolt	4 pcs
K		M4	Wrench	1 pcs
L			Nut	4 pcs
M		Ø4x55mm	Screw	2 pcs
N			Nut	2 pcs
O		Ø6x16mm	Washer	2 pcs
P			Glue tube	1 pcs
Q		Ø4x12mm	Screw	10 pcs
R		Ø4x35mm	Screw	4 pcs
S			Hook	5 sets
T			Drawer slider	1 sets


*Note: This piece comes preassembled for shipping purposes and must be disassembled to complete assembly



Philips head screwdriver required for assembly
(not included)


*The hardware quantities listed above are required for proper assembly.
Some extra hardware may also have been included.*

Step 1

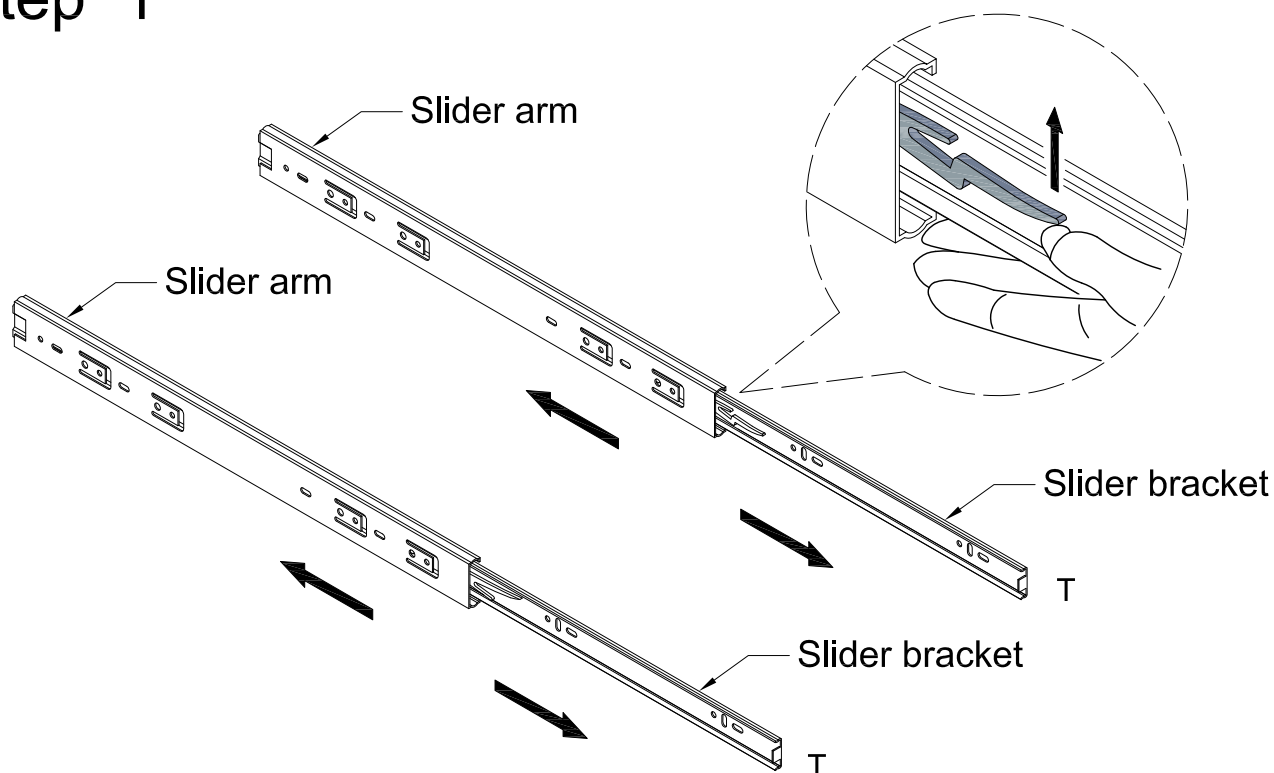


Disassemble drawer slider (T) by sliding the slider arm and slider bracket apart. Depress the small lever of the slider bracket and carefully pull the two pieces apart. Repeat this process for both drawer sliders (T).

Step 2

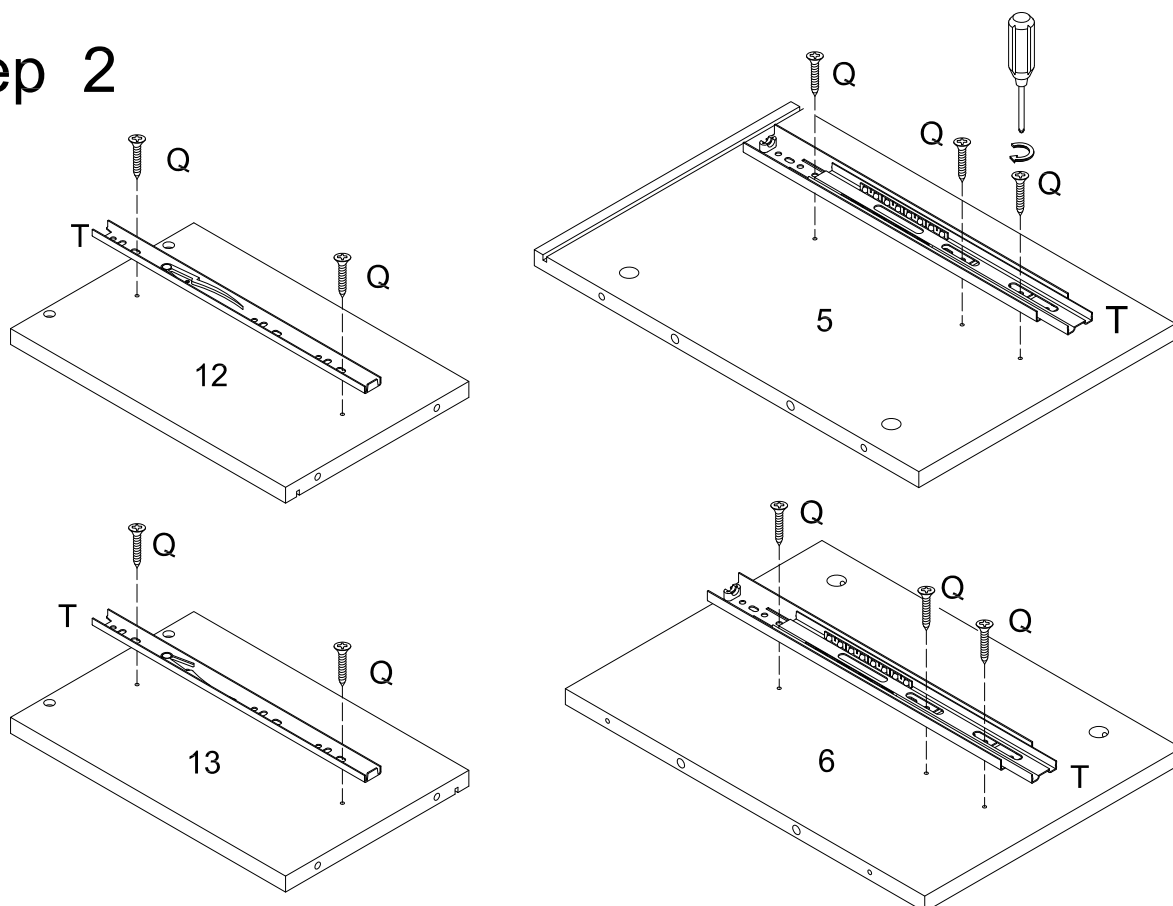


Secure drawer slider brackets (T) to drawer panel (12, 13) and drawer slider arms (T) to side panels (5, 6) with screw (Q).

Step 3

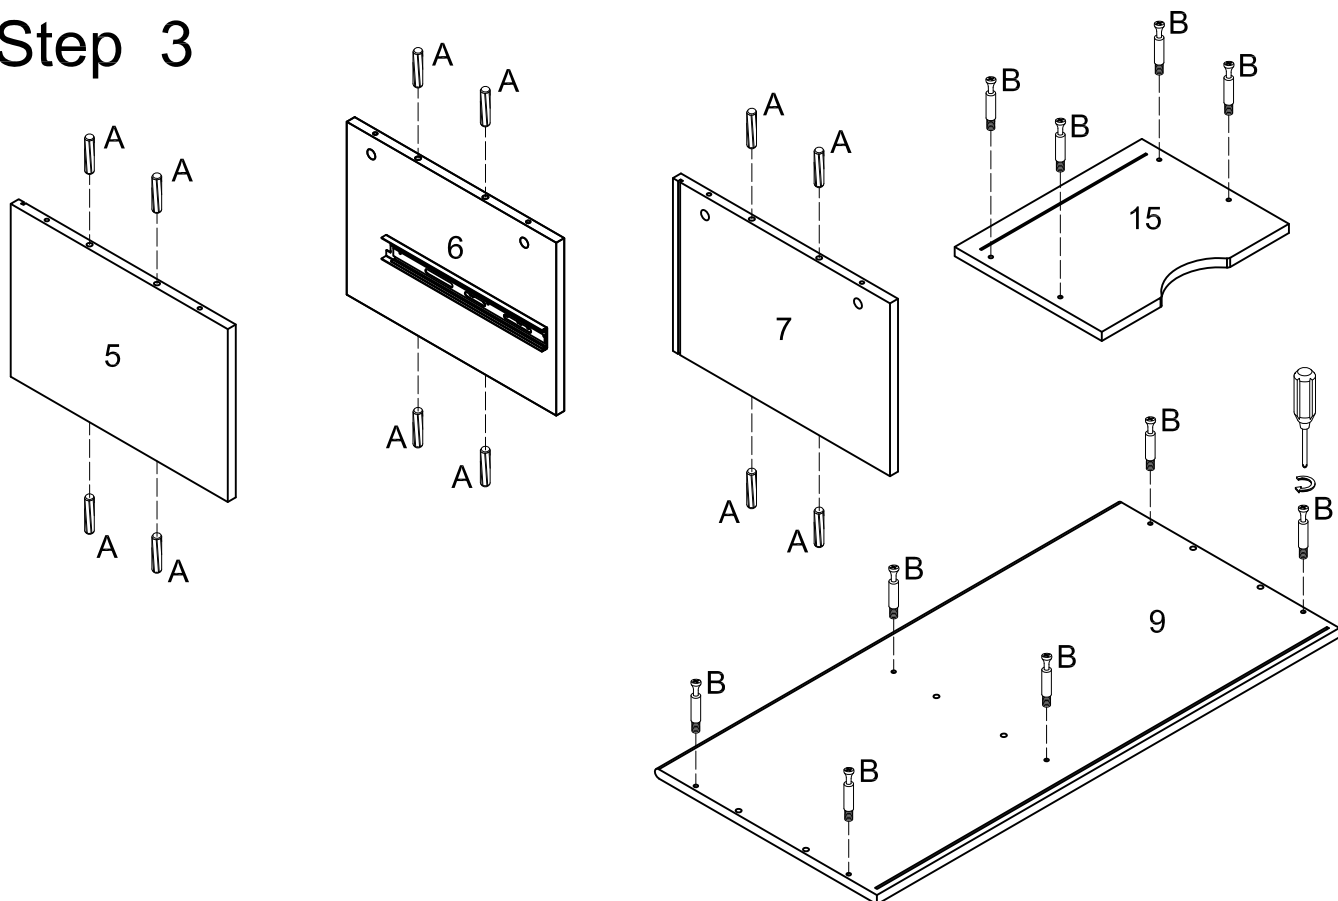


Insert wooden dowel (A) to side panel (5,6,7). Secure cam bolt (B) to drawer front panel (15) and seat panel (9).

Step 4

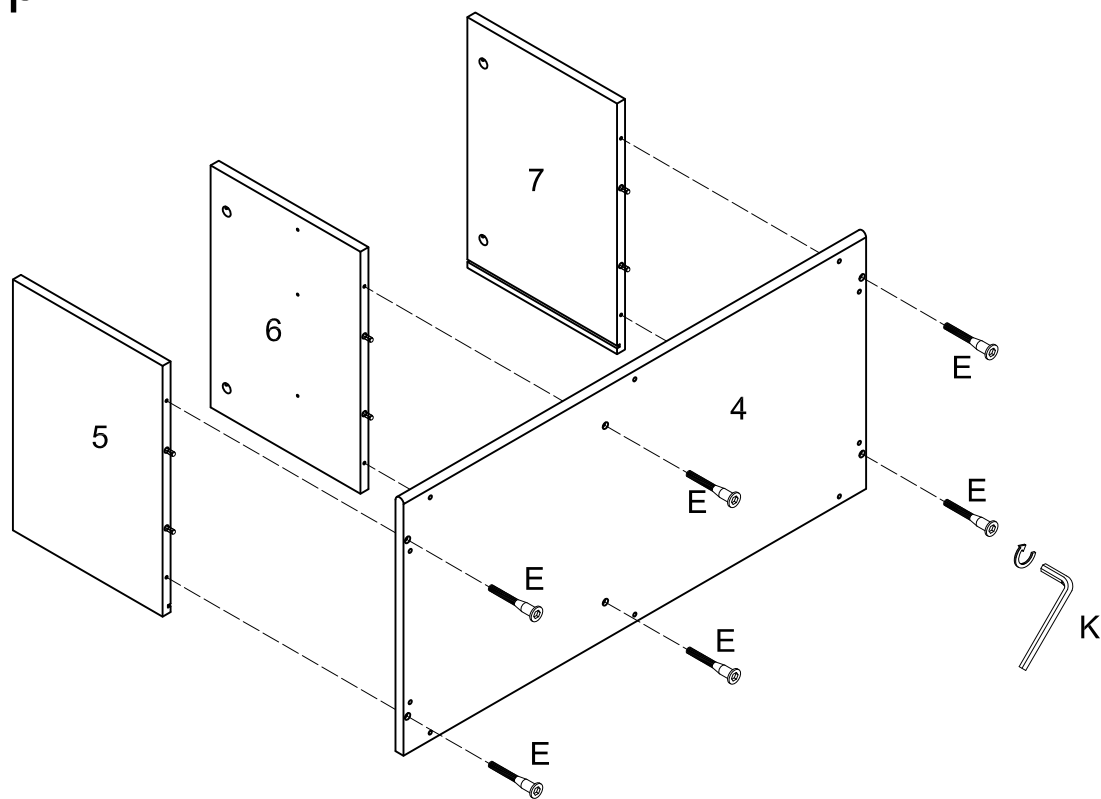


Insert side panel (5,6,7) to bottom panel (4), then use wrench (K) to secure them with bolt (E).

Step 5

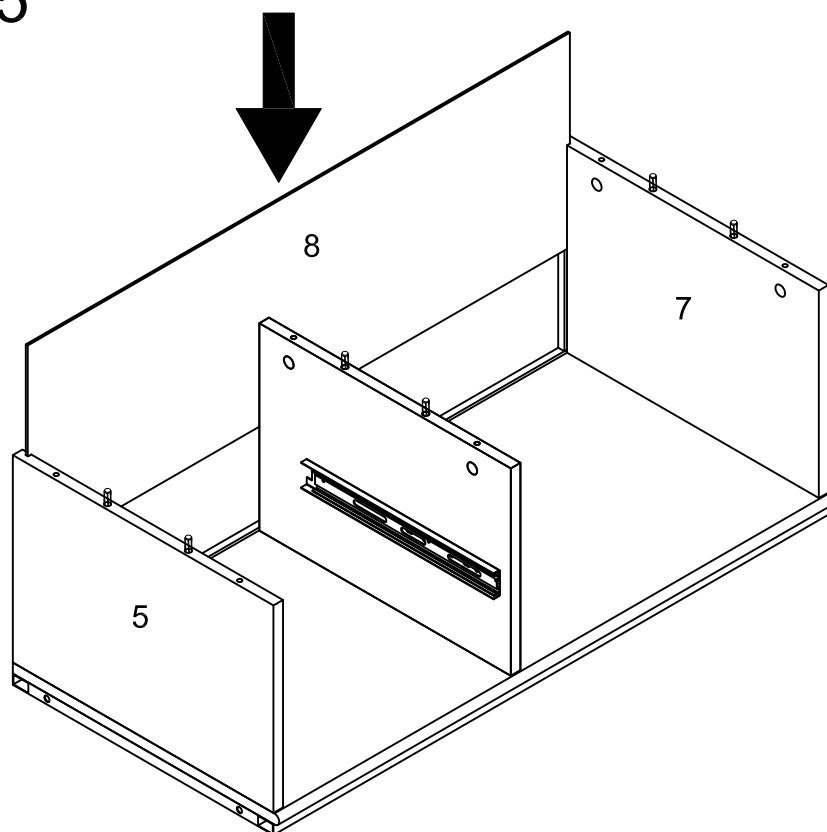


Slide back panel (8) into grooves as per diagram.

Step 6

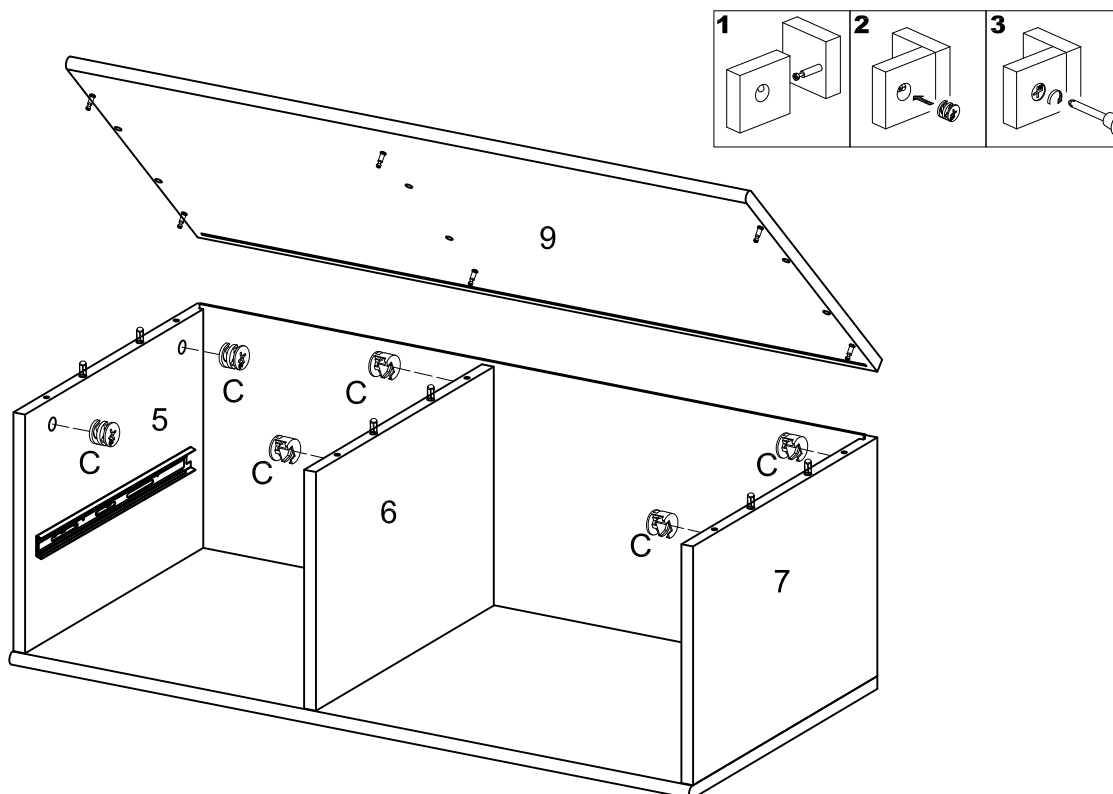


Place seat panel (9) onto side panel (5,6,7), then insert and secure cam lock (C) to side panel (5,6,7) to lock it.

Step 7

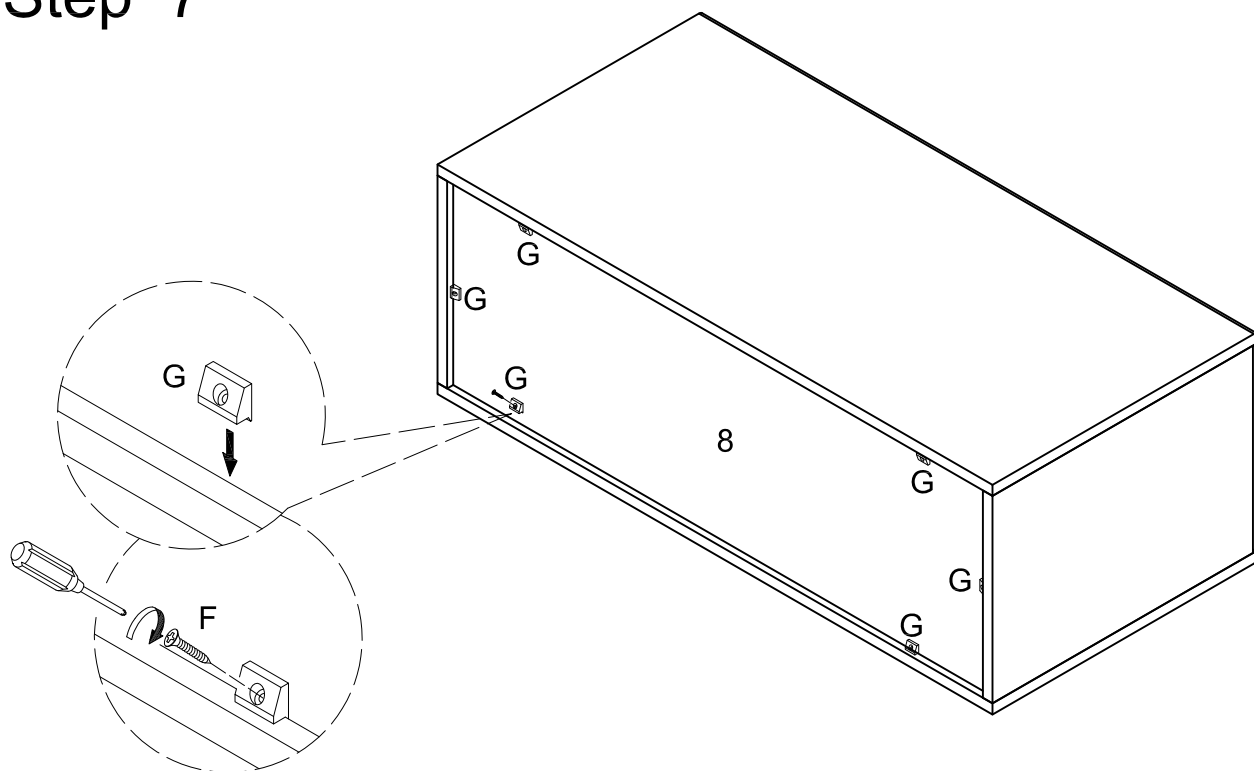


Secure plastic wedge (G) to back panel (8) with screw (F).

Step 8

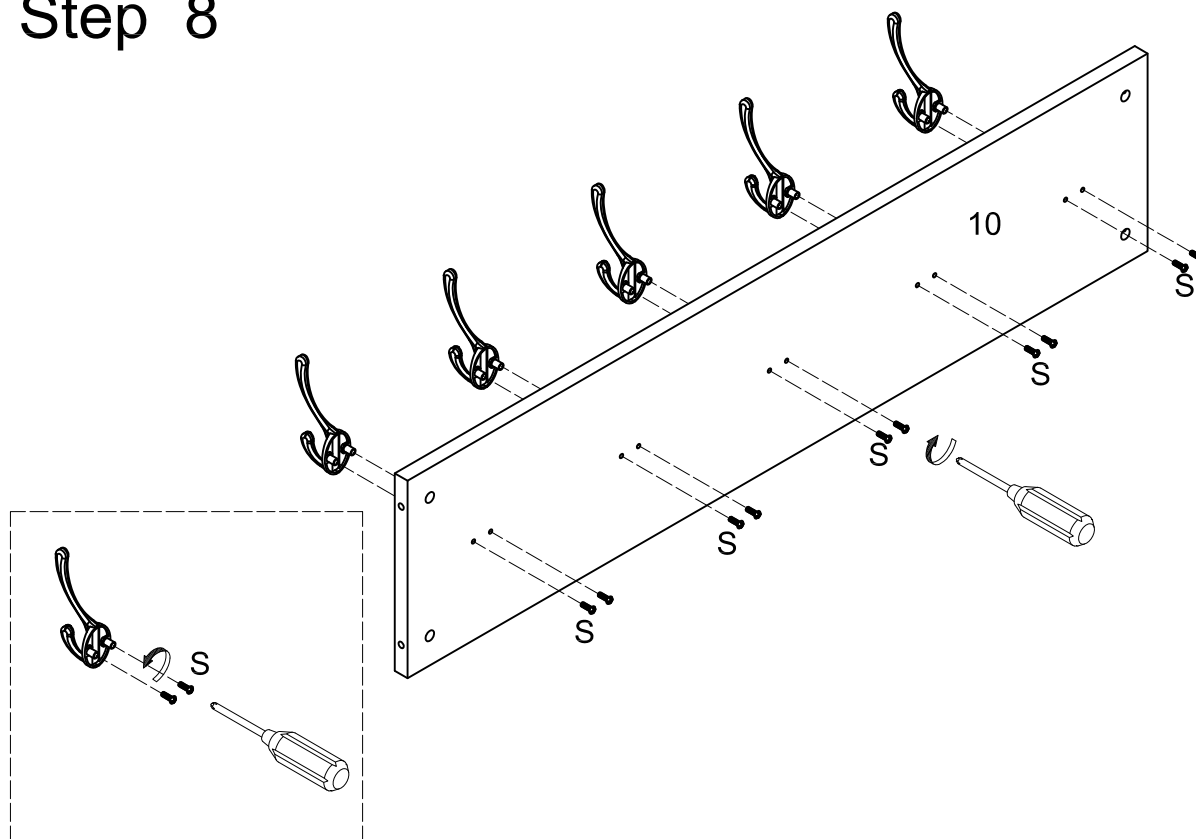


Disassemble two bolts attached in hook (S), then secure hook (S) to panel (10) as per diagram.

Step 9

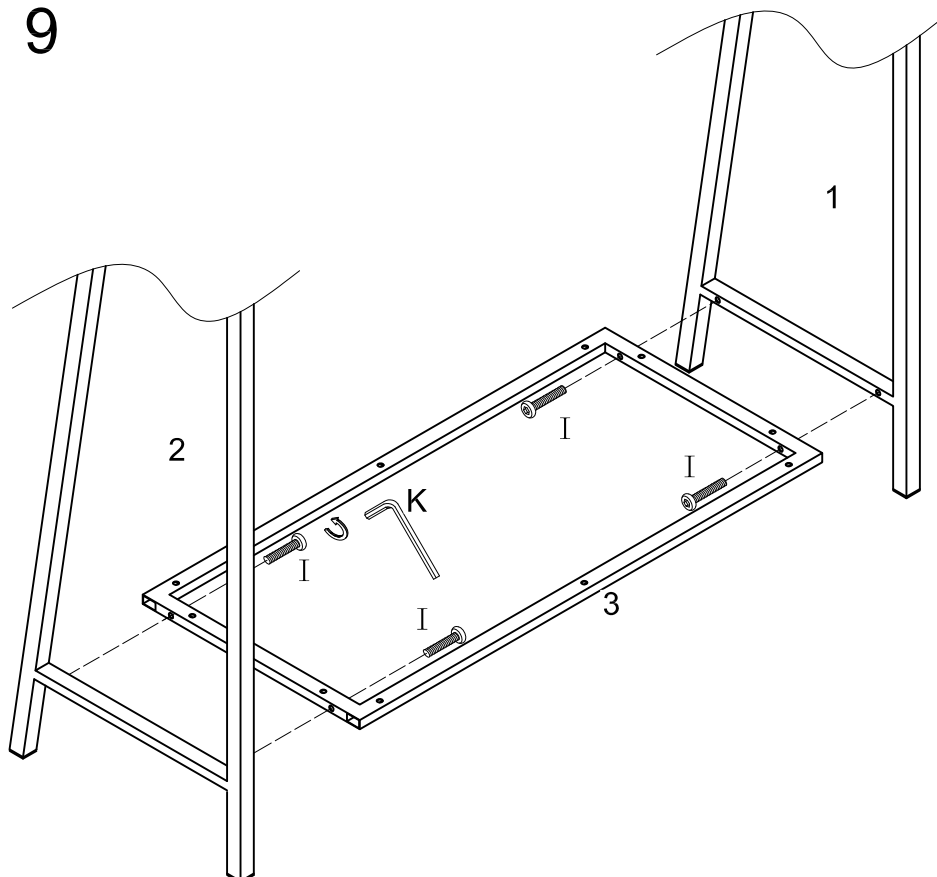


Use wrench (K) to secure bottom frame (3) to side frame (1,2) with bolt (I).

Step 10

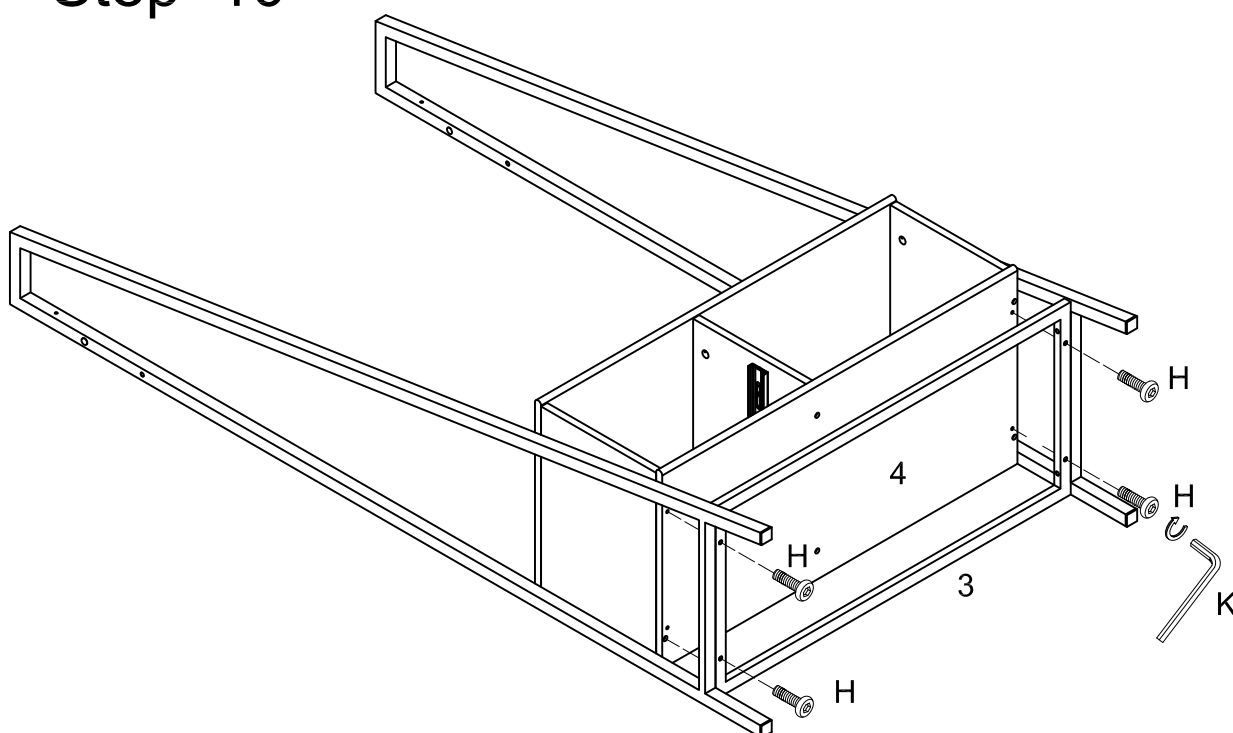


Use wrench (K) to secure bottom frame (3) to bottom panel (4) with bolt (H).

Step 11

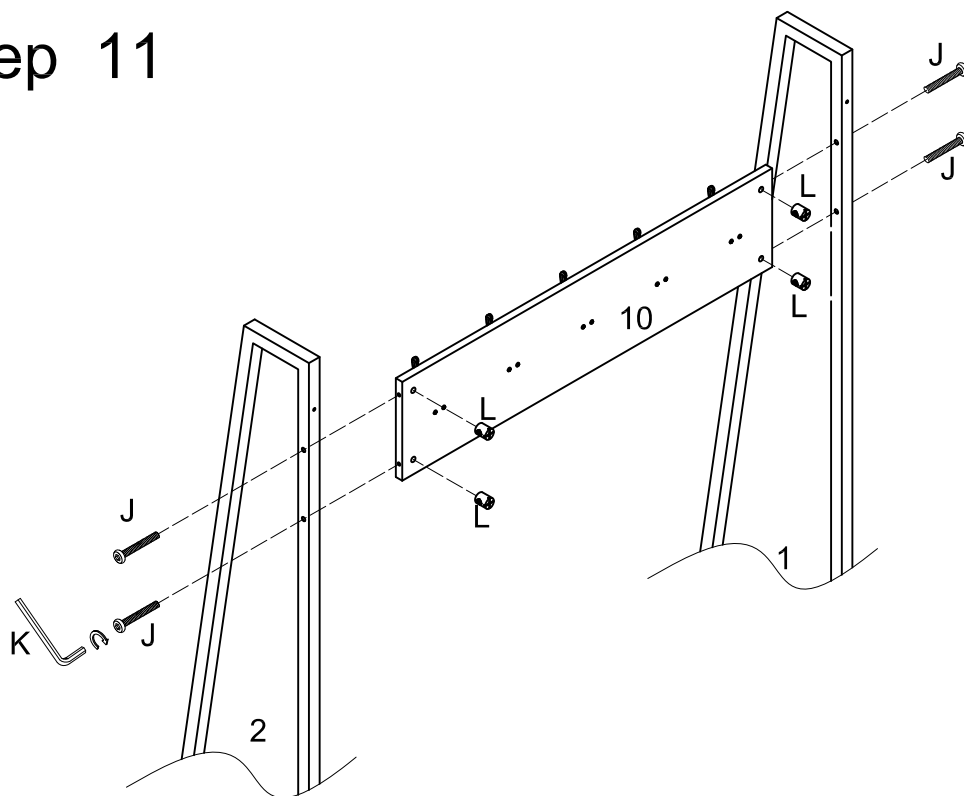


Use wrench (K) to secure panel (10) to side frame (1,2) with bolt (J) and nut (L).

Step 12

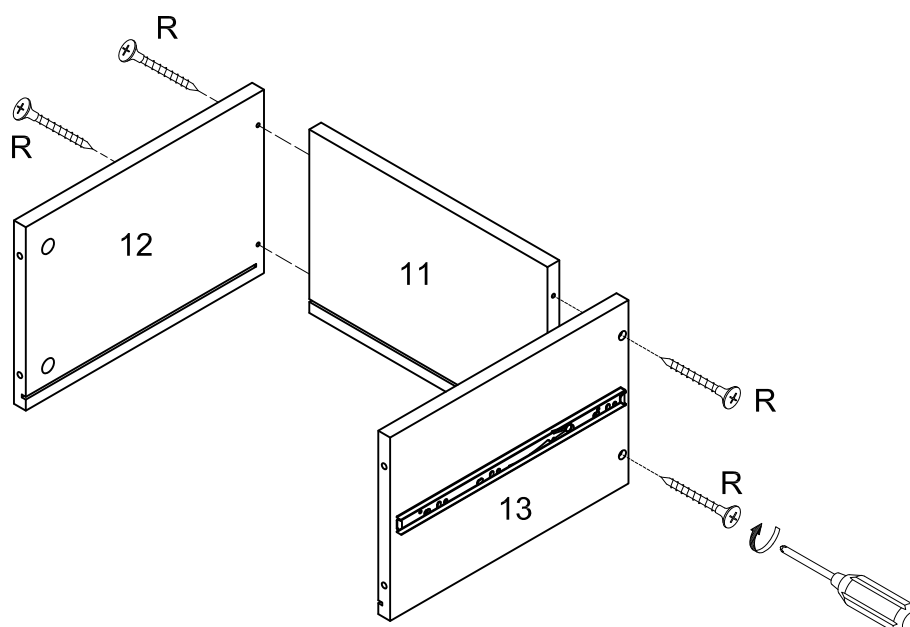



Secure drawer side panel (12,13) to drawer back panel (11) with screw (R).

Step 13

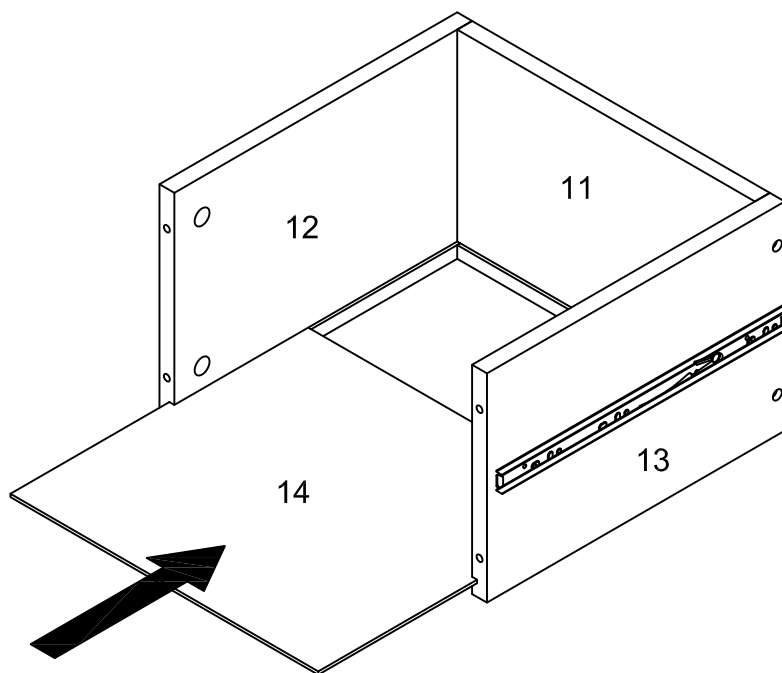


Slide drawer bottom panel (14) into grooves as per diagram.

Step 14

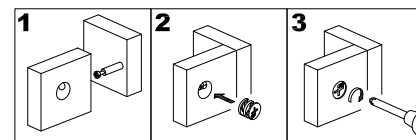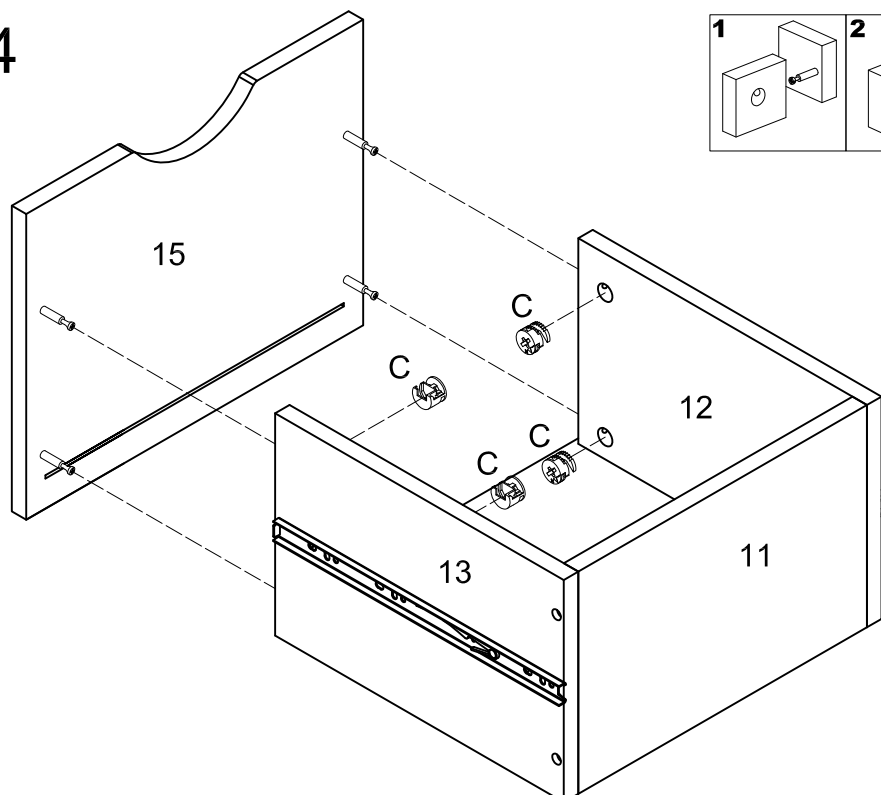



Mount drawer front panel (15) to drawer side panel (12,13), then insert and secure cam lock (C) to drawer side panel (12,13) to lock it.

Step 15

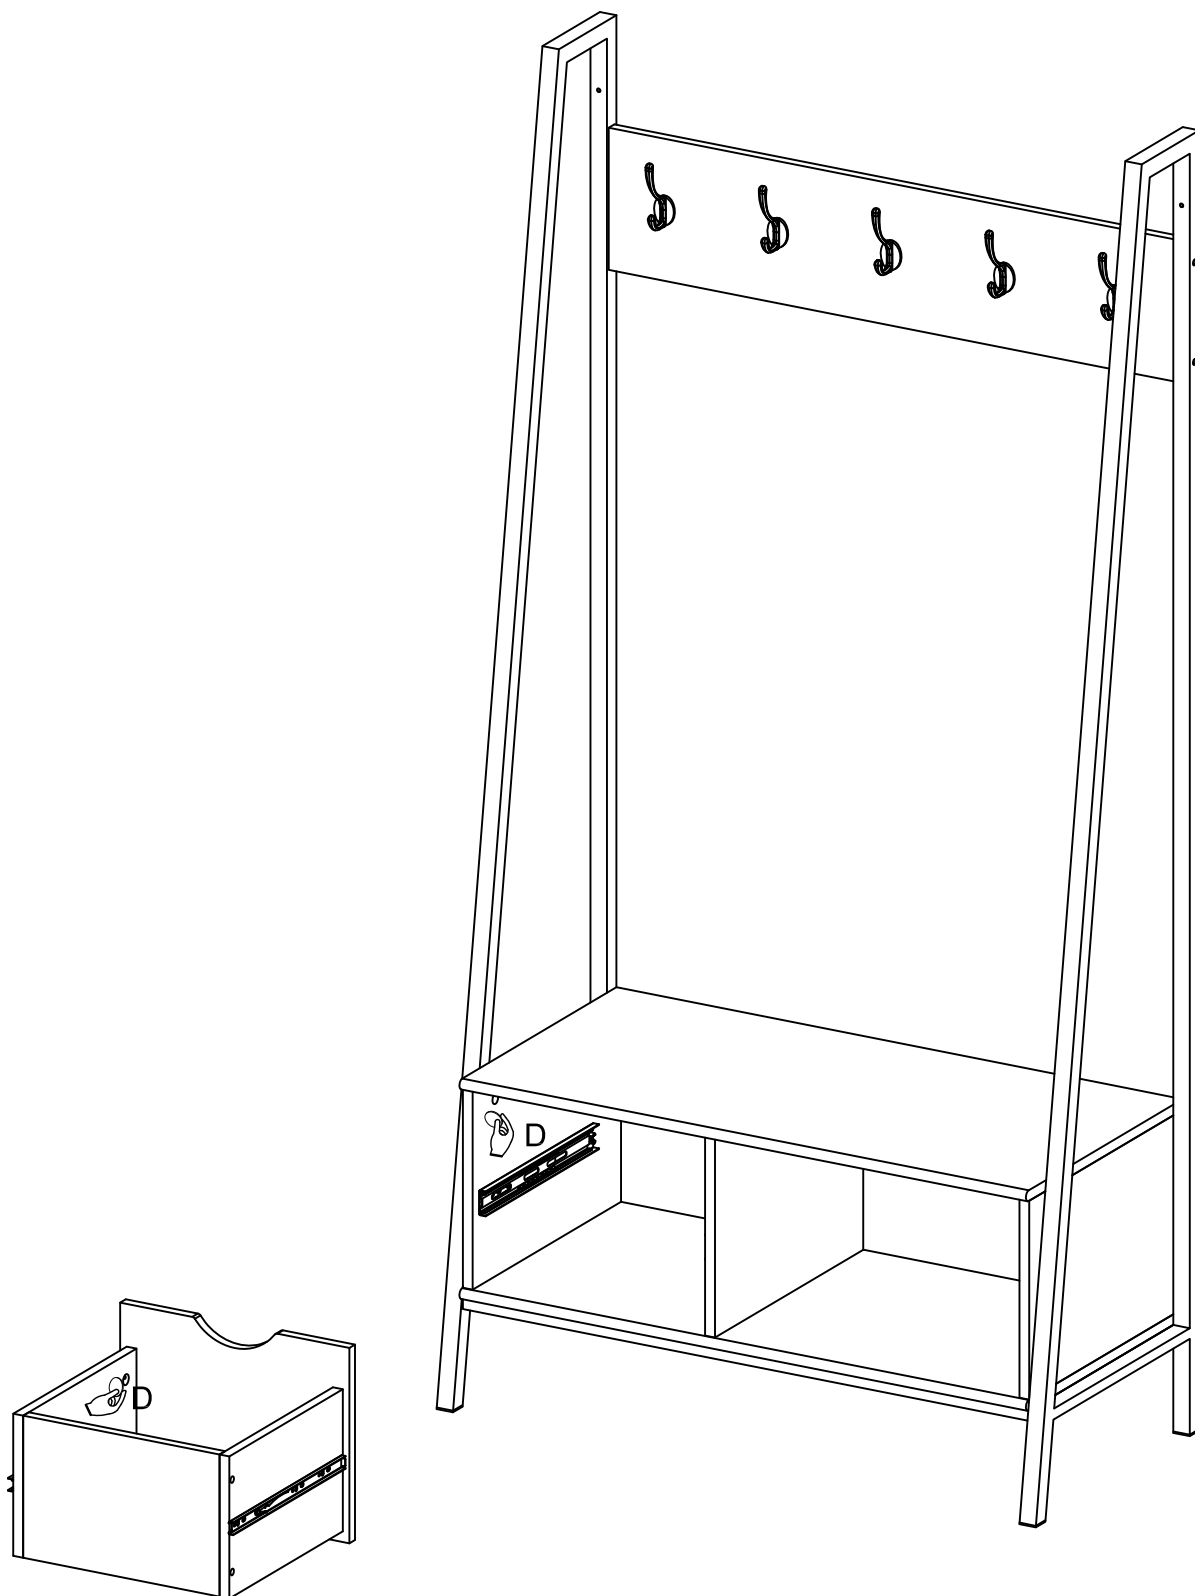


Place sticker (D) over holes as per diagram.

Step 16

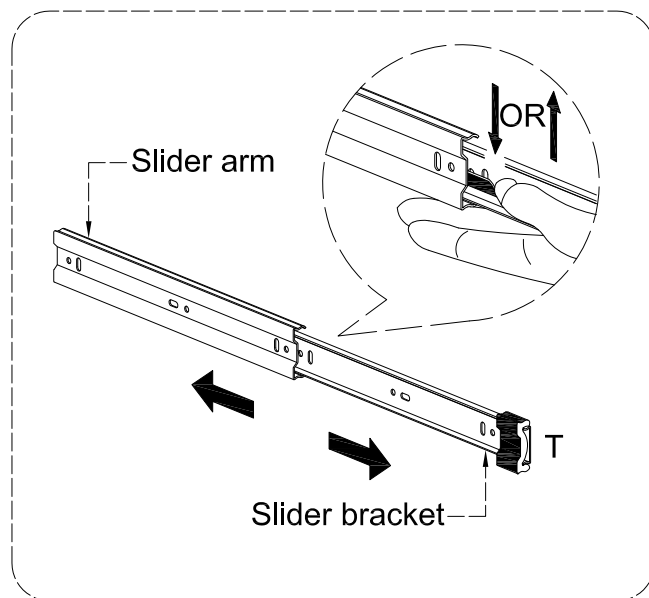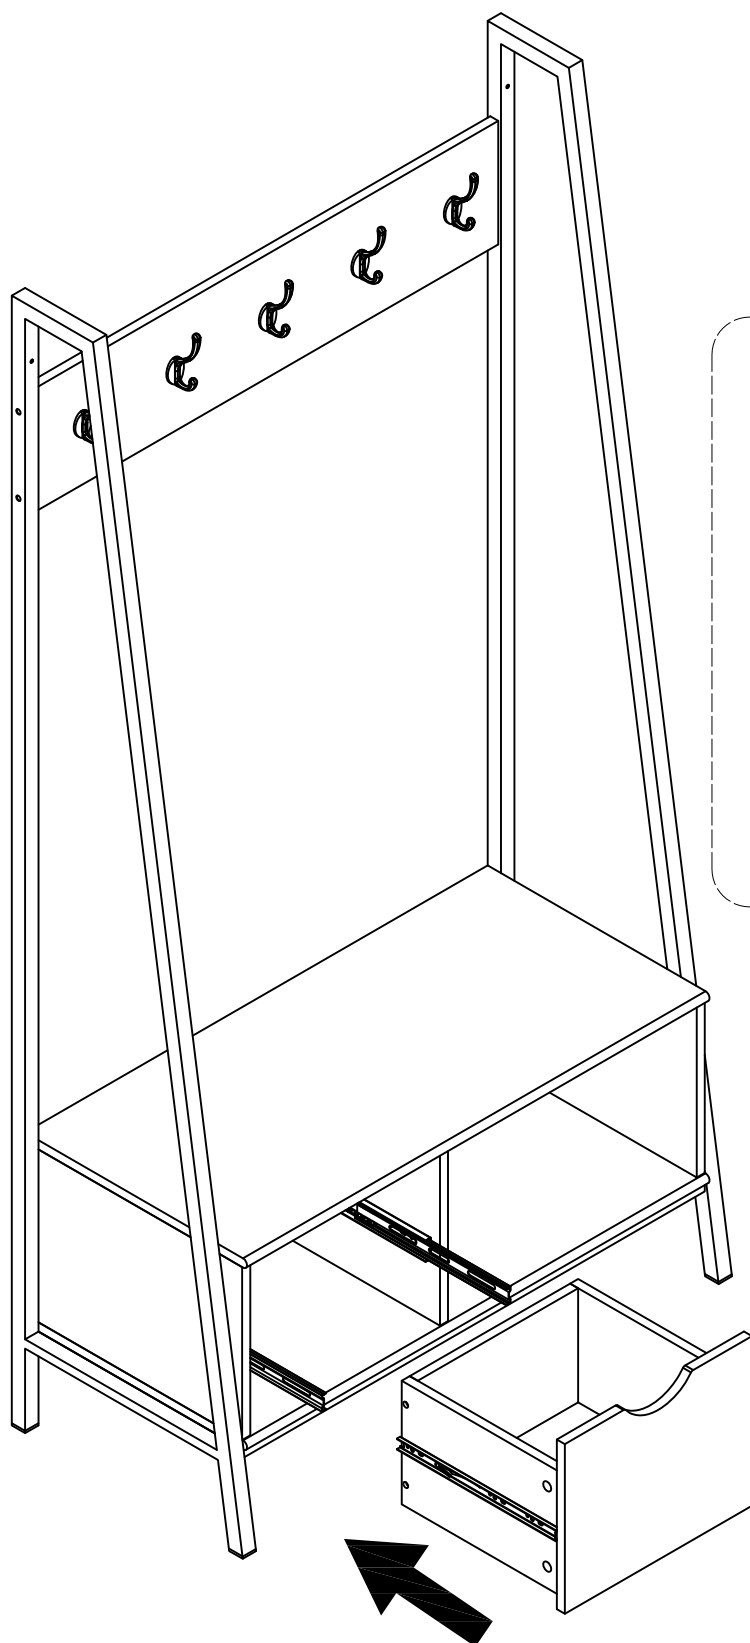

Press down/up on the lock on the slider bracket, then insert the drawer into the slider arm to lock it.


Step 17

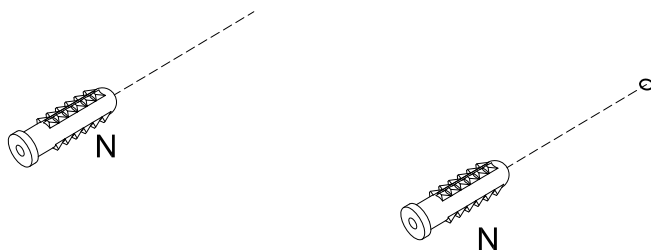

Wall


Place unit in desired location and mark the wall for anchor location. Insert plug (N) into wall as per diagram.

Step 18

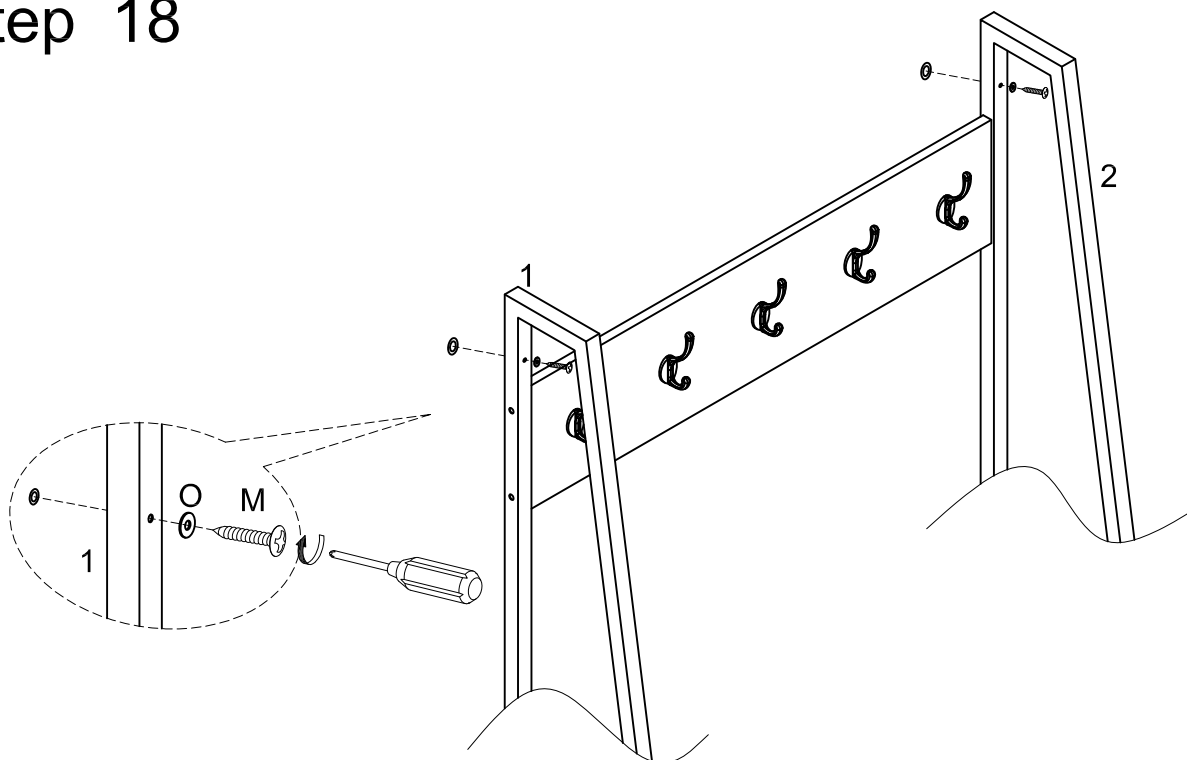

Secure side frame (1,2) to plug in wall with screw (M) and washer (O), to secure product to wall.

Step 19

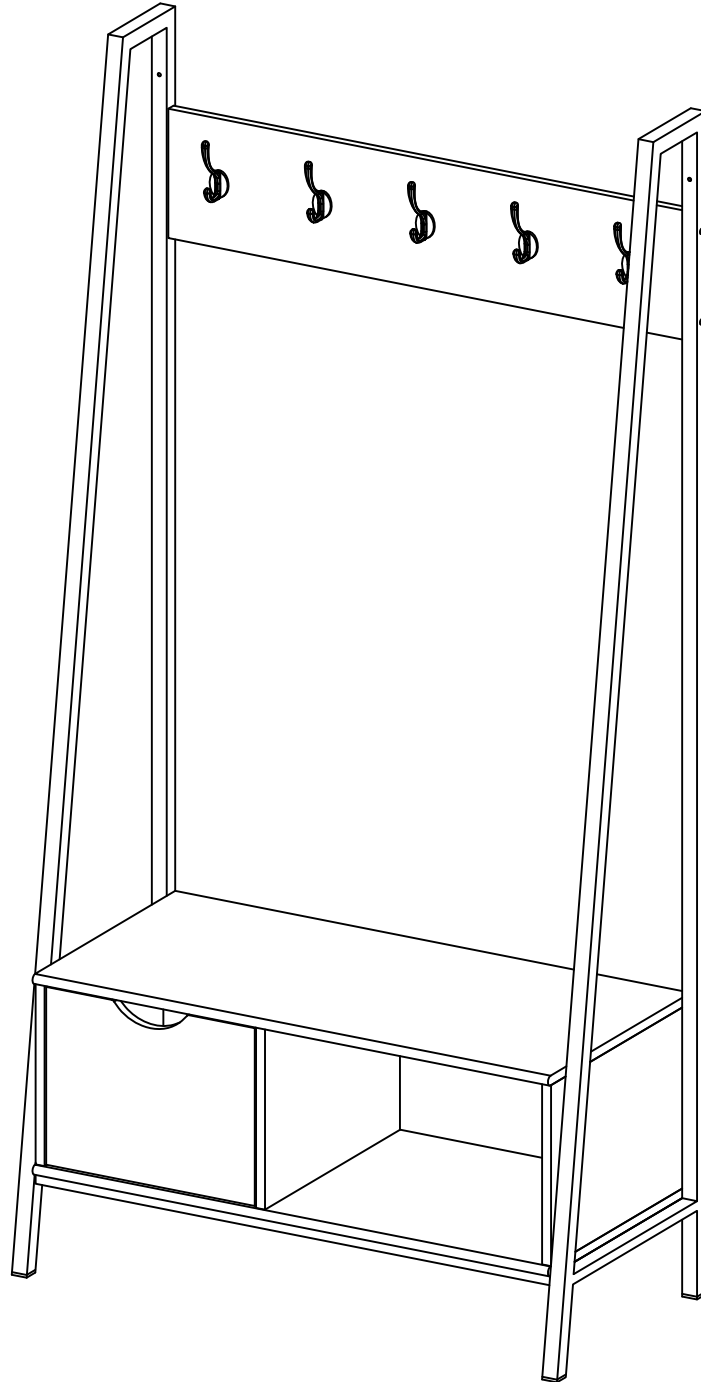

Final Assembly