

ASSEMBLY AND MOUNTING DIAGRAM

Important Safety Instructions & Warnings

Please read all instructions carefully before starting installation

We strongly recommend installation by a licensed electrician.


Make sure the electricity to the wires you are working with is shut off. The fuse is removed or circuit breaker is turned off. Simply turning the power off to the light switch is not sufficient to prevent electrical shock.

Before discarding the carton double check the packaging to make sure all parts has been found.


This fixture was designed to be mounted to an octagon outlet box. The box must be securely mounted to the structure of the building.



OUTLET BOX WIRES

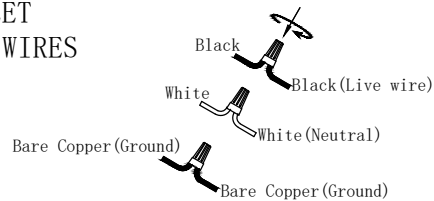

FIXTURE WIRES

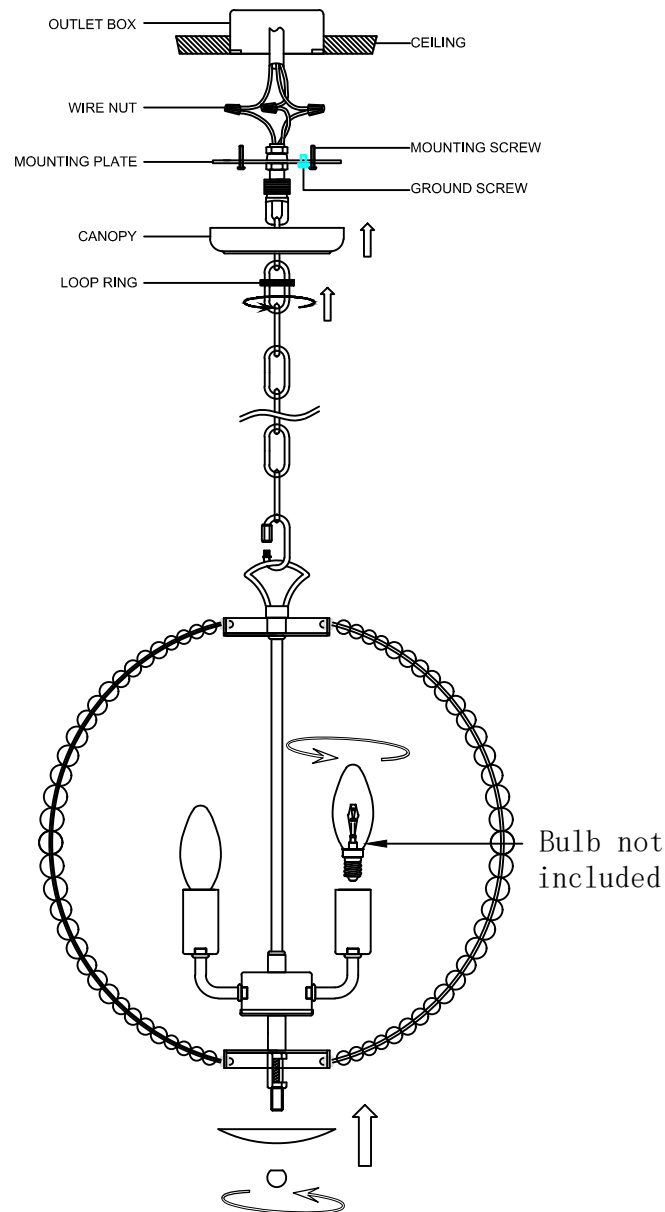

Assembly Instructions



(INDOOR INSTALLATION ONLY)

Before installation, Please check back page to assemble this light fixture, then follow below steps for installation.

STEP 1 Turn off power at the circuit box to avoid possible electric shock.

STEP 2 Attach mounting plate to the outlet box by using mounting screws.

STEP 3 Connect fixture ground wire to ground wire from the wall outlet box (usually green or copper color) by using wire nut or connect both ground wires to green screw on the mounting plate and secure them together.

STEP 4 Connect the neutral (white) fixture wire coming from the fixture base to neutral (usually white) outlet wire. Fasten both wires together with a wire nut and tightly wrap the wire nut with electrical tape.

STEP 5 Repeat the previous step with the hot (black wires) . Make sure there are no exposed wires or strands that could cause a dangerous short circuit.

STEP 6 Place the canopy over the outlet box and fasten it by the ball nut.

STEP 7 Install bulbs. (not included)

STEP 8 Restore power to the circuit at breaker or fuse-box, enjoy it.

【 BULB REQUIREMENTS 】 : 4 x 60W (MAX) E12 Bulb (Not Included) , compatible with LED, Incandescent, Compact Fluorescent, Halogen bulb

DIMMING:

This chandelier is dimmable if use matched switch and bulb.



CLEANING

Please clean with a soft, dry cloth ONLY! Do not use cleaning products.

ASSEMBLY ILLUSTRATION

Note:

1. Secure the bottom ring with the thread tube as on the drawing.
2. Connect center tube with the lamp fixture part.
3. Secure the center tube with upper ring, hanging ring, fasten them together tightly. Be sure that the holes on upper ring and bottom ring are aligned.

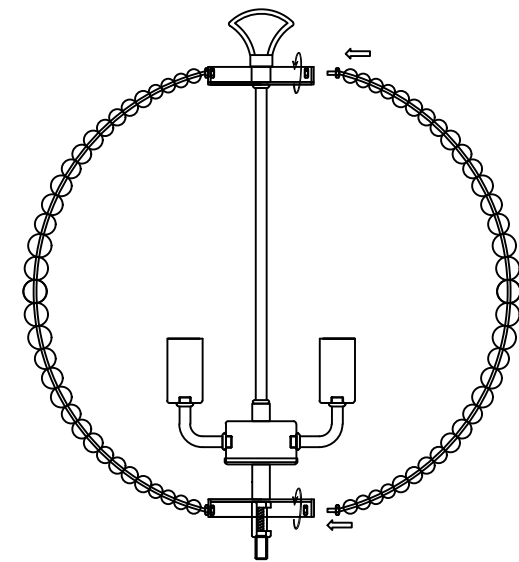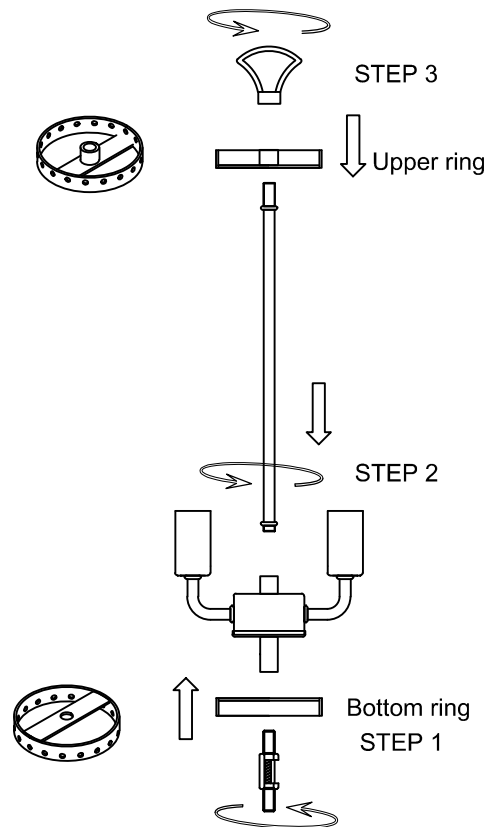

STEP 4
Secure all the wood bead branches.