

WARNING!!

Children have died from furniture tipover. Tip restraints have been included with this product; you must install the tip restraints according to these instructions in order to minimize the risk of furniture tipping.

NEVER allow children to climb or hang on furniture, including drawers or cabinet doors.

In addition to installing the restrains, to help prevent tip-over

1. **NEVER** put a TV or other heavy objects on top of this product".
2. Do not stand on the product

 WARNING	
	This product is NOT a Clothing Storage Unit (CSU). DO NOT use it for clothing storage. Improper use may cause furniture tipover.

 WARNING	
	Children have died from furniture tipover. To reduce the risk of furniture tipover: • ALWAYS install tipover restraint provided. • NEVER put a TV on this product. • NEVER allow children to stand, climb or hang on drawers, doors, or shelves. • NEVER open more than one drawer at a time. • Place heaviest items in the lowest drawers. • Do not defeat or remove the drawer interlock system. <i>This is a permanent label. Do not remove!</i>
	

Assembly Instructions

Caution : You must read this before you proceed


Care & Maintenance

- ⊘  ● Not for commercial use. For residential use only.
- ✓  ● Furniture may scratch floors. We recommend using furniture pads to protect your floors.
- ⊘  ● Do not put hot items directly on furniture surface.
- ⊘  ● Do not clean furniture with harsh cleansers or polish.
- ⊘  ● Do not place furniture under direct sunlight.
- ⊘  ● Do not place furniture near heating or cooling vents.
- ⊘  ● Do not write on furniture without a padded barrier to protect the surface.
- ⊘  ● Do not place furniture outside . For indoor use only.
- ⊘  ● Stains may be removed with mild soap solution and damp cloth.
- ⊘  ● Children should not climb or jump on the furniture.
- ✓  ● Dust and pick-up spills using a clean, non-colored, lint-free cloth.

Please look in carton for hardware packs and legs.
Sets often ship in multiple boxes and may arrive a day or two apart.








SIDEBOARD

SKU : N779P463305







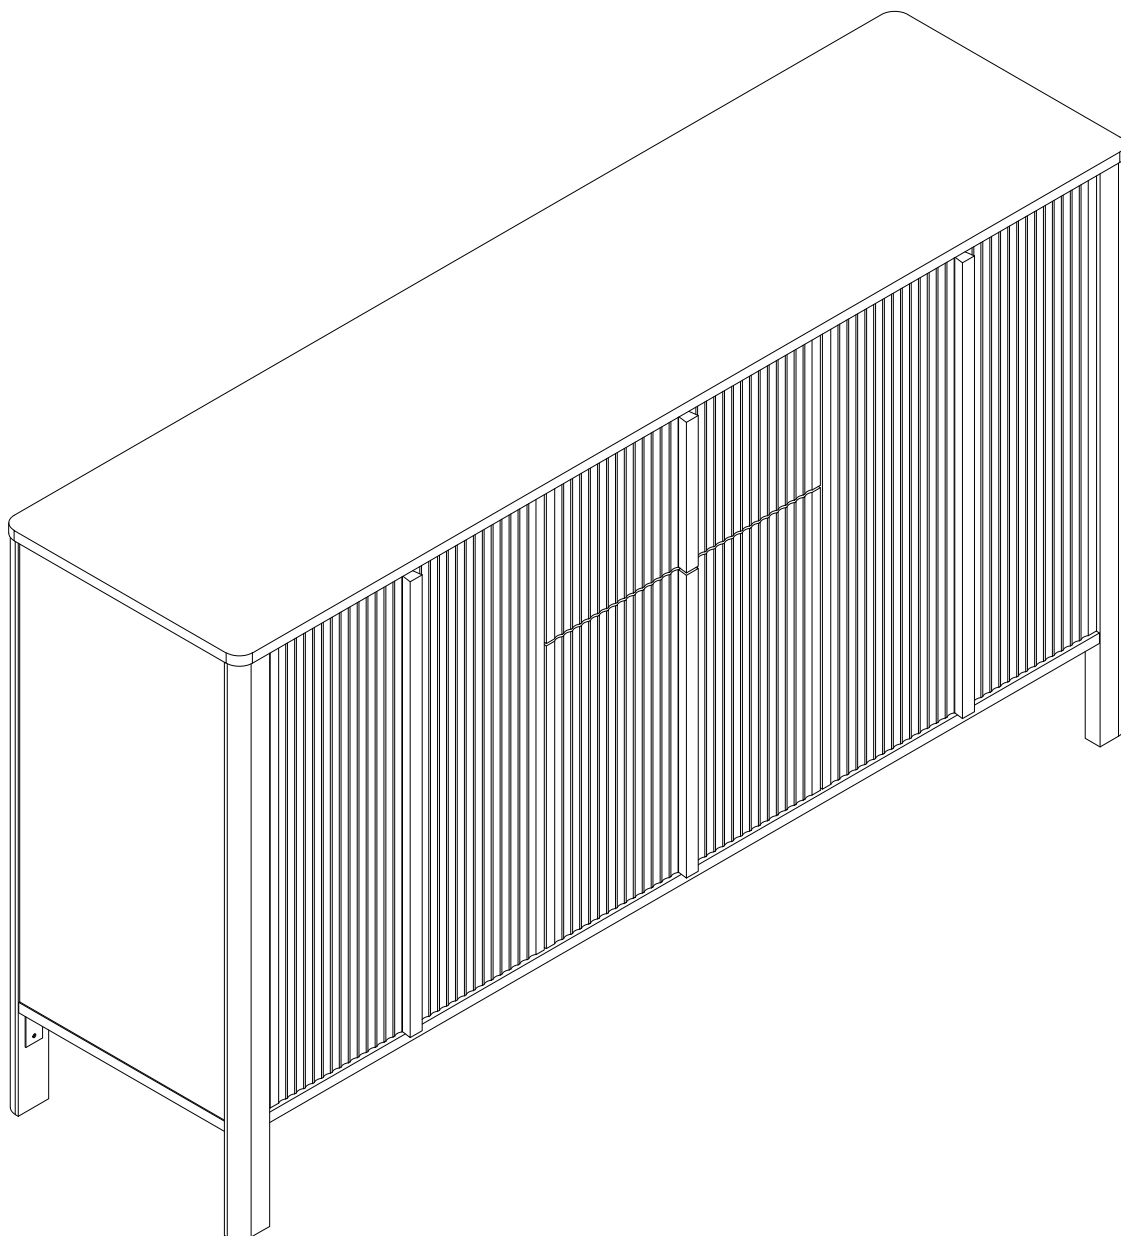


CAUTION : This Sideboard is NOT a TOY. Keep your child / children at bay in the process of assembly.
For turning the Sideboard and to prevent damage to the Sideboard, 2 persons may be needed to execute this action.







Parts List

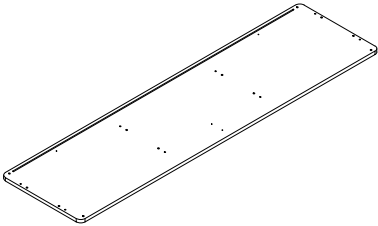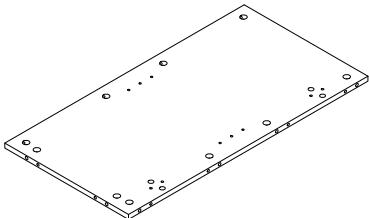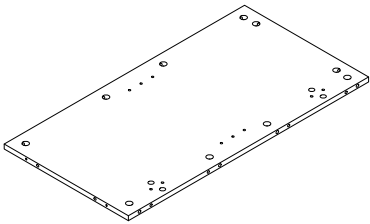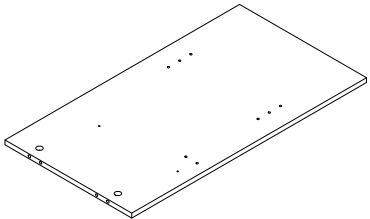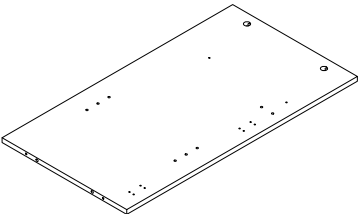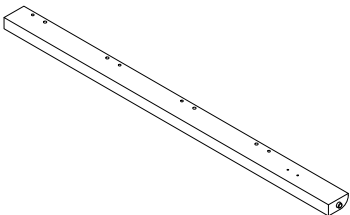Label	Picture	Description	QTY
①		Panel	1
②		Base Plate	1
③		Left Side Panel	1
④		Right Side Panel	1
⑤		Left Partition Board	1
⑥		Right Partition Board	1
⑦		Left Front Leg	1









Parts List

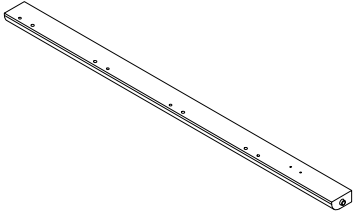Label	Picture	Description	QTY
8		Right Front Leg	1
9		Left Hind Leg	1
10		Right Hind Leg	1
11		Door Hinge Shims	4
12		Connecting Plate	1
13		Upper Back Panel	1
14		Below Back Panel	1








Parts List

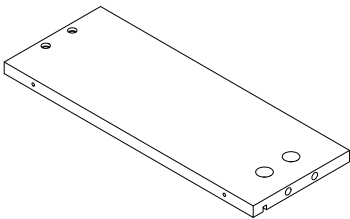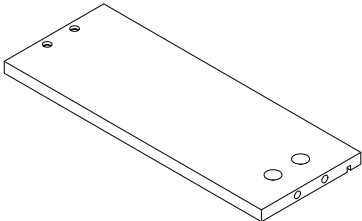Label	Picture	Description	QTY
15		Side Pull-Out Shelf	2
16		Middle Activity Shelf Board	1
17		Foot Pillar Panel	2
18		Support Feet	2
19		Left Drawer Side Panel	1
20		Right Drawer Side Panel	1
21		Drawer Back Panel	1









Parts List

Label	Picture	Description	QTY
22		Drawer Bottom Plate	1
23		Drawer Panel	1
24		Side Door panel	2
25		Middle Door panel	1
26		Side Door Panel Handle	2
27		Middle Door Panel Handle	1
28		Drawer Panel Handle	1
29		Backboard H-shaped Clamp Strip	1








Hardware

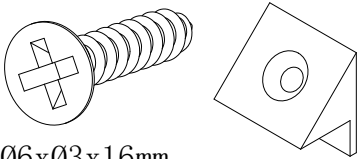Label	Picture	Description	QTY
A		Cam Bolt (Ø6x35mm)	32+4
B		Cam Nut (Ø15x10mm)	32+4
C		Dowel (Ø6x30mm)	36+4
D		Screw (Ø5x38mm)	14+2
E	 Ø6xØ3x16mm	Backplate Buckle Screw(Ø6xØ3x16mm)	12+2
F		Shelf Support	12+1
G		Full Overlay Hinge	6

Hardware


Label	Picture	Description	QTY
H		Pad Ø20mm	32+4
	 CL  CR  DL  DR	Slide Rail (L=300mm)	1
J		Bolt (M6*35MM)	8+1
K		Screw (Ø7xØ3.5x12mm)	36+3
L		Screw-in Leveling Feet	2
M		Allen Wrench	1
N		Dowel (Ø5x20mm)	12+1

Hardware

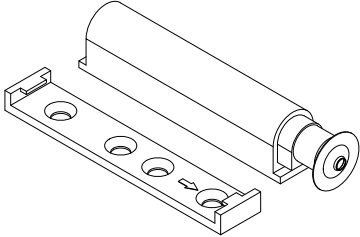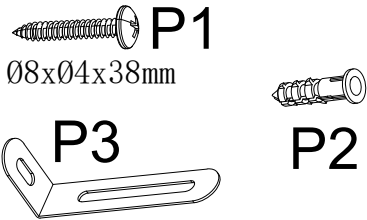Label	Picture	Description	QTY
O		Push-to-Open Latch	2
P	 P1 Ø8xØ4x38mm P2 P3	Anti-Tip Hardware Kit Screw(Ø8xØ4x38mm)	2
Q		90-Degree Angle Bracket	4
R		Screw (Ø8xØ4x12mm)	18+2
S		Screw (Ø8xØ4x20mm)	25+3
T		Screw (Ø6xØ3x12mm)	14+2
U		Screwdriver	1

Assembly Preparation

Before
Beginning
Assembly:

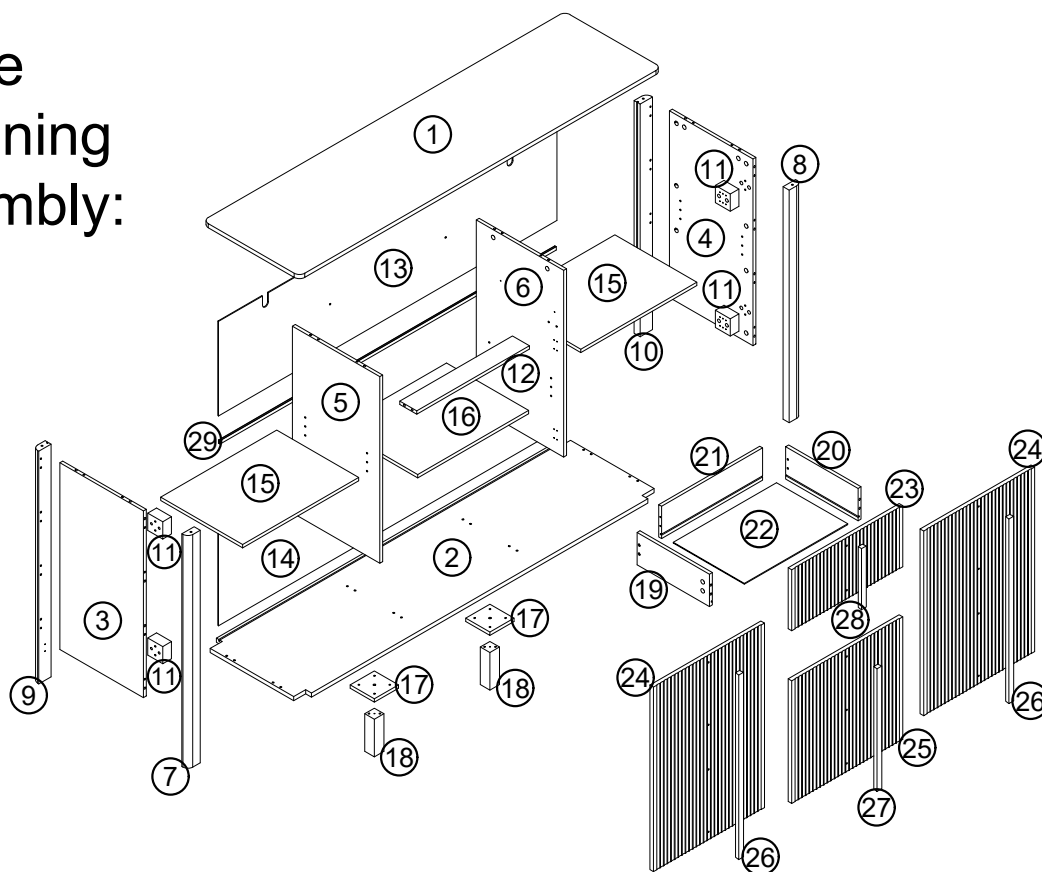

- Read instructions, cover to cover-



- Have 2 adults on hand for assembly-



- Do not assemble on flooring or carpet-




- Assemble on a clean non-marring surface (packing foam)-



- Save all packaging until finished-


Assembly Steps

This Sideboard has multiple parts and may require up to 60 minutes to assemble. To give you an overview of the Sideboard parts, the above picture is to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly.

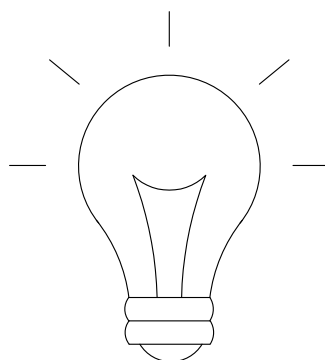


friendly reminder

To avoid errors and confusion during the installation of accessories, use the type and quantity of hardware accessories according to the installation procedure described in the instructions. First, unroll the accessories bag and lay out the hardware accessories, cut holes in the side, and take out the hardware accessories

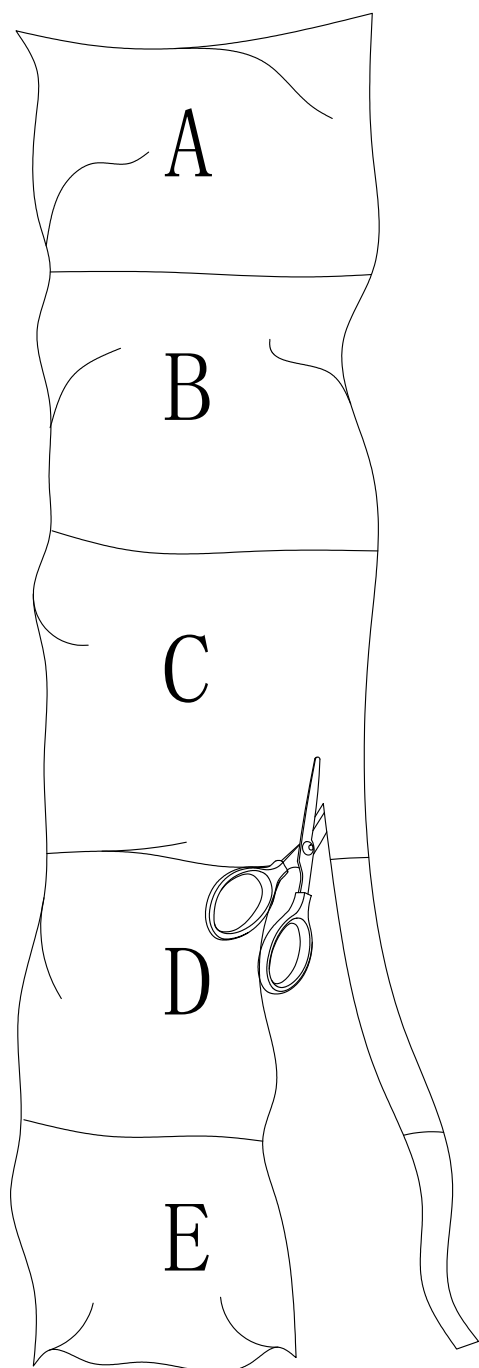

STEP 01

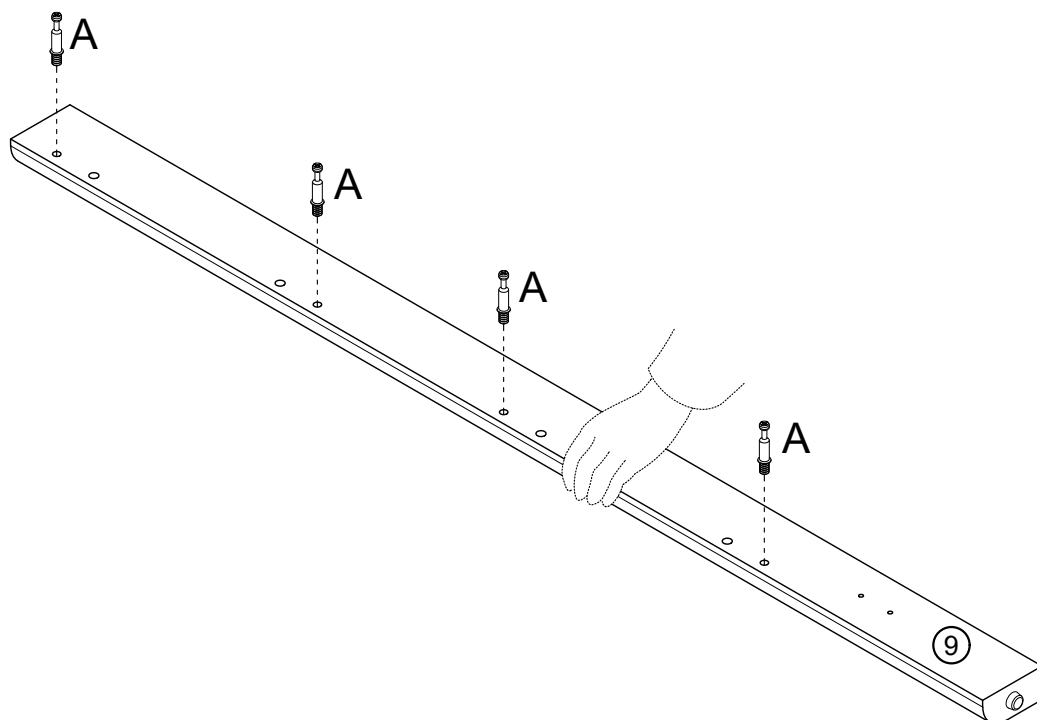


A x 4



Ø6x35mm

Fix Cam Bolt (A) onto Left hind leg (9)

STEP 02

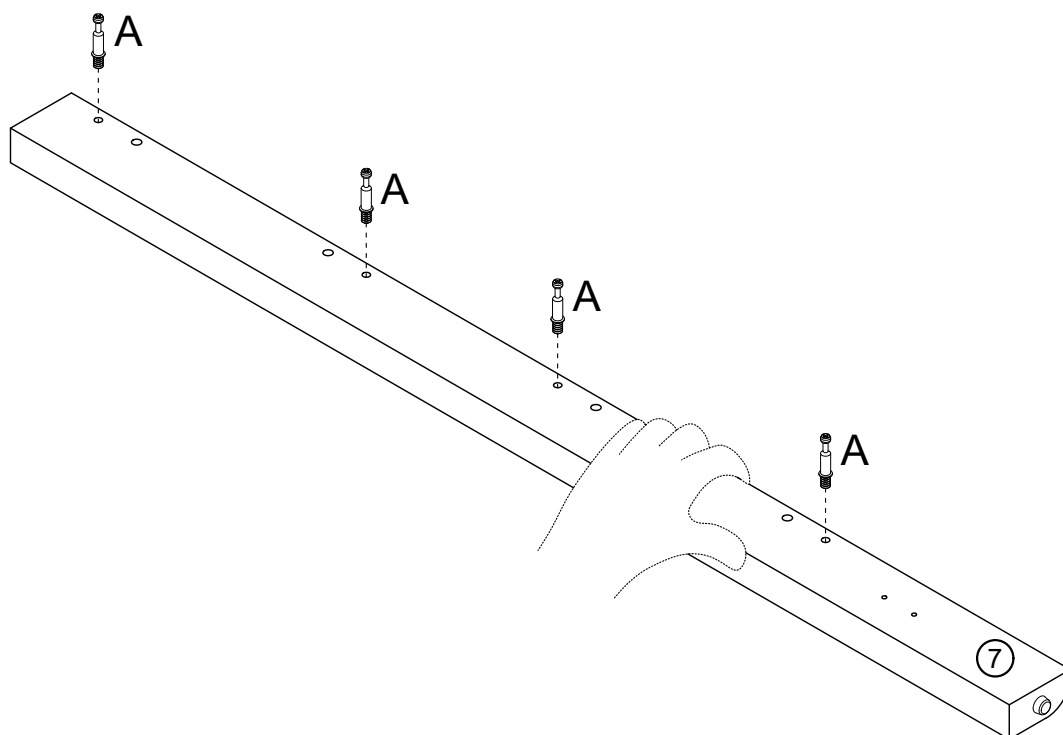


A x 4



Ø6x35mm

Fix Cam Bolt (A) onto Left front leg (7)

STEP 03

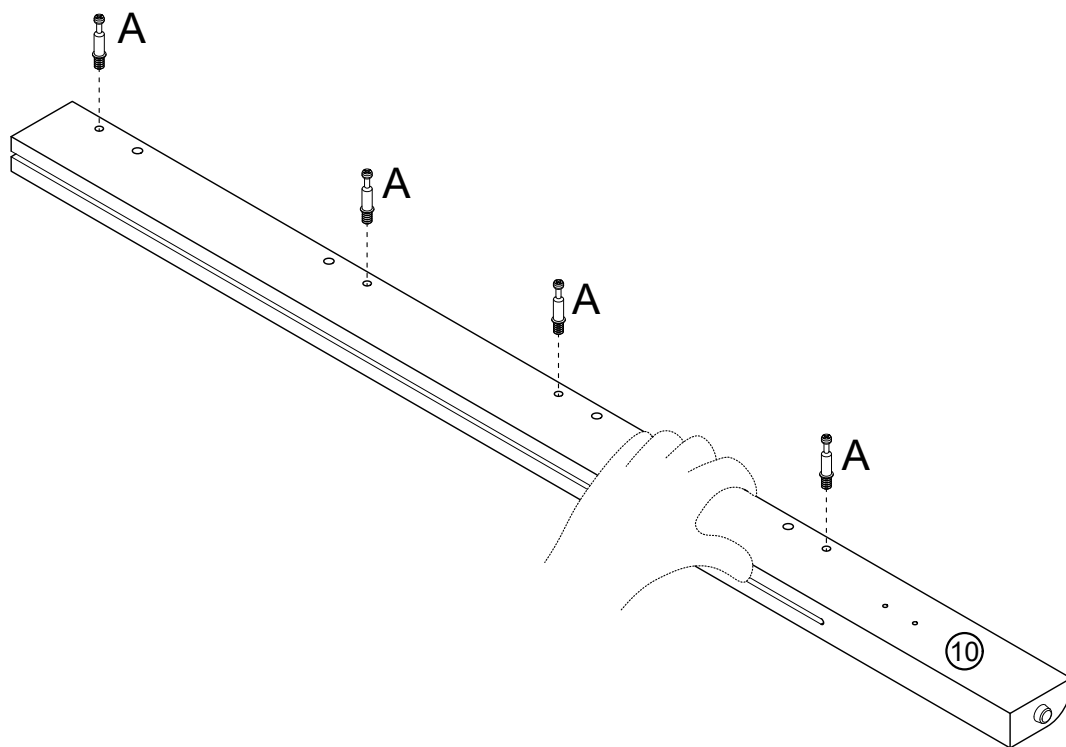


A x 4



Ø6x35mm

Fix Cam Bolt (A) onto Right hind leg (10)

STEP 04

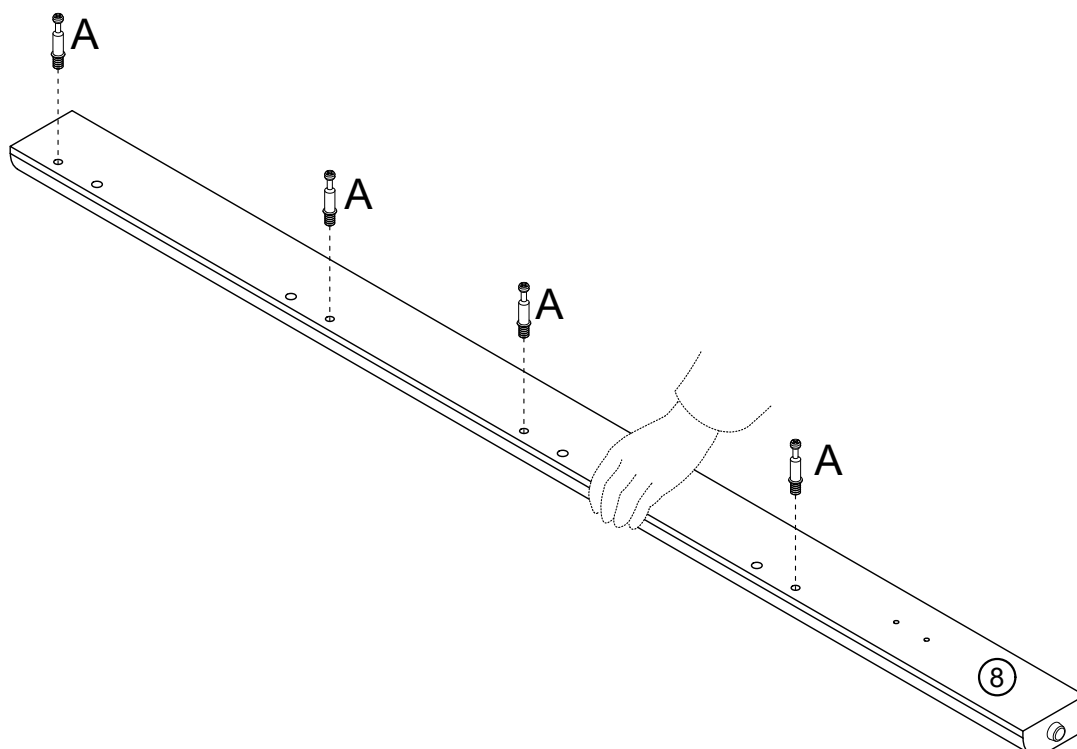


A x 4




Ø6x35mm

Fix Cam Bolt (A) onto Right front leg (8)

STEP 05

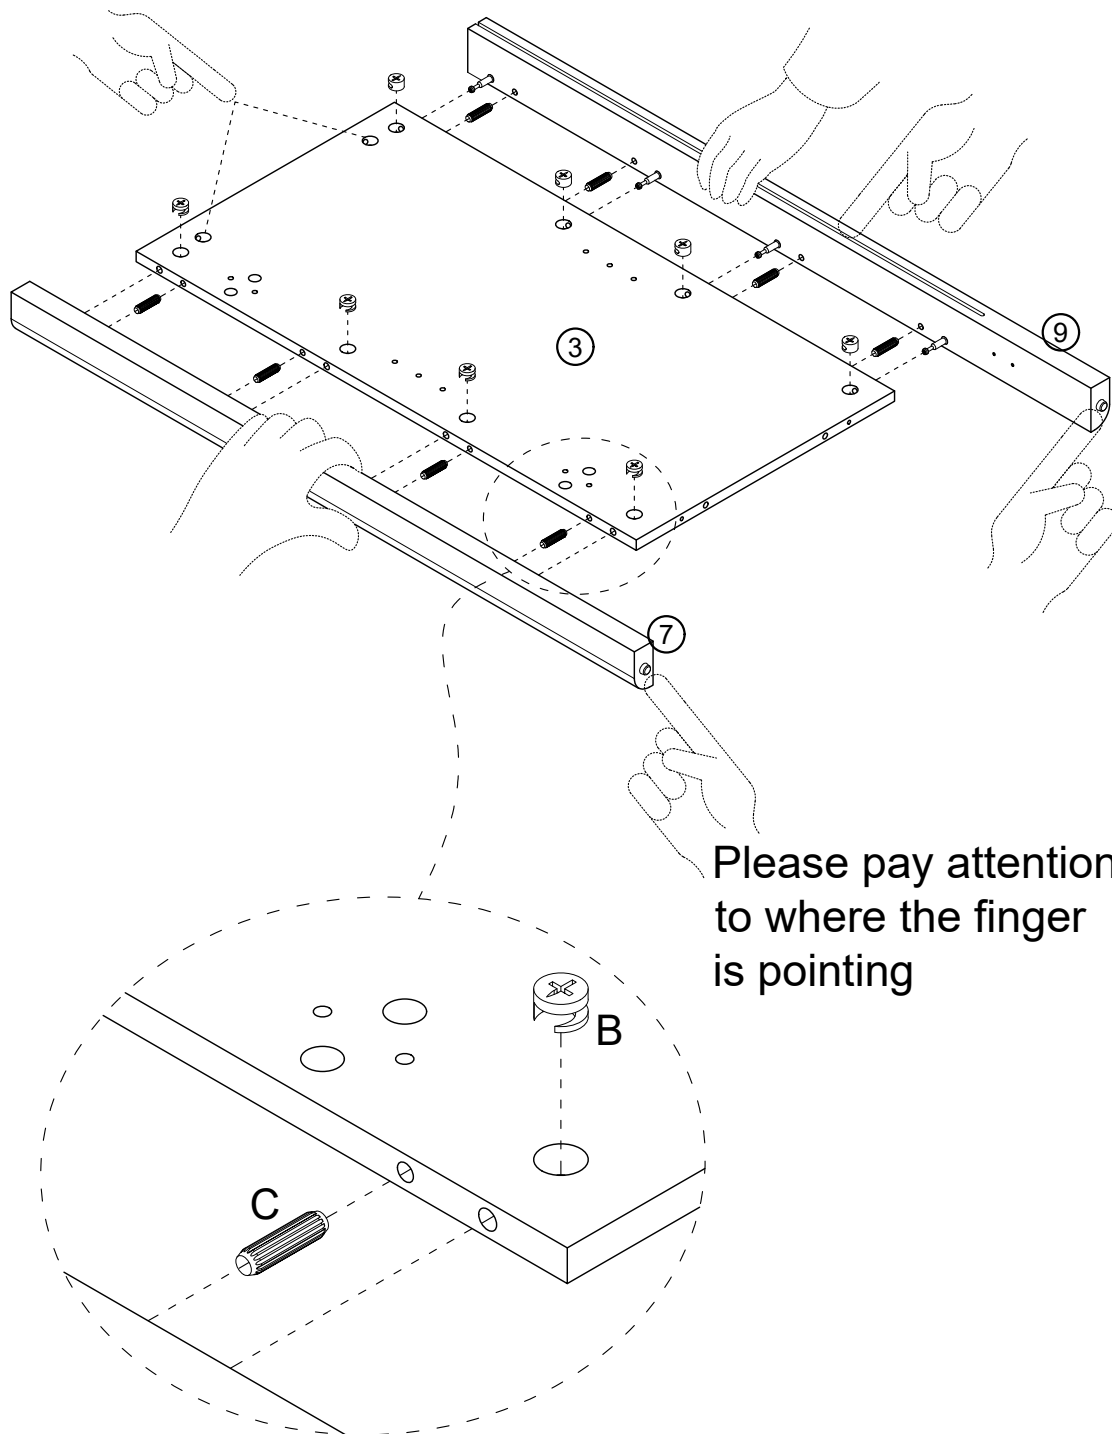

C x 8





B x 8



C




N

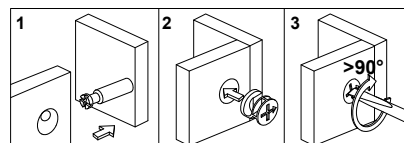


Connect Left front leg (⑦), Left hind leg (⑨) and Left Side Panel (③) with Dowel (C), and then lock Cam Nut (B)

STEP 06


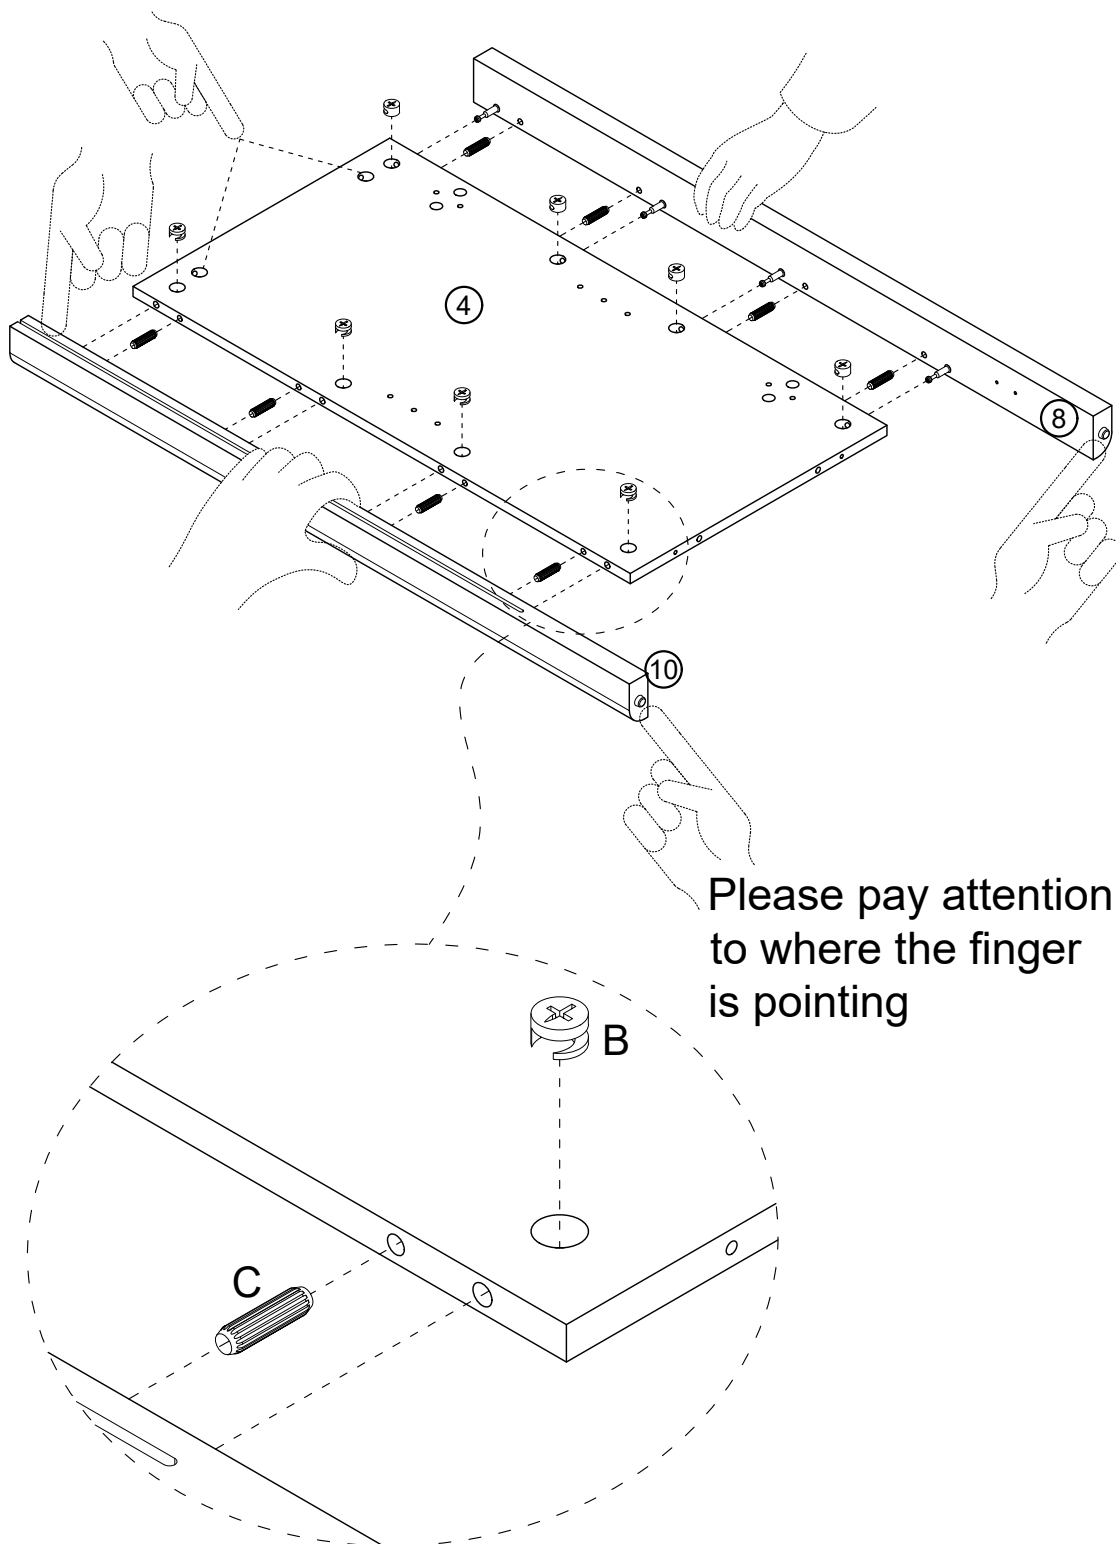


Please pay attention
to where the finger
is pointing

C x 8




B x 8

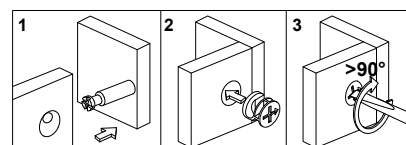


Connect Right hind leg (10), Right front leg (8) and Right Side Panel (4) with Dowel (C), and then lock Cam Nut (B)

STEP 07

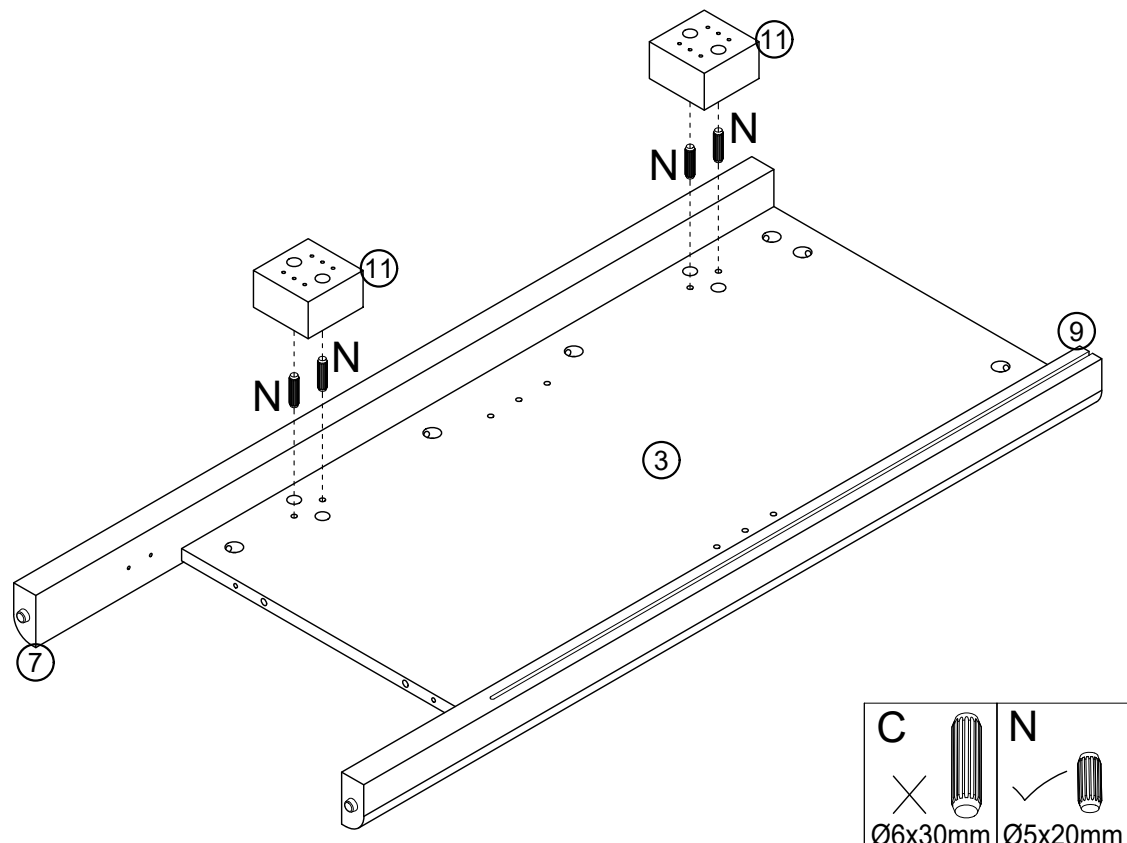


N x 4



Ø5x20mm

Connect Door Hinge Shims (11) and Left Side Panel (3) with Dowel (N)


STEP 08

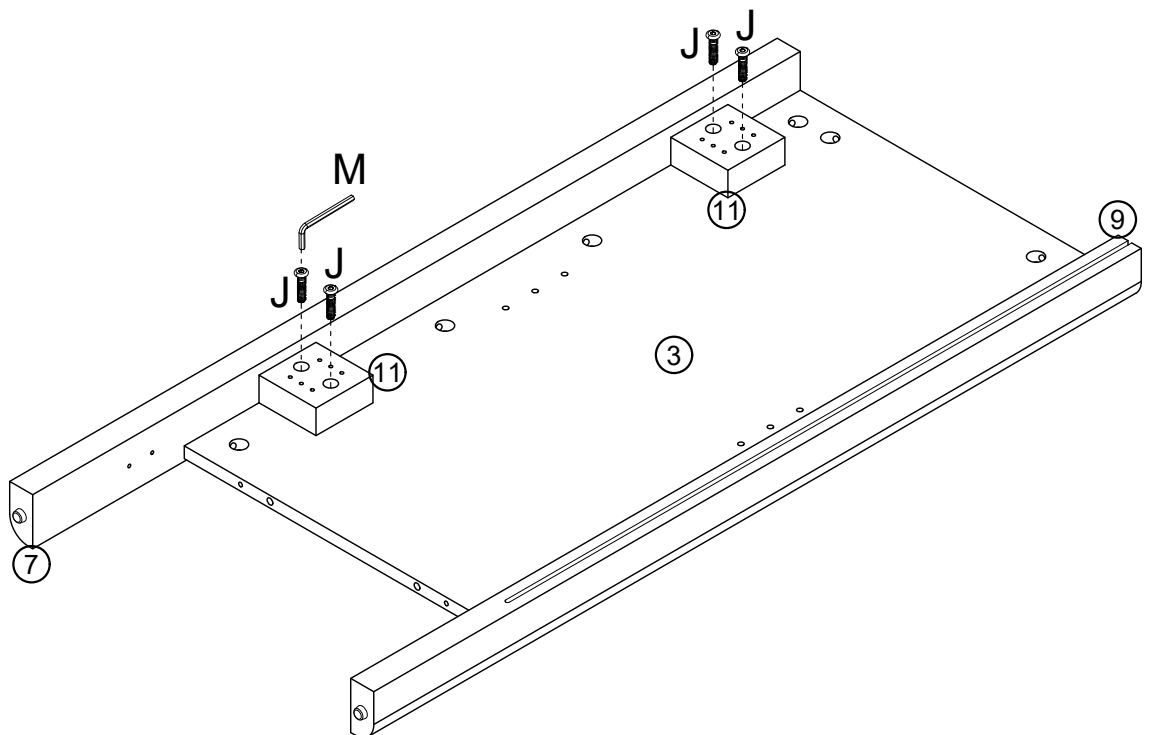

M x 1




J x 4




M6x35mm

Use Bolt (J) to securely Door Hinge Shims (11) onto Left Side Panel (3)

STEP 09

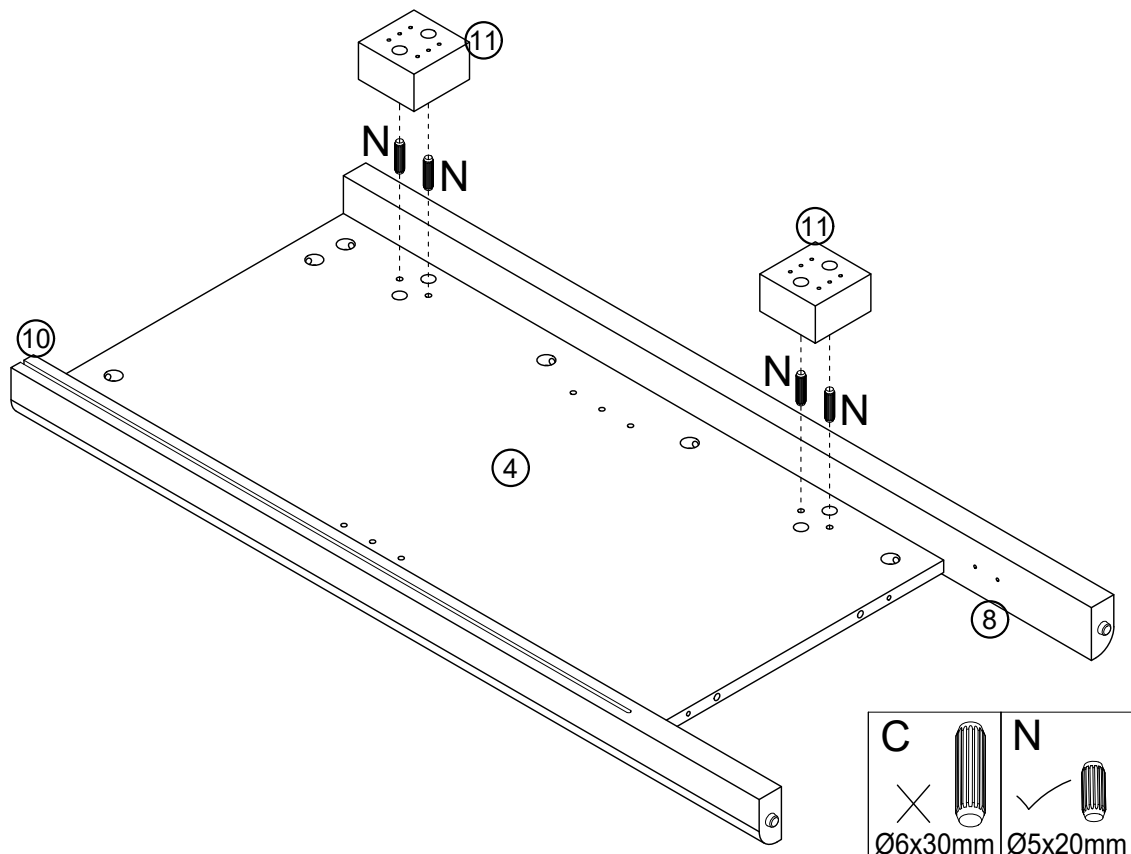


N x 4



Ø5x20mm

Connect Door Hinge Shims (11) and Right Side Panel (4) with Dowel (N)


STEP 10

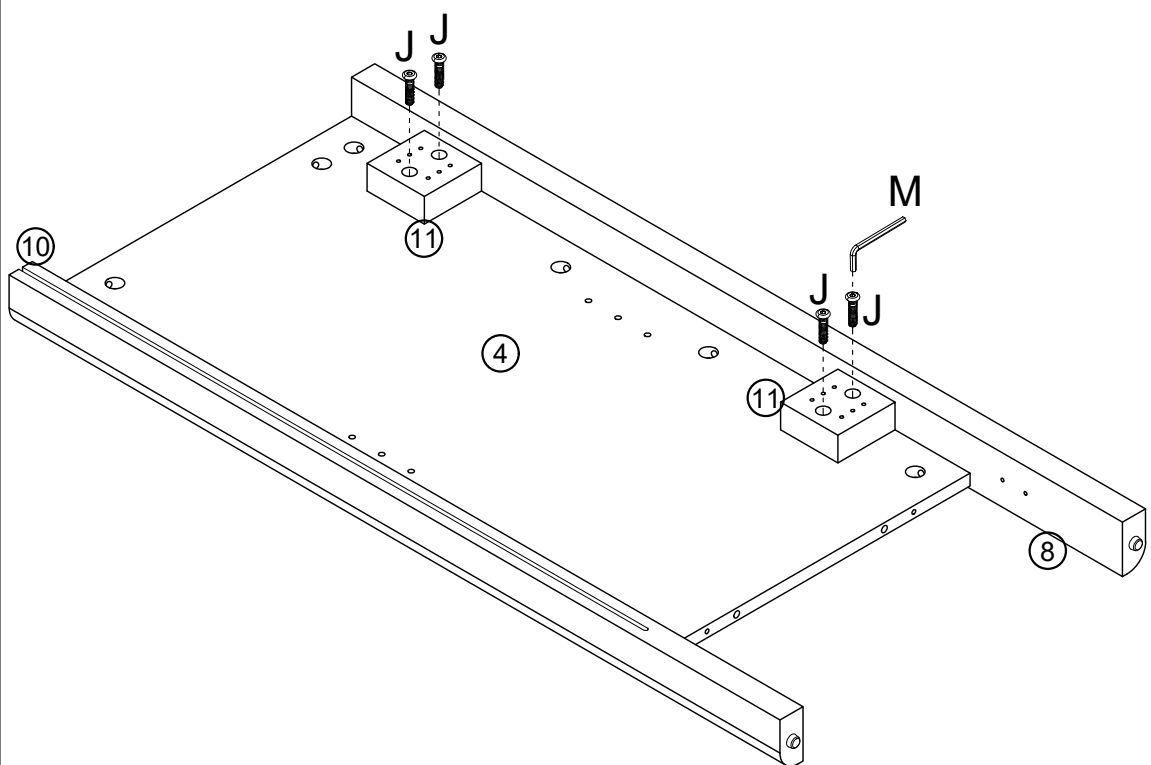

M x 1




J x 4




M6x35mm

Use Bolt (J) to securely Door Hinge Shims (11) onto Right Side Panel (4)

STEP 11

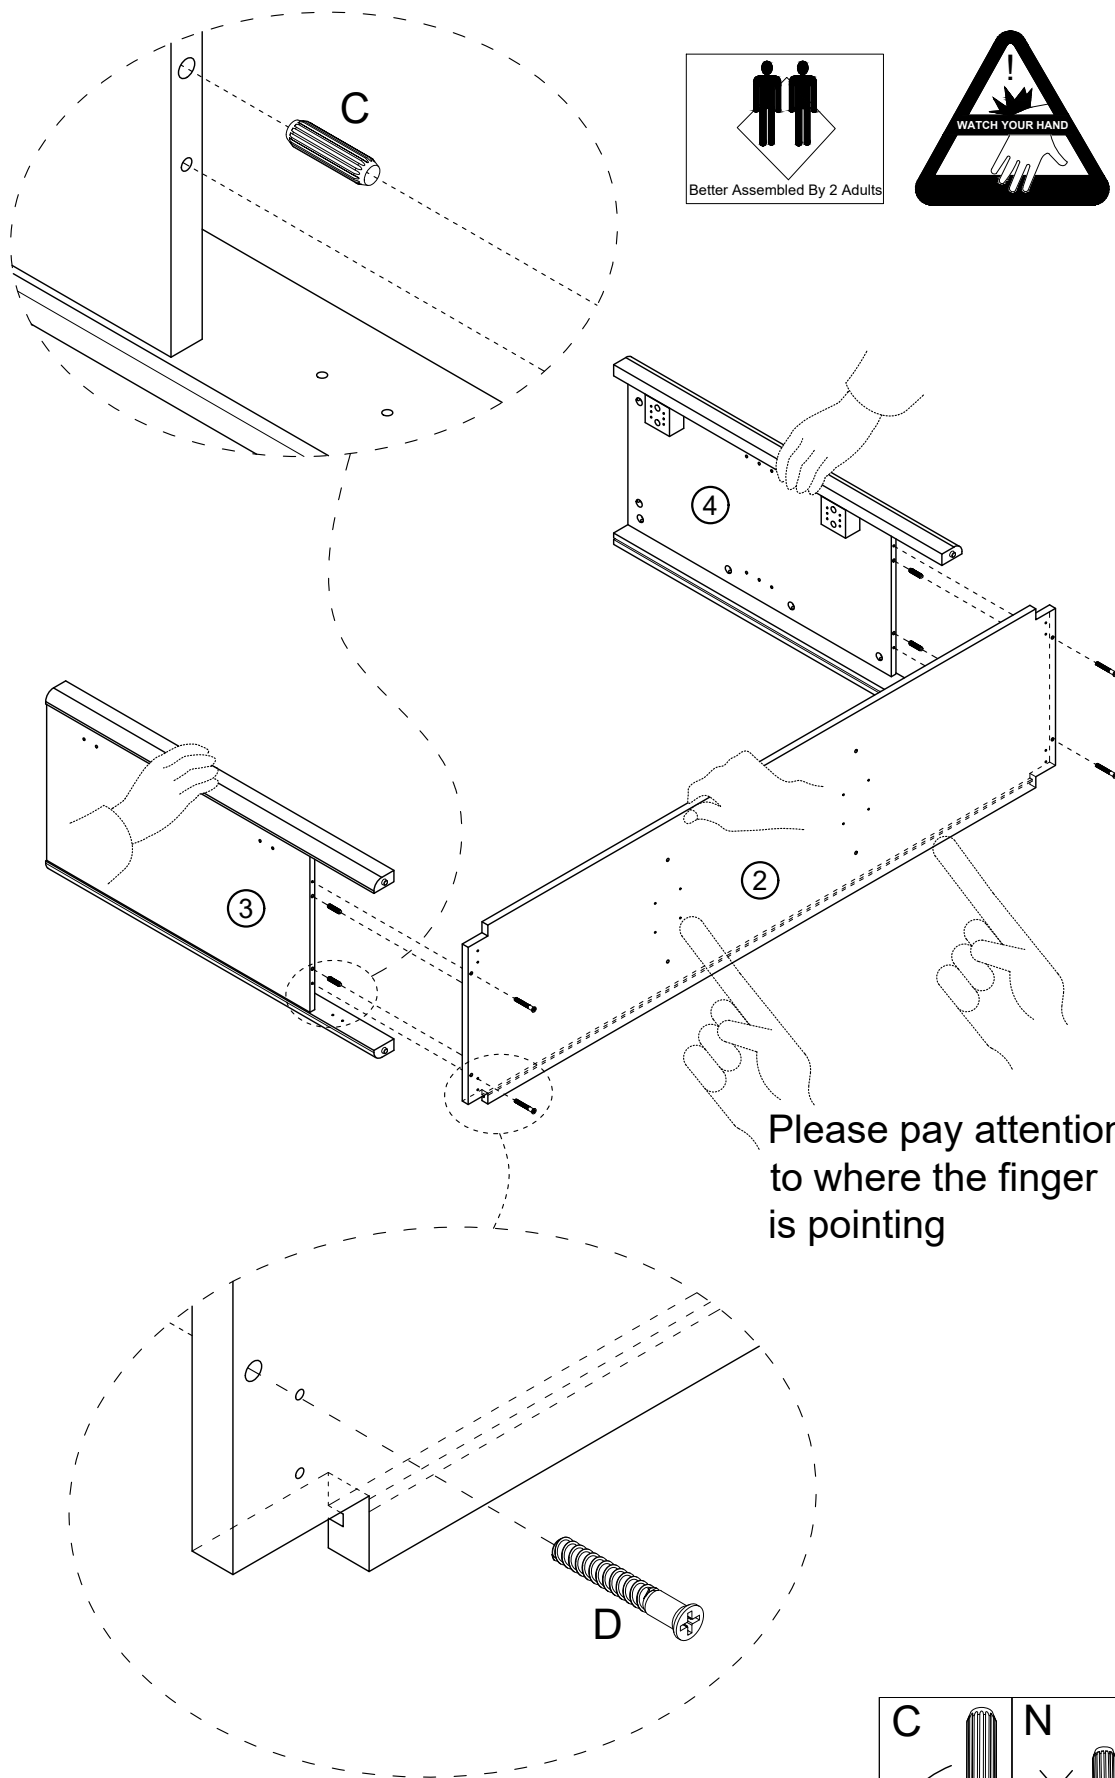


C x 4



Ø6x30mm

D x 4



Ø5x38mm

C



Ø6x30mm

N





Ø5x20mm

Use Dowel (C) to connect Base Plate ((2)) to Left Side Panel ((3)) and Right Side Panel ((4)) then use Screw (D) to secure them in place

STEP 12

T	K	E	S
Ø6xØ3x12	Ø7xØ3.5x12	Ø6xØ3x16	Ø8xØ4x20

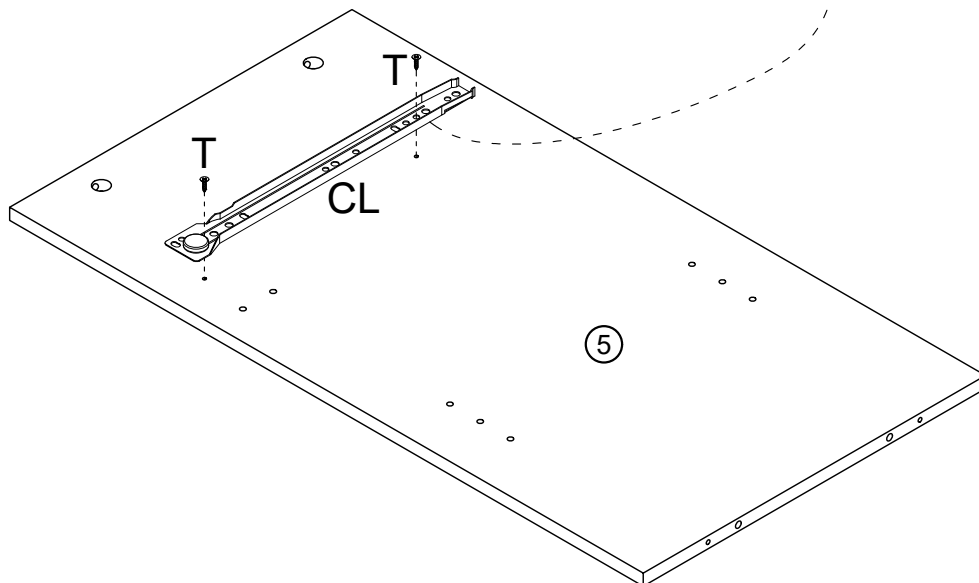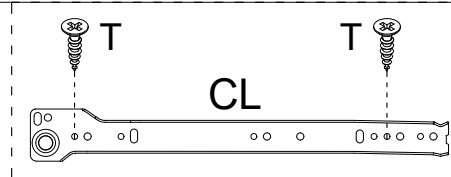

CL x 1

300mm



T x 2





Ø6xØ3x12mm

Install Slide Rail (CL) onto the hole of Left Partition Board (5) and fix them with Screw (T) The installation method is as shown in the figure Please pay attention to the installation direction of the guide rails

STEP 13

T	K	E	S
Ø6xØ3x12	Ø7xØ3.5x12	Ø6xØ3x16	Ø8xØ4x20

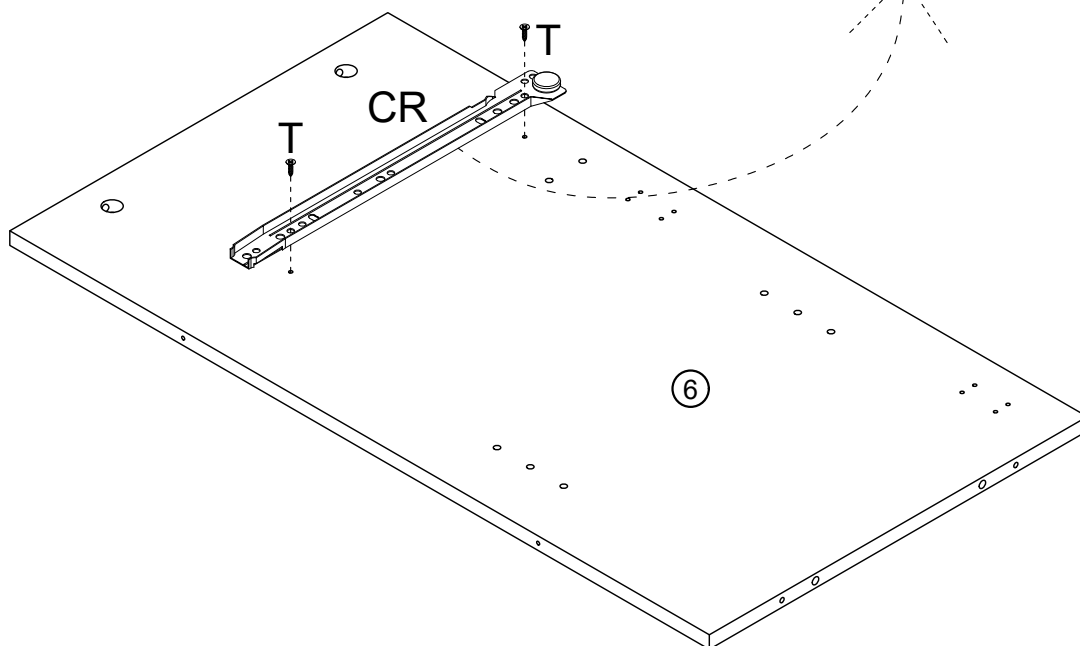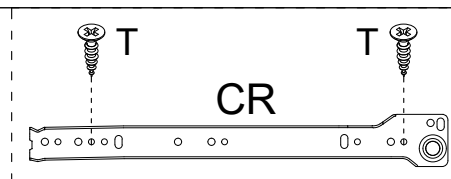


CR x 1

300mm




T x 2



Ø6xØ3x12mm

Install Slide Rail (CR) onto the hole of Right Partition Board (6) and fix them with Screw (T) The installation method is as shown in the figure Please pay attention to the installation direction of the guide rails

STEP 14

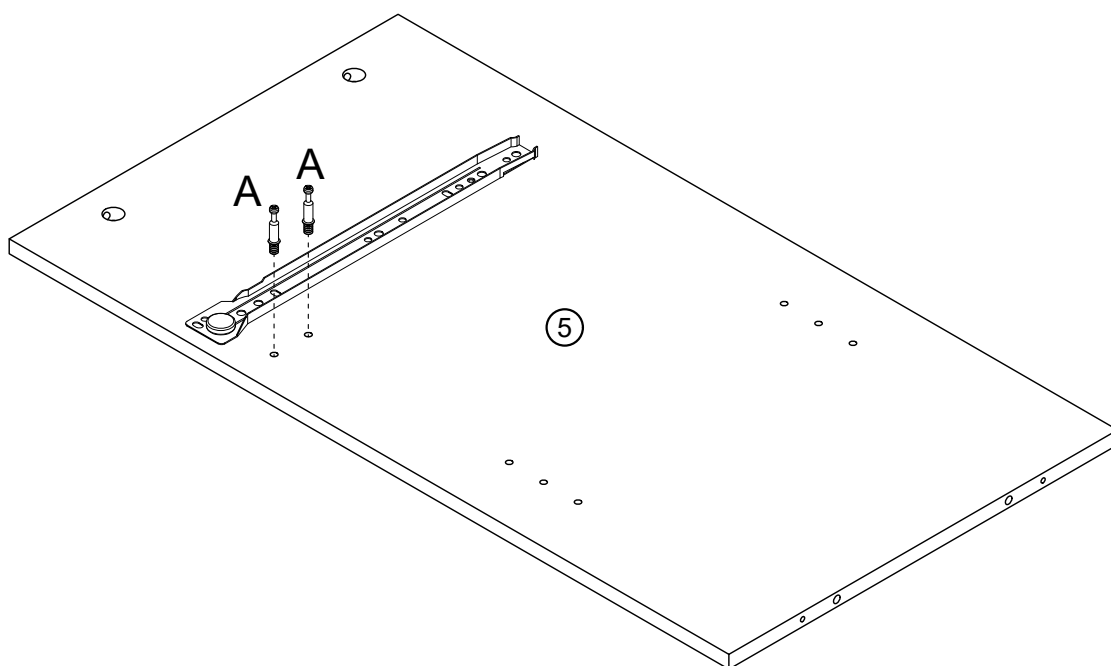


A x 2



Ø6x35mm

Fix Cam Bolt (A) onto Left Partition Board (⑤)

STEP 15

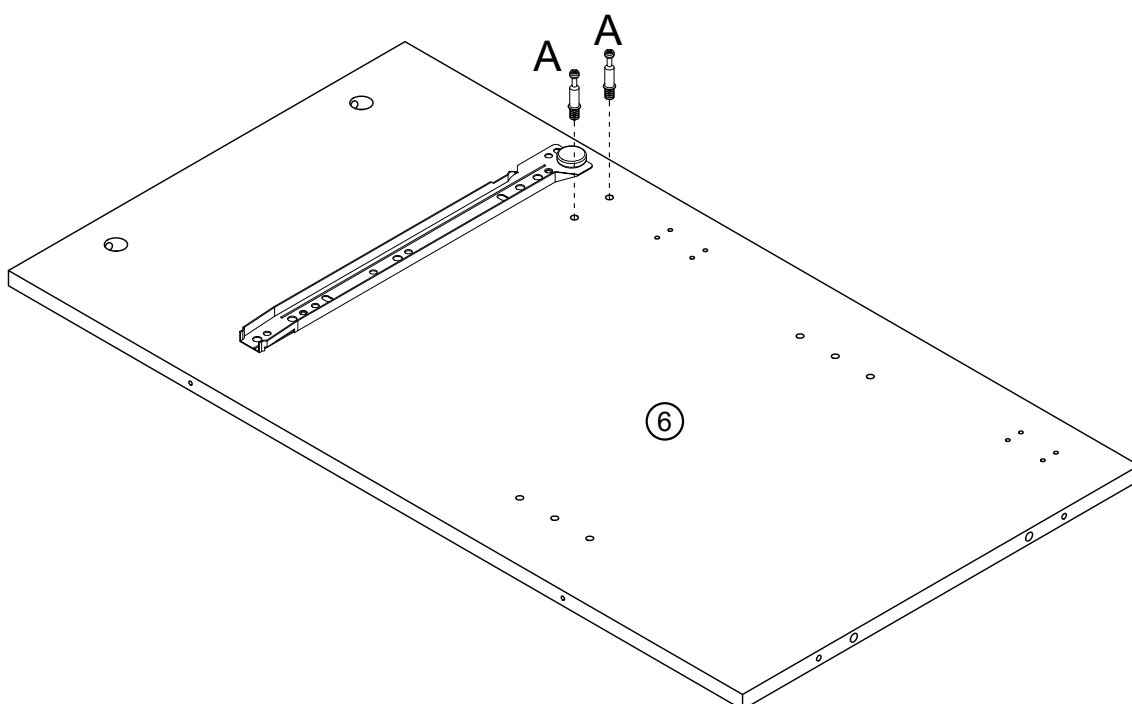

A x 2





Ø6x35mm




Fix Cam Bolt (A) onto Right Partition Board (⑥)

STEP 16

Disassembly diagram

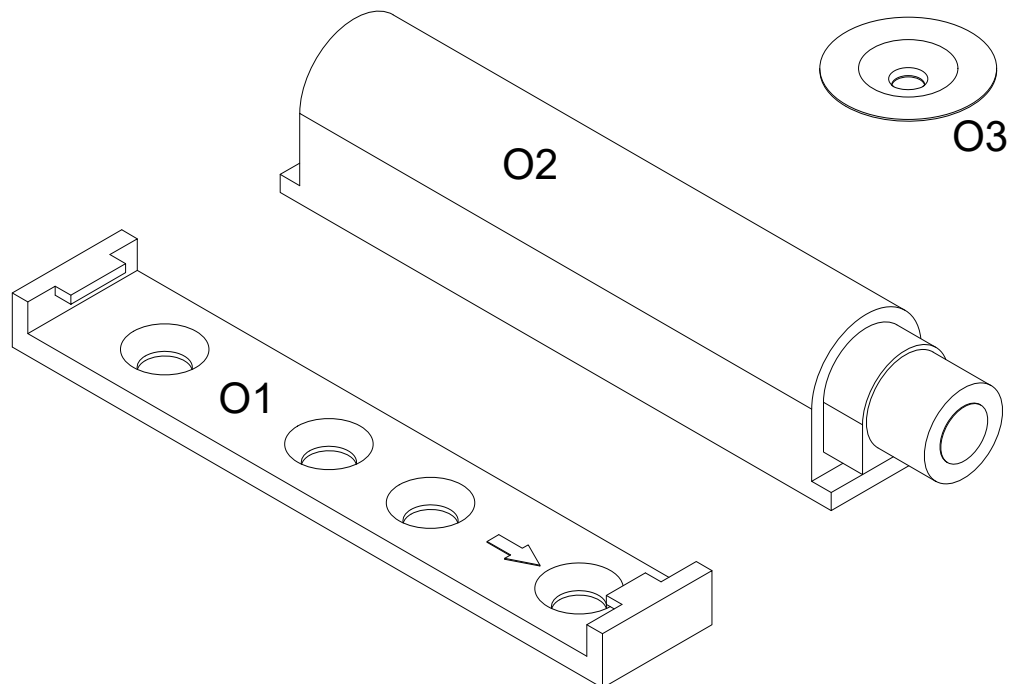


STEP 17

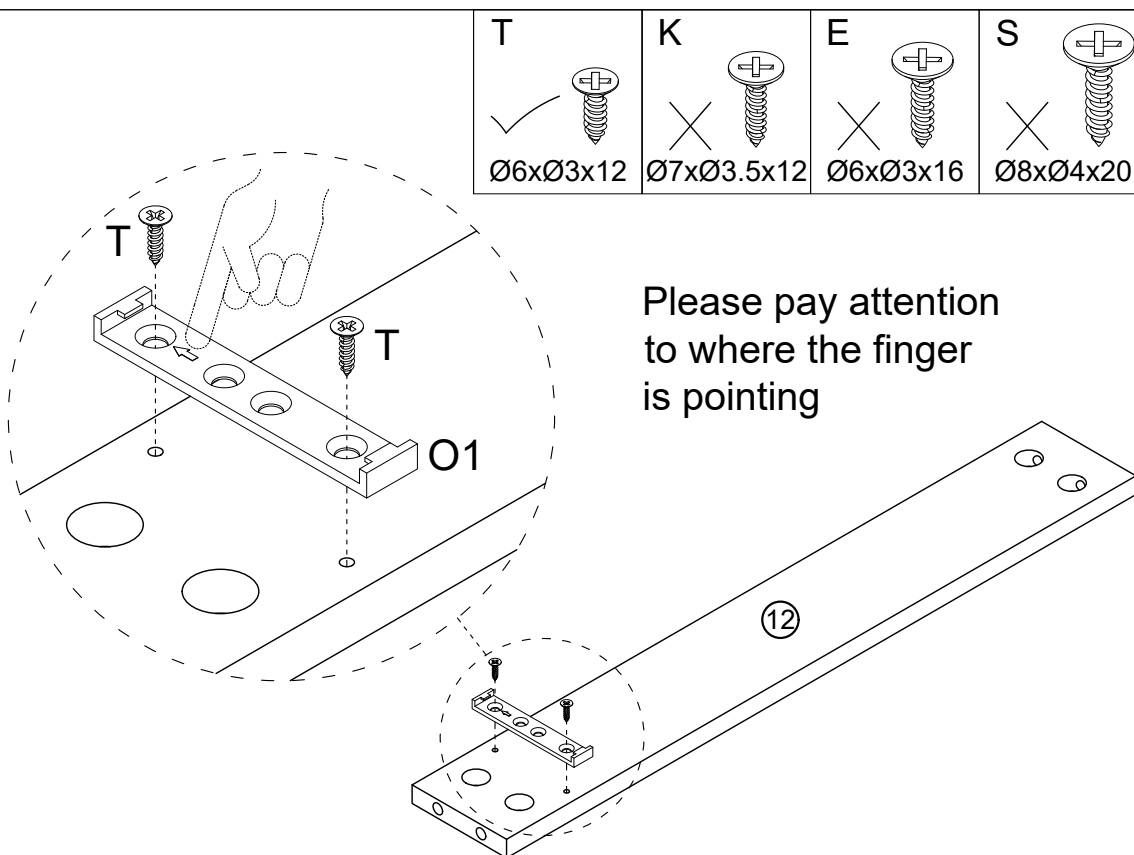


Use Screw (T) to securely Push-to-Open Latch (O1) onto Connecting plate (12)

STEP 18

Please pay attention
to where the finger
is pointing

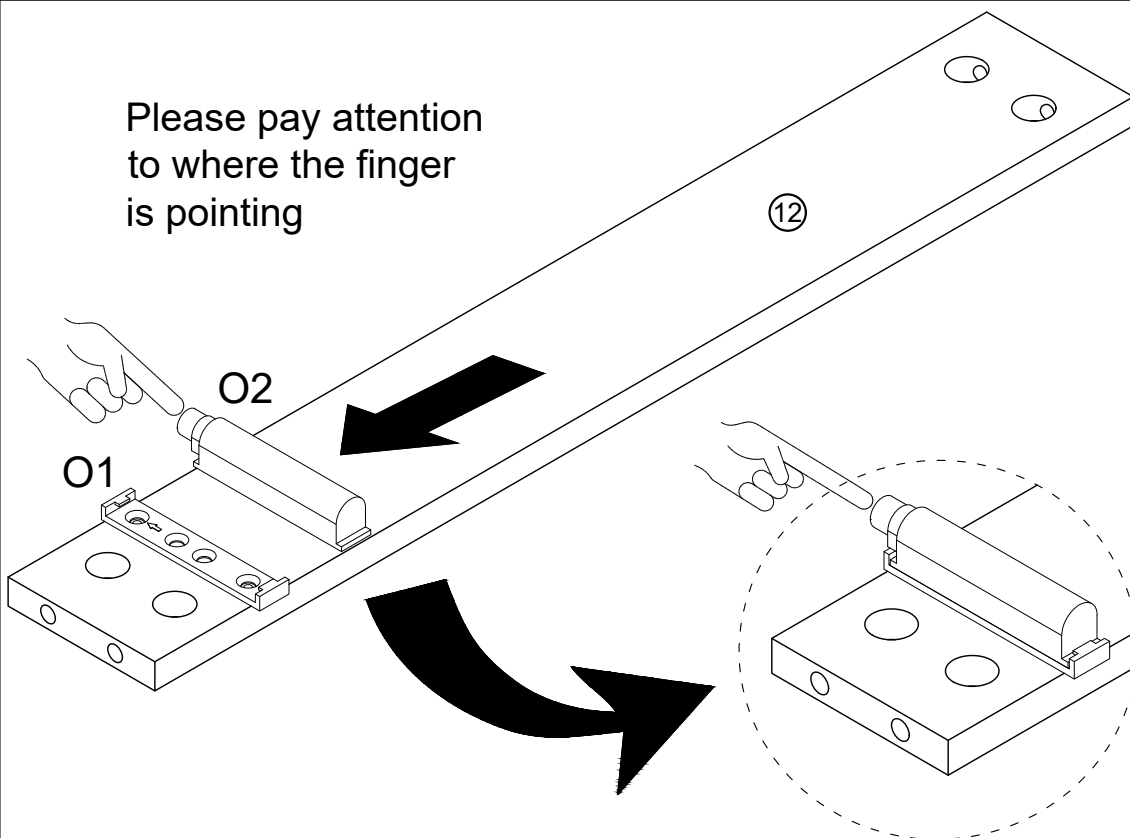


O2 x 1



Push the (O2) level into (O1) and align it with (O1)
The completed effect is shown in the figure on the right

STEP 19

Please pay attention
to where the finger
is pointing

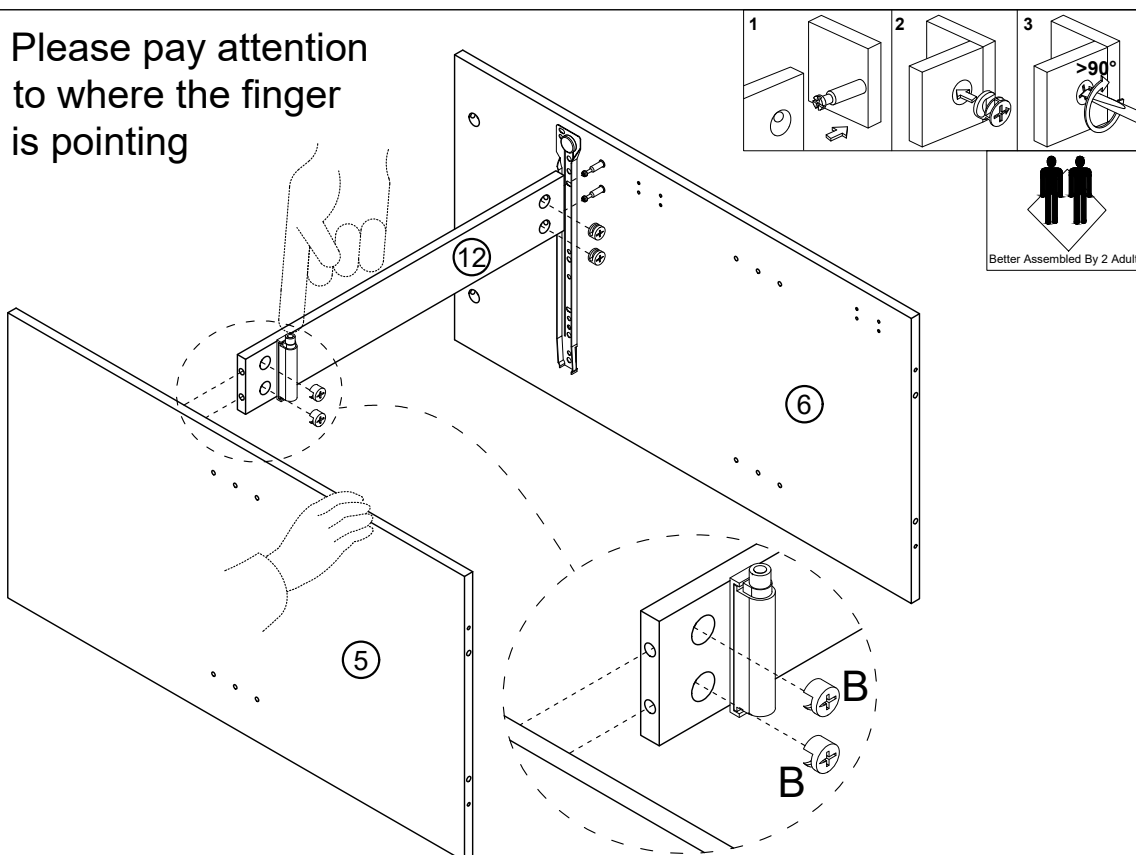



B x 4




Ø15x10mm

Connect Connecting plate ((12)) to Left Partition Board ((5)) and
Right Partition Board ((6)) Install and turn Nuts (B)
to secure position as shown

STEP 20

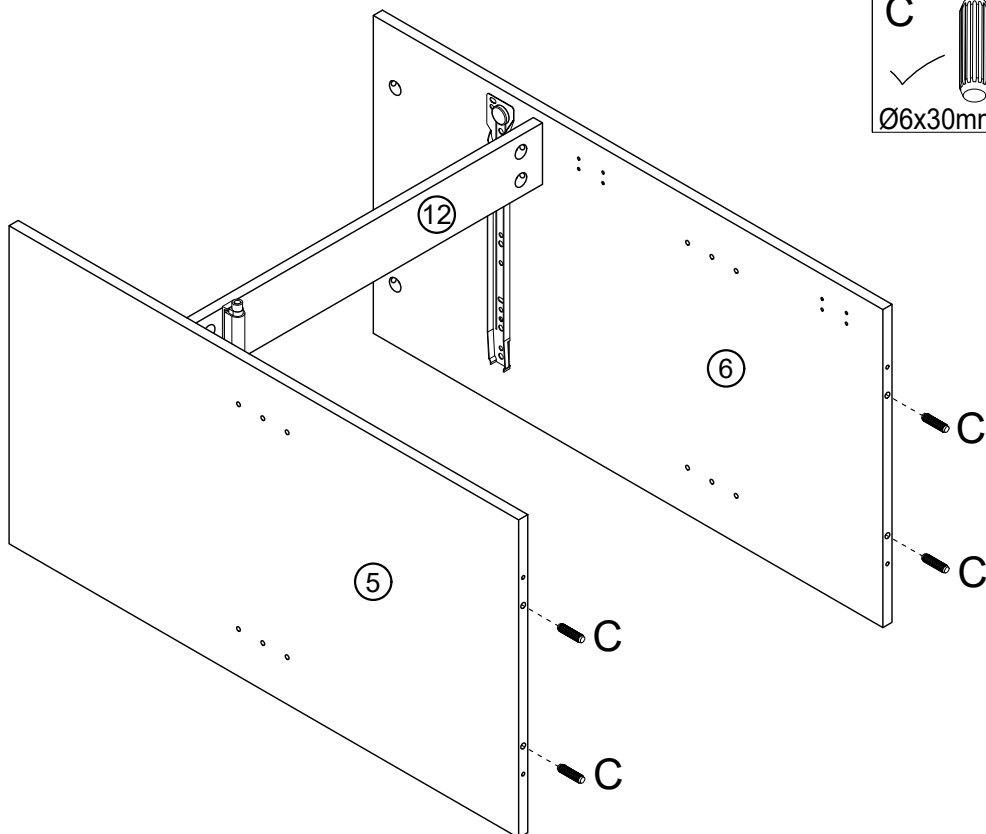


C x 4



Ø6x30mm


Place Dowel (C) into the correct hole position

STEP 21

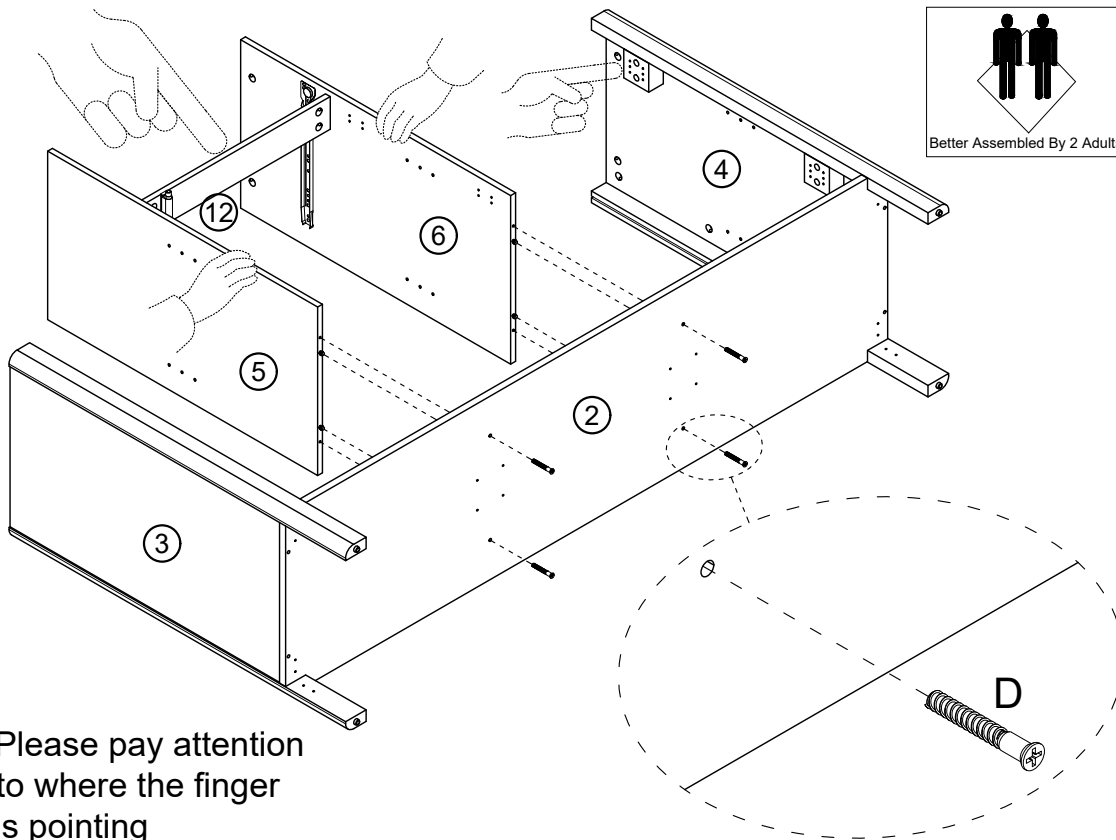

Please pay attention
to where the finger
is pointing


D x 4




Ø5x38mm

Align Base Plate (②) precisely to the correct hole
position and press it tightly, then lock Screw (D)

STEP 22

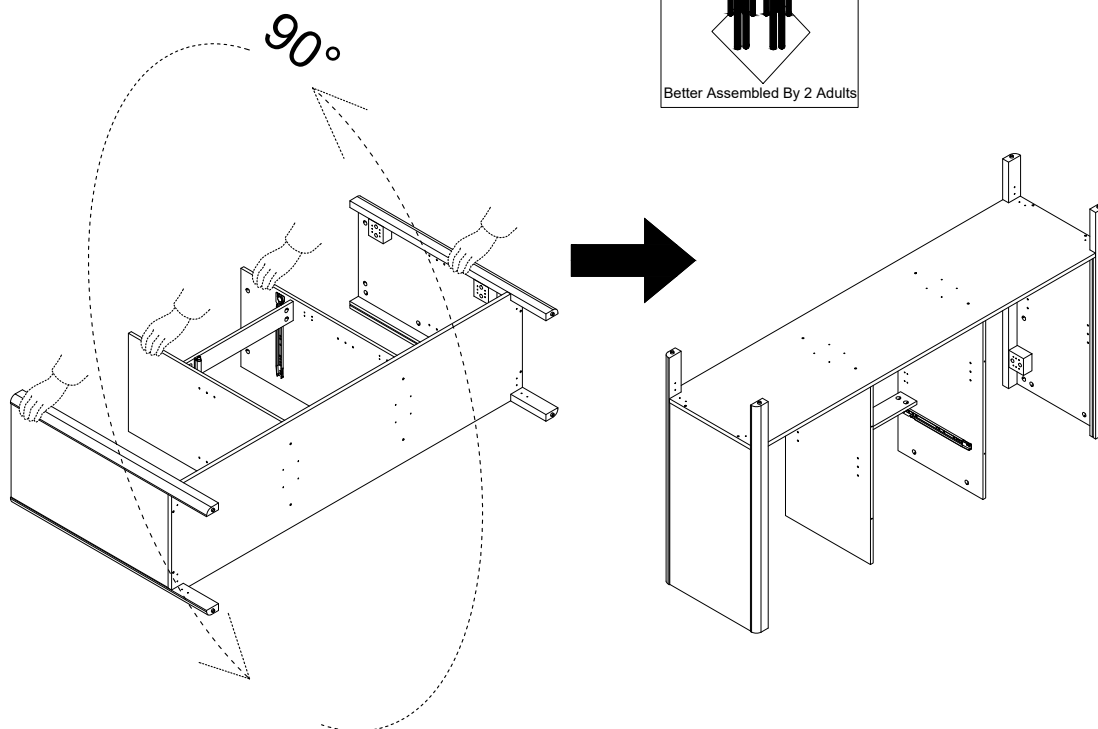


STEP 23

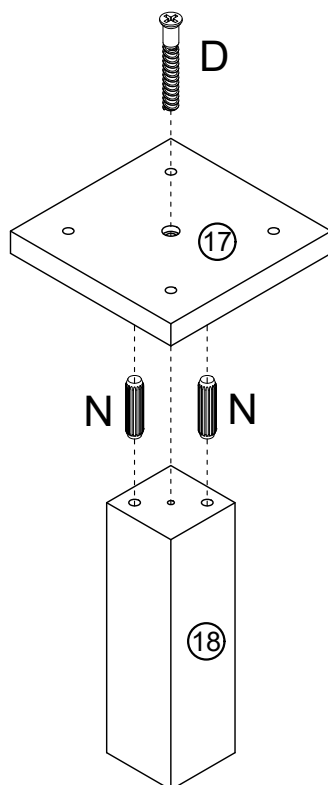

x2

N x 4




Ø5x20mm

D x 2





Ø5x38mm





Fix Foot pillar panel (17) onto Support Feet (18) using pin Dowel (N) and then lock it in place using screw (D)

STEP 24

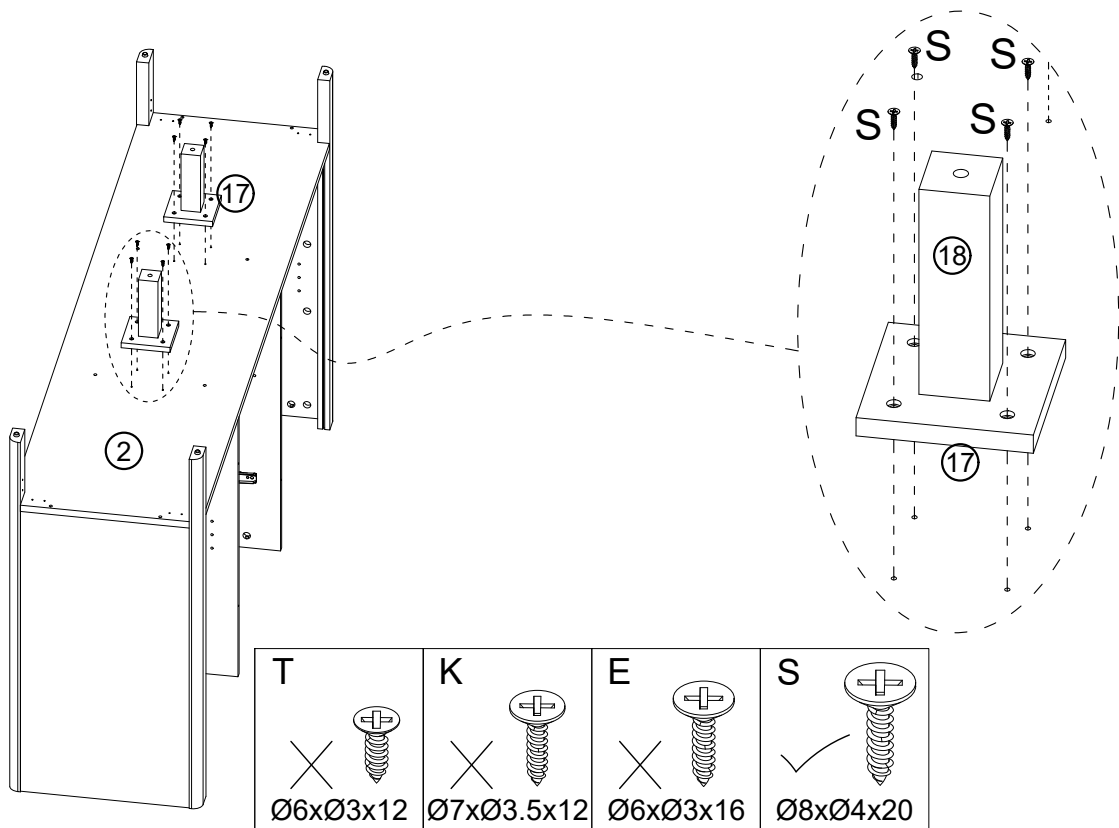

Use Screw (S) to Foot pillar panel (17) onto Base Plate (2)


STEP 25

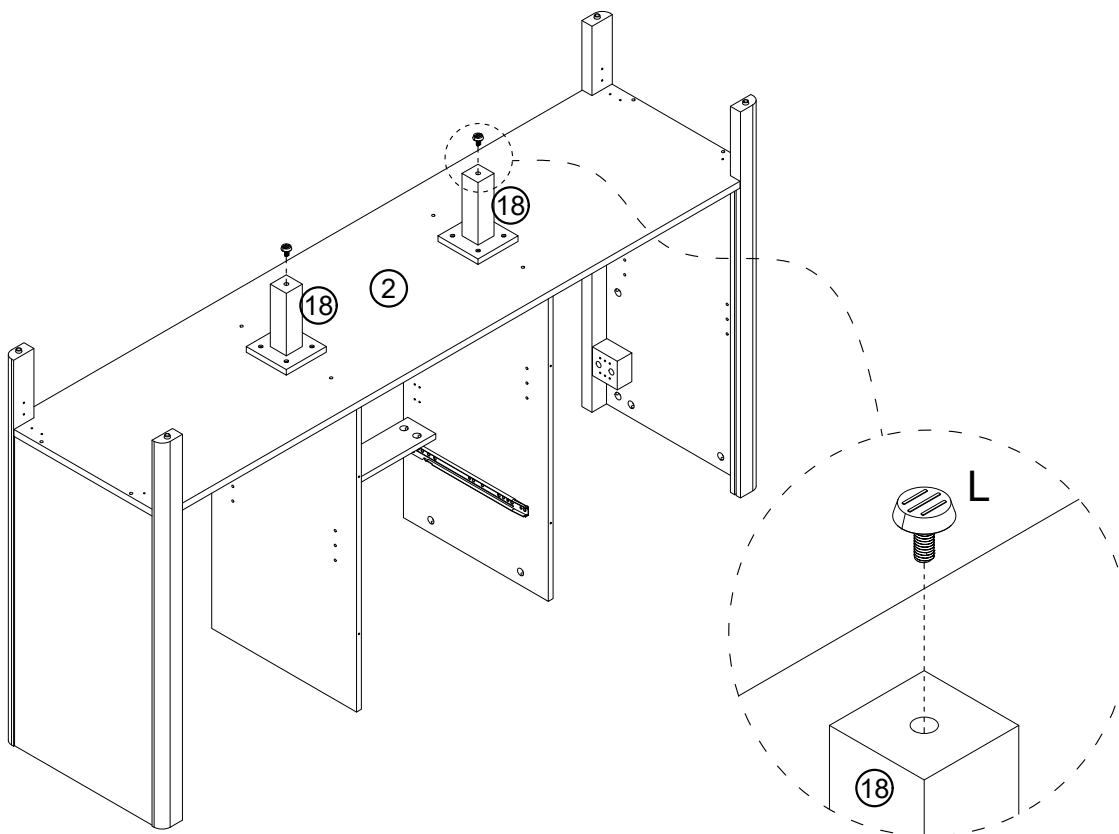


Tighten Screw-in Leveling Feet (L) onto Support Feet (18)

STEP 26

R		P	
✓	Ø8xØ4x12	✗	Ø8xØ4x38

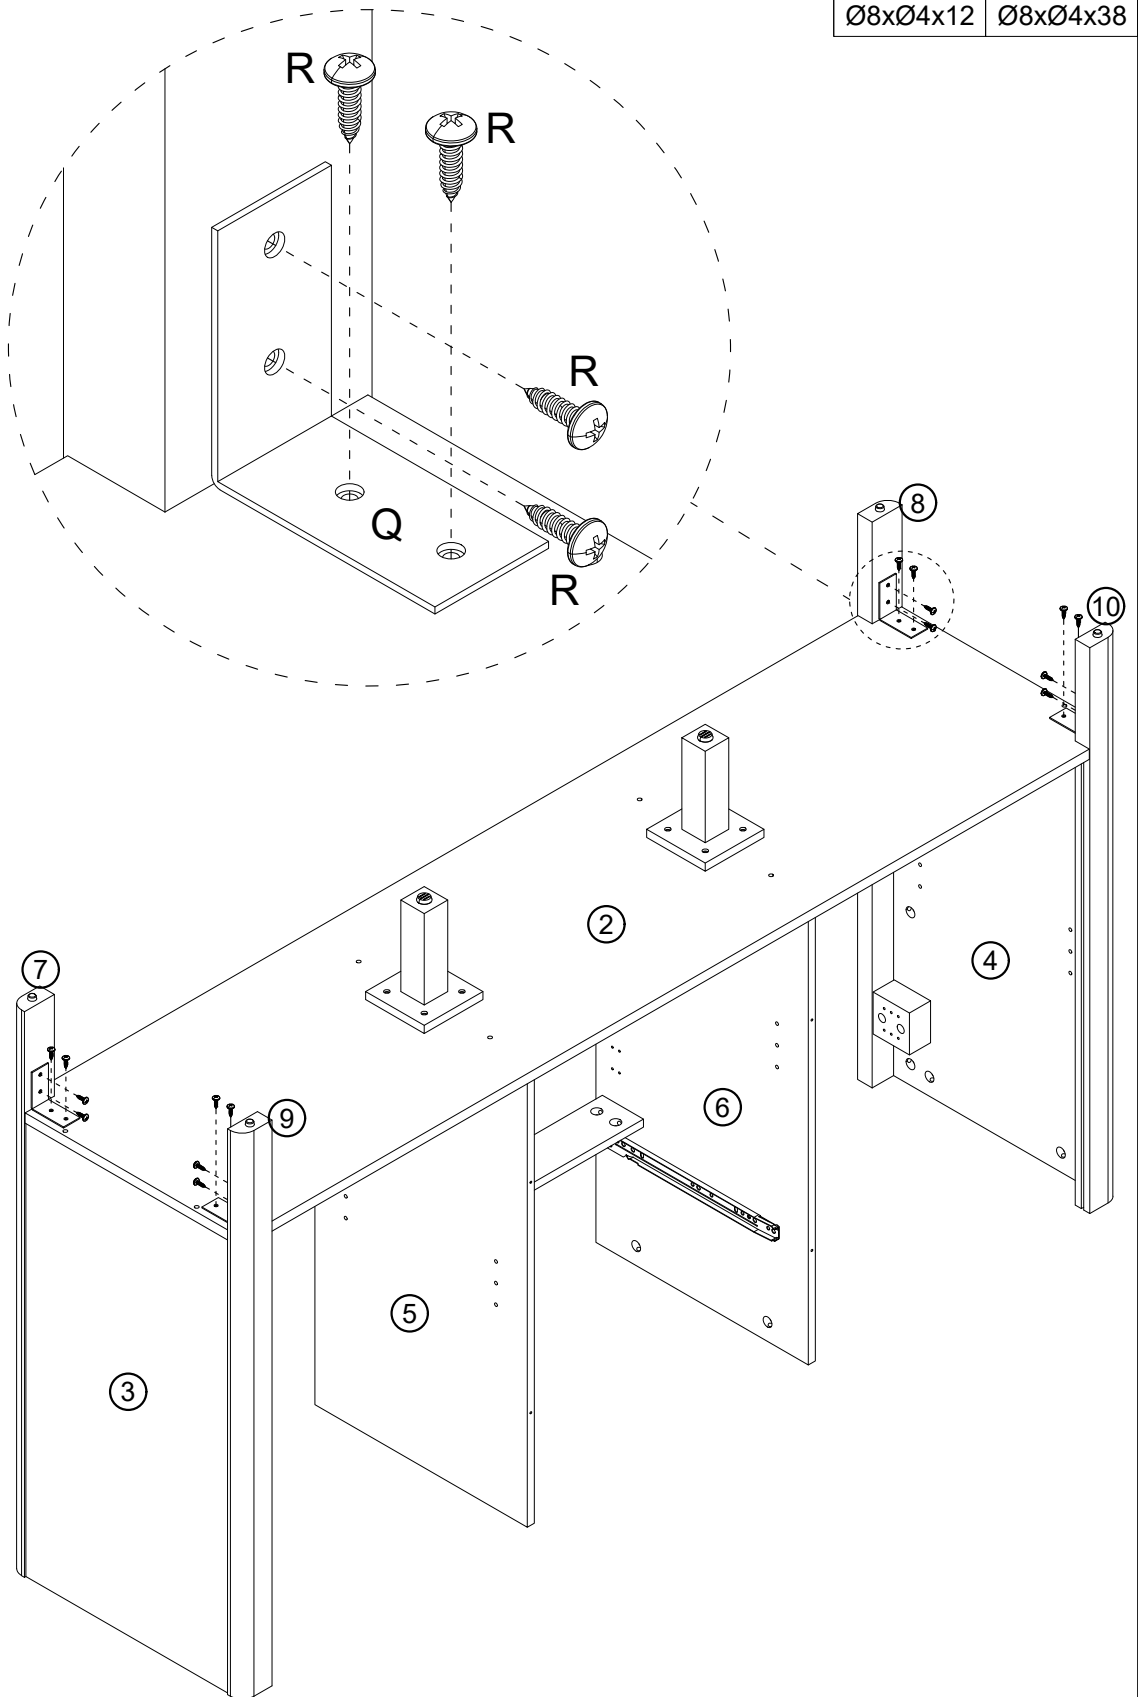

Q x 4




R x 16




Ø8xØ4x12mm

Connect 90-Degree Angle Bracket (Q) to (R) on pins Left front leg (7) Right front leg (8) Left hind leg (9) Right hind leg (10) and Base Plate (2)

STEP 27

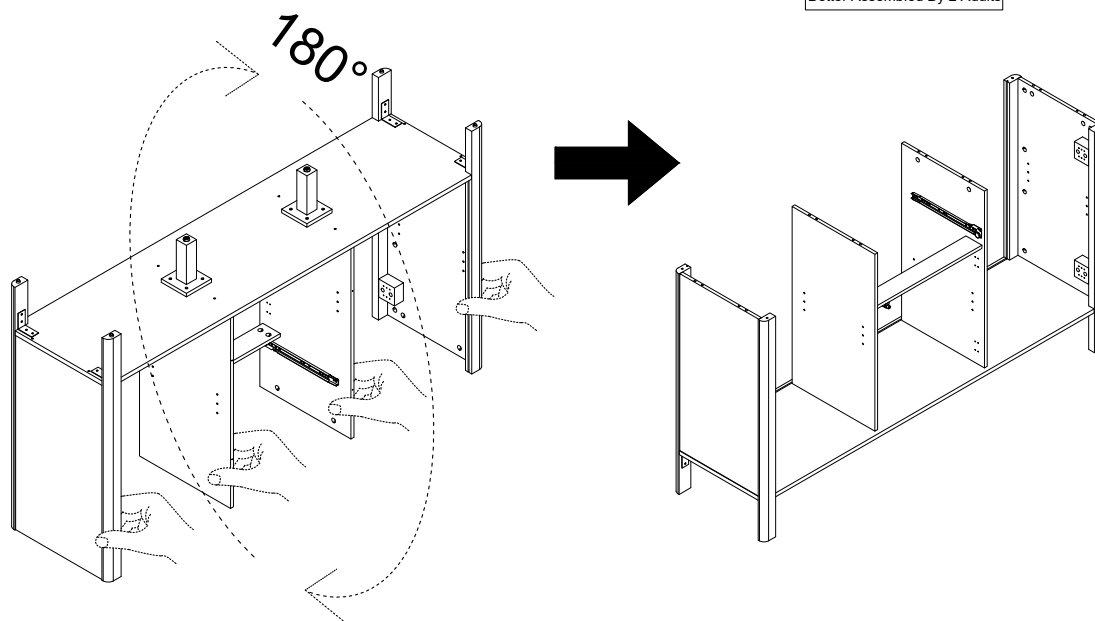


STEP 28

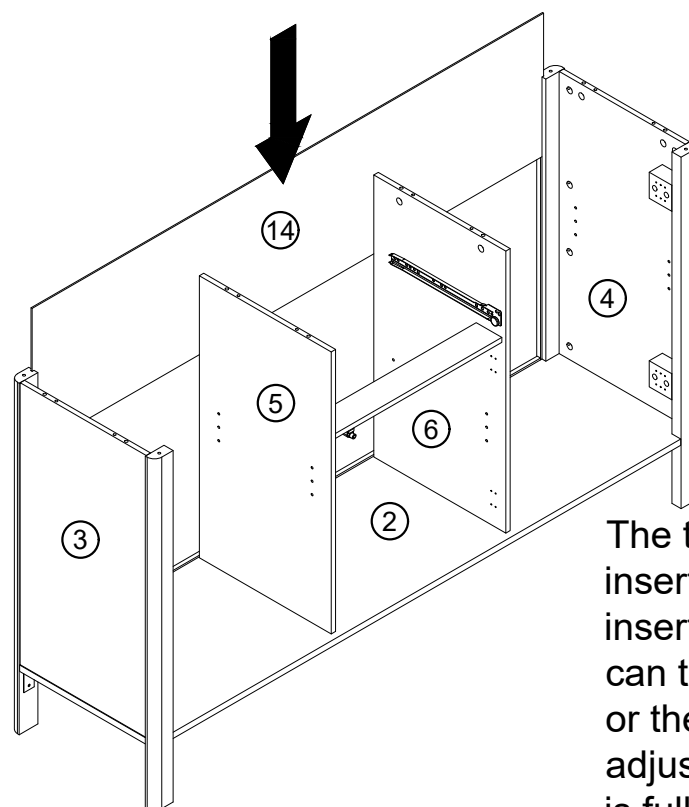

The thin plate needs to be fully inserted into the groove. If the insertion is not smooth, you can try pressing from the front or the back to make adjustments until the thin plate is fully inserted into the groove



Insert Below Back Panel (14) into the corresponding slot

STEP 29

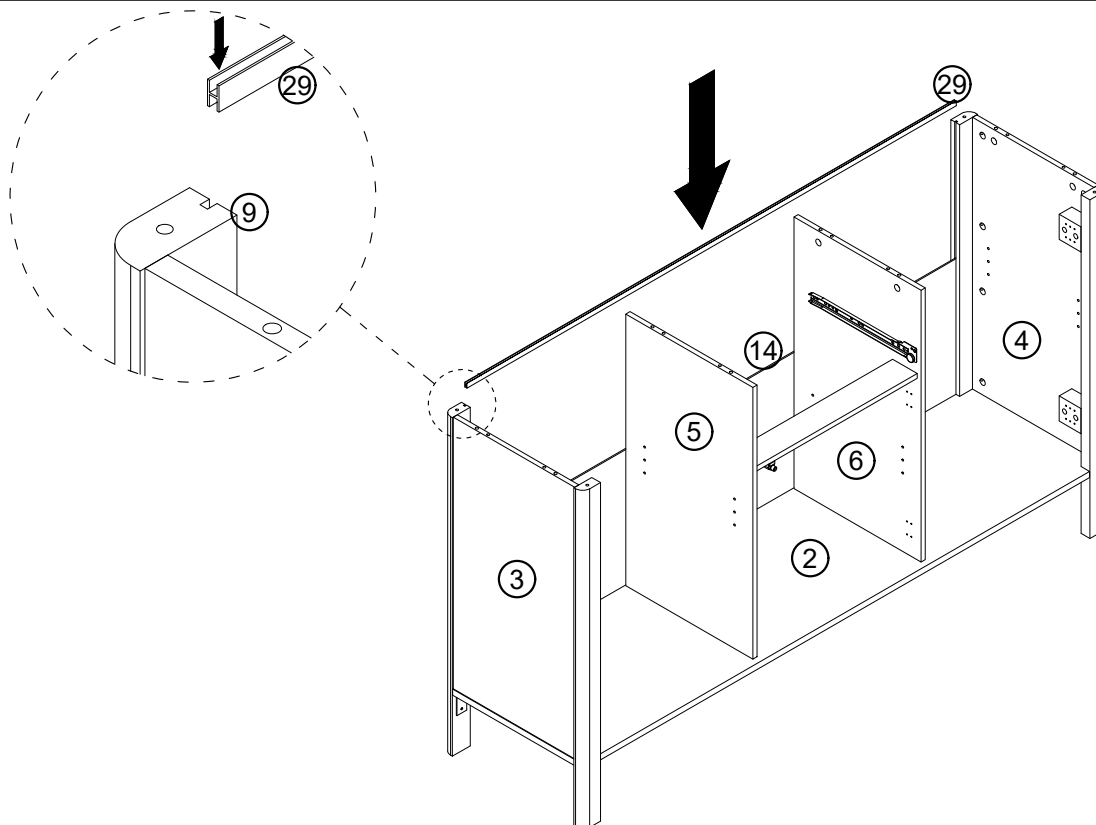

Insert the slot on Backboard H-shaped clamp strip (29) into Below Back Panel (14)


STEP 30

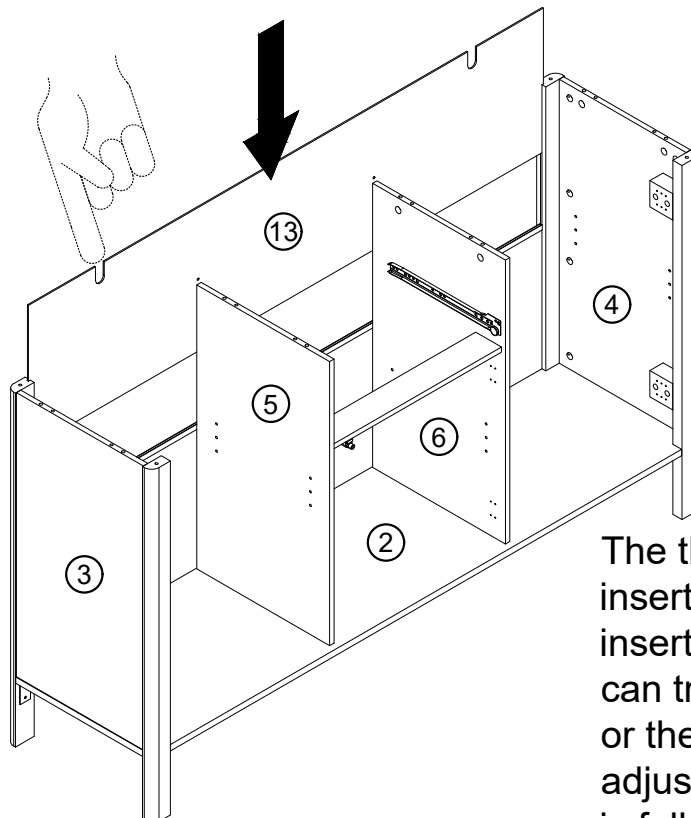

The thin plate needs to be fully inserted into the groove. If the insertion is not smooth, you can try pressing from the front or the back to make adjustments until the thin plate is fully inserted into the groove

Insert Upper Back Panel (13) into the corresponding slot

STEP 31

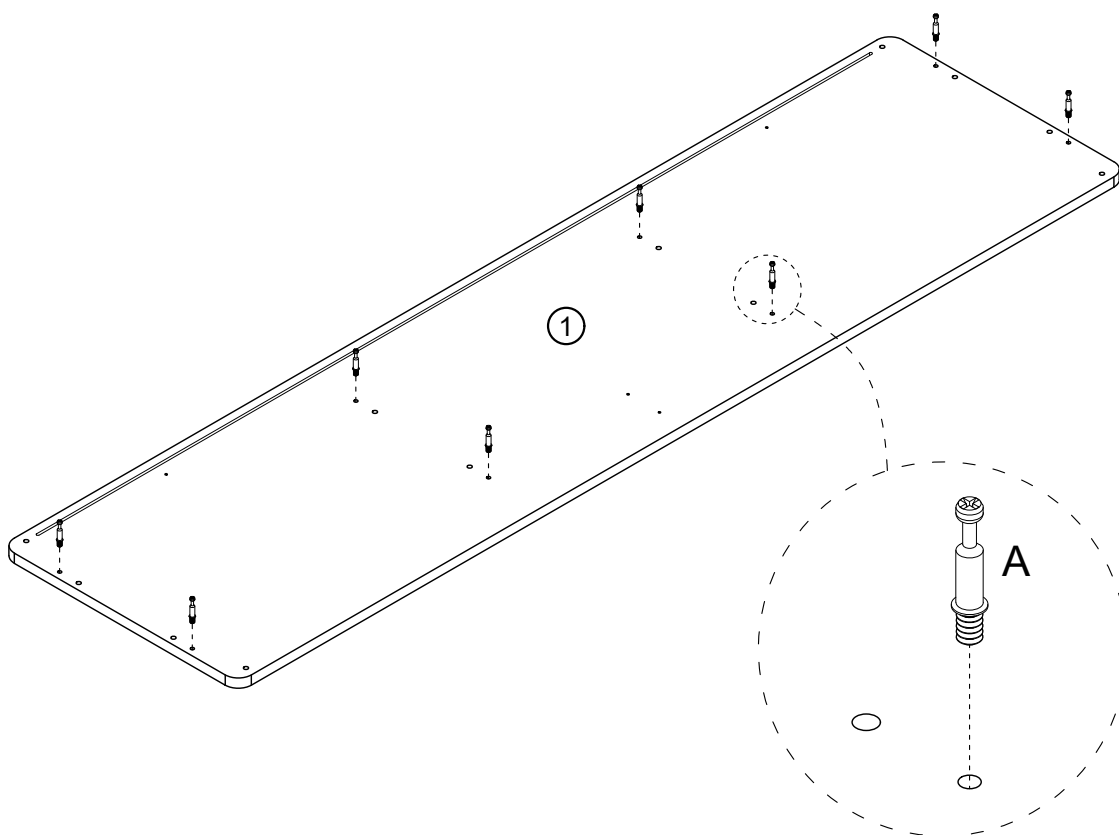


A x 8



Ø6x35mm

Fix Cam Bolt (A) onto Panel (1)

STEP 32

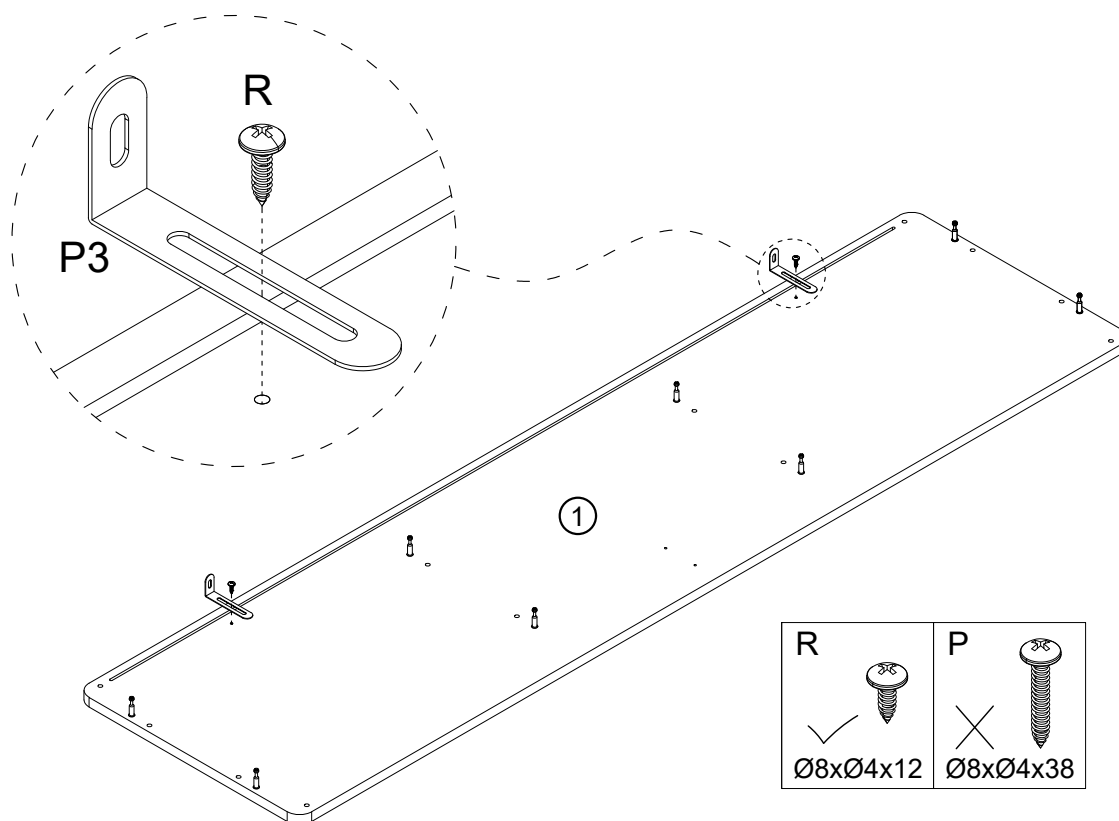


R x 2



Ø8xØ4x12mm

P x 2


P3




Use Screw (R) to securely Anti-Tip Hardware Kit (P3) onto Panel (1)

STEP 33

Please pay attention
to where the finger
is pointing

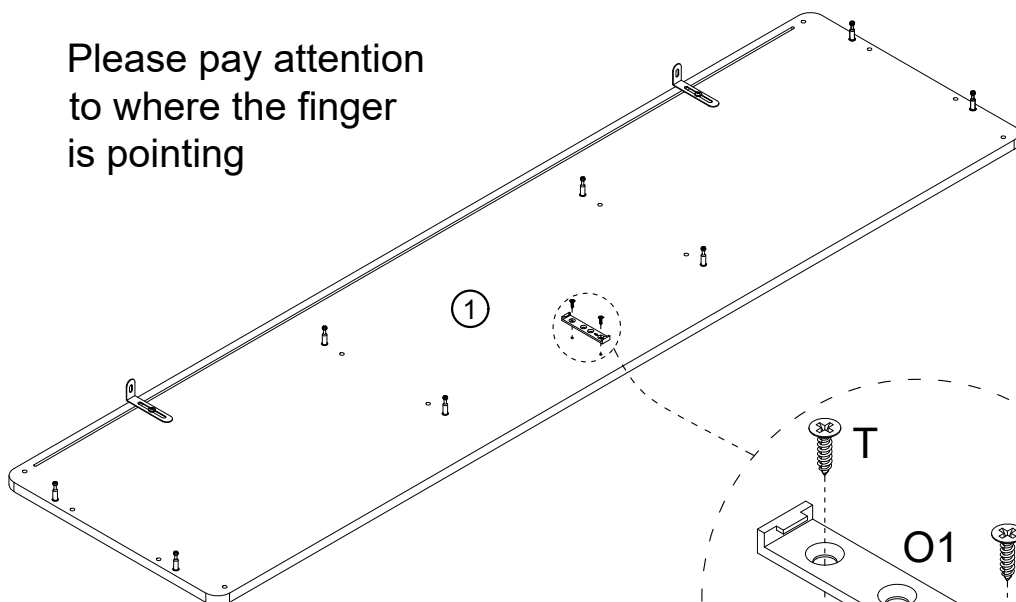

O1 x 1




T x 2




Ø6xØ3x12mm

T




Ø6xØ3x12

K




Ø7xØ3.5x12

E



Ø6xØ3x16


S




Ø8xØ4x20

Use Screw (T) to securely Push-to-Open Latch (O1)
onto Panel (①)


STEP 34

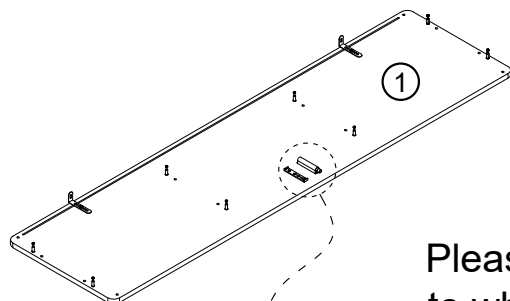

Please pay attention
to where the finger
is pointing

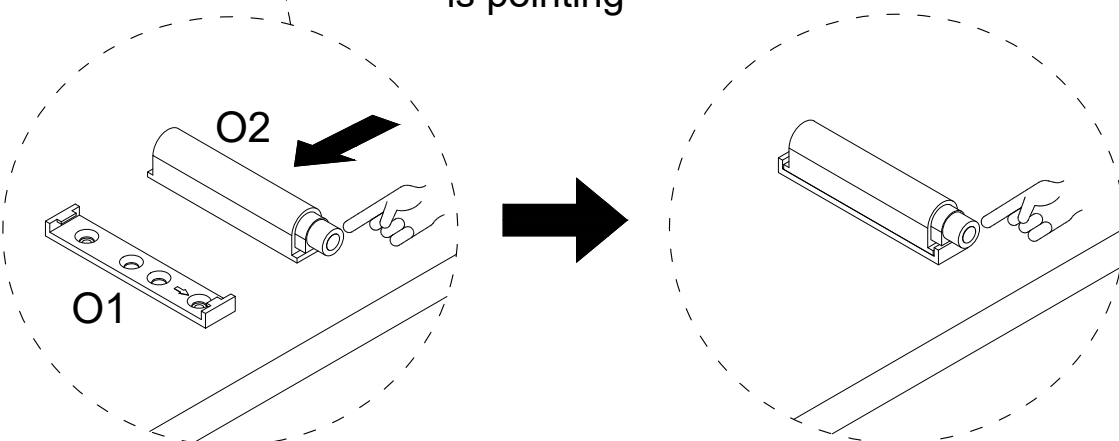


O2 x 1



Push the (O2) level into (O1) and align it with (O1)
The completed effect is shown in the figure on the right

STEP 35

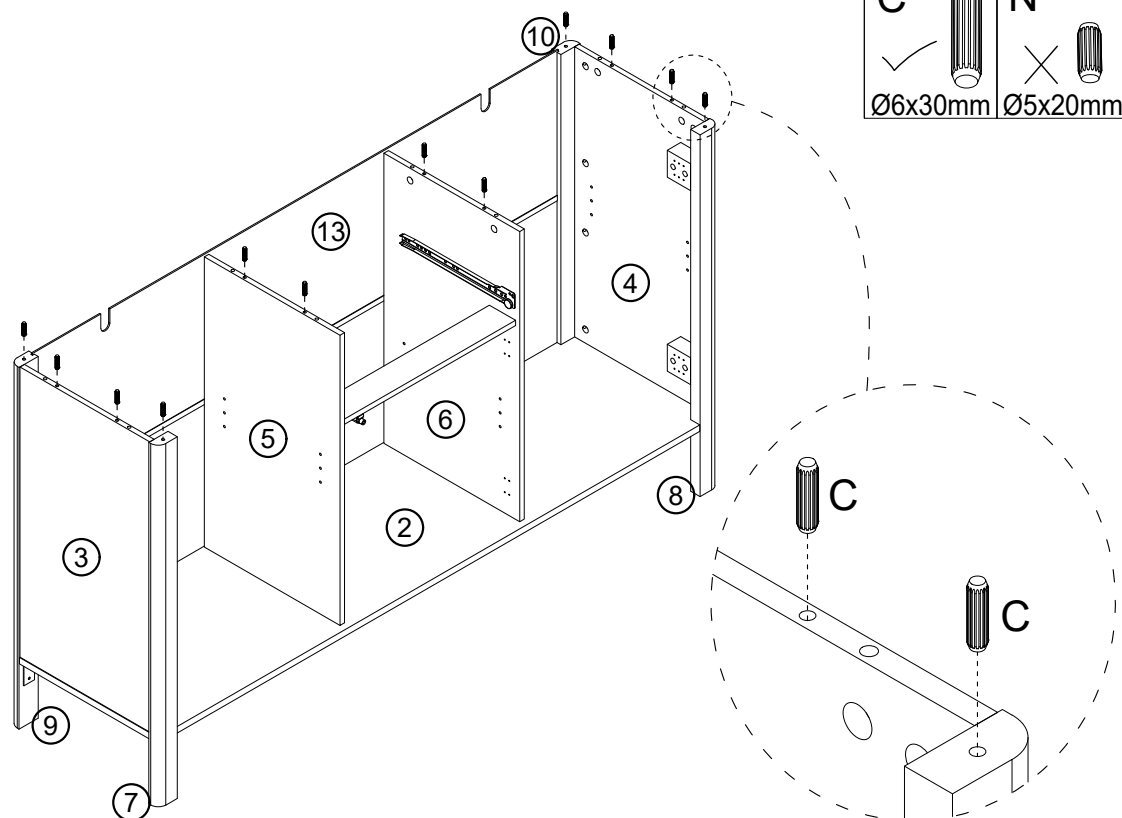



C x 12



Place Dowel (C) into the correct hole position

STEP 36


Please pay attention to where the finger is pointing

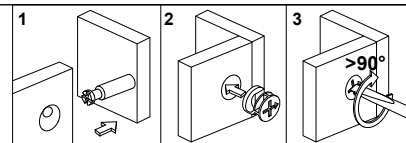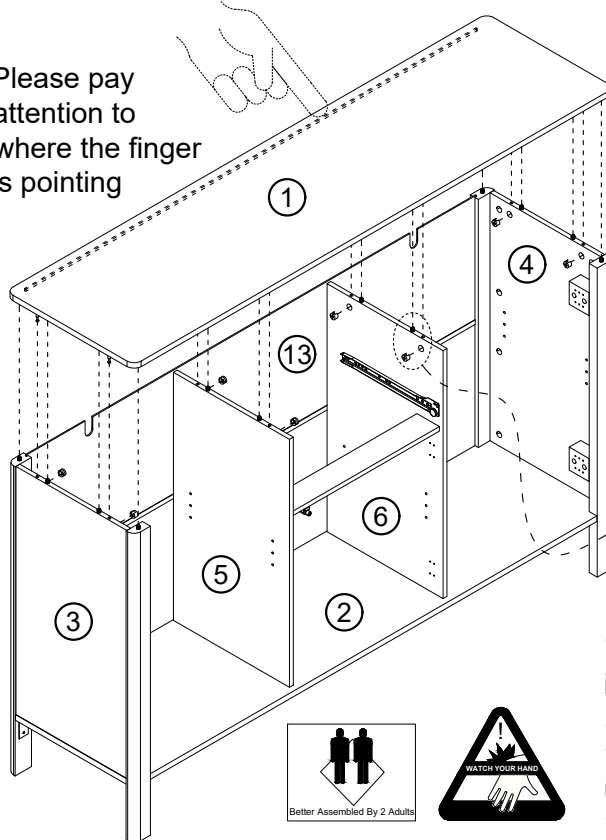

The thin plate needs to be fully inserted into the groove. If the insertion is not smooth, you can try pressing from the front or the back to make adjustments until the thin plate is fully inserted into the groove





B x 8




Connect Panel (1) to Left Side Panel (3) and Right Side Panel (4) and Left Partition Board (5) and Right Partition Board (6)
Install and turn Nuts (B)

STEP 37

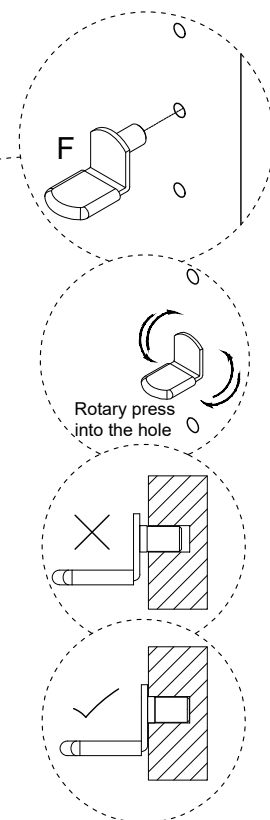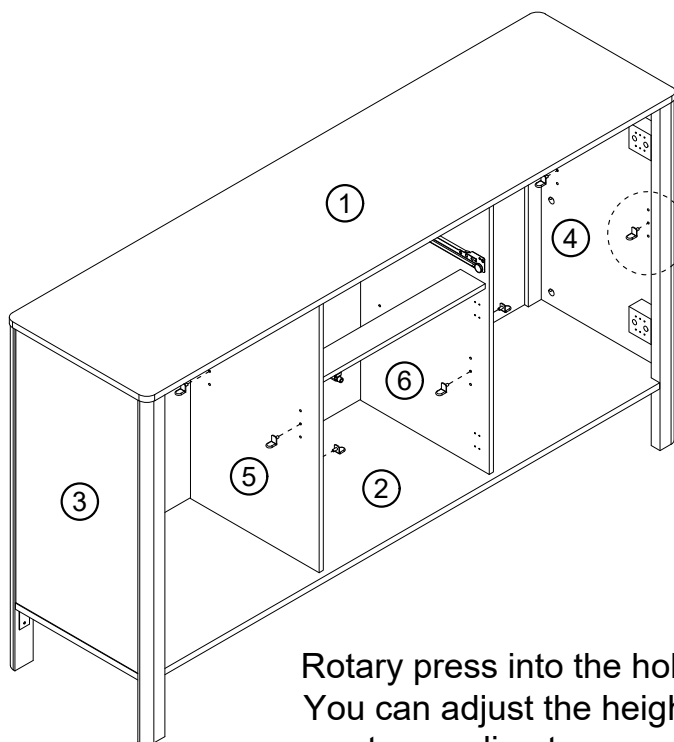


F x 12




Insert (F) completely into the holes of Left Side Panel (③) and Right Side Panel (④) and Left Partition Board (⑤) and Right Partition Board (⑥)

STEP 38

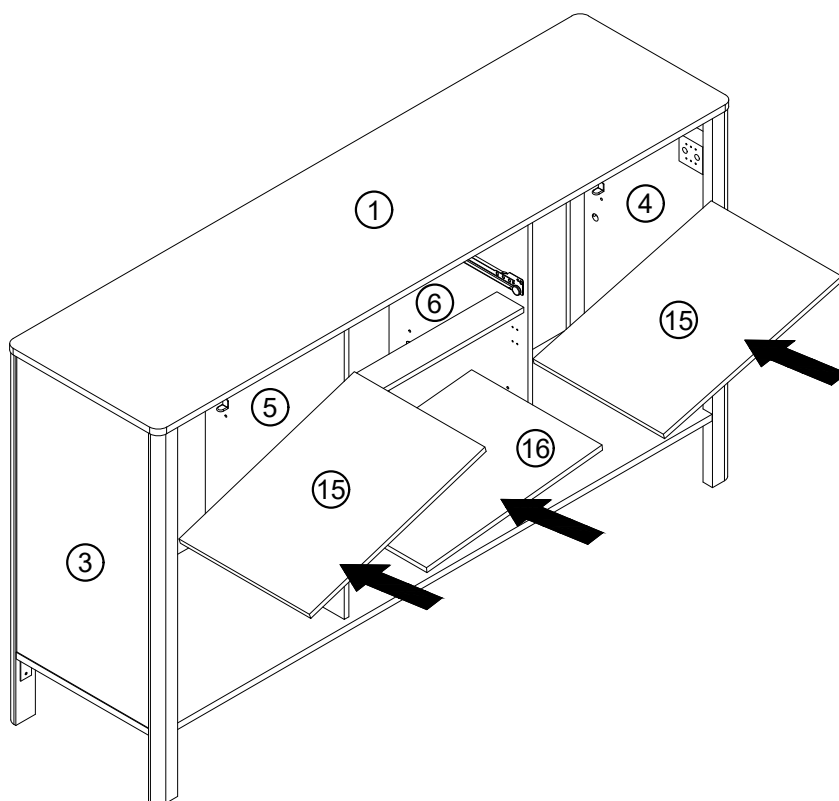

Place movable panels Side Pull-Out Shelf (⑮) and Middle activity shelf board (⑯) as shown in the diagram

STEP 39

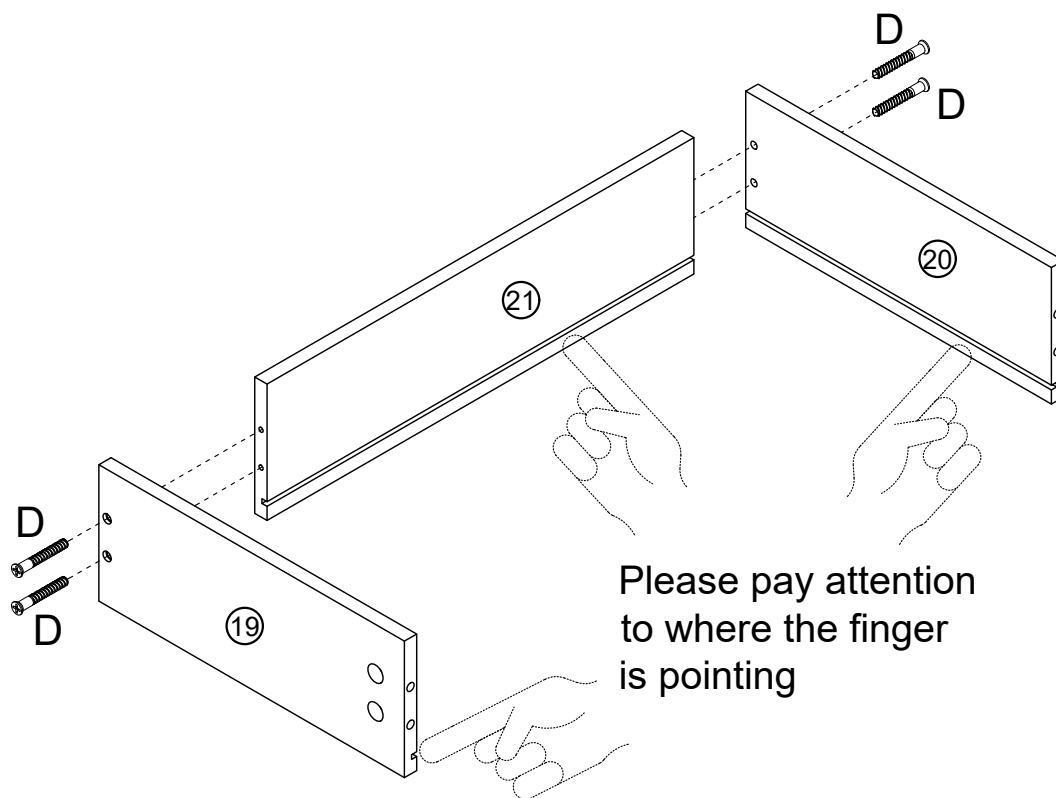


D x 4



Attach Left Drawer side Panel (19) and Right Drawer side Panel (20) to Drawer Back Panel (21) with Screws (D) as shown


STEP 40

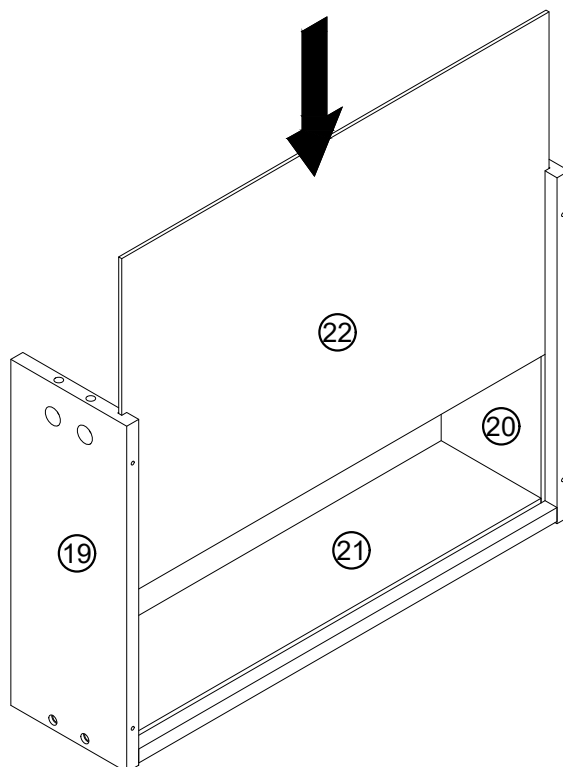

The thin plate needs to be fully inserted into the groove. If the insertion is not smooth, you can try pressing from the front or the back to make adjustments until the thin plate is fully inserted into the groove

Attach Drawer Bottom Plate (22) to the assembled unit from Step 39

STEP 41

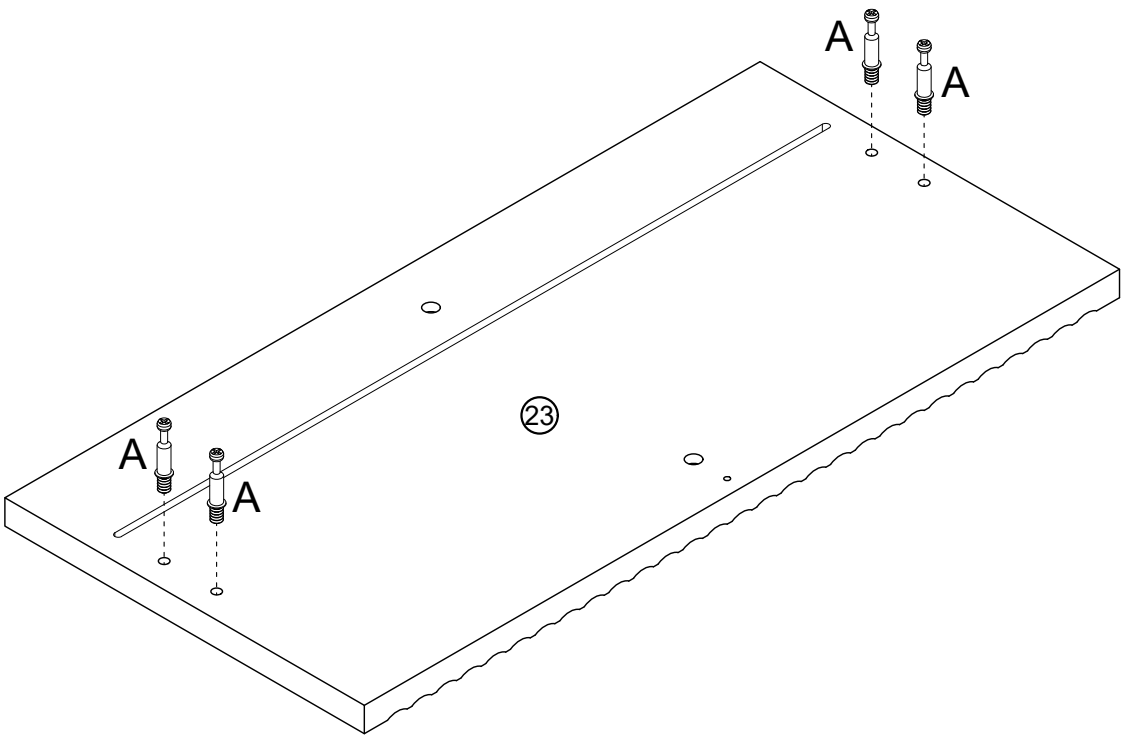


A x 4



Ø6x35mm

Fix Cam Bolt (A) onto Drawer Panel (23)

STEP 42

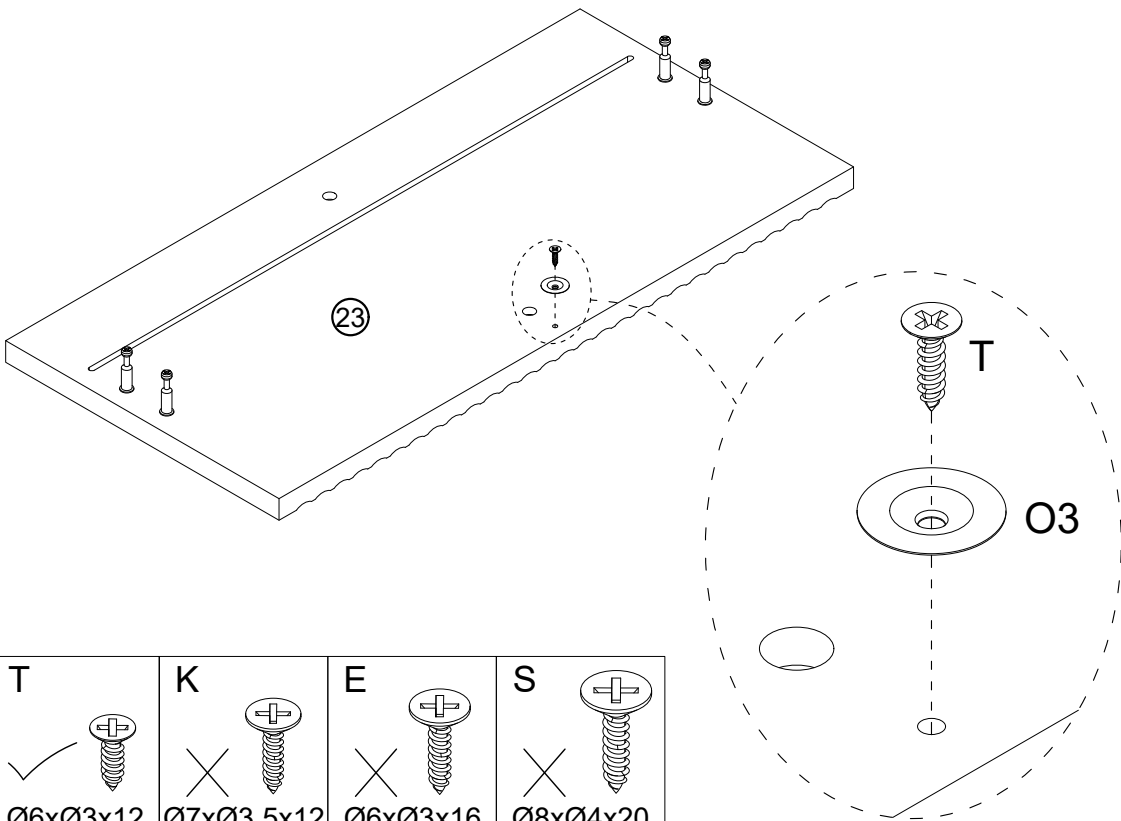

O3 x 1



T x 1









Ø6xØ3x12mm

T	K	E	S
Ø6xØ3x12	Ø7xØ3.5x12	Ø6xØ3x16	Ø8xØ4x20

Use Screw (T) to securely Push-to-Open Latch (O3) onto Drawer Panel (23)

STEP 43




T  Ø6xØ3x12	K  Ø7xØ3.5x12	E  Ø6xØ3x16	S  Ø8xØ4x20
--	--	--	--

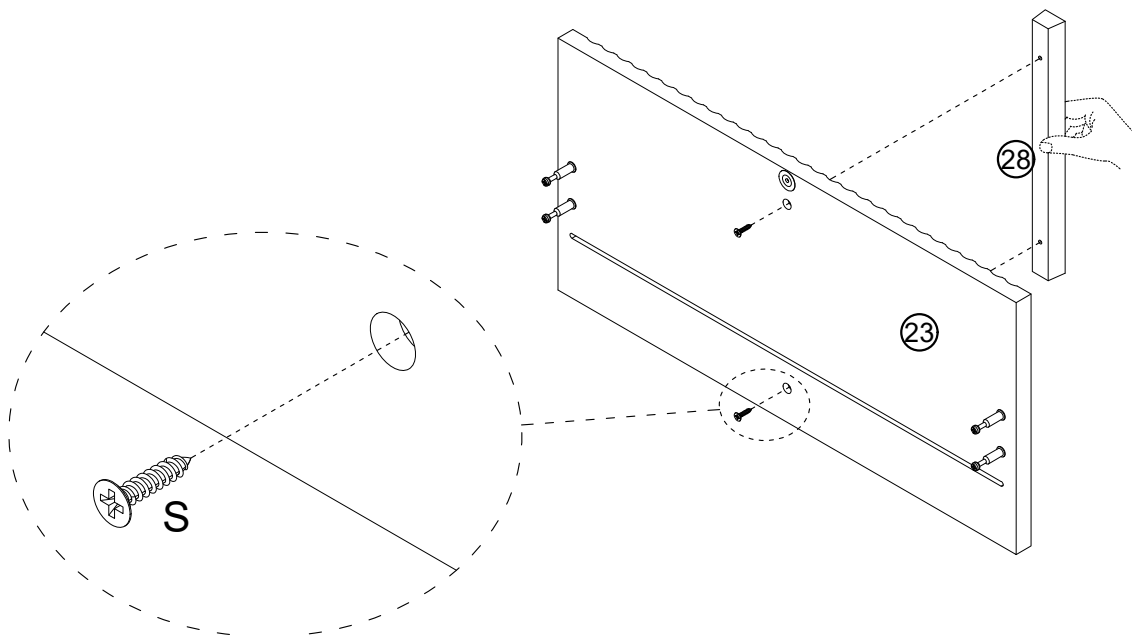

Lock Drawer Panel handle (28) onto Drawer Panel (23) using Screw (S)

STEP 44


The thin plate needs to be fully inserted into the groove. If the insertion is not smooth, you can try pressing from the front or the back to make adjustments until the thin plate is fully inserted into the groove

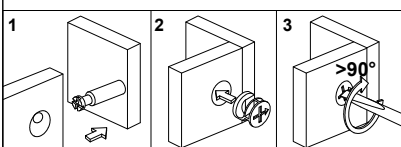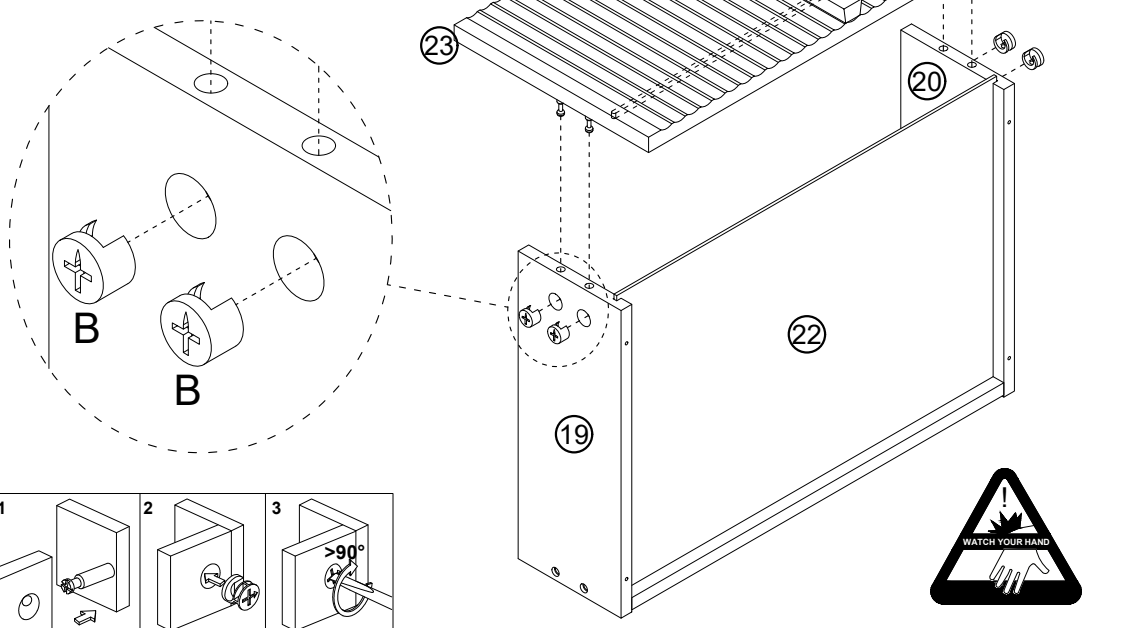

Connect Drawer Panel (23) to Left Drawer side Panel (19) and Right Drawer side Panel (20) Install and turn Cam Nut (B) to secure position as shown

STEP 45

T ✓ Ø6xØ3x12	K ✗ Ø7xØ3.5x12	E ✗ Ø6xØ3x16	S ✗ Ø8xØ4x20
--------------------	----------------------	--------------------	--------------------

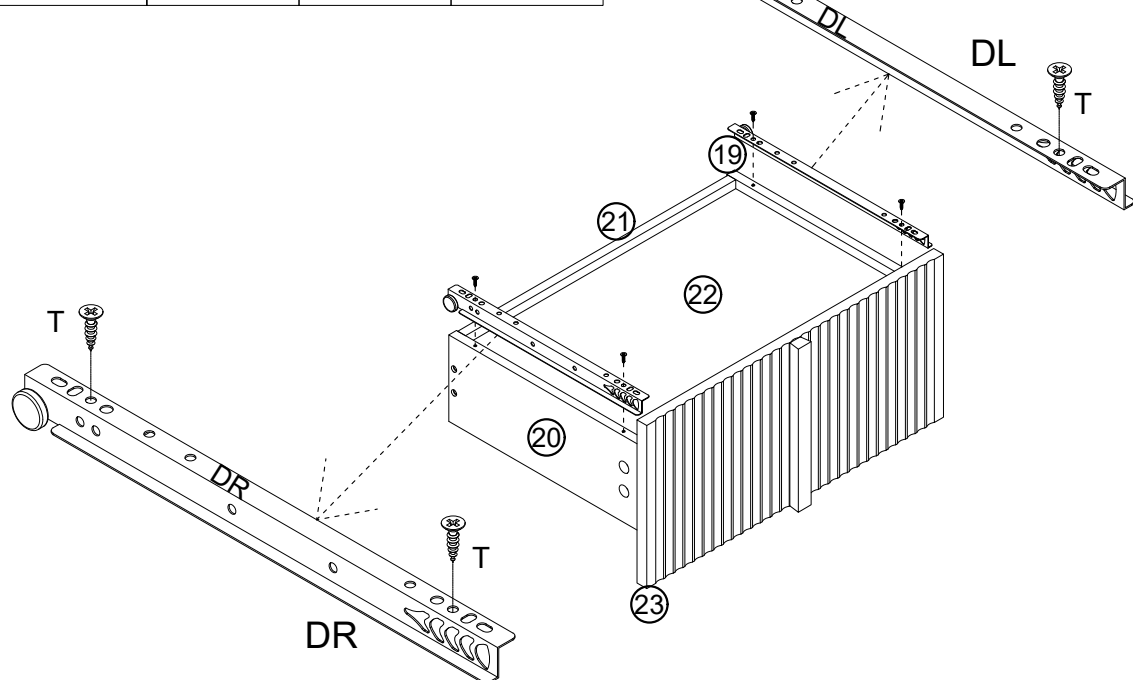

DL x 1

300mm

DR x 1

300mm


T x 4



Ø6xØ3x12mm

Install Slide Rail(L-"DR" and "DL") to Left Drawer side Panel ((19)) and Right Drawer side Panel ((20)) with Screws (T) as shown


STEP 46

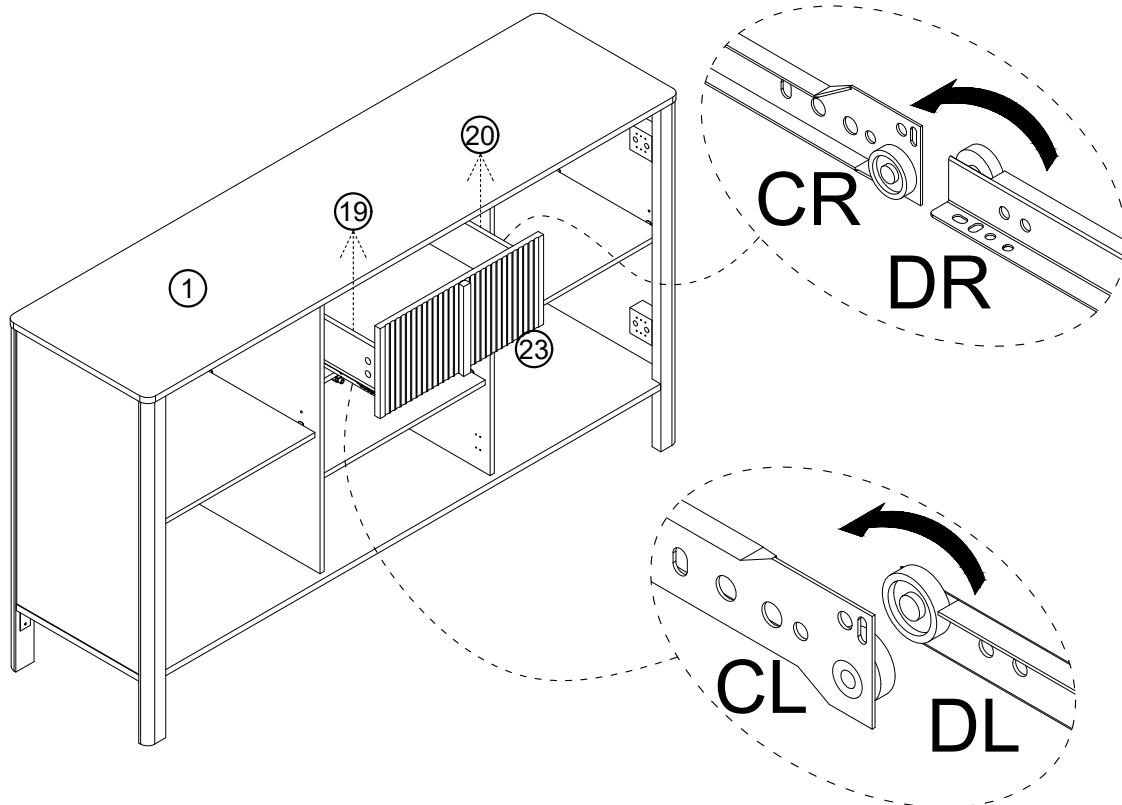

Install the drawer into the Sideboard as shown

STEP 47

Customers can choose whether to use H to cover the holes based on their specific needs

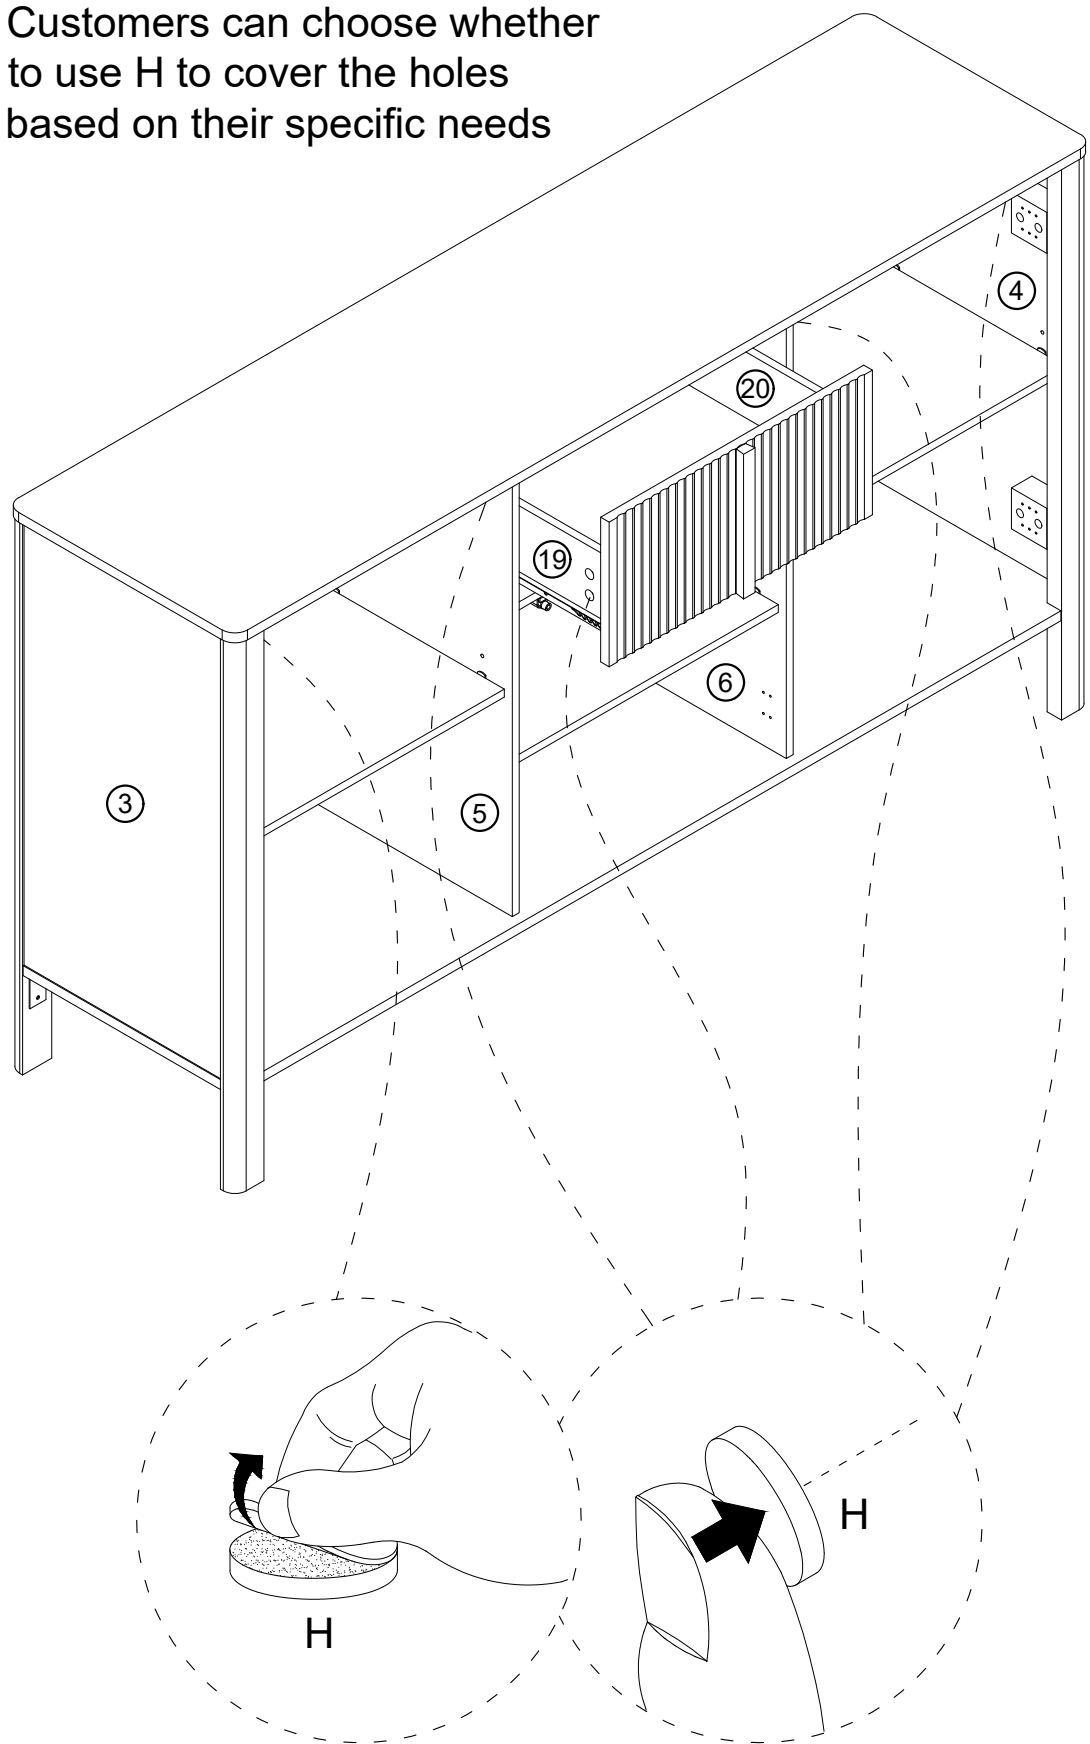


H x 32




Cover the visible hole with a Pad (H)

STEP 48

T	K	E	S
			
Ø6xØ3x12	Ø7xØ3.5x12	Ø6xØ3x16	Ø8xØ4x20

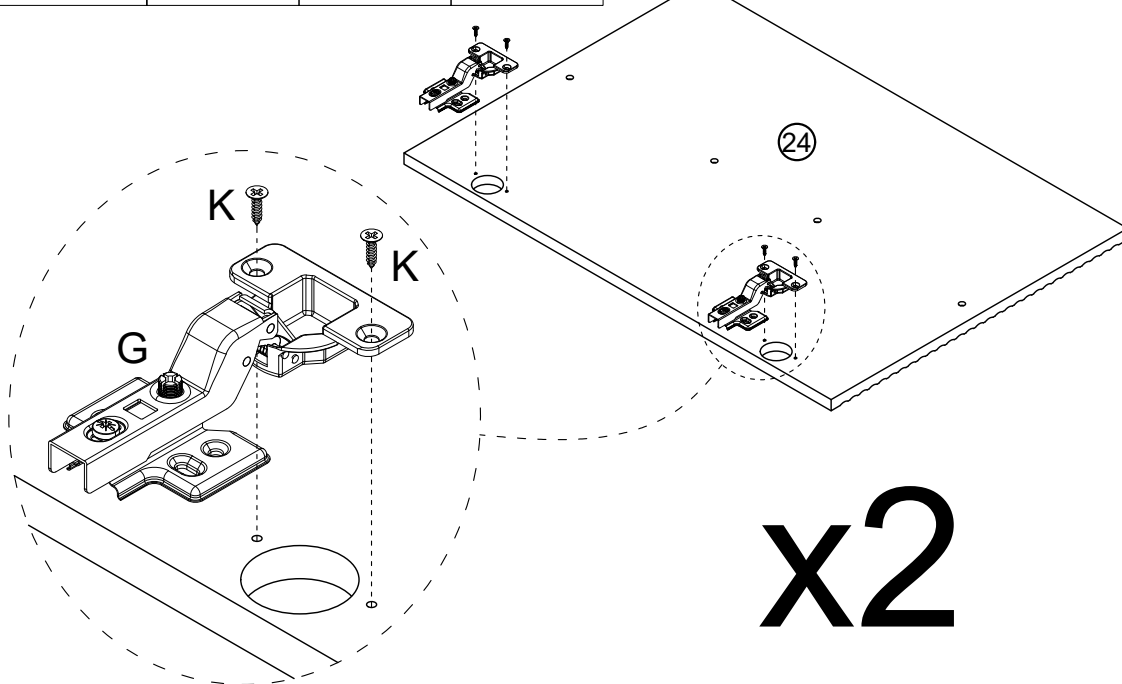

G x 4



K x 8




Ø7xØ3.5x12mm


Lock Full Overlay Hinge (G) onto Side door panel (24)
using Screw (K)

STEP 49

T	K	E	S
			
Ø6xØ3x12	Ø7xØ3.5x12	Ø6xØ3x16	Ø8xØ4x20

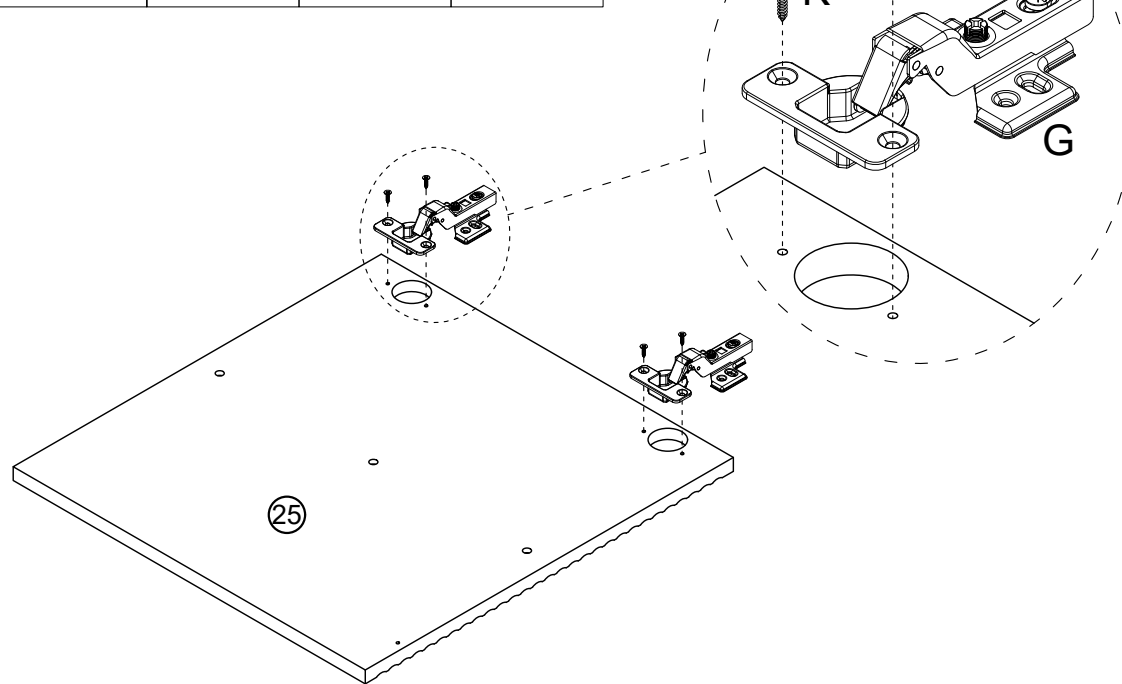

G x 2



K x 4





Ø7xØ3.5x12mm


Lock Full Overlay Hinge (G) onto Middle door panel (25)
using Screw (K)

STEP 50

T	K	E	S
Ø6xØ3x12	Ø7xØ3.5x12	Ø6xØ3x16	Ø8xØ4x20

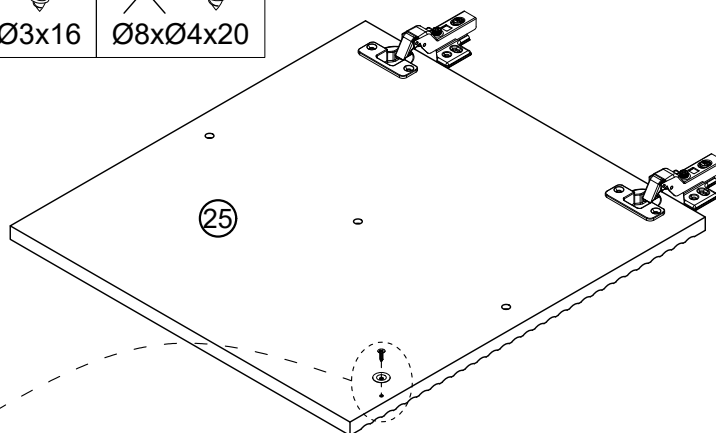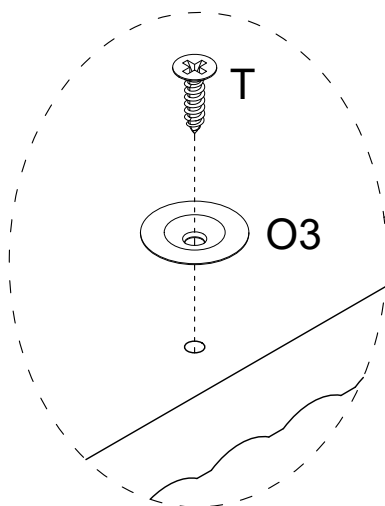

O3 x 1



T x 1





Ø6xØ3x12mm

Use Screw (T) to securely Push-to-Open Latch (O3) onto Middle door panel (25)


STEP 51

T	K	E	S
Ø6xØ3x12	Ø7xØ3.5x12	Ø6xØ3x16	Ø8xØ4x20

x2

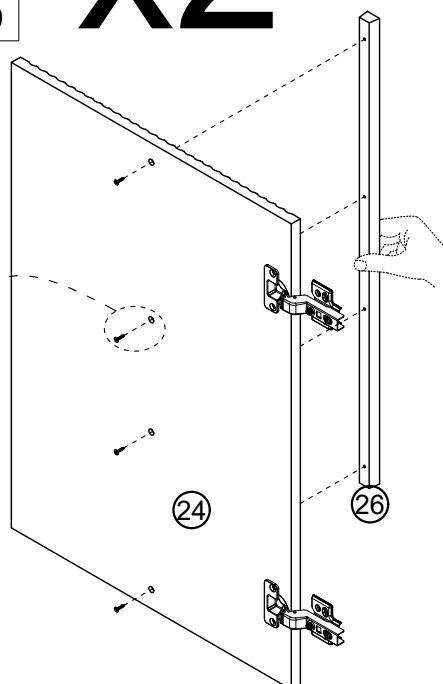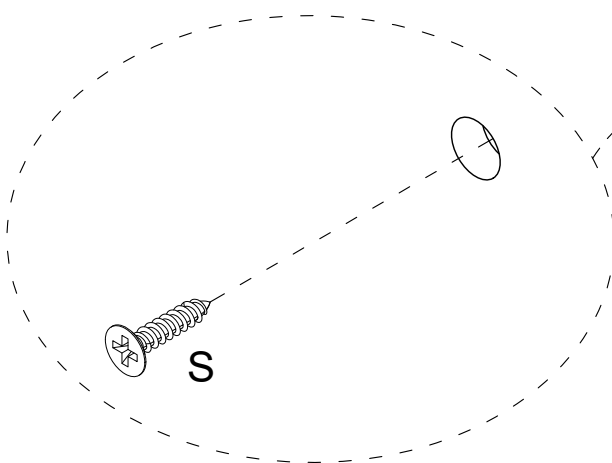


S x 8





Ø8xØ4x20mm

Lock Side door panel handle (26) onto Side door panel (24) using Screw (S)

STEP 52


T	K	E	S
			
Ø6xØ3x12	Ø7xØ3.5x12	Ø6xØ3x16	Ø8xØ4x20

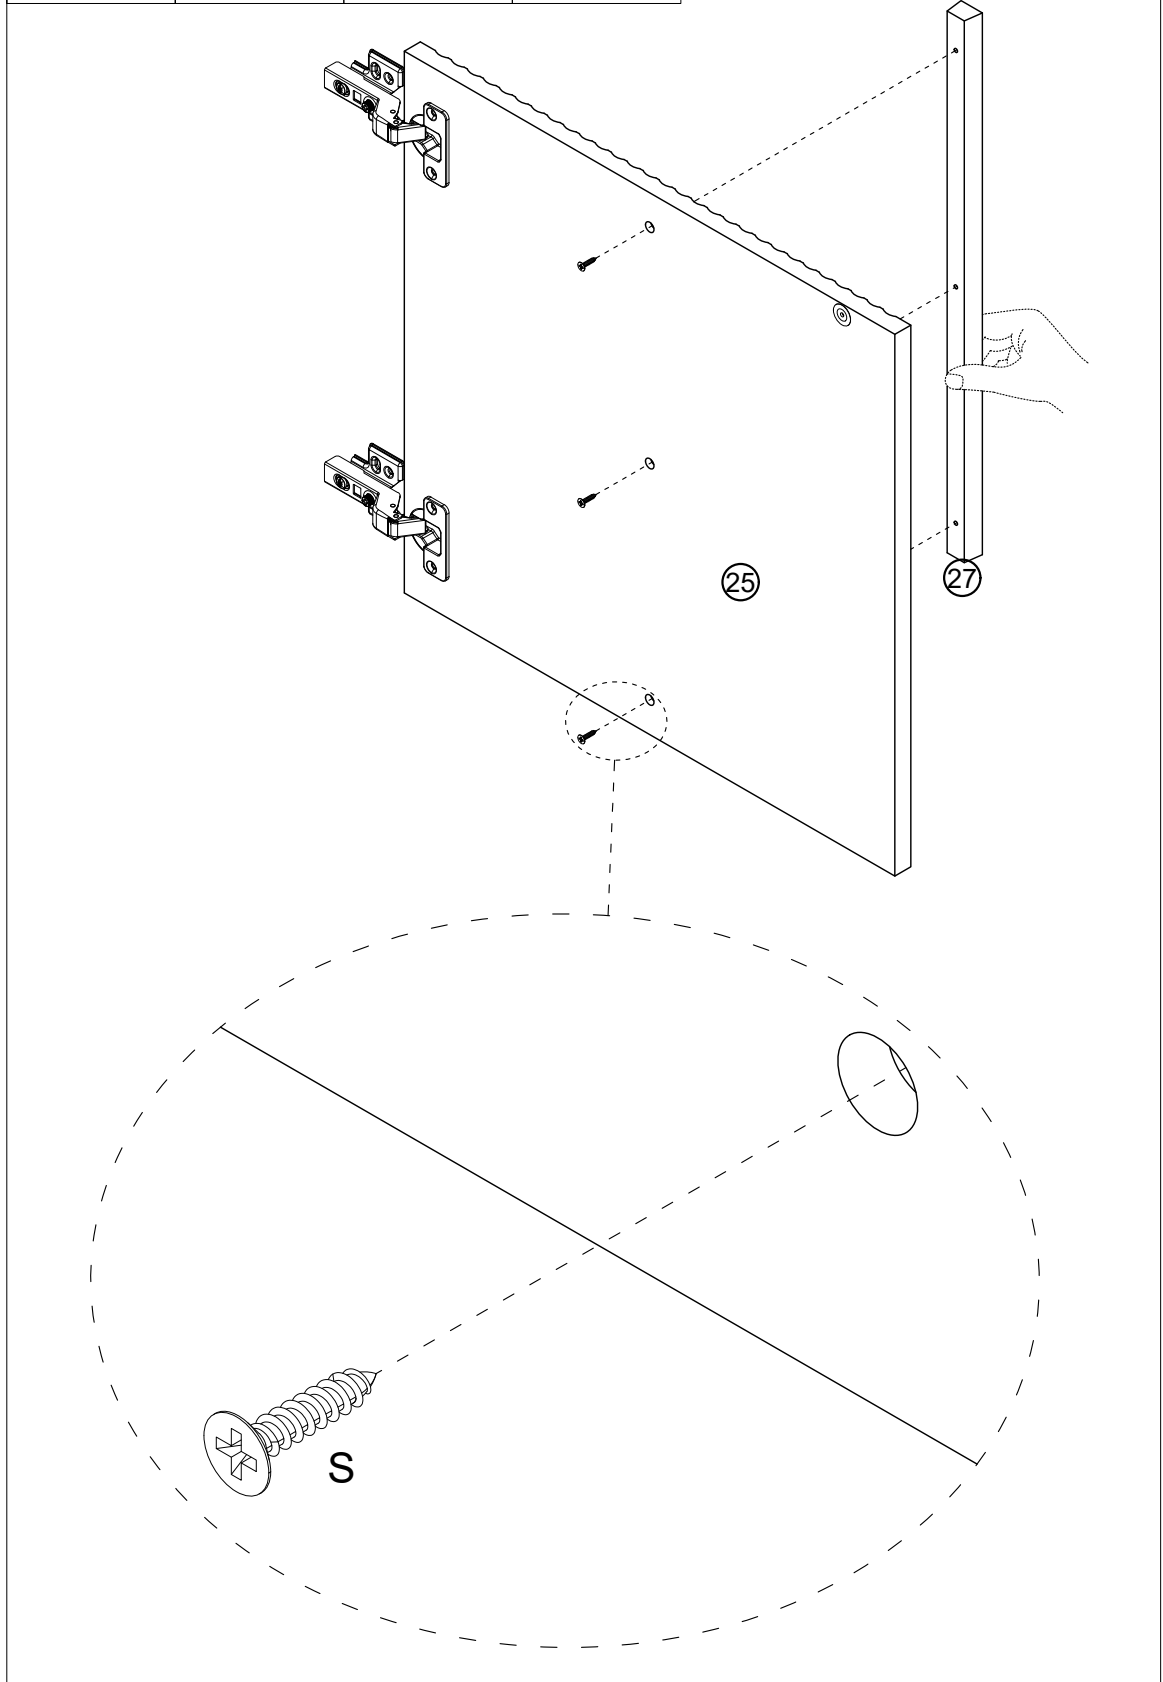


S x 3

 Ø8xØ4x20mm

Lock Middle door panel handle (27) onto
 Middle door panel (25) using Screw (S)


STEP 53



Loosen this screw and push up/down for a slight up-down adjustment of the door.





Loosen this screw for a slight left-right adjustment of the door.




Loosen this screw and push forward/backward for a slight front-back adjustment of the door.

T	K	E	S
✗	✓	✗	✗
Ø6xØ3x12	Ø7xØ3.5x12	Ø6xØ3x16	Ø8xØ4x20

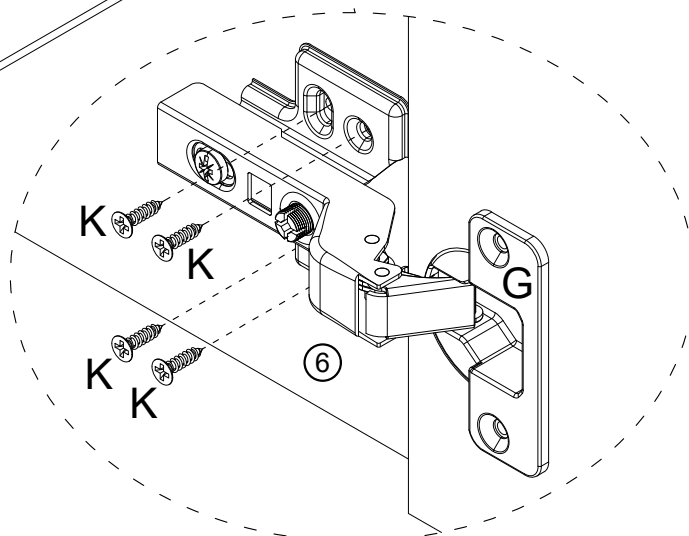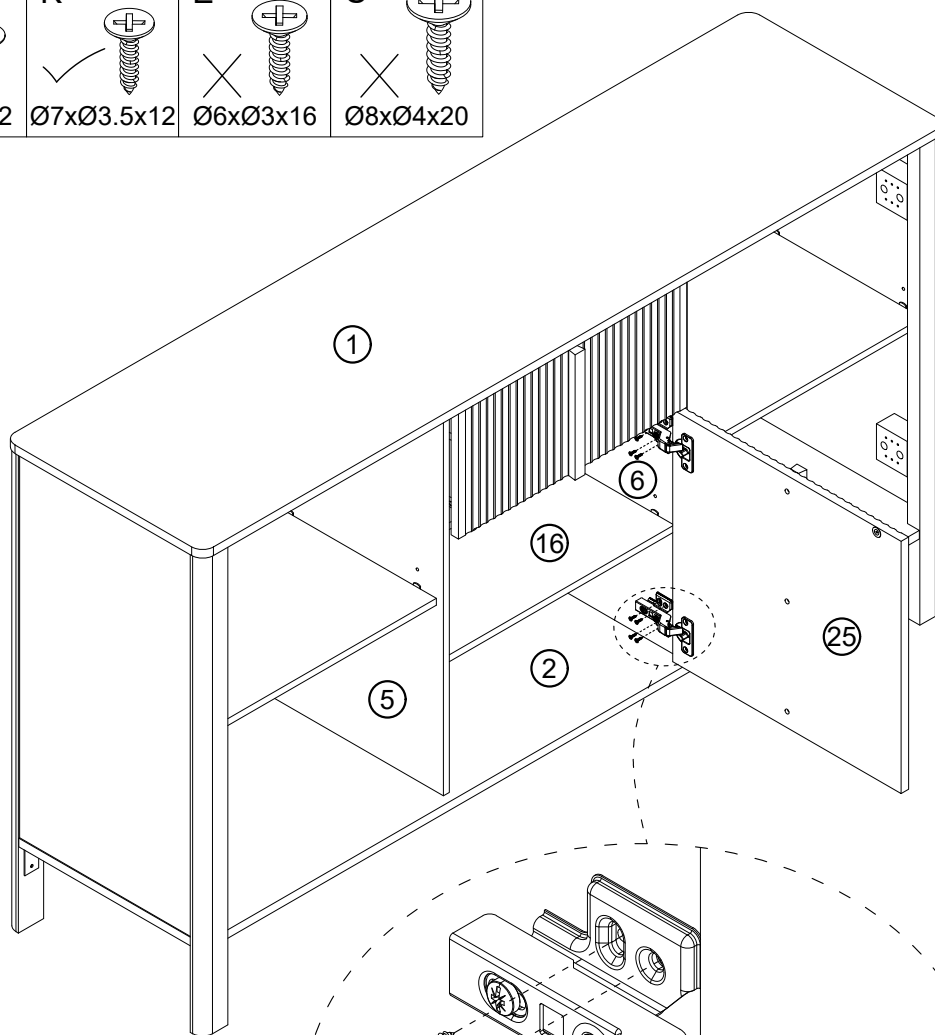


K x 8




Ø7xØ3.5x12mm

Lock Full Overlay Hinge (G) onto Right Partition Board (6) using Screw (K)


STEP 54



Loosen this screw and push up/down for a slight up-down adjustment of the door.





Loosen this screw for a slight left-right adjustment of the door.




Loosen this screw and push forward/backward for a slight front-back adjustment of the door.

T	K	E	S
Ø6xØ3x12	Ø7xØ3.5x12	Ø6xØ3x16	Ø8xØ4x20

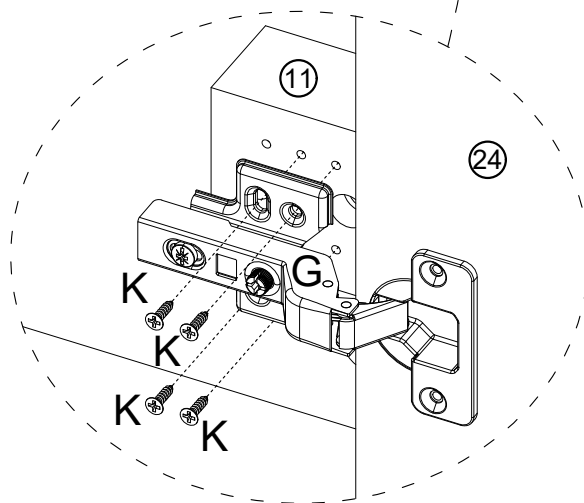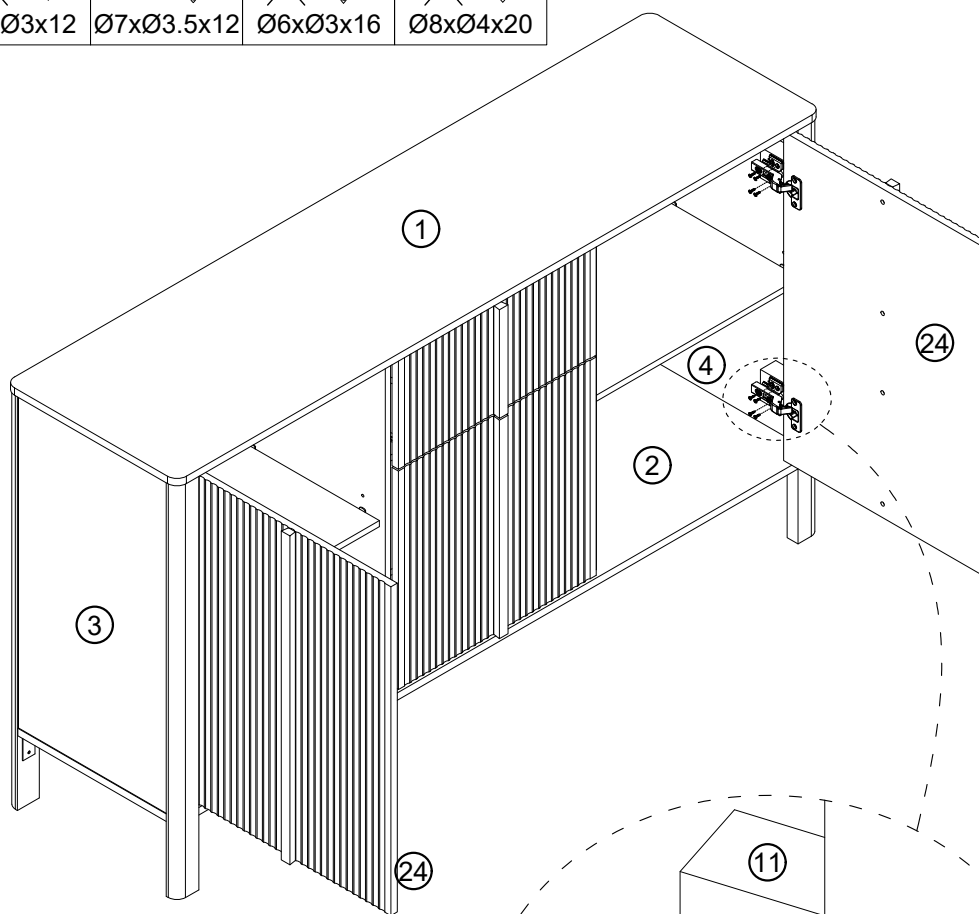

K x 16




Ø7xØ3.5x12mm

Lock Full Overlay Hinge (G) onto Door Hinge Shims (11) using Screw (K)



STEP 55

Customers can adjust the gap between the door panel and drawer to the desired position by shaking the cabinet and adjusting the height of the bottom foot nails

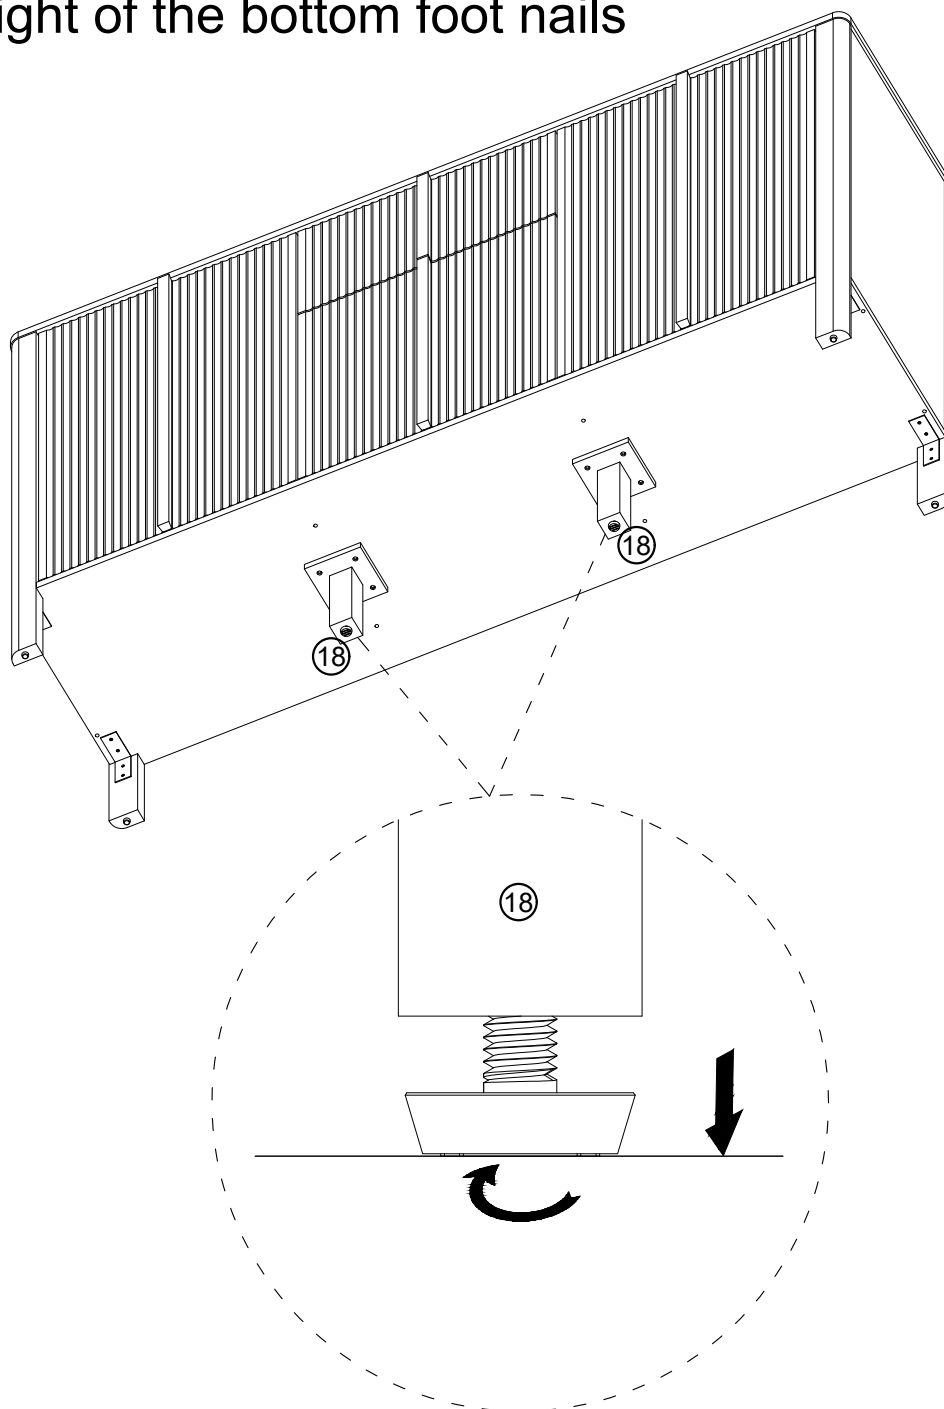


Adjust the height of these adjusting feet to ensure that the product is perfectly flush with the ground and to prevent any shaking

STEP 56

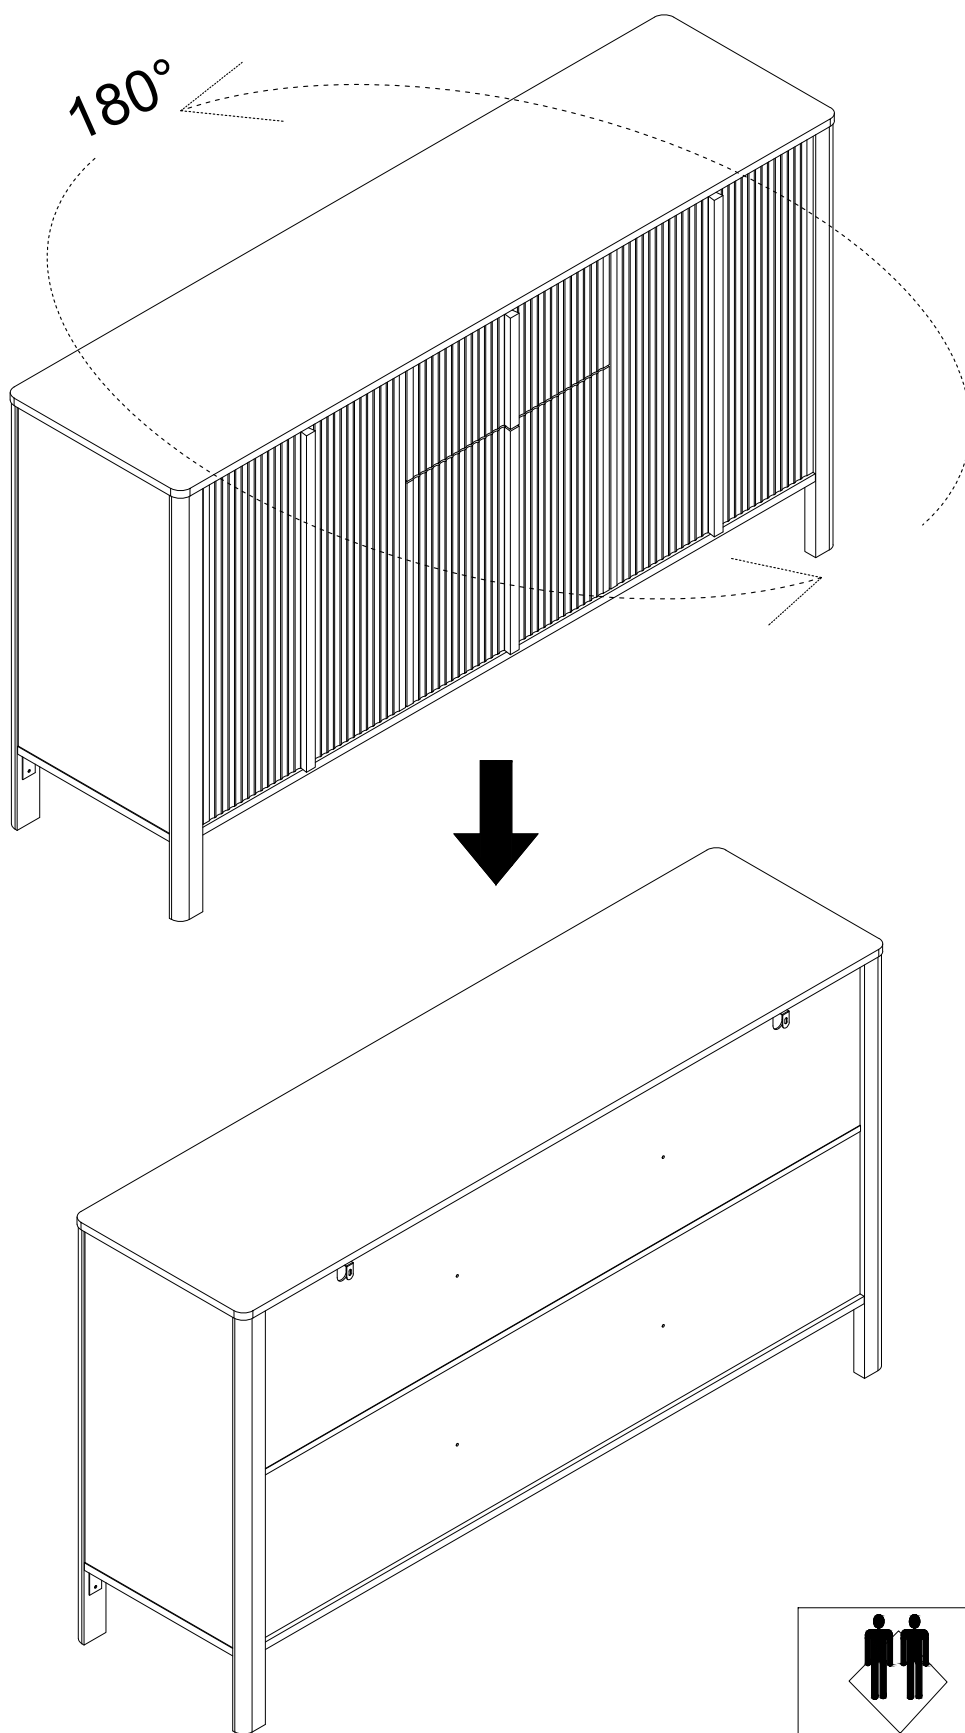

STEP 57

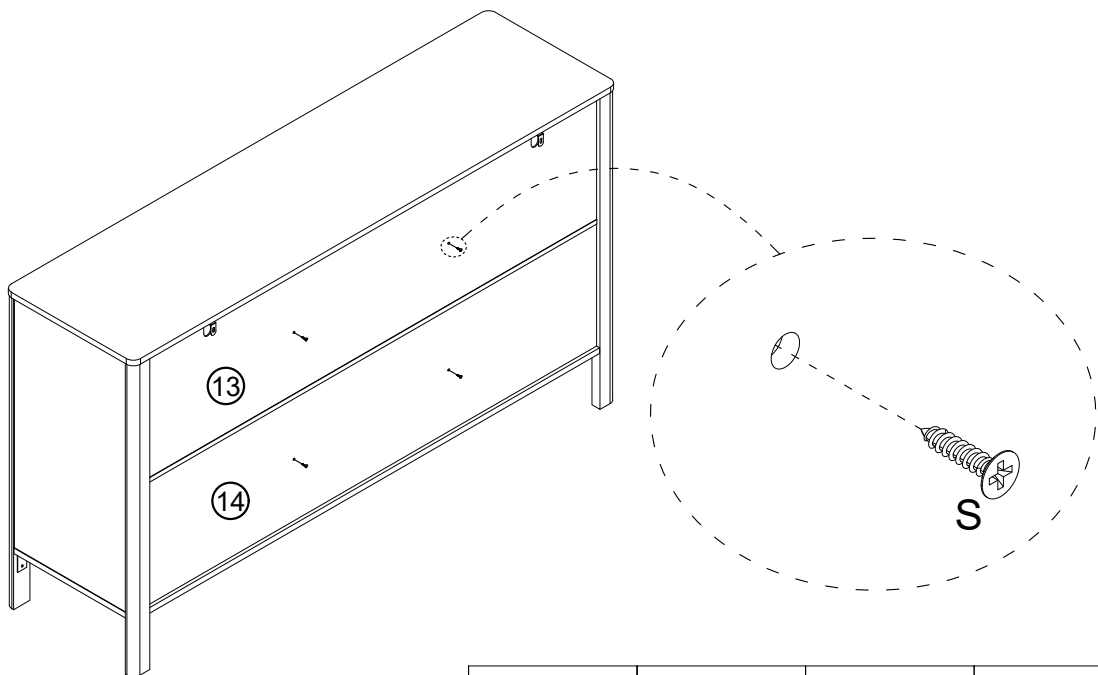


T	K	E	S
Ø6xØ3x12	Ø7xØ3.5x12	Ø6xØ3x16	Ø8xØ4x20

S x 4

Ø8xØ4x20mm

STEP 58


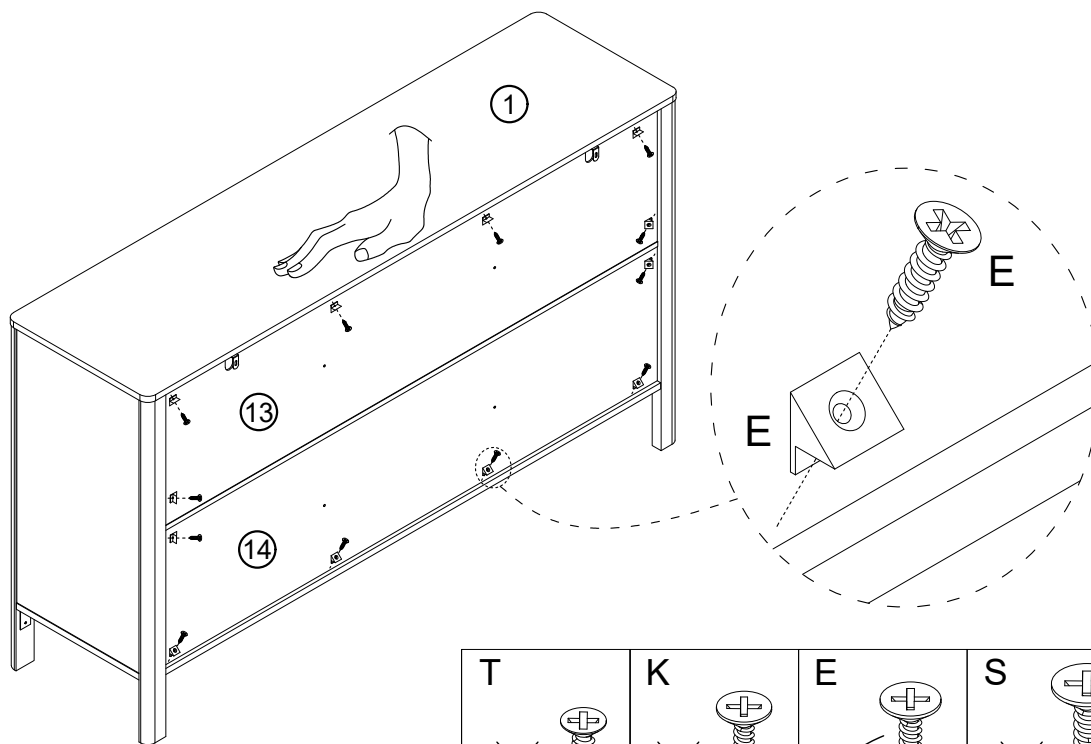


T	K	E	S
Ø6xØ3x12	Ø7xØ3.5x12	Ø6xØ3x16	Ø8xØ4x20


E x 12

Ø6xØ3x16mm


STEP 59

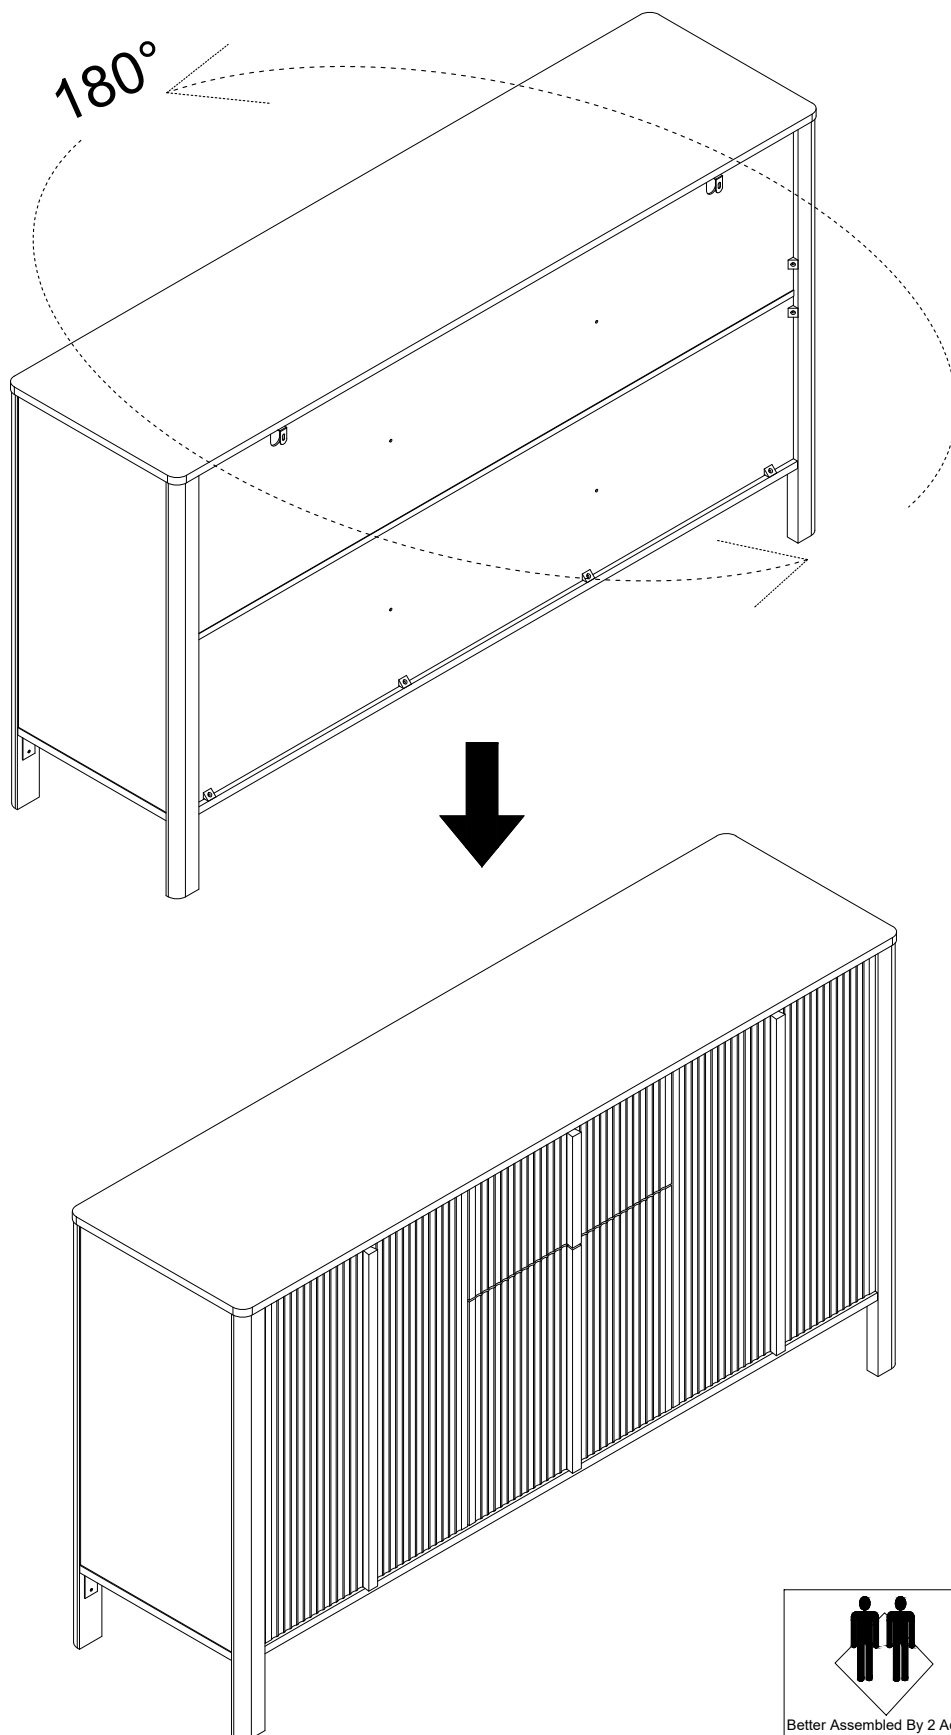




STEP 60

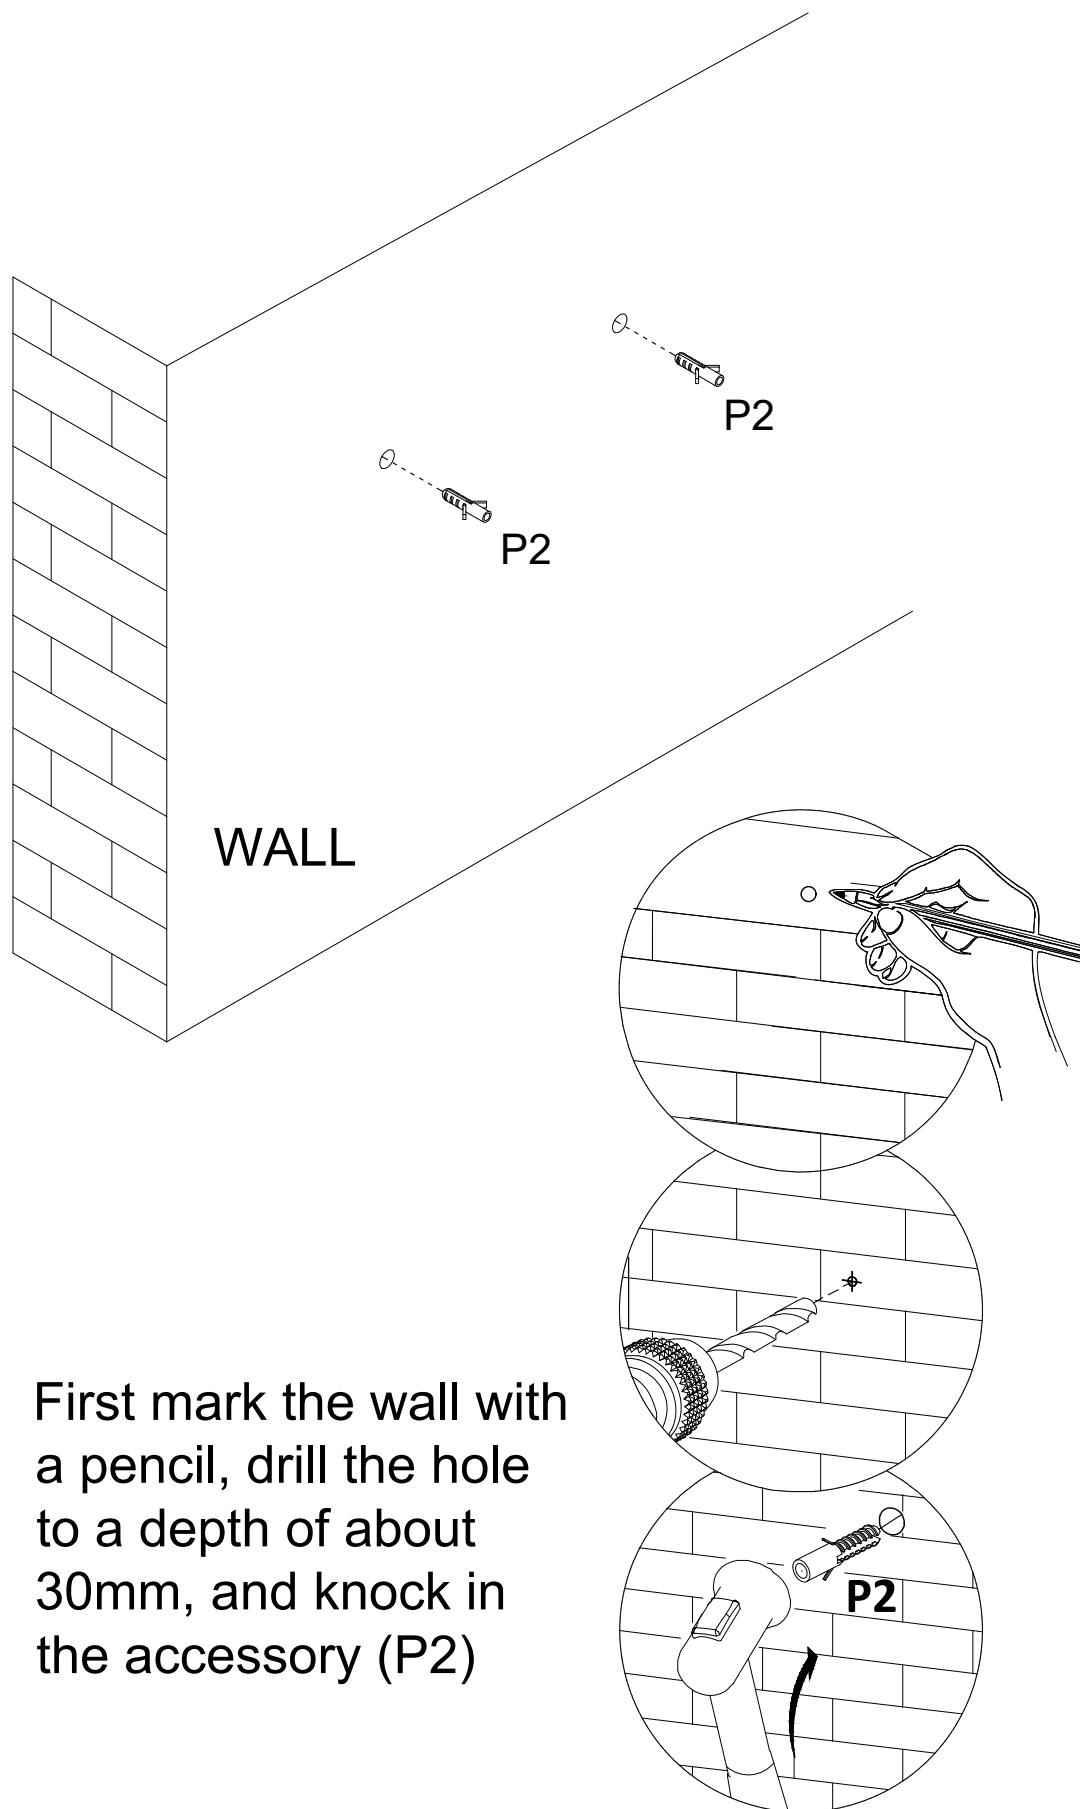


P x 2



STEP 61

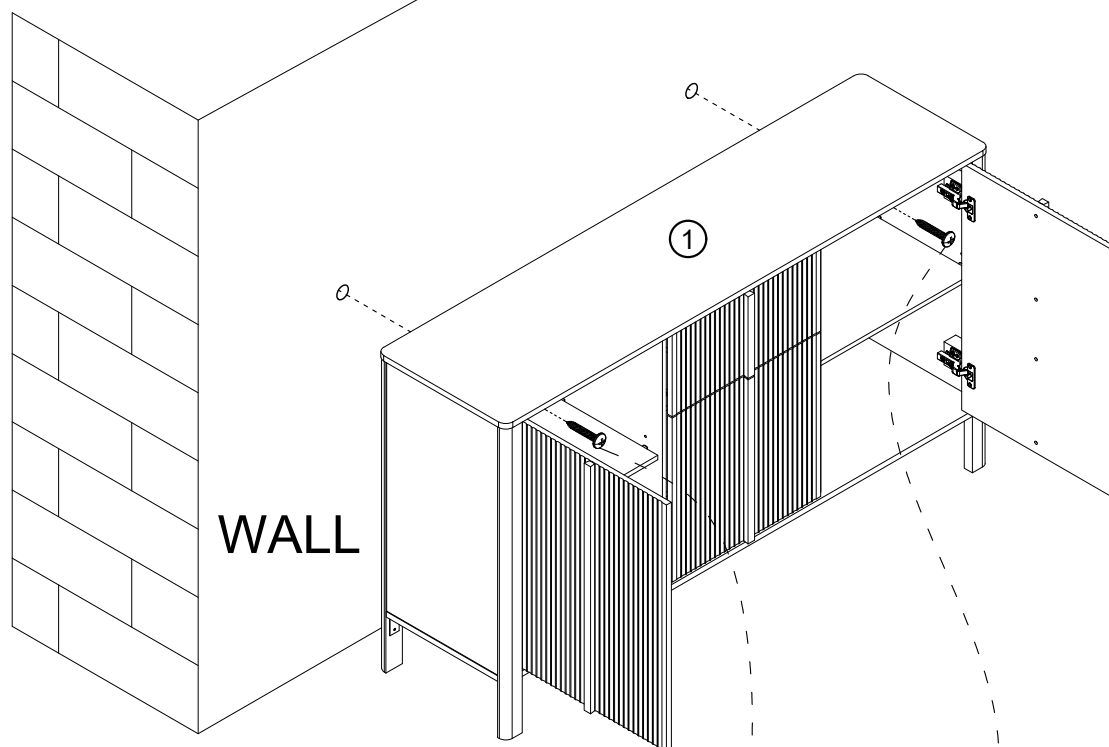

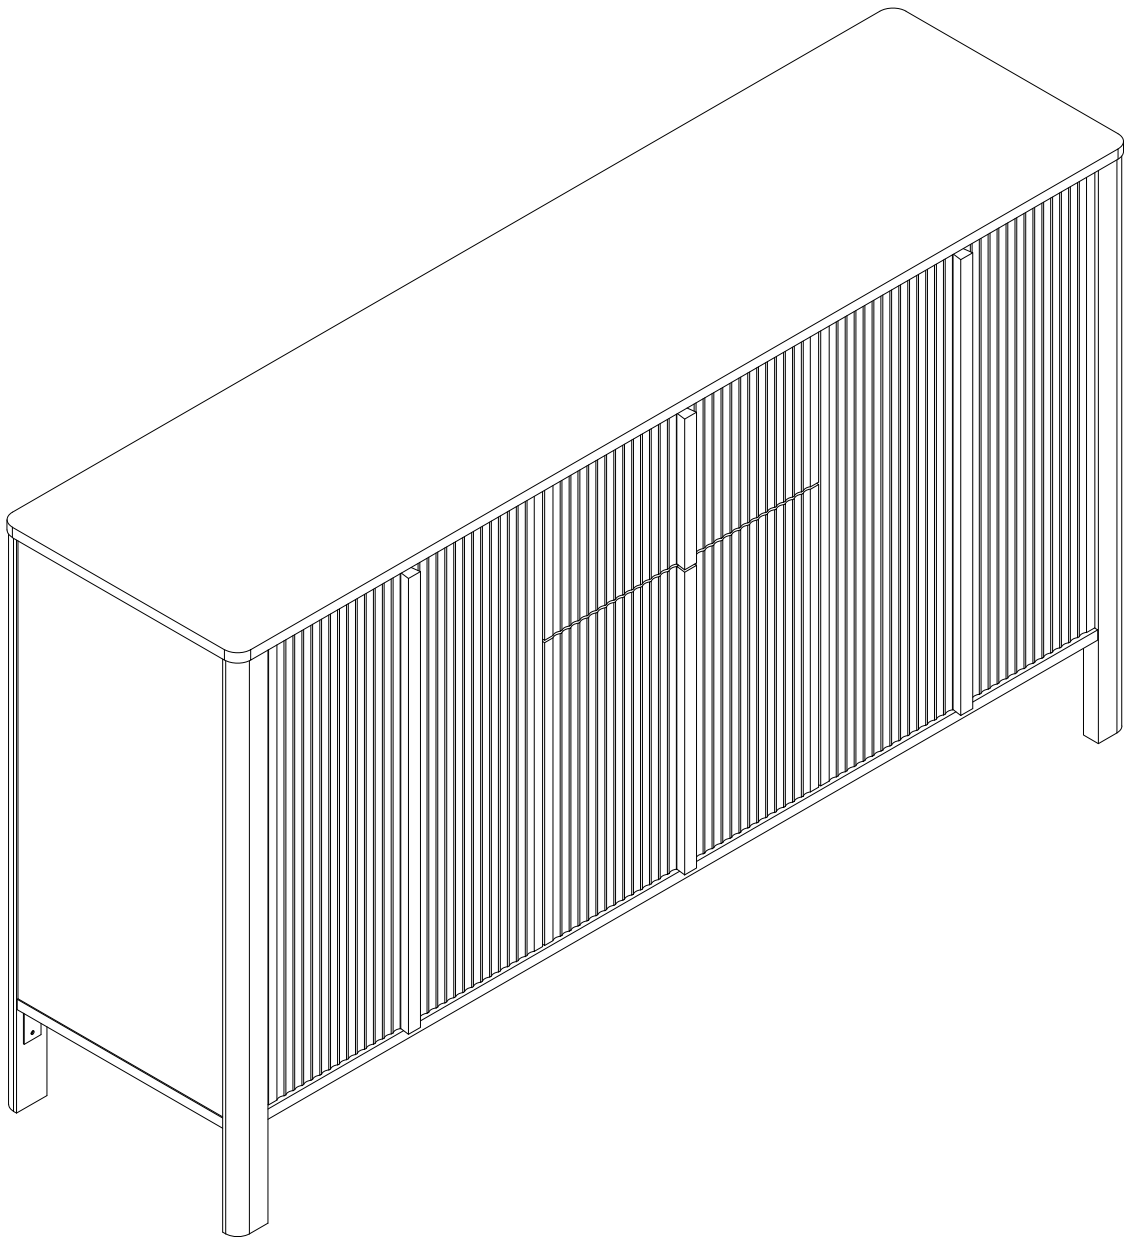

Questions & Answers about Proposition 65

- What is Proposition 65?

Proposition 65 requires businesses to provide warnings to Californians about significant exposures to chemicals that cause cancer, birth defects or other reproductive harm. These chemicals can be in the products that Californians purchase, in their homes or workplaces, or that are released into the environment. By requiring that this information be provided, Proposition 65 enables Californians to make informed decisions about their exposures to these chemicals.

Proposition 65 also prohibits California businesses from knowingly discharging significant amounts of listed chemicals into sources of drinking water.

Proposition 65 requires California to publish a list of chemicals known to cause cancer, birth defects or other reproductive harm. This list, which must be updated at least once a year, has grown to include approximately 900 chemicals since it was first published in 1987.

- What types of chemicals are on the Proposition 65 list?

The list contains a wide range of naturally occurring and synthetic chemicals that include additives or ingredients in pesticides, common household products, food, drugs, dyes, or solvents. Listed chemicals may also be used in manufacturing and construction, or they may be byproducts of chemical processes, such as motor vehicle exhaust.

- What does a warning mean?

If a warning is placed on a product label or posted or distributed at a workplace, a business, or in rental housing, the business issuing the warning is aware or believes that it is exposing individuals to one or more listed chemicals.

By law, a warning must be given for listed chemicals unless the exposure is low enough to pose no significant risk of cancer or is significantly below levels observed to cause birth defects or other reproductive harm.

- Where can I get more information on Proposition 65?

If you have specific questions on the administration or implementation of Proposition 65, you can contact OEHHA's Proposition 65 program at P65.Questions@oehha.ca.gov, or by phone at (916) 445-6900.