


5 Drawer Chest of Drawers

Assembly Guide

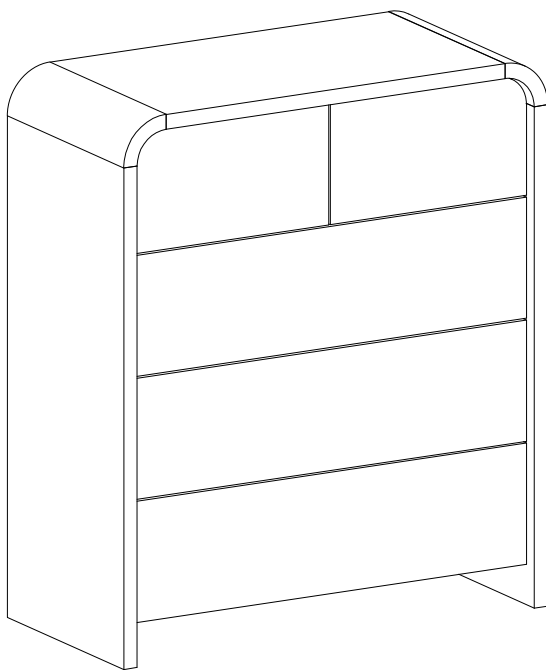

EasyBuild Design, powered by owvo. Less assembling, more living.

IMPORTANT: please read these instructions fully before starting assembly



**SAFETY AND
CARE ADVICE**



NO POWER TOOLS

- Check you have all the components and tools listed
- Remove all fittings from their bags and separate into groups
- We do not recommend use of power tools - this could damage the unit. Only use hand screwdrivers and Allen keys
- Keep children and animals away from the work area, small parts could cause choking if swallowed
- Make sure you have enough space to lay out the parts before starting
- Assemble the item as close to its final position (same room) as possible
- Do not over tighten the nuts to avoid damage to the threads
- Only clean using a damp cloth and mild detergent. Do not use bleach or abrasive cleaners
- Do not allow children to climb or play on this product. From time to time, check there are no loose screws in this unit
- This product should not be discarded with household waste. Take to your local authority waste disposal centre
- Unless otherwise stated, this product is designed for domestic use and is not certified for commercial or contract settings

IMPORTANT INFORMATION



60 Minute
Build



Two Person
Build




Max Weight
Capacity
40kg

Note: Assembly estimates are approximate and can differ based on the specific environment and user experience.

WHAT'S IN THE BOX

Note: the quantities are the correct amount to complete the assembly. In some cases more fixings may be supplied than are required.









Getting to know your product:

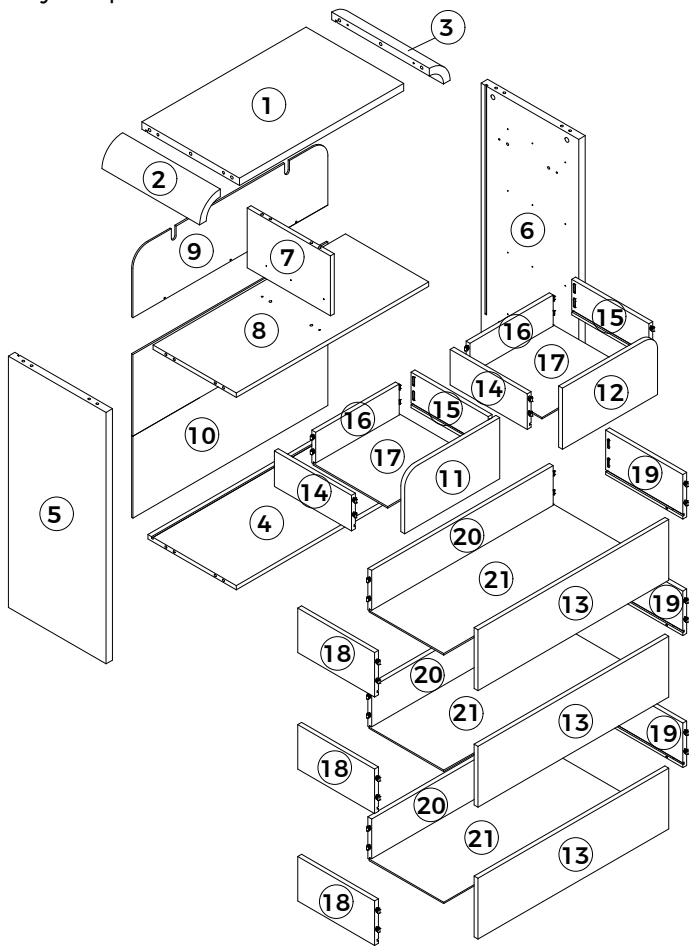

WHAT'S IN THE BOX

Note: the quantities are the correct amount to complete the assembly. In some cases more fixings may be supplied than are required.



Parts Key:

Label	Part Name	Image / Drawing	Quantity	Label	Part Name	Image / Drawing	Quantity
1	Top Panel		1	9	Upper Back Panel		1
2	Left Corner Rail		1	10	Lower Back Panel		1
3	Right Corner Rail		1	11	Top Left Drawer Front		1
4	Bottom Panel		1	12	Top Right Drawer Front		1
5	Left Side Panel		1	13	Lower Drawer Front		3
6	Right Side Panel		1	14	Top Drawer Left Side		2
7	Divider Panel		1	15	Top Drawer Right Side		2
8	Fixed Shelf		1	16	Top Drawer Back		2

WHAT'S IN THE BOX

Note: the quantities are the correct amount to complete the assembly. In some cases more fixings may be supplied than are required.

Parts Key:

Label	Part Name	Image / Drawing	Quantity
17	Top Drawer Base		2
18	Lower Drawer Left Side		3
19	Lower Drawer Right Side		3
20	Lower Drawer Back		3
21	Lower Drawer Base		3

WHAT'S IN THE BOX

Note: the quantities are the correct amount to complete the assembly. In some cases more fixings may be supplied than are required.

Hardware Key:

Label	Hardware Description	Image / Drawing	Size(mm)	Quantity
A	Cam Bolt		ø7x34mm	20
B	Cam Nut		ø15x12mm	20
C	Small Dowel		ø8x30mm	16
D	Large Dowel		ø10x40mm	6
E	Left Slide		310mm	5
F	Right Slide		310mm	5
G	Screw		ø5x15mm	30
K	Metal Plate		35x18x2mm	4
L	Screw		ø3.5x15mm	8
M	Felt Pad		ø20x5mm	4
N	L-Bracket		80x30x15mm	2
P	Screw		ø4x14mm	4

WHAT'S IN THE BOX

Note: the quantities are the correct amount to complete the assembly. In some cases more fixings may be supplied than are required.

Hardware Key:


Label	Hardware Description	Image / Drawing	Size(mm)	Quantity
Q	Wedge		14x13x10mm	8
R	Screw		ø3x19mm	11

Note:


- Use a clear, flat surface to avoid bumps or scratches before assembling.
- Insert all fixings loosely at first to allow for alignment; only tighten them once everything is properly positioned, as some adjustment may be required.
- Avoid over-tightening, as this may damage the parts.
- Seek assistance when moving large or heavy parts

Fitting Assembly Instructions


Assembly





Push connector into housing to join.



Make sure there is no gap between the panels.





Disassembly




STEP 1

Attach 2 x Top drawer left sides [14] and 2 x Top drawer right sides [15] to Top drawer fronts [11] & [12] as shown.

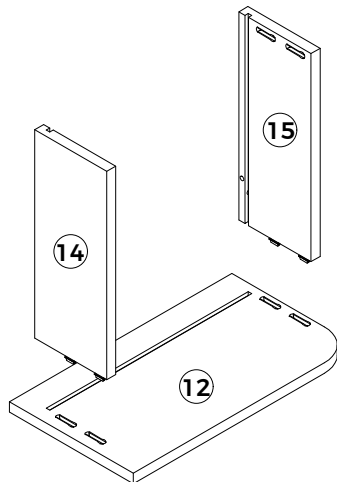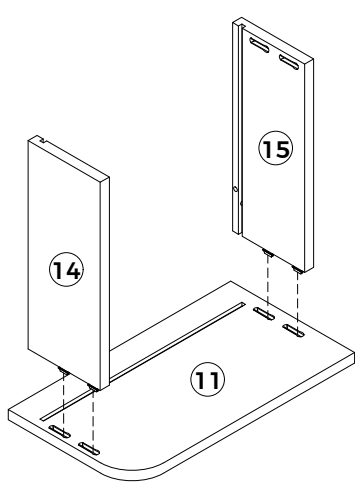



STEP 2

Slide 2 x Top drawer bases [17] into the grooves on top drawer sides and drawer front panels as shown.

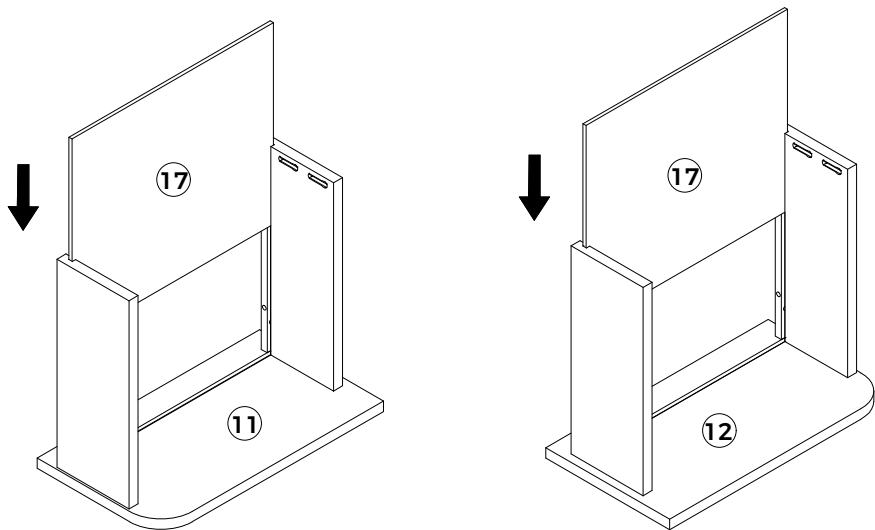


STEP 3

Attach 2 x Top drawer backs [16] to top drawer side panels as shown. Ensure top drawer base panel is fully slotted into the grooves.

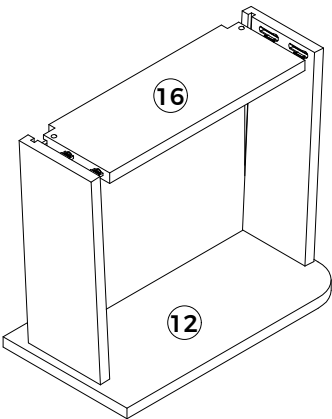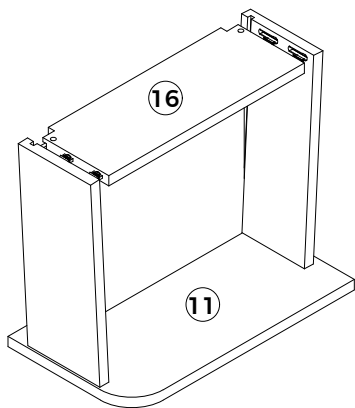

STEP 4


Attach 3 x Lower drawer left sides [18] and 3 x Lower drawer right sides [19] to Lower drawer fronts [13] as shown.

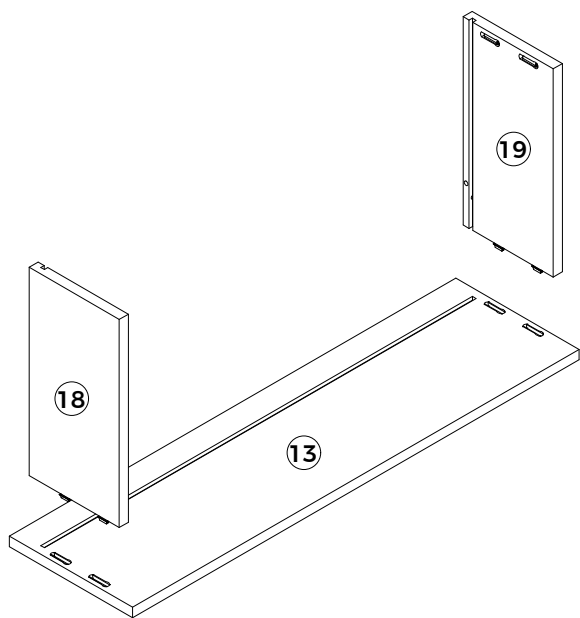

x3

STEP 5


Slide 3 x Lower drawer bases [21] into the grooves on drawer side and drawer front panels as shown.

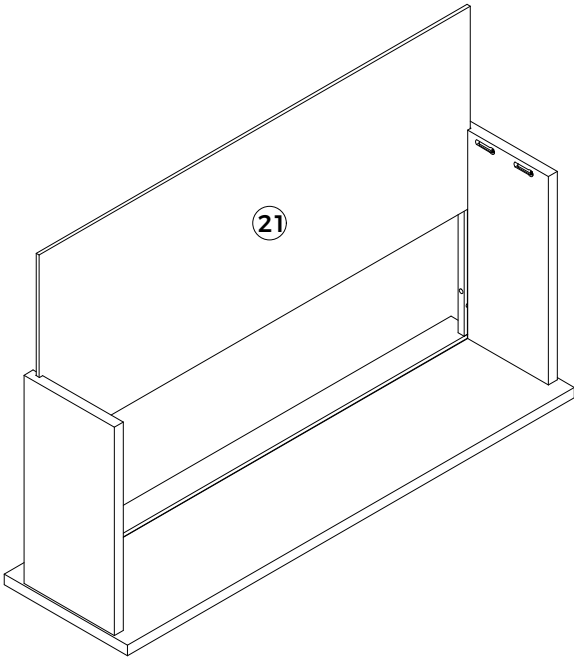

x3

STEP 6


Attach 3 x Lower drawer backs [20] to drawer side panels as shown.
Ensure lower drawer base panel is fully slotted into the grooves.

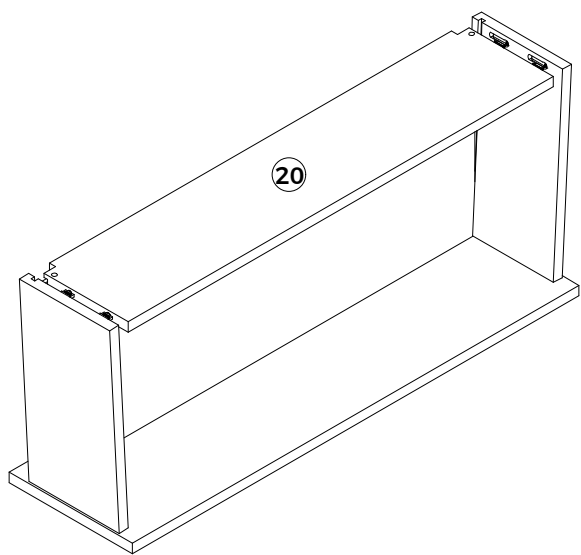


x3

STEP 7


Insert 8 x Small dowels [C] into Bottom panel [4] and Fixed shelf [8] .
If needed use a mallet to gently tap the dowels into place.
Screw 2 x cam bolts [A] into Fixed panel [8] as shown,
tighten with a Phillips head screwdriver.

				
	A	2PCS	C	8PCS
				

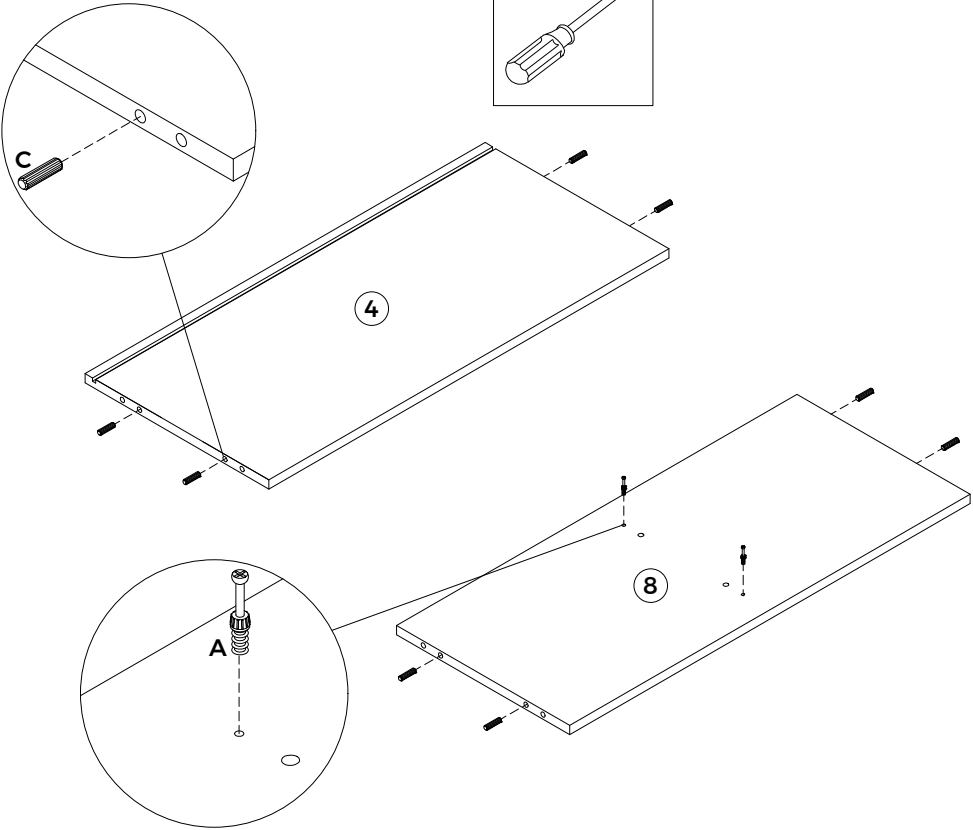


STEP 8

Insert 4 x Small dowels [C] into Side panels [5] & [6] as shown.
Attach 4 x left slides [E] onto Left side panel [5] with 12 x screws [G] as shown, using a Phillips head screwdriver.
Attach 4 x Right slides [F] onto Right side panel [6] with 12 x screws [G] as shown, using a Phillips head screwdriver.

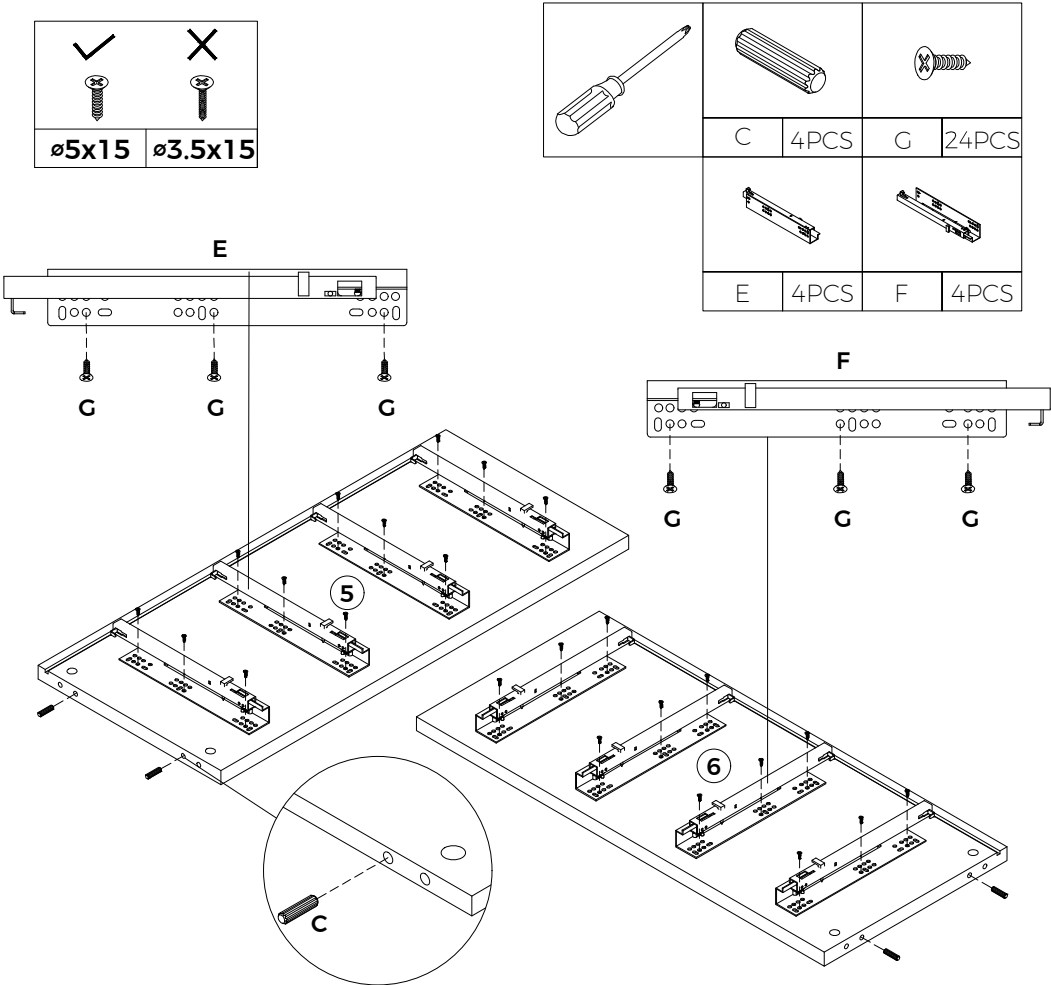


STEP 9

Screw 8 x cam bolts [A] into Side panels [5] & [6] as shown, tighten with a Phillips head screwdriver.
Attach 4 x felt pads [M] to side panels as shown.

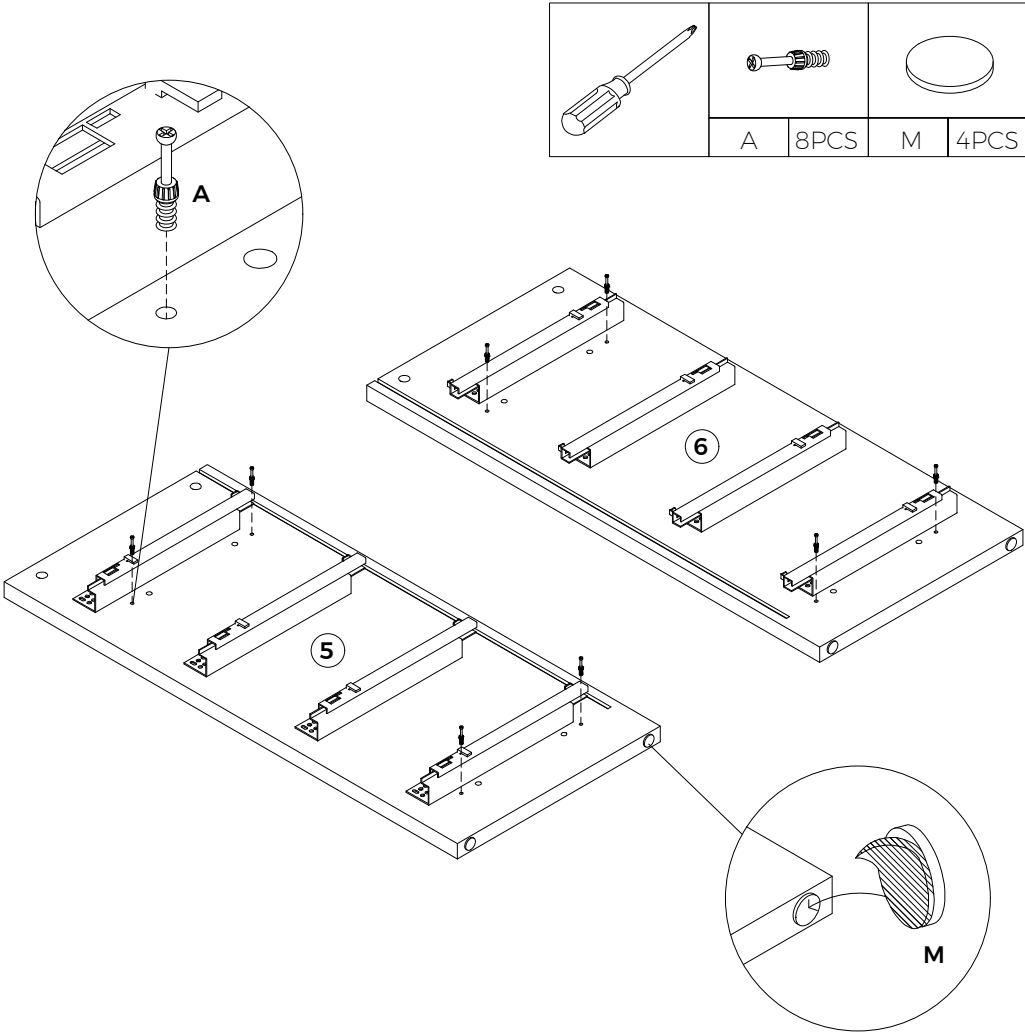


STEP 10

Insert 4 x small dowels [C] into Divider panel [7] as shown.
Attach 1 x Right slide [F] onto Divider panel [7] with 3 x screws [G] as shown,
using a Phillips head screwdriver.





	C	4PCS	F	1PC
	G	3PCS		

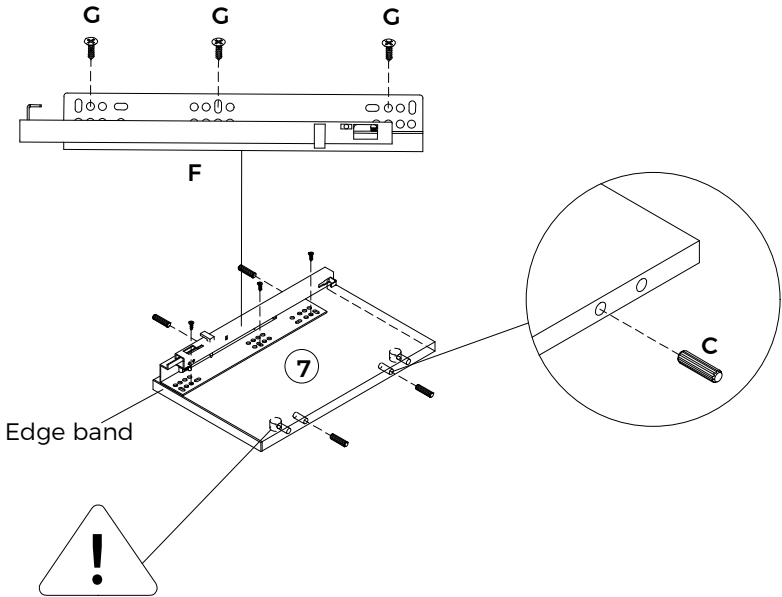

Hole facing downward



STEP 11

Attach Fixed shelf [8] and Bottom panel [4] to Right side panel [6].
Insert 4 x cam nuts [B] into Fixed shelf [8] and Bottom panel [4] as shown,
turn cam nuts clockwise to lock using a flat head screwdriver.

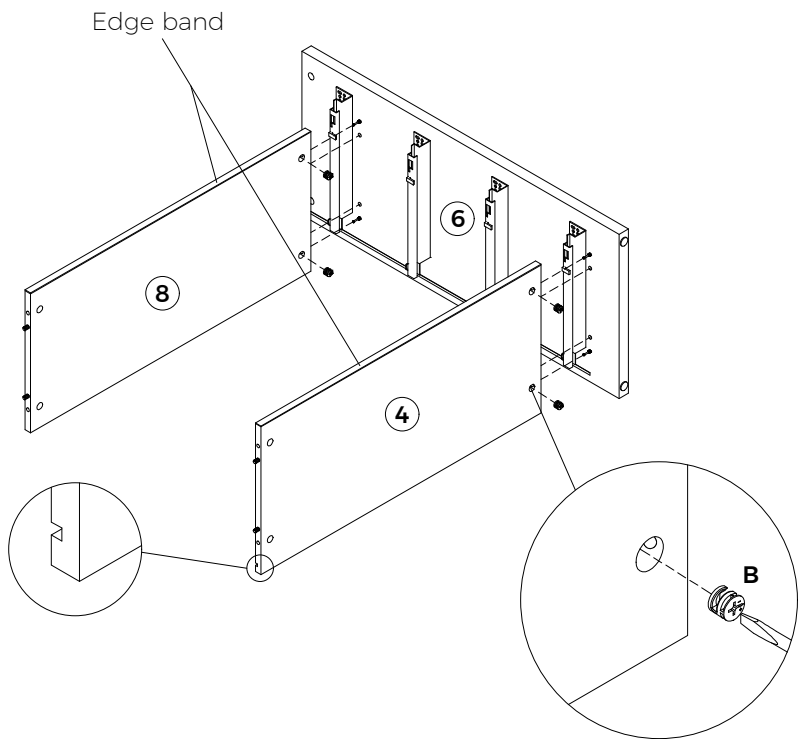



STEP 12

Attach Left side panel [5] to Fixed shelf [8] and Bottom panel [4].
Insert 4 x cam nuts [B] into Fixed shelf [8] and Bottom panel [4] as shown,
turn cam nuts clockwise to lock using a flat head screwdriver.

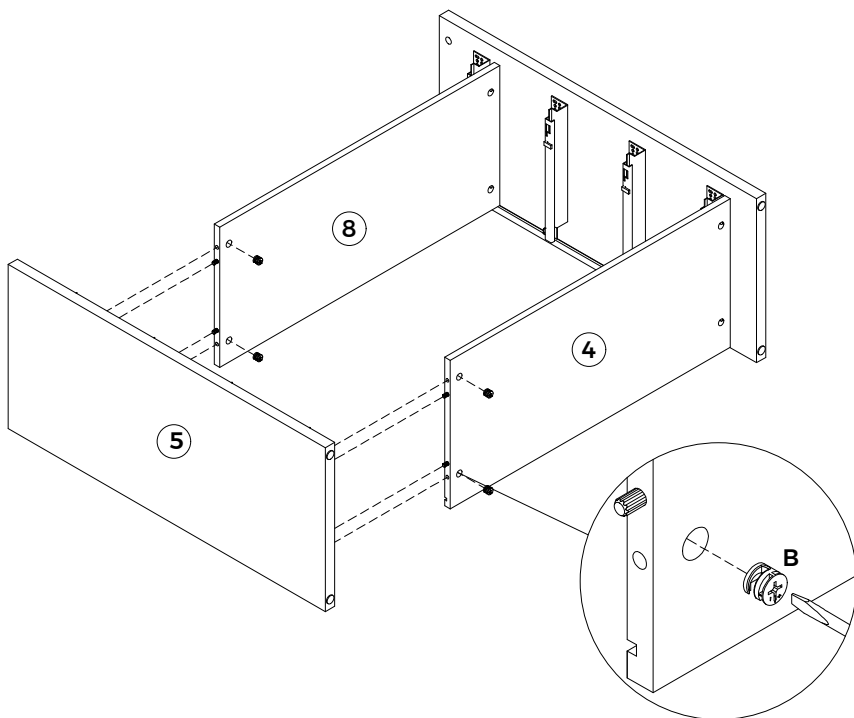




STEP 13

Attach Divider panel [7] to Fixed shelf [8].
Insert 2 x cam nuts [B] into Divider panel [7] as shown,
tighten with a flat head screwdriver.

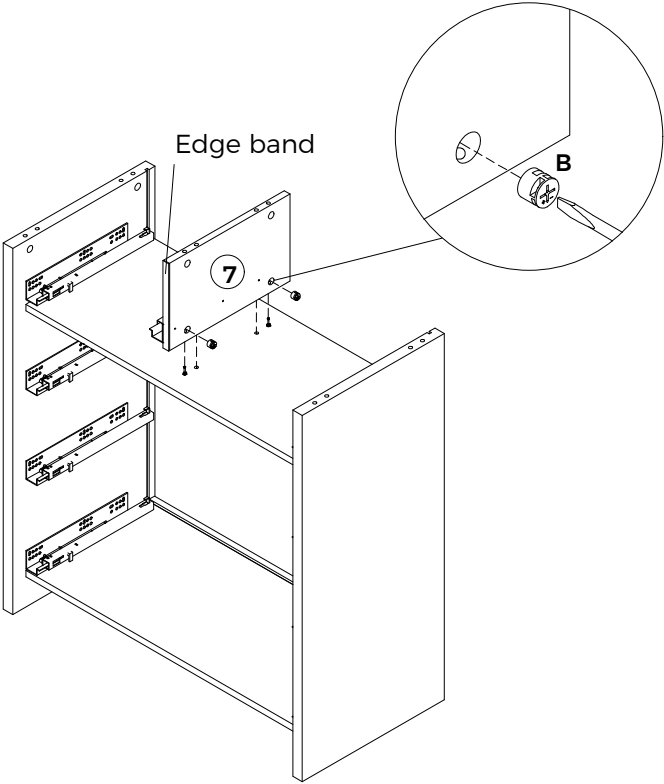


STEP 14

Attach 1 x left slide [E] onto Divider panel [7] with 3 x screws [G] as shown, using a Phillips head screwdriver.

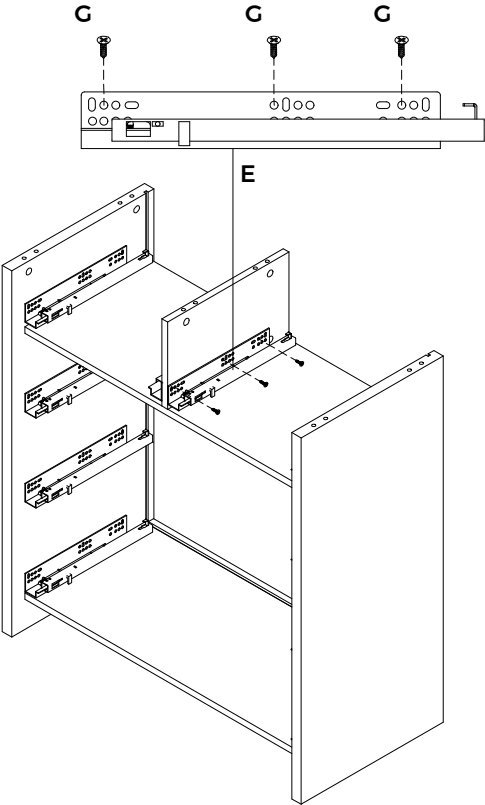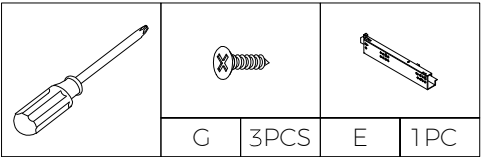


STEP 15

Slot in Upper back panel [9] and Lower back panel [10] into the grooves on side panels and bottom panel as shown. Ensure back panels are fully slotted into the grooves.

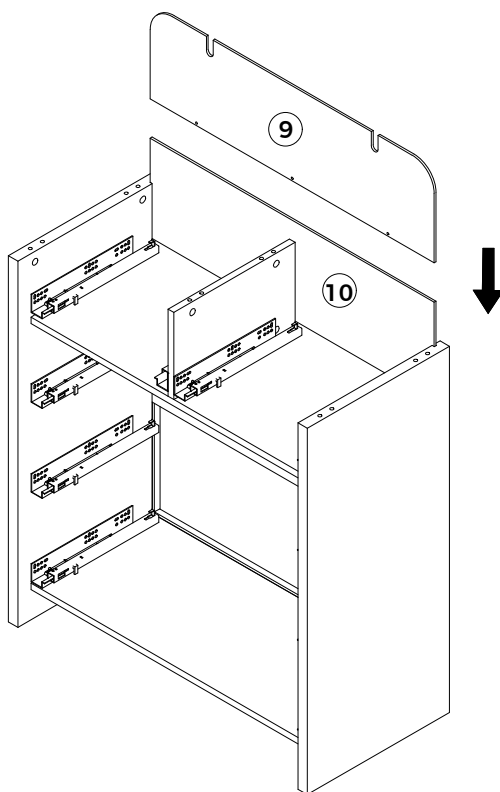




STEP 16

Insert 6 x large dowels [D] into Top panel [1] as shown.
If needed use a mallet to gently tap the dowels into place.
Screw 2 x cam bolts [A] into Top panel [1] as shown.
Attach 2 x L-brackets [N] to Top panel [1] with 4 x screws [P] as shown,
tighten with a Phillips head screwdriver.

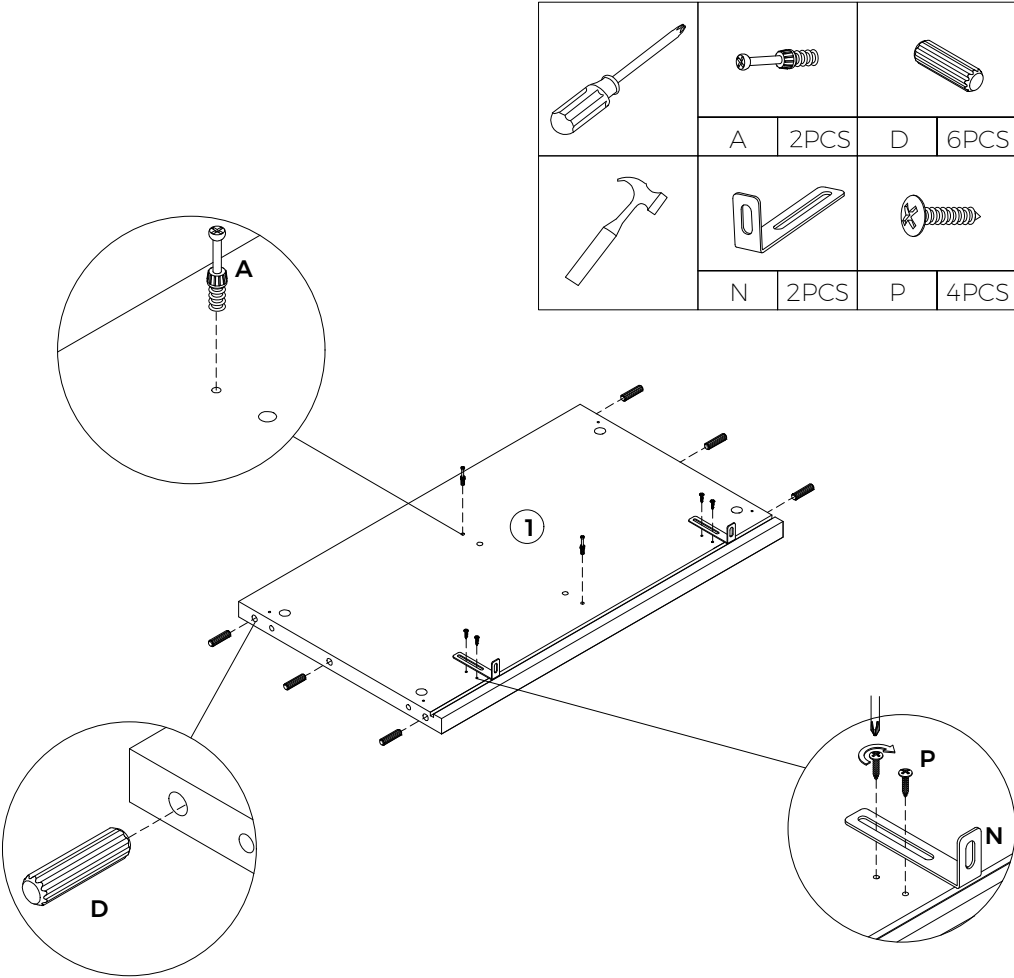



STEP 17

Screw 8 x cam bolts [A] into Corner rails [2] & [3] as shown.

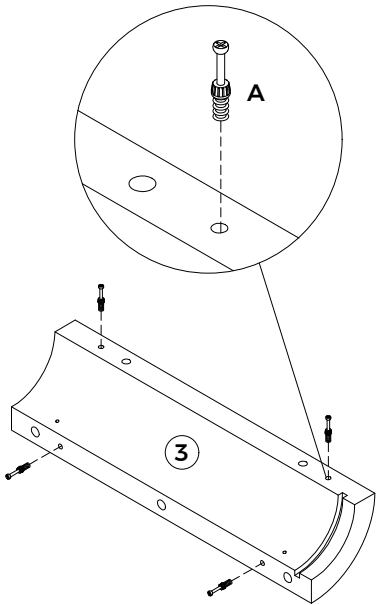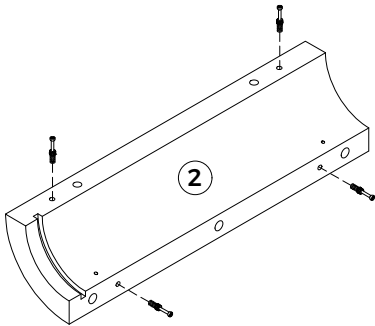


STEP 18


Attach Left corner rail [2] and Right corner rail [3] to Top panel [1] with 4 x cam nuts [B] as shown, tighten with a flat head screwdriver.

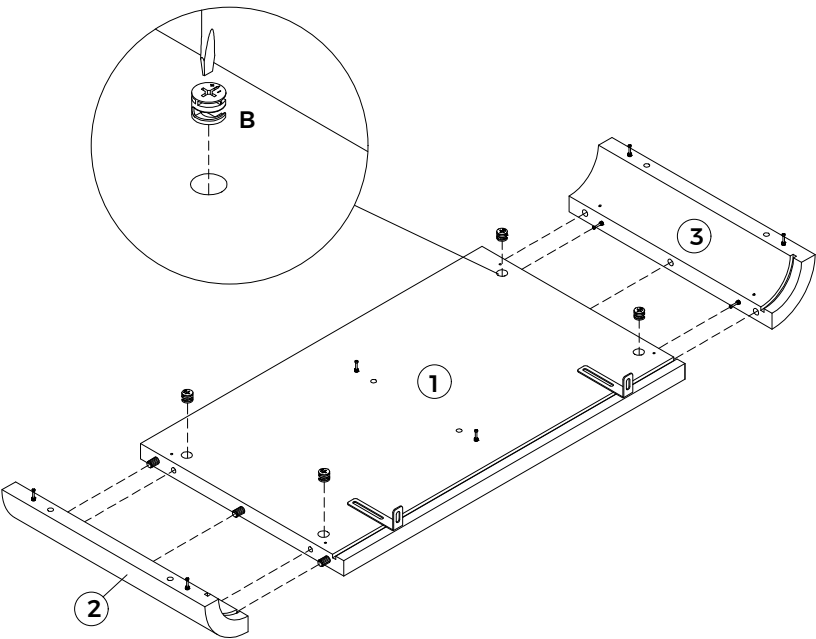

STEP 19



Attach 4 x metal plates [K] to Top panel [1] and Corner rails [2] & [3] with 8 x screws [L] as shown, tighten with a Phillips head screwdriver.

					
K		4PCS		L	
				8PCS	

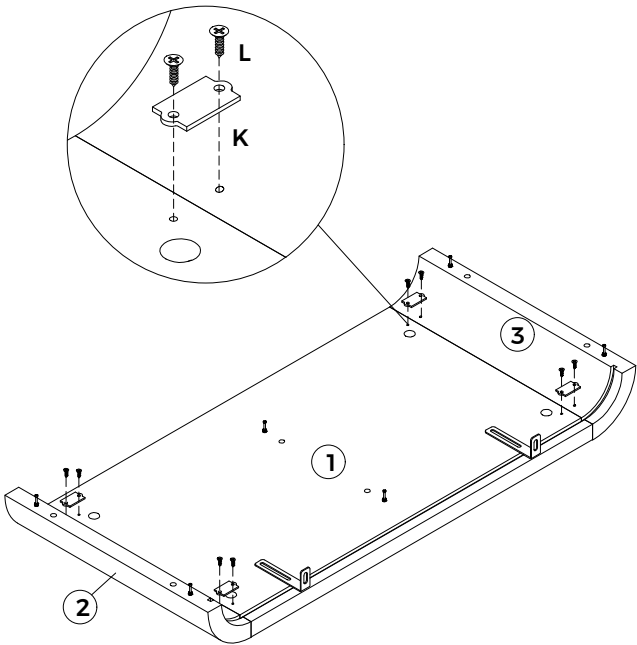

STEP 20

Attach assembled top panel to assembled frame as shown. Insert 6 x cam nuts [B] into Side panels [5] & [6] and Divider panel [7] as shown, tighten with a flat head screwdriver.

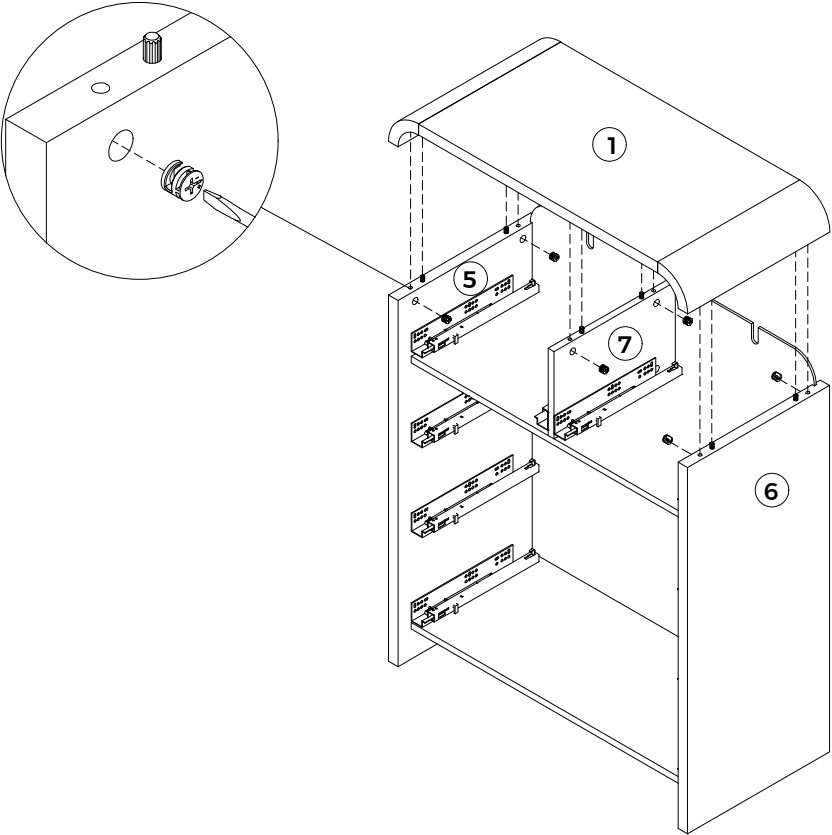


STEP 21

If necessary, gently adjust the Top panel [1] sideways in either direction until XX and YY are equal.

Holding it in place, fix 8 x wedges [Q] to assembled unit with 8 x screws [R] as shown, using a Phillips head screwdriver.

Screw 3 x screws [R] into Upper back panel [9] as shown, using a phillips head screwdriver.

			
Q	8PCS	R	11PCS

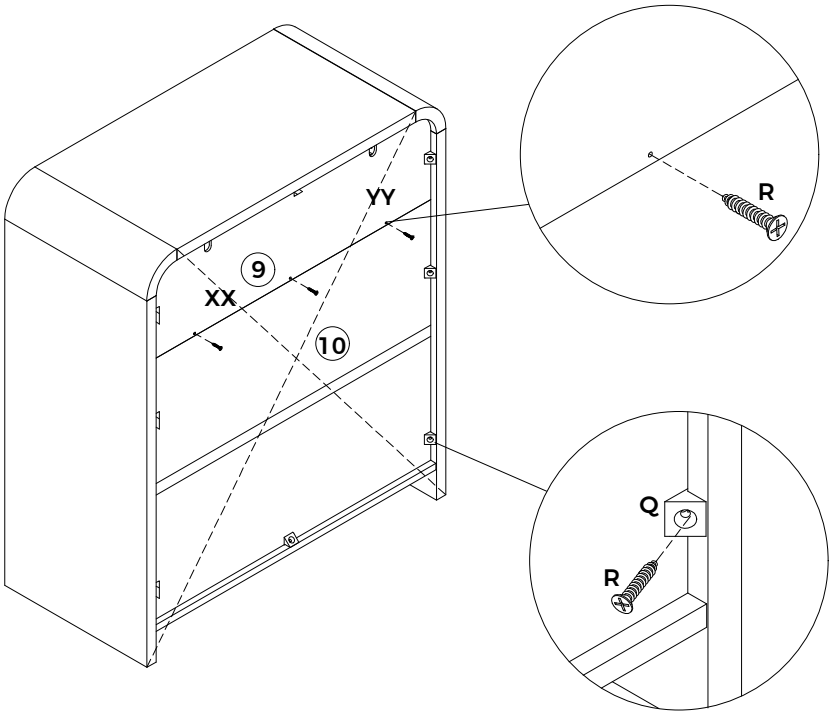

STEP 22 - Anti-tip Restraint

WARNING

To reduce the risk of serious injury or death from tip-over, this unit must be securely anchored to a suitable wall before use.


- Never allow children to climb, stand or hang on this furniture.
- Always secure the unit to a suitable wall using appropriate fixings for your wall type.
- Before drilling, check for hidden electrical cables, water pipes and other concealed services.
- If you are unsure how to install the anti-tip restraint or select suitable fixings, seek advice from a qualified installer or your local hardware store.

Installation

1. With assistance, move the chest into its final position.
2. Using the attached L-brackets [N] as a guide, mark the fixing positions on the wall.
3. Move the cabinet away from the wall and prepare the wall for fixing as required.
4. Reposition the cabinet and securely fasten the L-brackets [N] to the wall using fixings suitable for your wall type.
5. Check that the cabinet is level, stable and securely anchored before use.


Important Handling Note

Always lift the cabinet from the base. Do not lift or carry the cabinet by the top panel, as this may cause damage or separation.

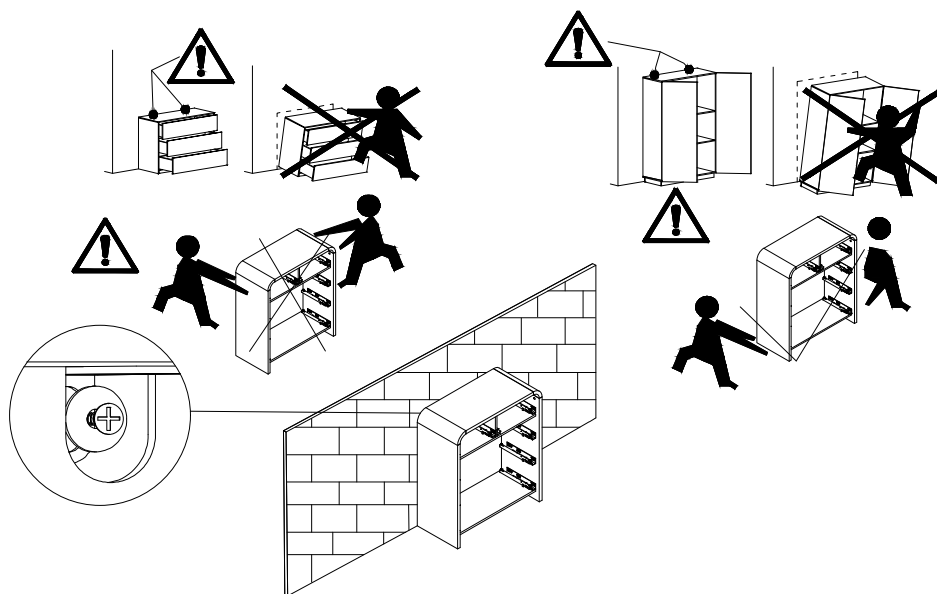







STEP 23

Insert the drawers into chest carefully as shown.

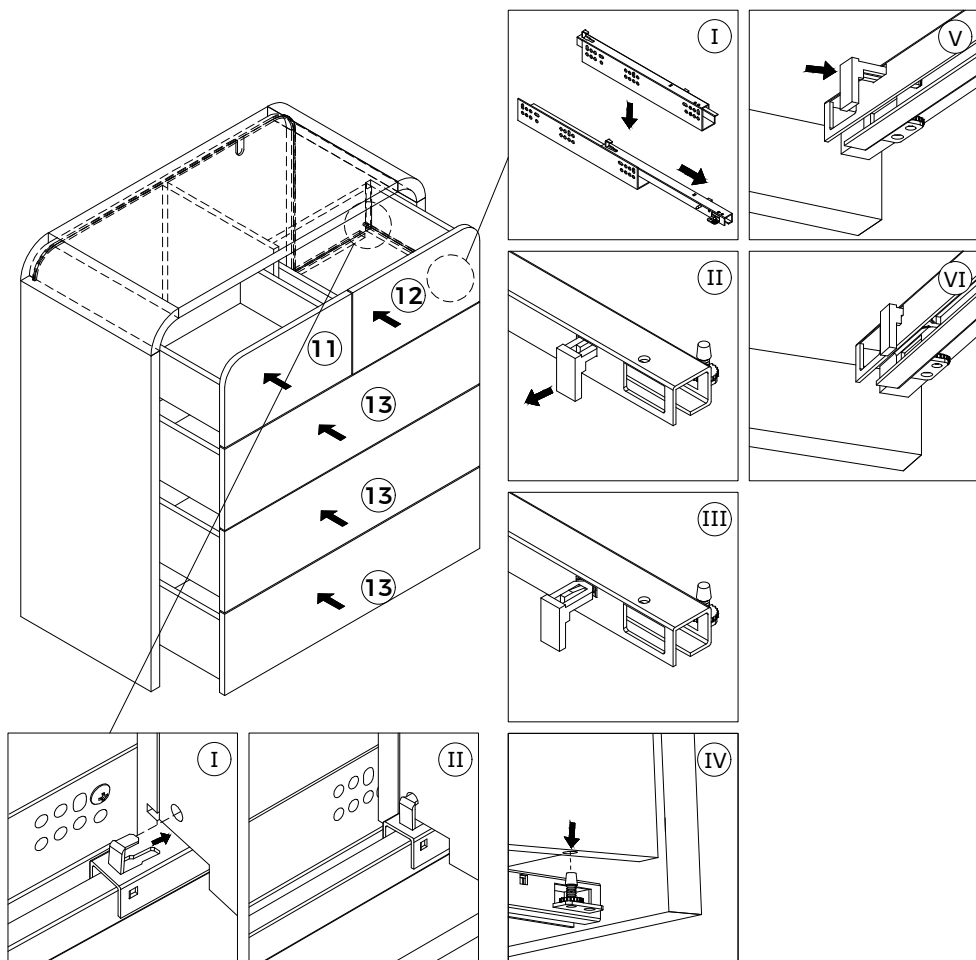


STEP 24

If needed, adjust the drawer slide as shown.

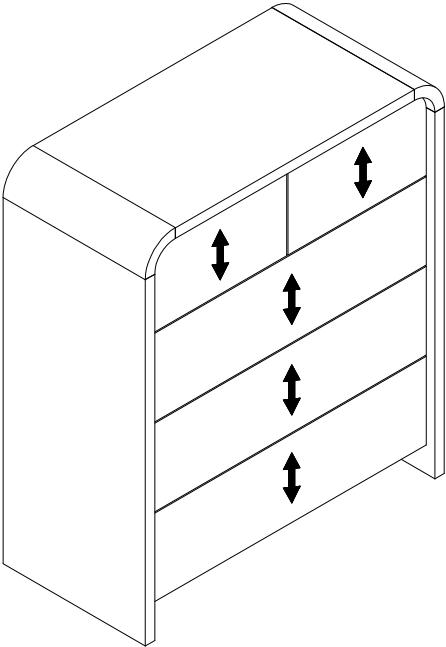

STEP 25

Note: To open the drawer, push the center of the drawer front inward as shown.

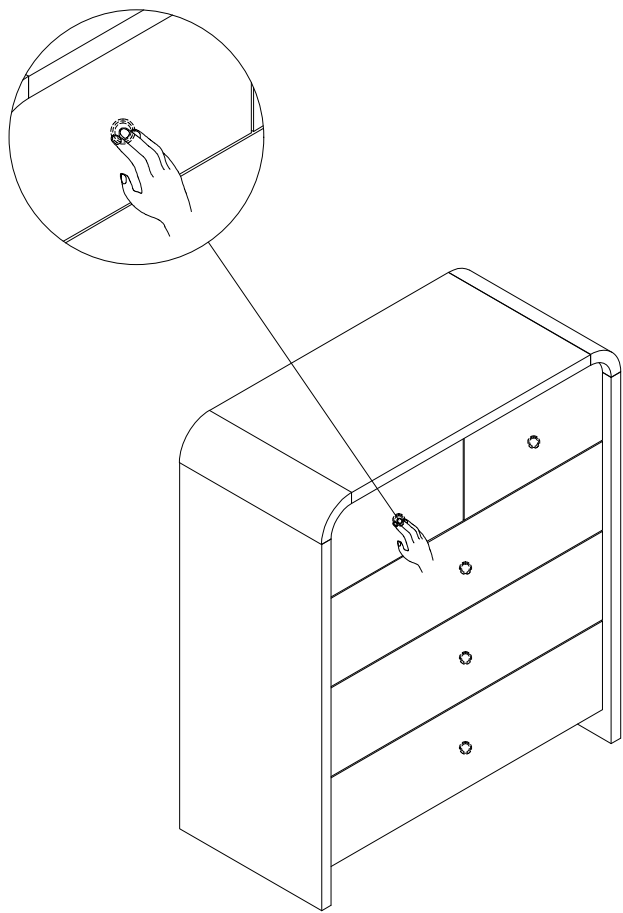



our 2 year GUARANTEE

Our products come with a 2 year guarantee, giving you extra peace of mind when shopping with us!

What the guarantee covers



PRE-INSERTED FIXINGS

e.g. loose metal threads



FAULTY JOINTS

e.g. legs bending



EXTERNAL FIXING FAULTS

e.g. metal discs removing
from table top



STRUCTURAL INTEGRITY

e.g. the frame of the
product