



The page features abstract geometric shapes in shades of gray. In the top right corner, there is a small triangle pointing towards the center. The bottom half of the page is dominated by a large, complex shape composed of several overlapping triangles and polygons, creating a layered, mountain-like effect.


Installation & Assembly

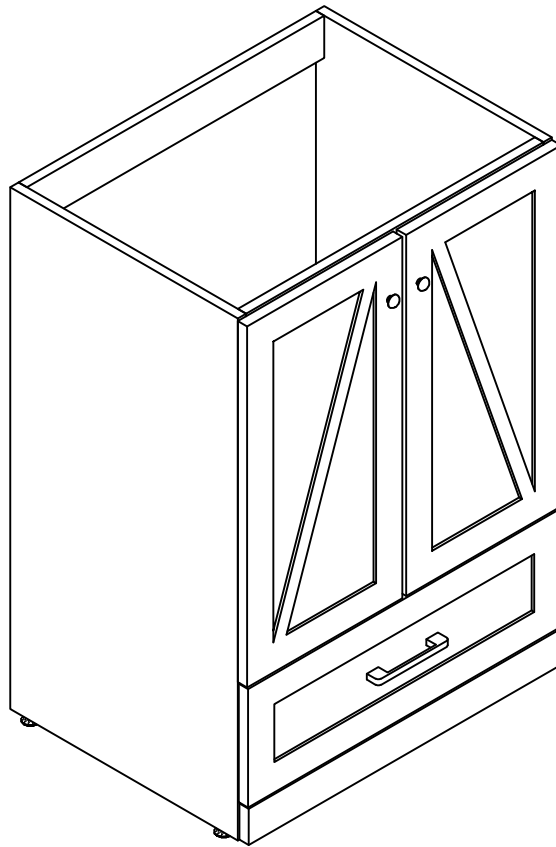

YOU MAY NEED (NOT SUPPLY)

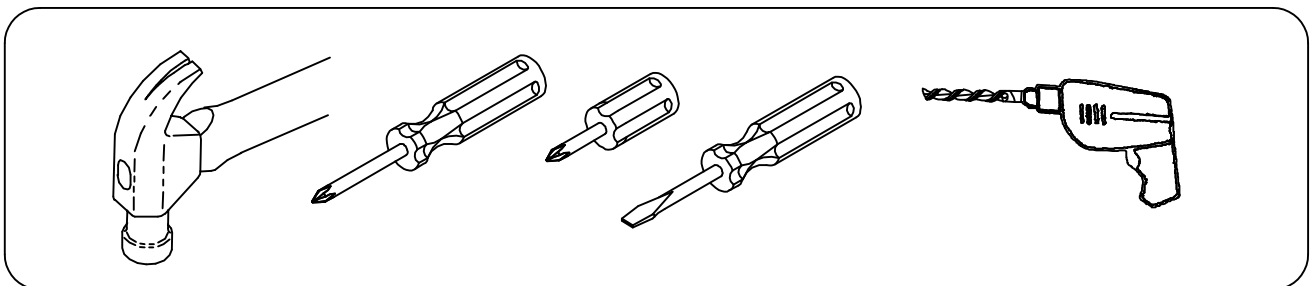

ASSEMBLY DIAGRAM

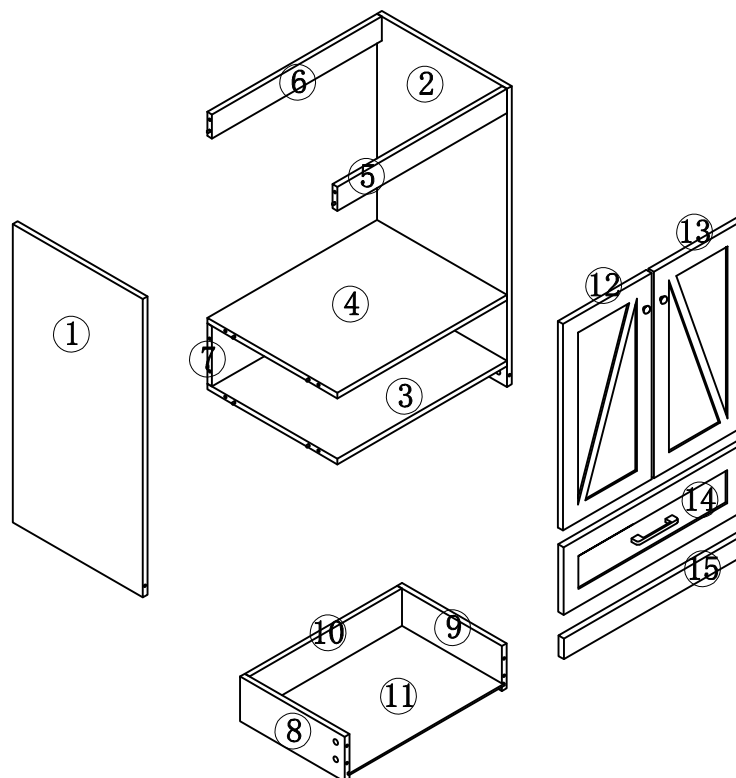



PARTS LIST					
PARTS LIST					
NO	DESCRIPTION	QTY	NO	DESCRIPTION	QTY
①	Left side panel 	1	⑨	Right drawer side panel 	1
②	Right side panel 	1	⑩	Drawer rear panel 	1
③	Bottom panel 	1	⑪	Drawer bottom panel 	1
④	fixed middle board 	1	⑫	Left door panel 	1
⑤	Front fixed panel 	1	⑬	Right door panel 	1
⑥	Back fixed panel 	1	⑭	Drawer front panel 	1
⑦	Back fixed panel 	1	⑮	Front fixed panel 	1
⑧	Left drawer side panel 	1			

PARTS LIST					
HARDWARE LIST					
NO	DESCRIPTION	QTY	NO	DESCRIPTION	QTY
A	Three-in-one eccentric wheel 	26	G	4*16mm screw 	36
B	Three-in-one connecting rod 	26	H	4*18mm screw 	2
C	Three-in-one sticker 	26	I	4*23mm screw 	2
D	8*40mm wood dowel pins 	12	J	Small adjustable foot 	4
E	Drawer slides 	2	K	Door handle 	2
F	Door hinges 	4	L	door handle 	1
CAUTION: Please confirm the parts list before installation					

STEP 1


HARDWARE LIST		
Three-in-one connecting rod B  26PCS	Small adjustable foot J  4PCS	

1.Put the three-in-one connecting rod in the 10mm hole of the following panels and tighten them with a cross screwdriver or an electric tool.

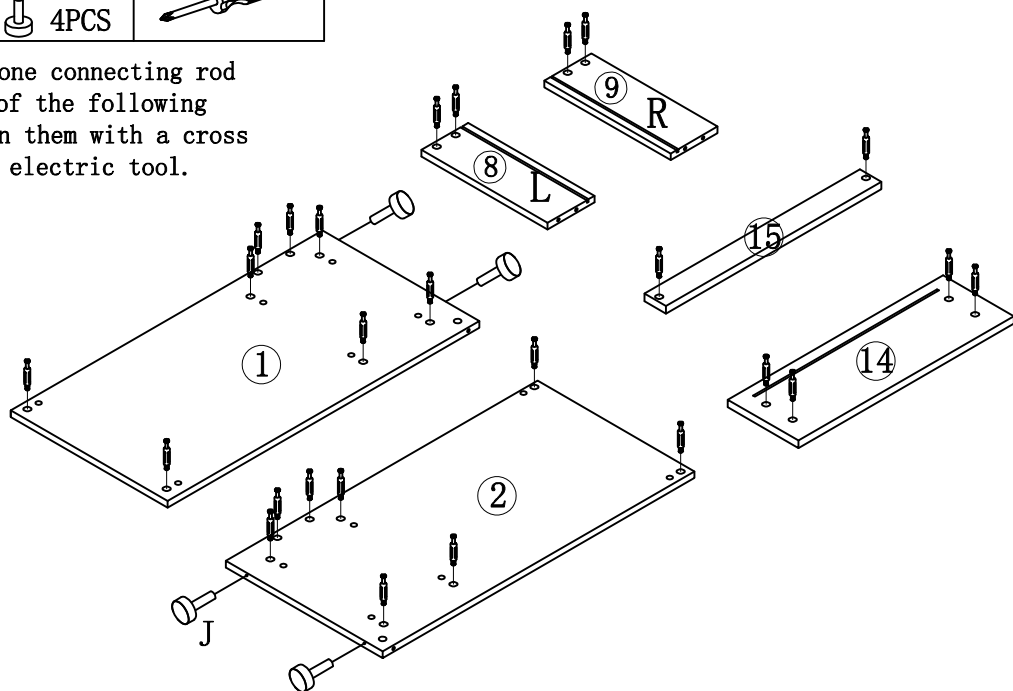

2.Fix the small adjustable feet on the bottom of the left and right side panels


STEP 2

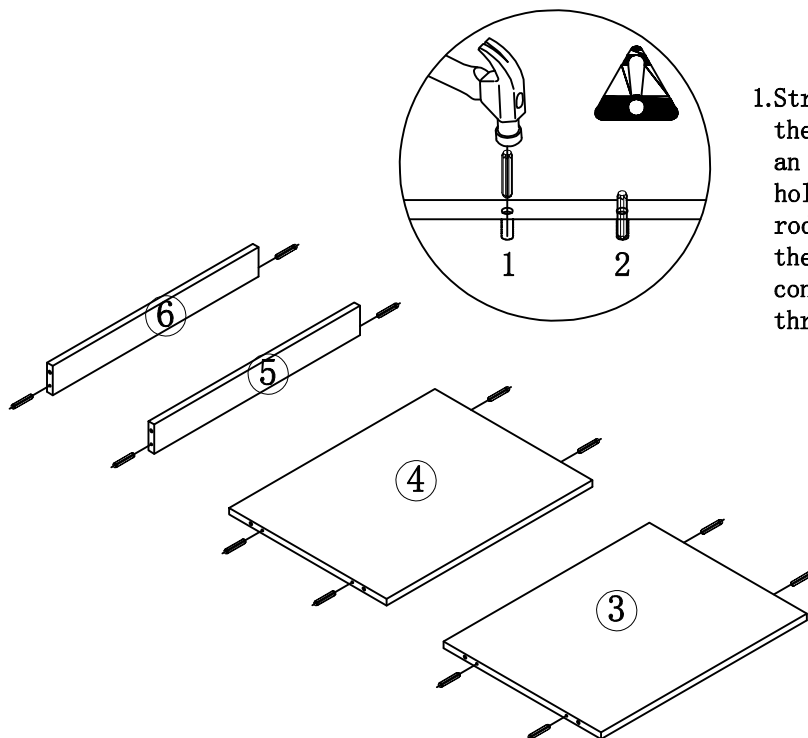

1.Strike the 08*40mm wood dowel pin into the 8mm hole of the above panels with an iron hammer. Please note that the hole of the three-in-one connecting rod should also be 8mm. The hole of the three-in-one connecting rod connects to the hole of 15mm three-in-one eccentric wheel.

HARDWARE LIST	
8*40mm wood dowel pins D  12PCS	

STEP 3


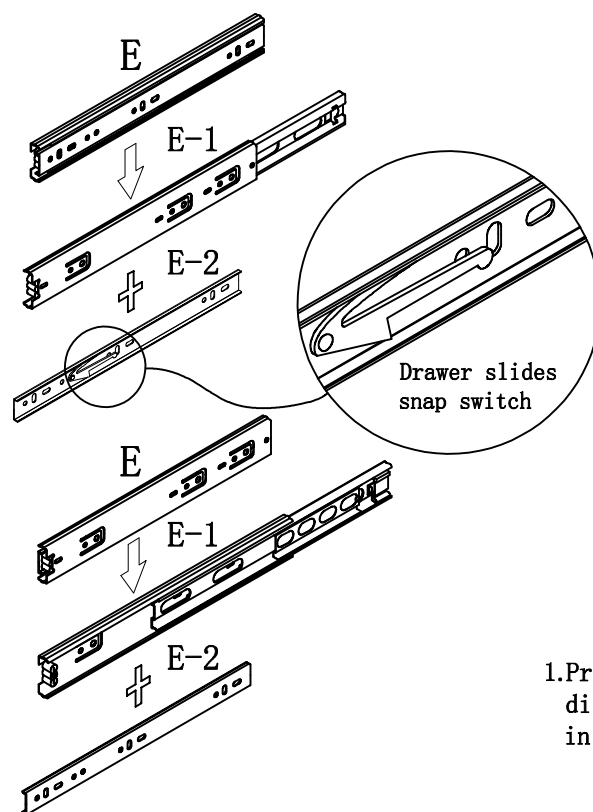


HARDWARE LIST	
Drawer slides	
E	2PCS

1. Press the slide snap switch, disassemble slide blocks and put them in a place properly for further use.

STEP 4



1. Fix the drawer slide to the side panel with 4*16mm screws.

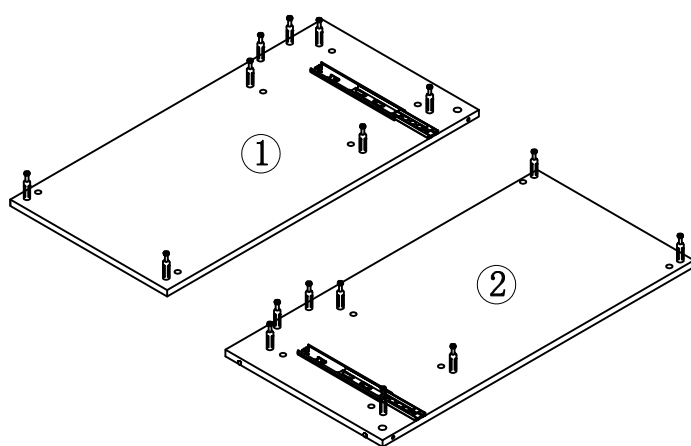


2PCS E-1

HARDWARE LIST		
4*16mm screw	Drawer slides	
G	E-1	
6PCS	2PCS	

STEP 5

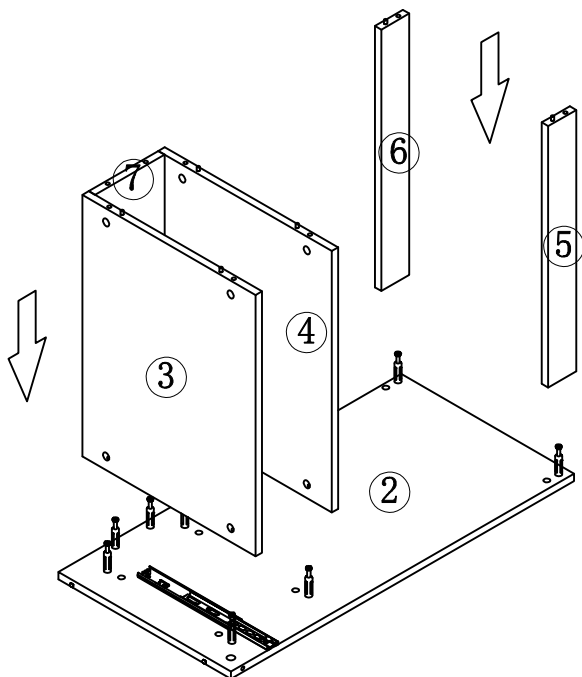

1.Connect No. 3-4-5-6-7 panel to No.2 panel tightly with the three-in-one eccentric wheel.



2.Cover the mounting hole of the eccentric wheel with a three-in-one sticker.



HARDWARE LIST

Three-in-one
eccentric wheel
A  8PCS


Three-in-one
sticker
C  8PCS



STEP 6

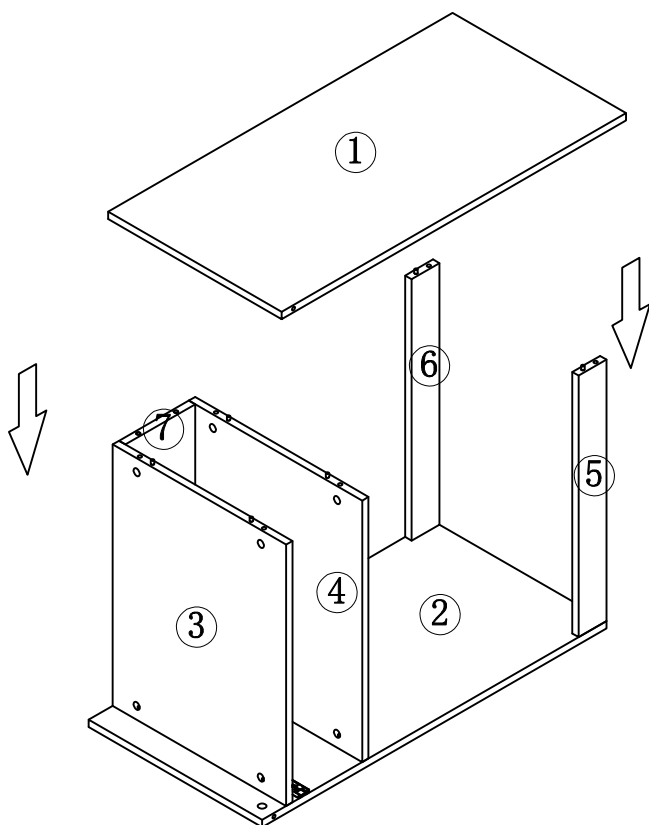

1.Connect No. 1 panel to No. 3-4-5-6-7 panel tightly with the three-in-one eccentric wheel.



2.Cover the mounting hole of the eccentric wheel with a three-in-one sticker.



HARDWARE LIST

Three-in-one
eccentric wheel
A  8PCS


Three-in-one
sticker
C  8PCS



STEP 7

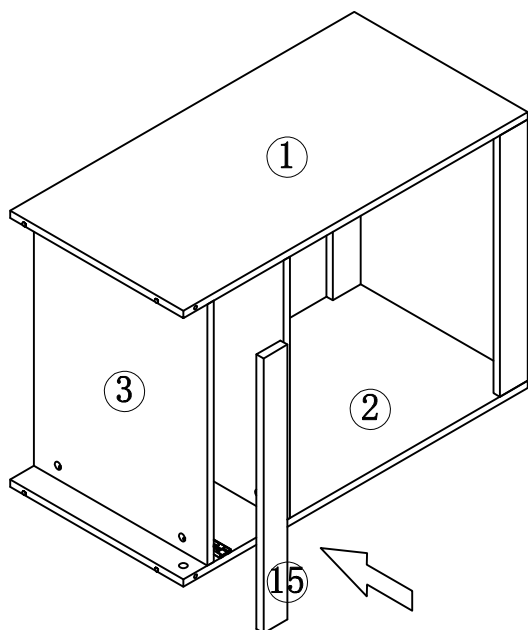

1. Connect No. 15 panel to No. 1-2 panel tightly with the three-in-one eccentric wheel.



2. Cover the mounting hole of the eccentric wheel with a three-in-one sticker.



HARDWARE LIST

Three-in-one
eccentric wheel
A  2PCS


Three-in-one
sticker
C  2PCS



STEP 8

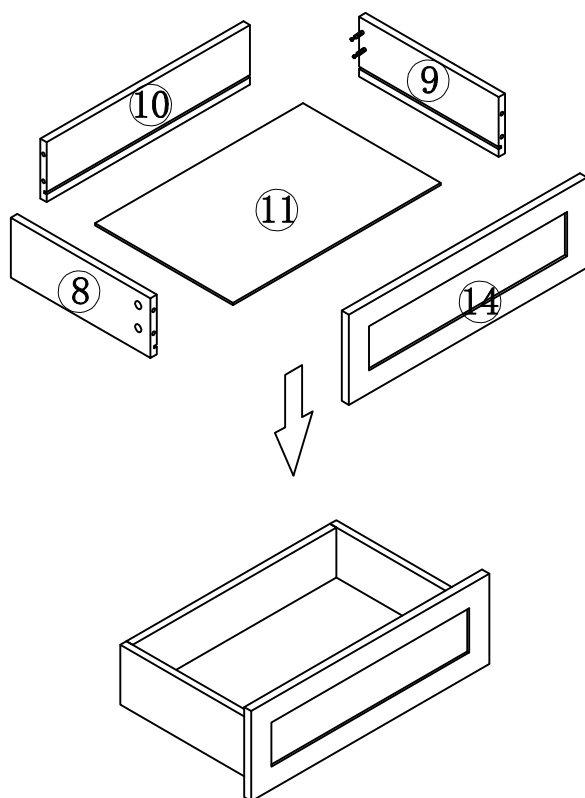

1. Install No. 8-9-10-11-14 panels with the three-in-one eccentric wheel tightly.



2. Cover the mounting hole of the eccentric wheel with a three-in-one sticker.



HARDWARE LIST

Three-in-one
eccentric wheel
A  8PCS

Three-in-one
sticker
C  8PCS



STEP 9

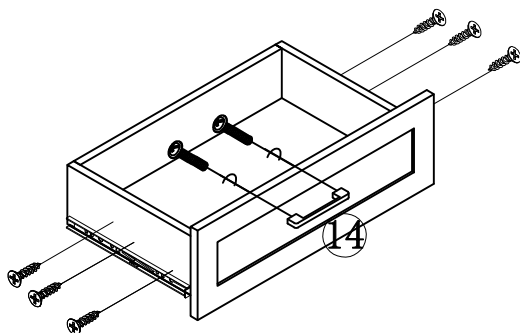


3. Lock the spare drawer slide block to the drawer.


4. Install the door handle with 4*18mm screws.

HARDWARE LIST		
Door handle	4*18mm screw	
L 1PCS	H 2PCS	
4*16mm screw	Drawer slides	
G 6PCS	E-2 2PCS	

STEP 10

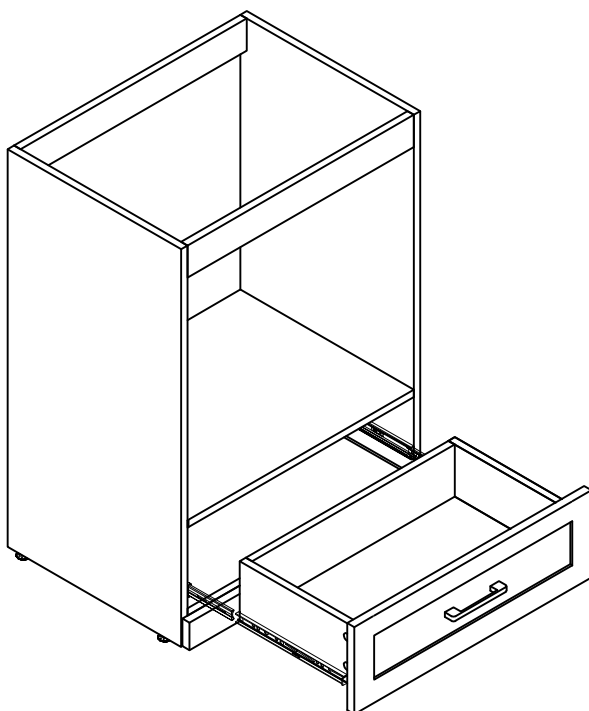


Align slide block with the trough on the guide rail, press the snap switch and press it forward to install the drawer.

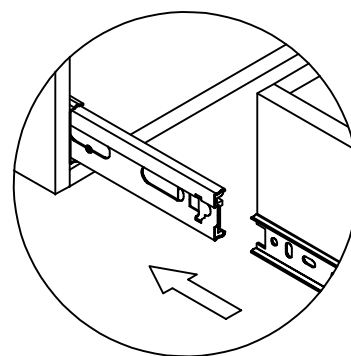


If the drawer is uneven or catches the door, loosen the screws, slightly reposition the slides, then retighten to adjust drawer height.


STEP 11

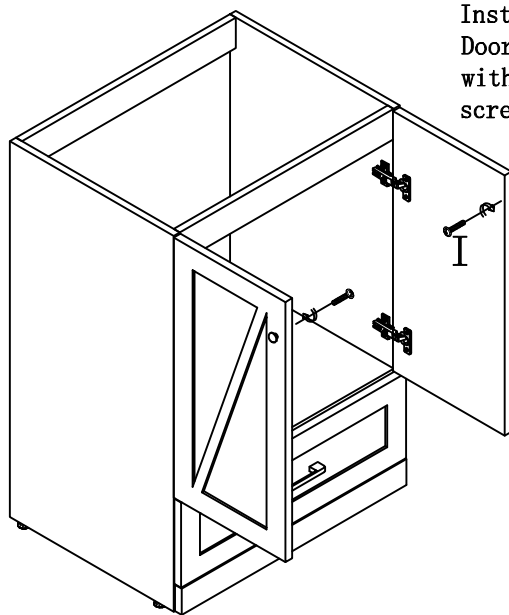


Install the Door handle with 4*23mm screws.





1. Install the hinge cup to the door panel with 4*16mm screws.



2. Install the hinge to the side panel with 4*16mm screws.



4. Adjust the door panel clearance.




3. Install the hinge cup on the door panel to the hinge of the side panel.

HARDWARE LIST				
4*16mm screw	Door hinge	Door handle	4*23mm screw	
G 24PCS	F 4PCS	K 2PCS	I 2PCS	


Hinge/Door Adjustment and Realignment

If adjustment or realignment is needed, follow the instructions provided in the following chart.


Vertical adjustment




1. Loosen screws







2. Adjust hinge







3. Tighten screws



Horizontal adjustment



Door gap adjustment





Choking hazard-Small Parts : This unit contains small parts, not for children under 3 years.

Tip-over hazard : Secure finished unit to wall stud using L-Bracket and wall screw (#10*1.5"W/out provided). If a wall stud is not neccessible , Consault your local hardware store for appropriate mounting hardware . Failure to properly install will result in product collapse or tip-over. Serious injury can occur .