DREAMS IDEA

Instruction Manual



DREAMS IDEA

NO.CB00(18&19)

ABOUT US

DREAMSIDEA IS A ONE-STOP HOME

FURNISHING AND SERVICE COMPANY BASED IN USA.

WE ARE DEDICATED TO BRING YOUR DREAM HOME TO LIFE.

OUR SERVICES COVER FROM DESIGN, PRODUCTION,

DIRECT SELL, STORAGE, AND TRANSPORTATION.

IF REALITY IS THE NEAR SHORE

AND IDEALISM THE FAR SHORE,

DREAMSIDEA

AS THE FERRY BETWEEN THEM,


EAGER TO ACCOMPANY YOU ON A JOURNEY

TO YOUR IDEAL HOME.

ITEM NO.CB00(18&19)

WARRANTY

We strive to offer high quality product and we also try our best to satisfy each customer that order from us, no matter on products or services as needed. Each customer receives a record of their order, such as the order number or item receipt. For any items that are out of warranty period, you may still be able to purchase the replacement parts from our company if they are available.

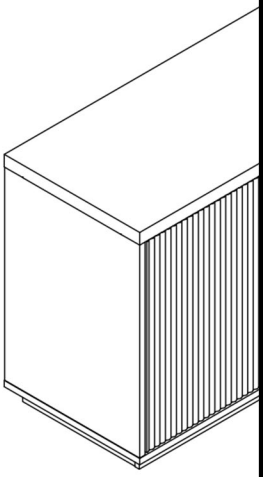

Are you having difficulty
with assembly? Missing parts?
E-mail:support@dreamsidea.com
Tel:+1-562-510-9089

send an email with your order No. to us
For return, please check the return policy with the retailer or platforms you bought from.
Appreciate your purchasing from us.
Pop up your life by our furniture !

MAINTENANCE AND WARNING

Please read the manual thoroughly before you start installing.

Avoid direct sun light and high humidity.

Packaging and small parts may have choking hazard, please keep them away from children and pets.

Please clean the product according to each clean code, check the product description for more information.

This product is designed for indoor residential use only.

Avoid placing hot, wet, or heavy objects directly on the surface.

DO NOT overload the shelves.

Keep the doors and drawers closed when not in use to maintain balance.

If moving the product, empty all shelves and drawers first.

Disassemble large furniture before relocation to avoid structural stress.









PRODUCT DESCRIPTION

High-Capacity Divided Storage System: Four equal-width doors open to clearly partitioned interior compartments, offering generous space for books, documents, décor, media equipment, and daily essentials.


Integrated Cable Management Opening: A reserved wiring hole allows convenient device connection for entertainment components or office electronics, keeping cords controlled and visually streamlined without disrupting the cabinet's minimalist exterior.

Premium Solid Wood Construction: The cabinet body, door panels, and substantial base are crafted entirely from natural solid wood, delivering impressive load-bearing performance, long-term durability, and a healthier indoor furnishing choice.

















Reinforced One-Piece Structure with Elevated Base: The integrated cabinet frame enhances stability, while the thick same-material base raises the unit slightly for improved moisture protection and structural balance.

Minimalist Design with Textured Detail: Clean architectural lines, symmetrical proportions, concealed pull design, and precision vertical fluting create subtle visual depth while preserving a sleek, uninterrupted façade.

EXPLODED VIEW

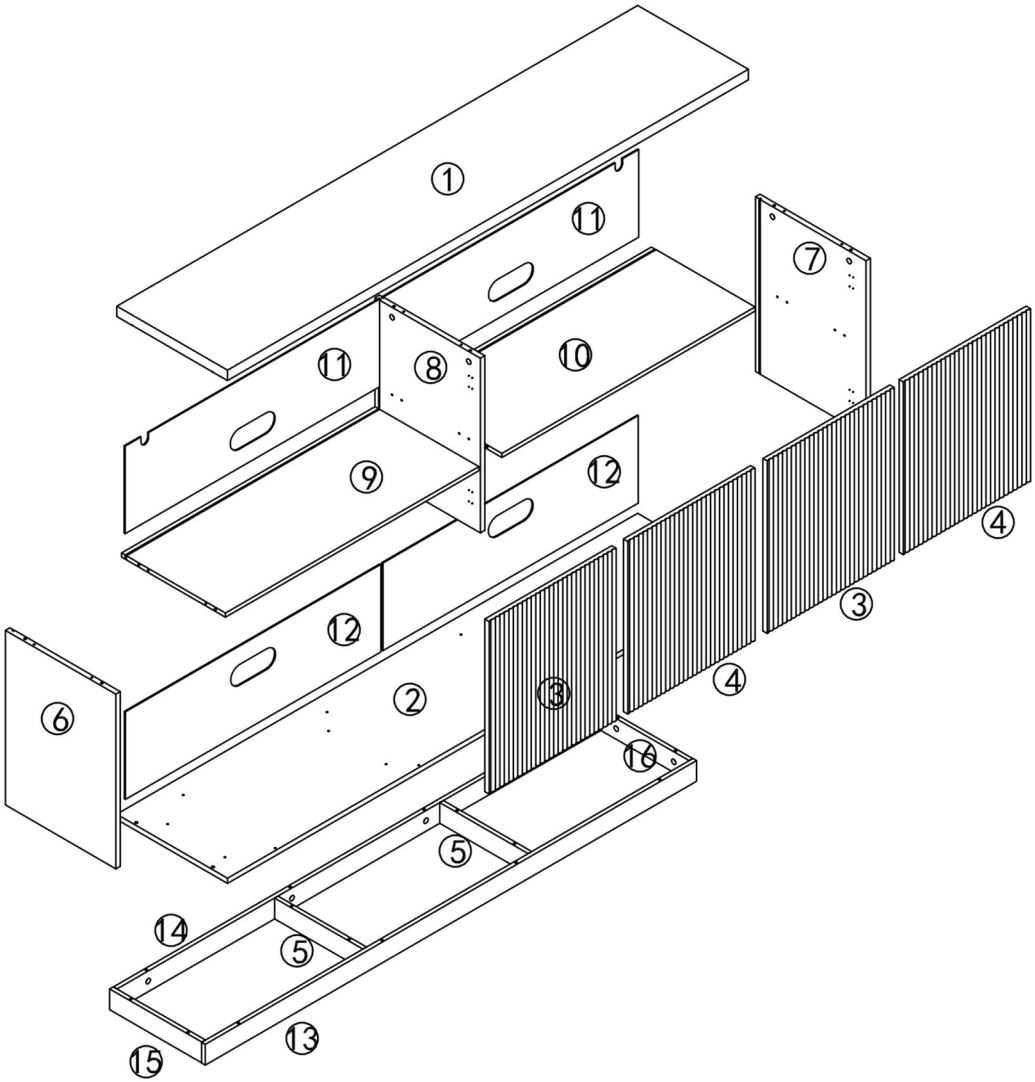



PARTS

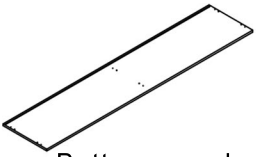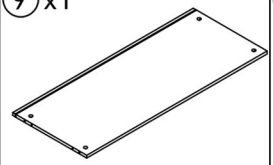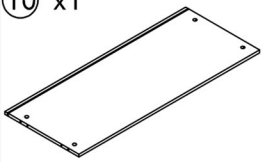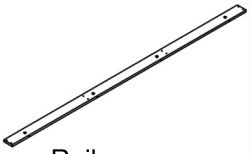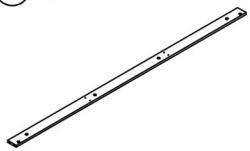① x1  Top panel	② x1  Bottom panel	③ x2  Doors	④ x2  Doors
⑤ x2  Support blocks	⑥ x1  Side panel	⑦ x1  Side panel	⑧ x1  Middle panel
⑨ x1  Shelf boards	⑩ x1  Shelf boards	⑪ x2  Back panels	⑫ x2  Back panels
⑬ x1  Rail	⑭ x1  Rail	⑮ x1  Support blocks	⑯ x1  Support blocks

HARDWARE

TOOL LIST


NOTE: Designated with (★) We provide additional spare parts in the hardware package


A x 40 +4  ★Cam bolts	B x 40 +4  ★Cam locks	C x 28 +3  Wooden dowel ★ Ø6*30mm	D x 4+1  Screws M3.5*35mm
E x 64 +7  Screws ★M3.5X12mm	F x 24 +3  Screws ★M3X16mm	G x24 +3  ★Back panel clips	H x 1  Screwdriver
J x 2  J4 J3 J2 J1 Anti-tip brackets	L x 4  Side door Hings	M x 4  Middle door Hings	N x 4  Magnetic catches


Please make sure all hardware&packing material fitting the list. Especially some small accessories may be missing during transportation. Please contact us if you have any question.

step 1 ---Center Board Prep

Screw the cam bolts (A) into the holes on both sides of the center boards (8).

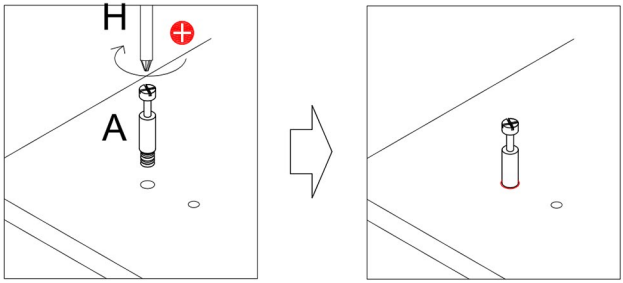


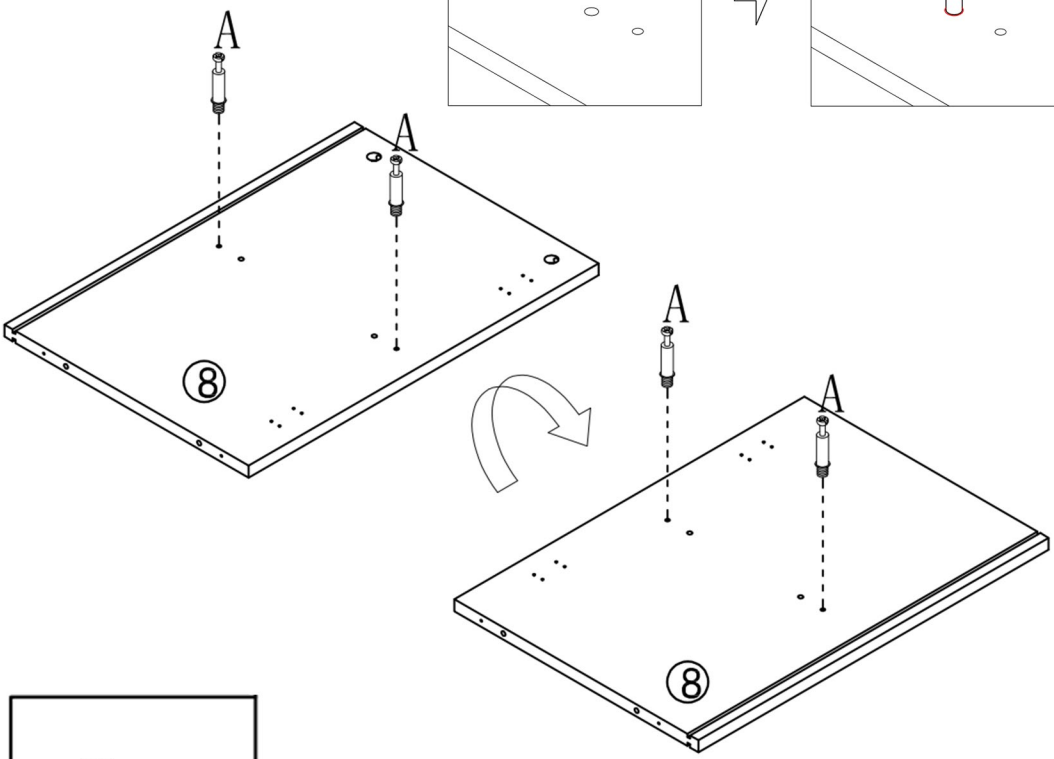



step 2 ---Inner Structure


Connect the shelf boards (9) and (10) to the center board (8) using wood dowels (C) and cam locks (B).

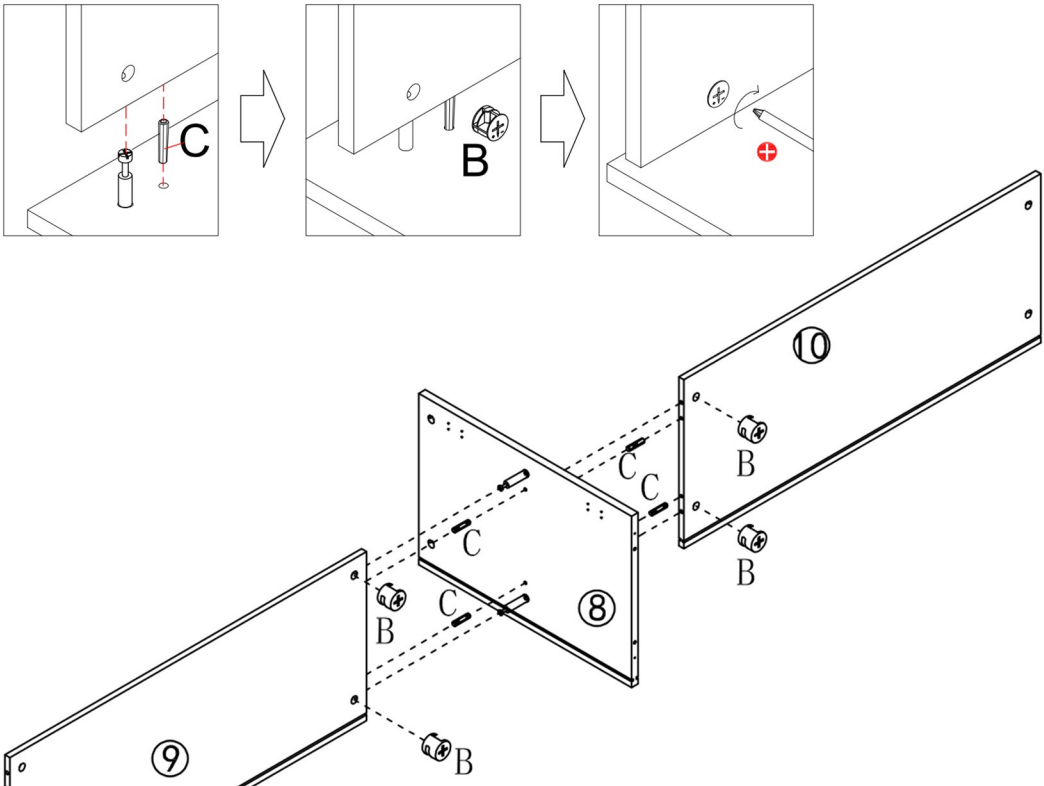


	
Cx4	Bx4

step 3 ---Side Panel Prep


Screw the cam bolts (A) into the inner side of side panels (6) and (7).

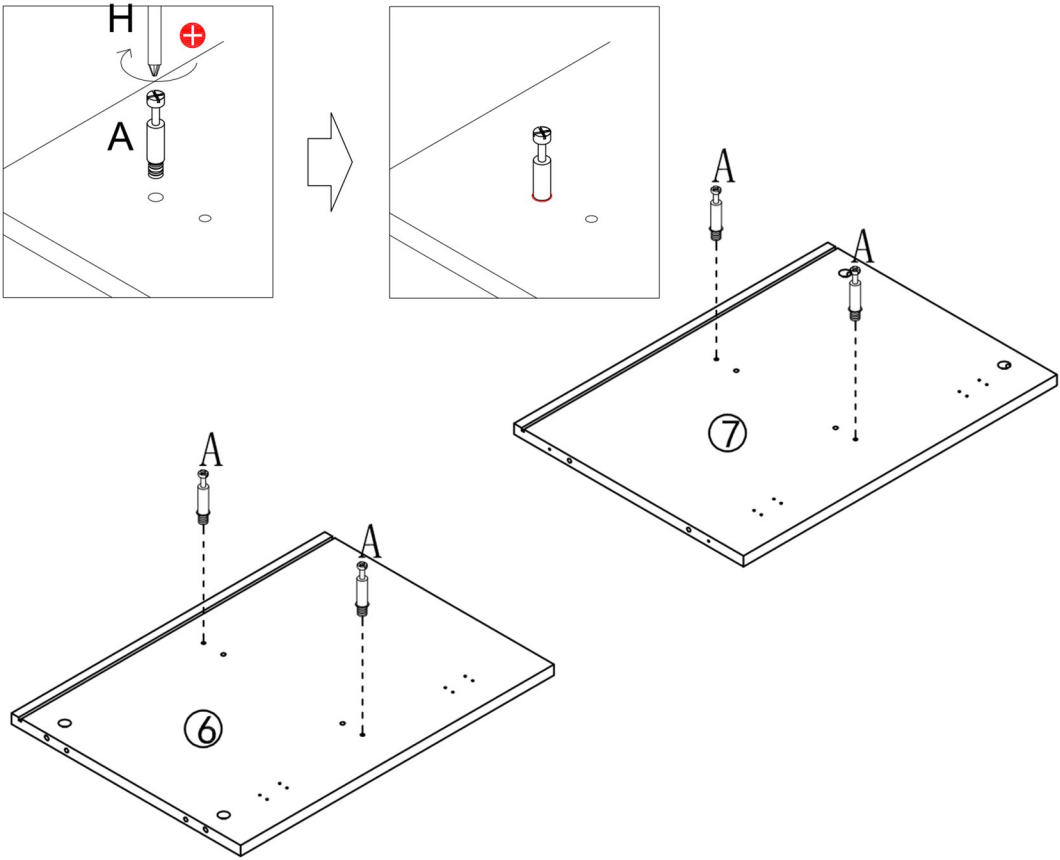


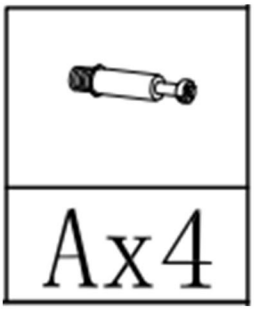

step 4 ---Side Panel Assembly

Attach side panels (6) and (7) to the internal structure using wood dowels (C) and cam locks (B).

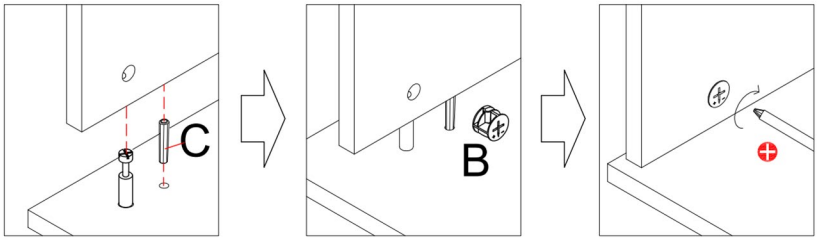


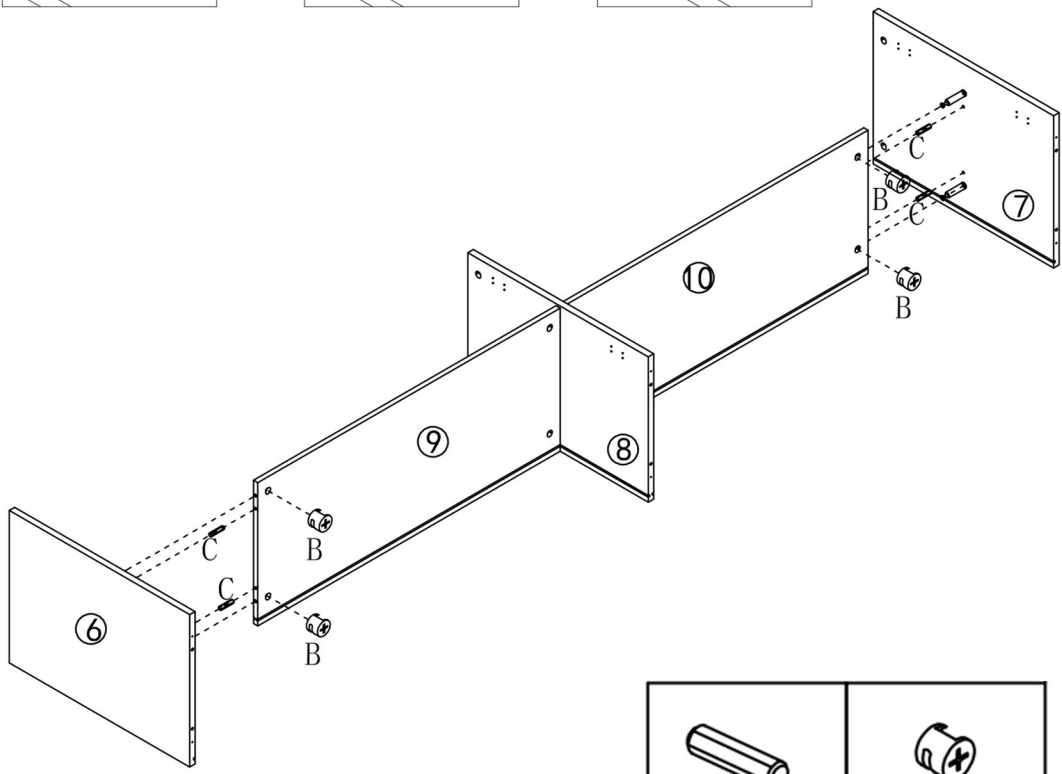

Cx4	Bx4


step 5 --- Insert Backing

Slide the back panels (11) and (12) into the grooves of the side and center boards as shown.

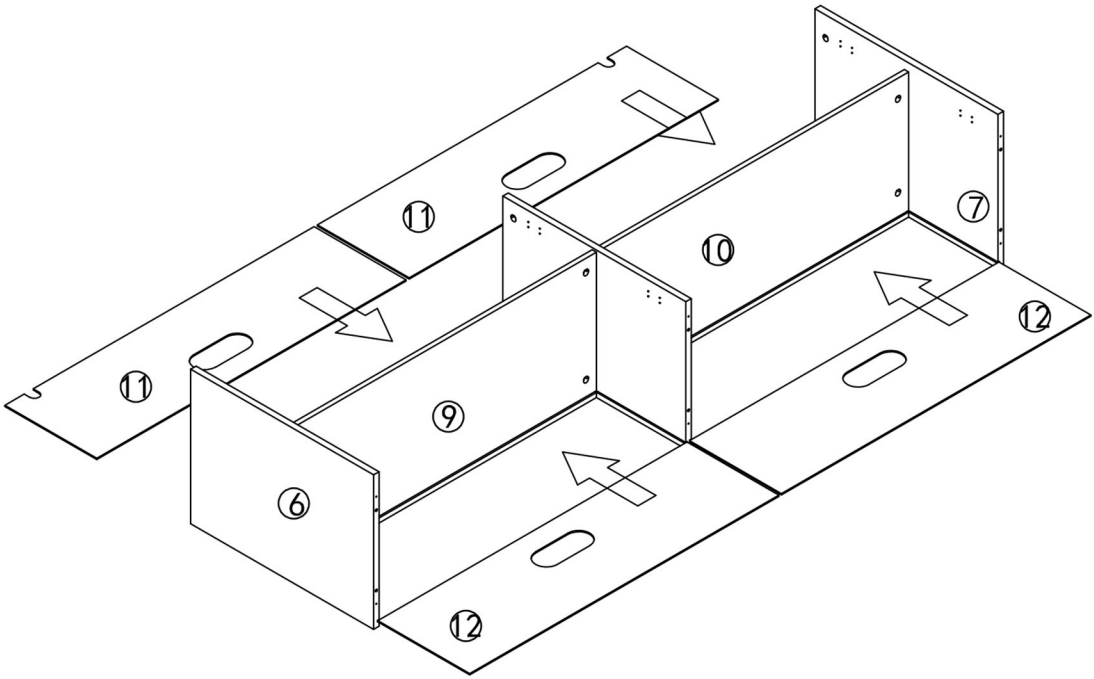

step 6 --- Top Board Prep (1)


Screw cam bolts (A) into the top board (1). Attach anti-tip brackets (J1) using screws (J3) and magnetic catches (N) using screws (E).

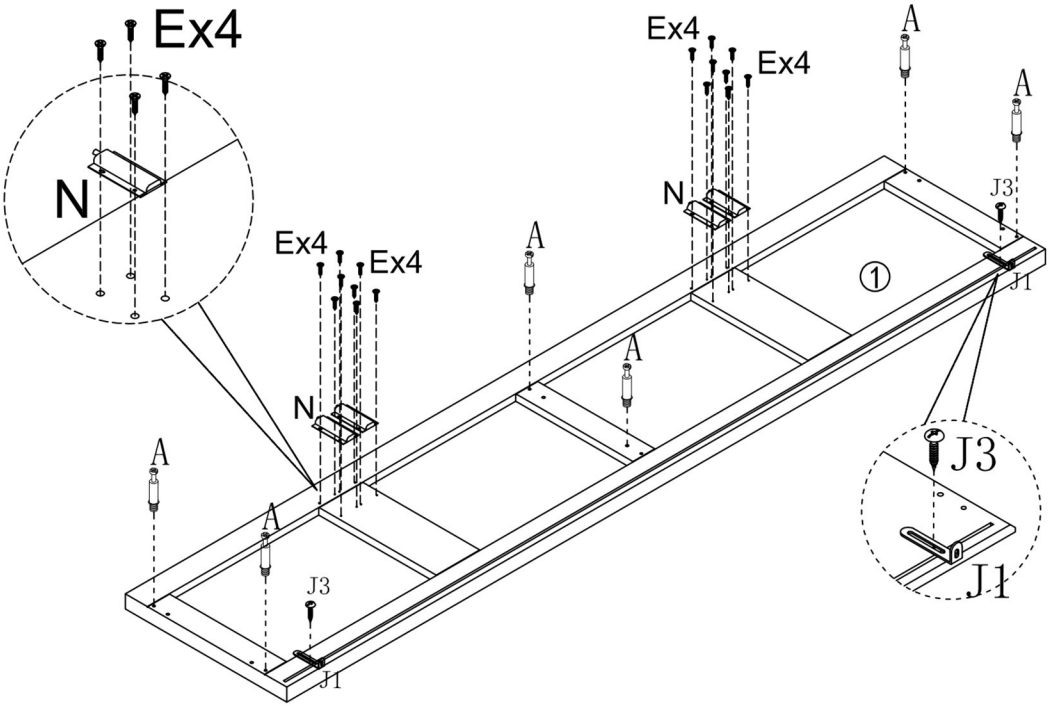

A X 6	J3 X 2	J1 X 2	N X 4	E X 16

step 7 --- Install Top Board (1)


Place the top board (1) onto the cabinet frame and secure it using wood dowels (C) and cam locks (B).

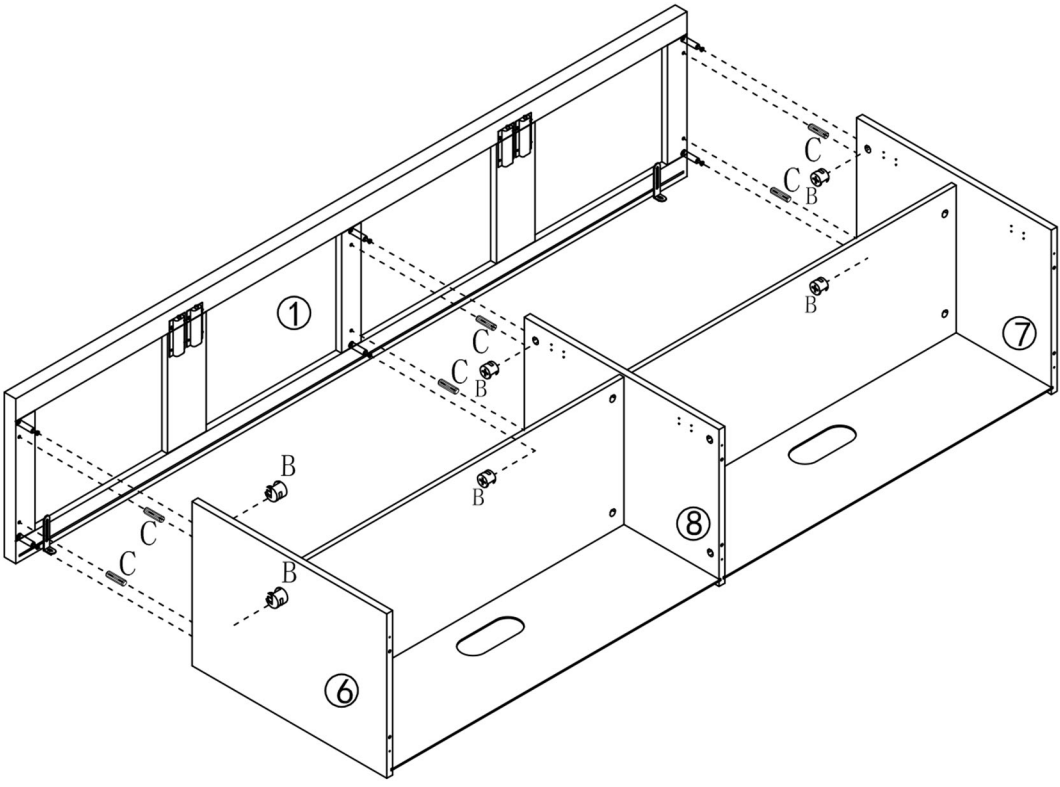

	
Cx6	Bx6


step 8 ---Bottom Board Prep


Screw 16 cam bolts (A) into the bottom board (2).
Flip the base plate (2) over and install the two three-in-one screws as illustrated.

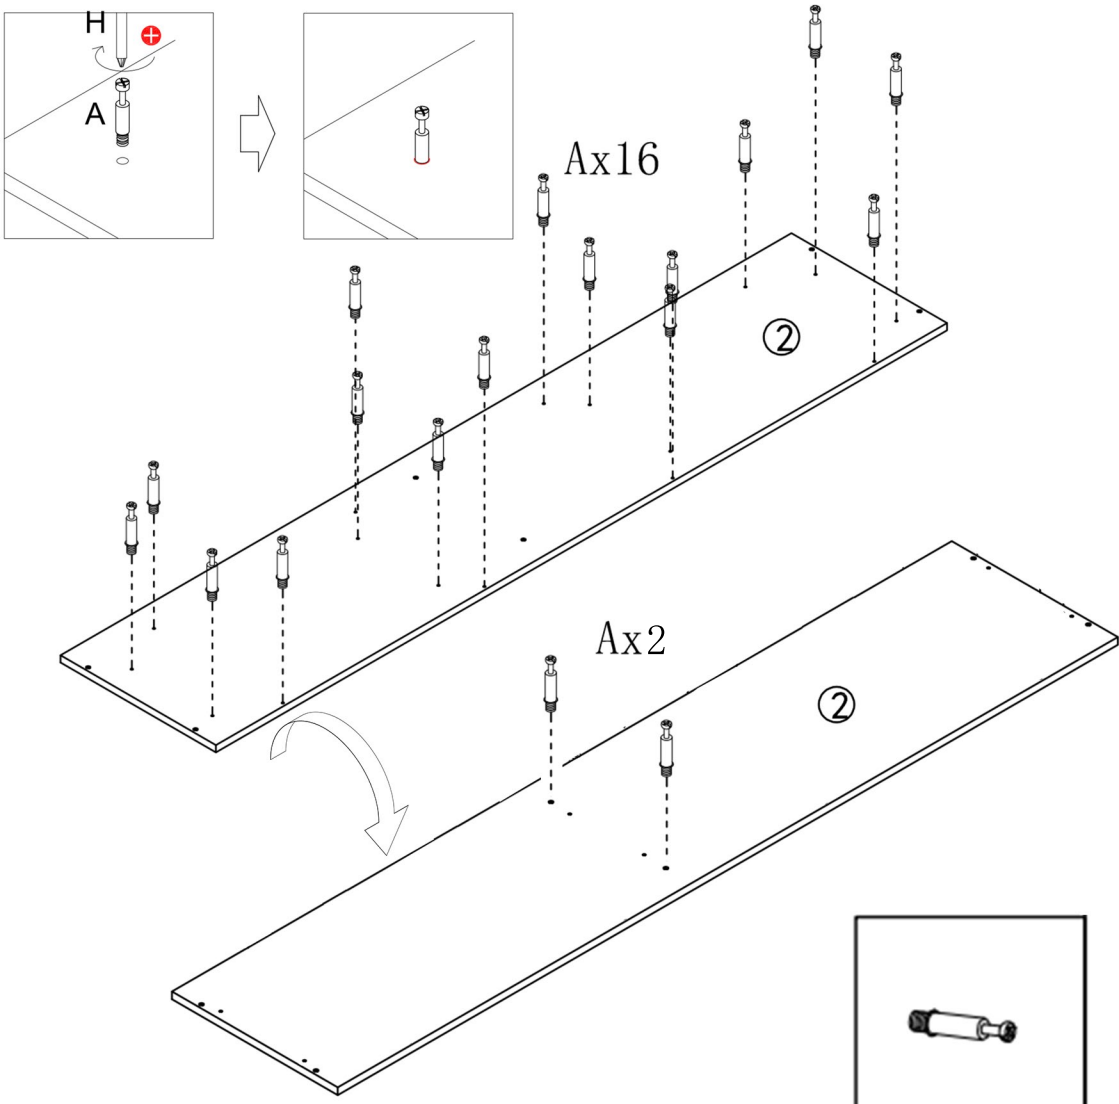

step 9 ---Attach Bottom Board


Secure the bottom board (2) to the vertical panels using wood dowels (C) and screws (D).
Secure it using wood dowels (C) and cam locks (B).

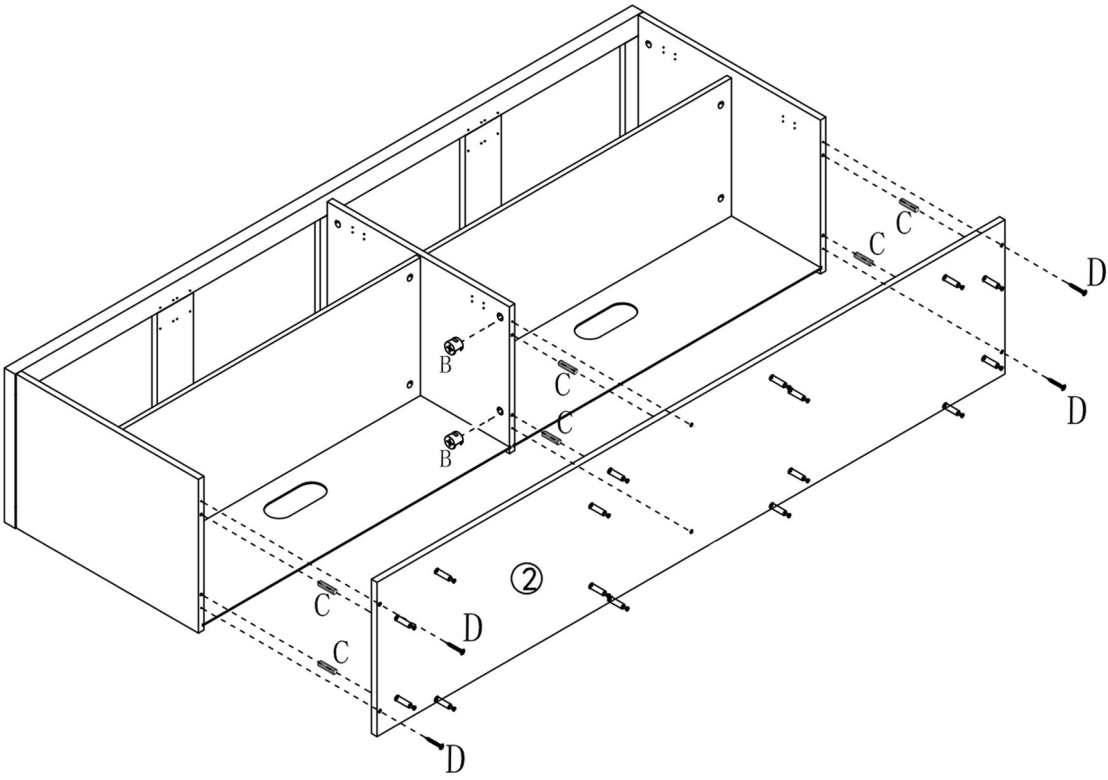


		
Dx4	Cx6	Bx2

step 10 ---Base Rail Prep


Screw cam bolts (A) into the base rails (13) and (14).

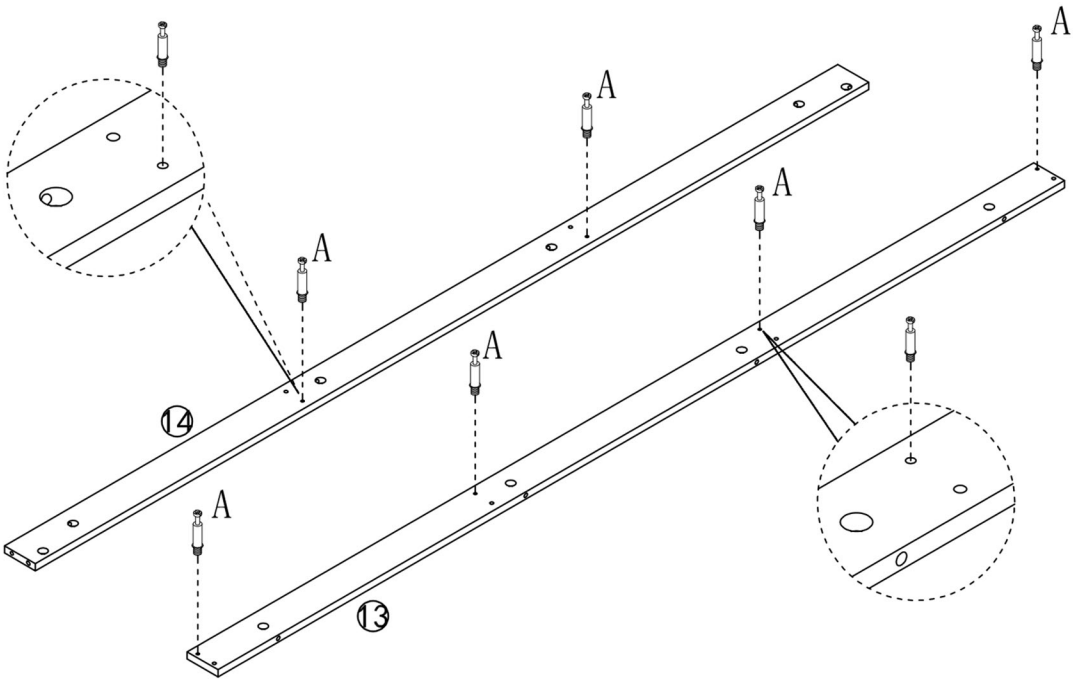

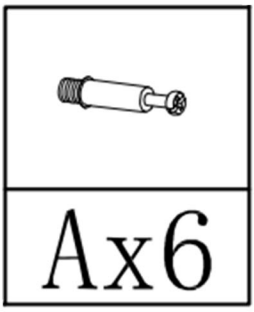

step 11


Connect the support blocks (5, 15, 16) to the base rail (14) using wood dowels (C) and cam locks (B).

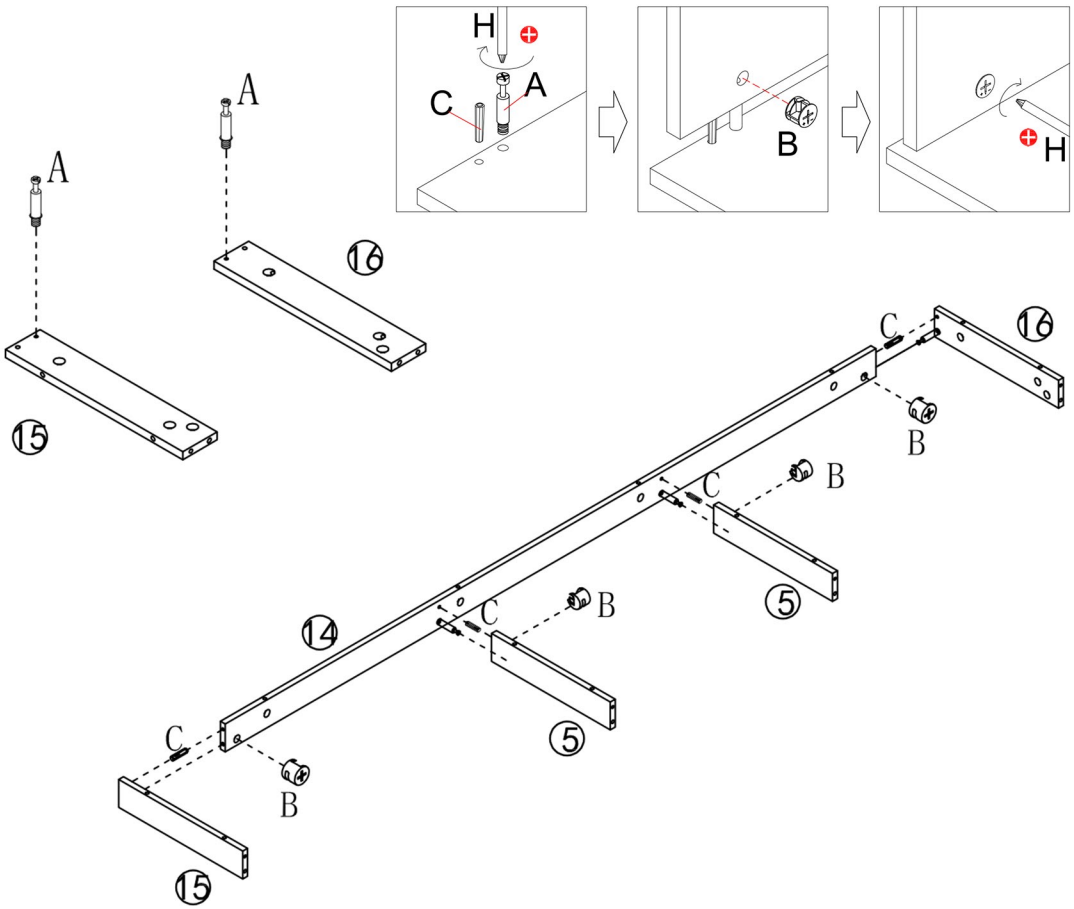


Ax2	Cx4	Bx4

step 12 ---Finish Base Frame


Attach the other base rail (13) to the support blocks using wood dowels (C) and cam locks (B).

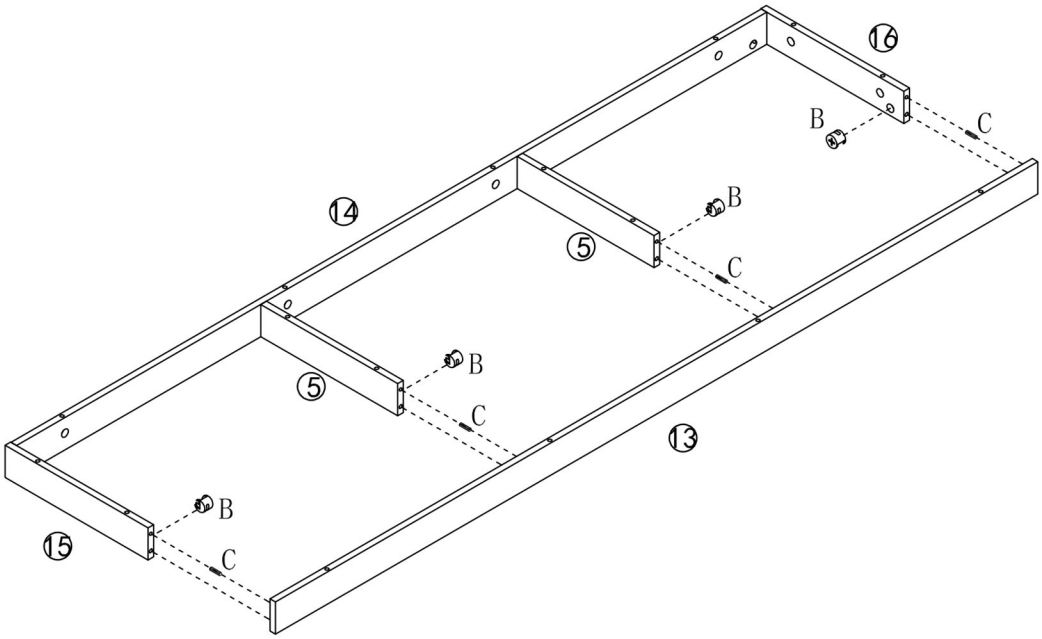

	
Cx4	Bx4

step 13 ---Install Base


Mount the assembled base frame onto the bottom board (2) and tighten it with cam locks (B).

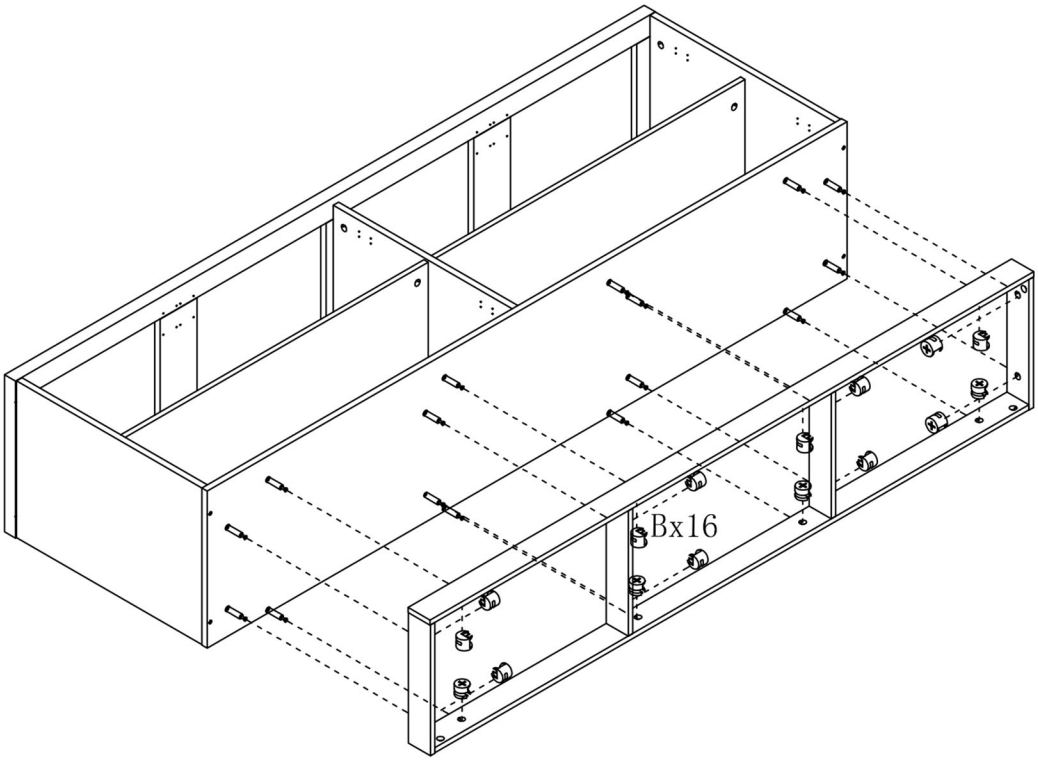




step 14 ---Prepare Doors

Attach hinges (L and M) to the doors (3 and 4) using screws (E).

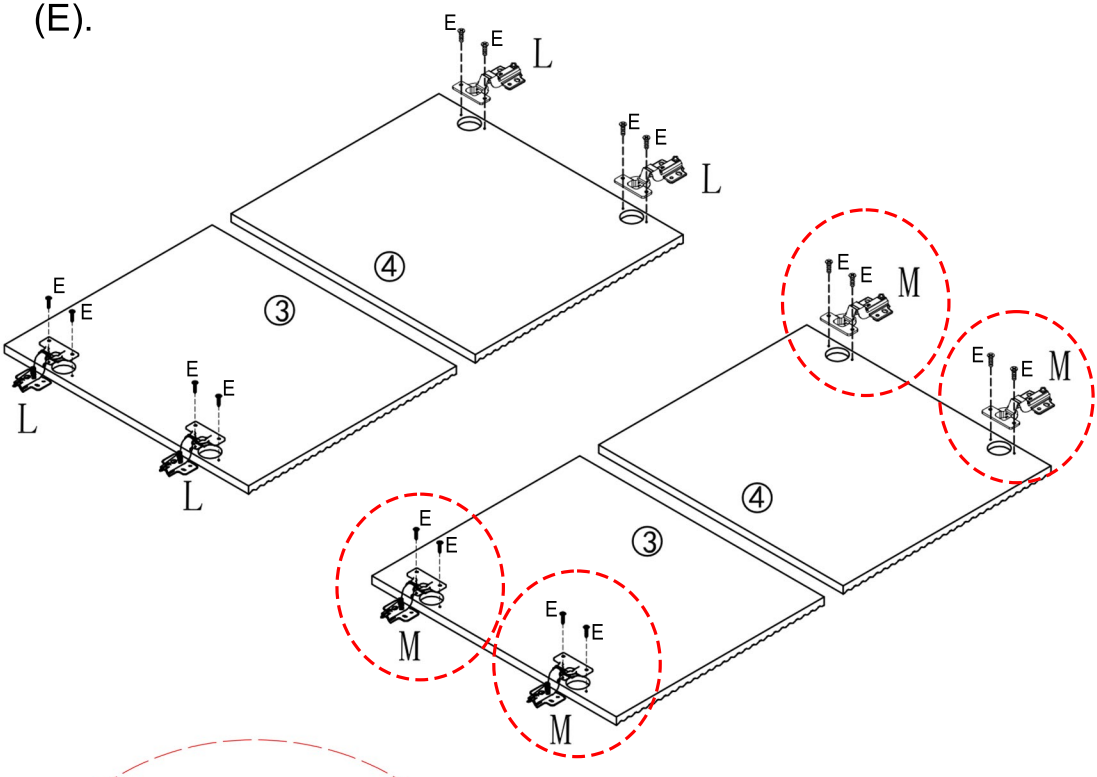

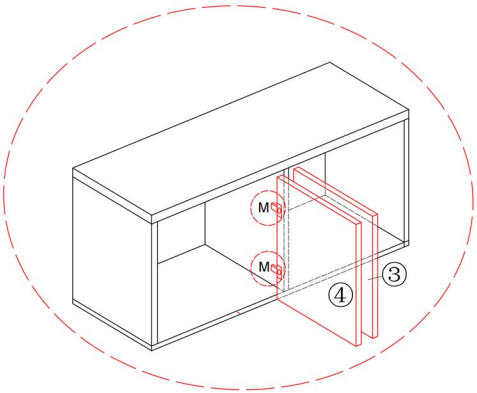


The door panel with hinges (M) needs to be installed in the middle position of the cabinet.

		
Lx4	Mx4	Ex16

step 15 --- Hang Doors


Mount the doors to the cabinet. Note: Install the adjustment screws first to position the door, then install the fixing screws (E).

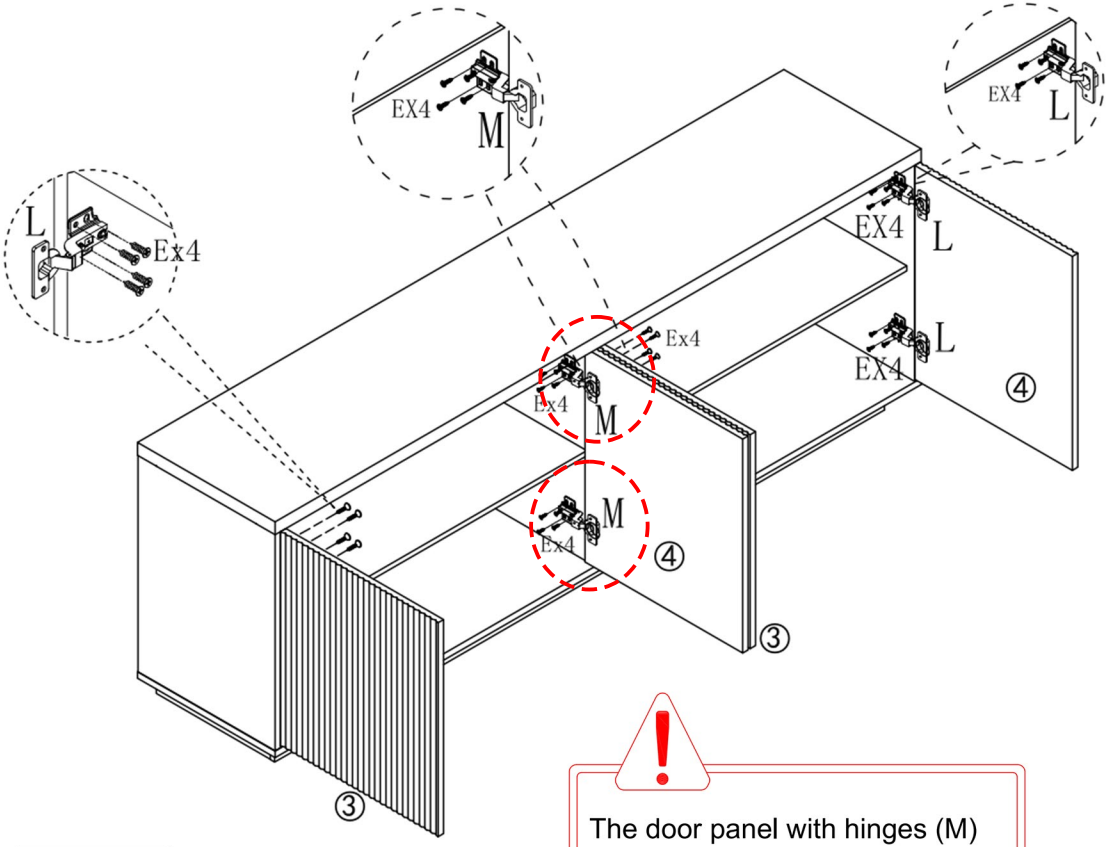


The door panel with hinges (M) needs to be installed in the middle position of the cabinet.




step 16

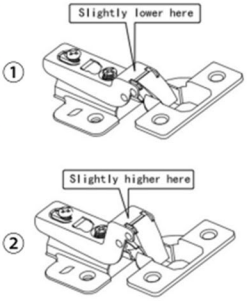

NOTE: Different doors need different hinges for installation . Please check the parts in the instruction manual before installation. Each door requires 2 identical hinges.

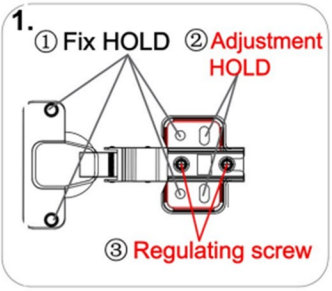


1.One hinge have 4 Fix holds ,
2 Adjustment holds and
2 Regulating screws

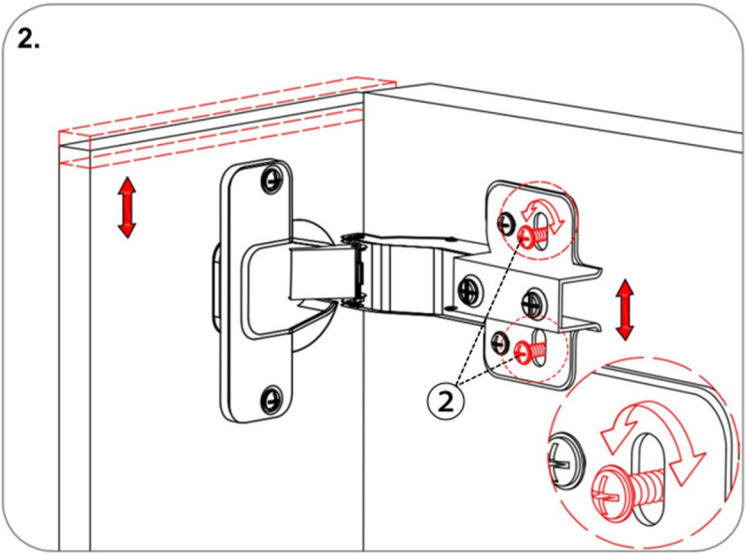


2.Install hinge on door using two fixed holes①,then attach the hinge's two adjustment holes ②to the cabinet frame—(tighten adjustment screws 70% first, fully secure only after confirming correct door height).

step 16

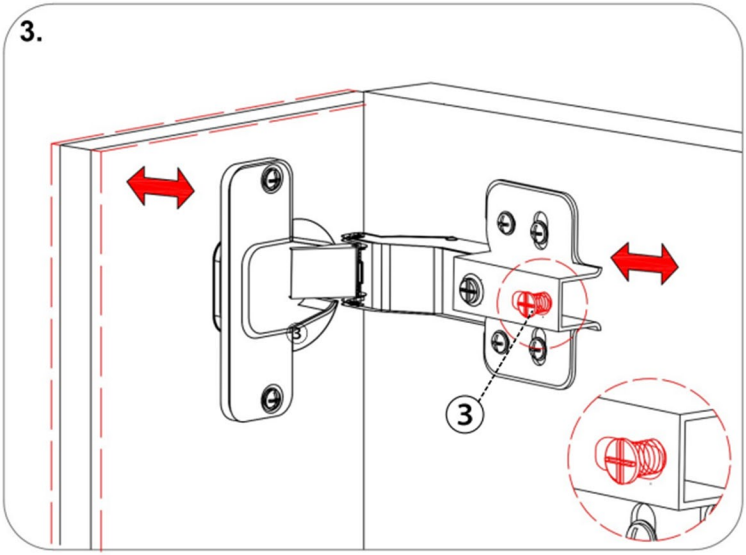

3.For Door's minor in/out adjustments: Loosen the hinge Regulating screw③, shift the door to the desired position, then retighten the screw.

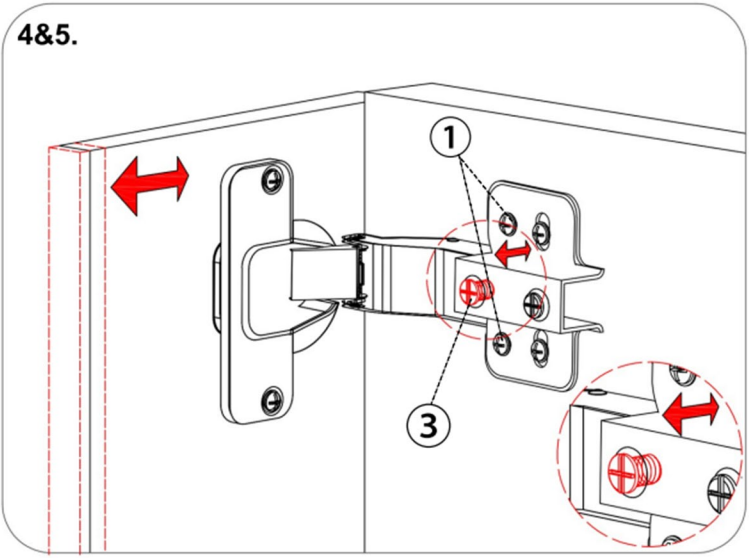


4.For door's subtle up/down adjustments, simply turn the Regulating screw ③left or right.

5.Once you confirm the door looks good and opens/closes smoothly after installation, tighten the remaining 2 hinge Fix hold ①screws to secure it firmly.

step 17 ---Secure Backing

Attach the back panel clips (G) around the edges of the back panels using screws (F).

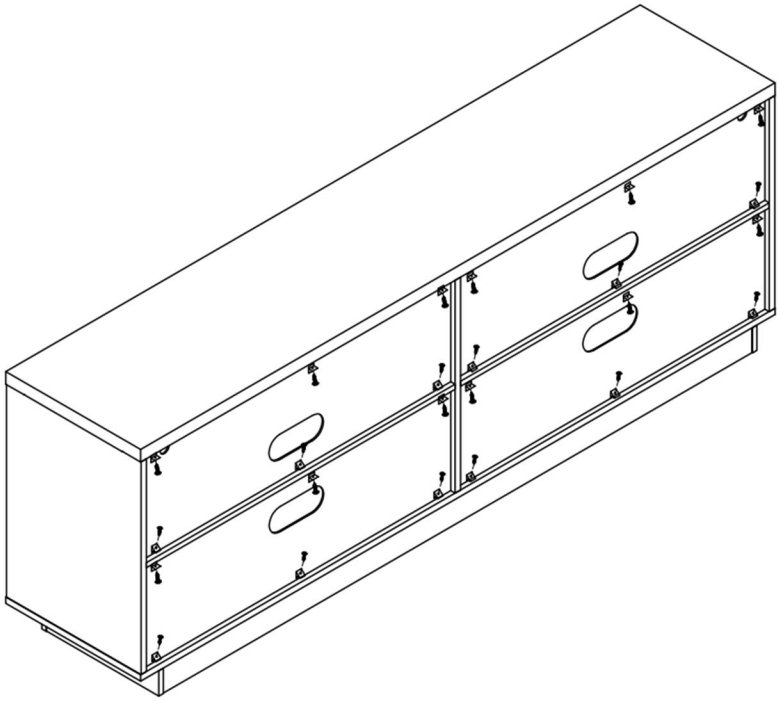





	
Gx24	Fx24

step 18 ---Wall Security

For safety, drill holes in the wall, insert anchors (J4), and secure the anti-tip brackets (J1) with screws (J2).

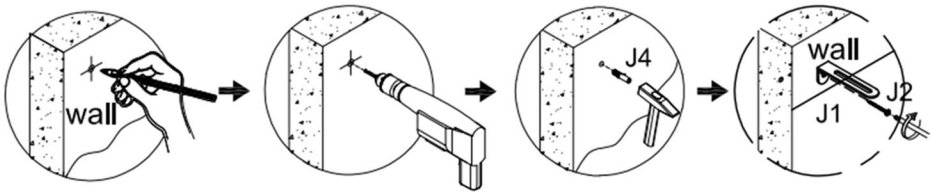

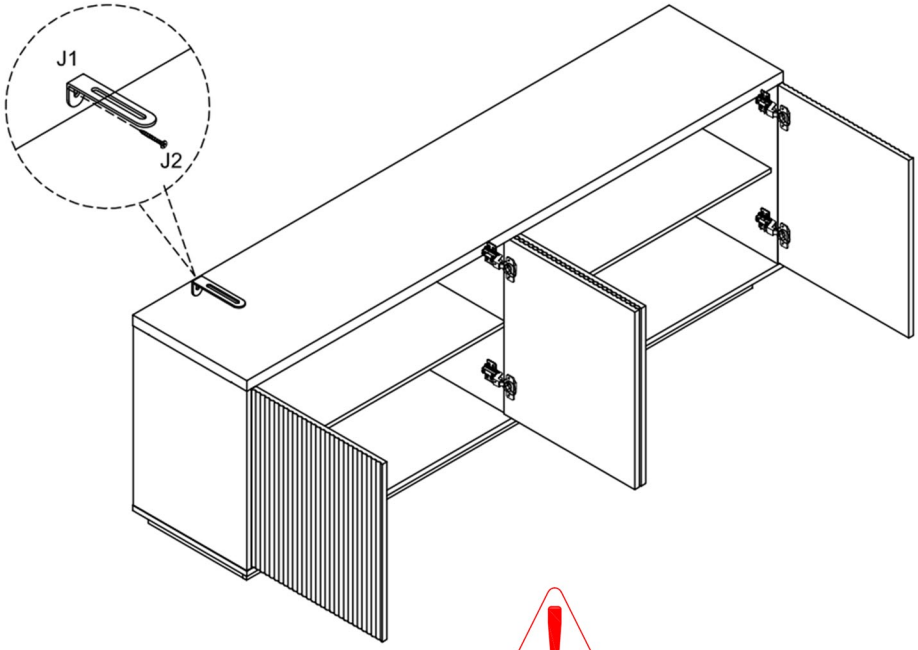

	
J4x2	J2x2

The TV stand must be positioned against a wall and securely attached to it according to the instructions in Step 17 of the manual.

ASSEMBLY INSTRUCTIONS

Tel.+1-562-510-9089

E-mail:support@dreamsidea.com

https://www.dreamsidea.com