BUNK-BED ASSEMBLYINSTRUCTIONS

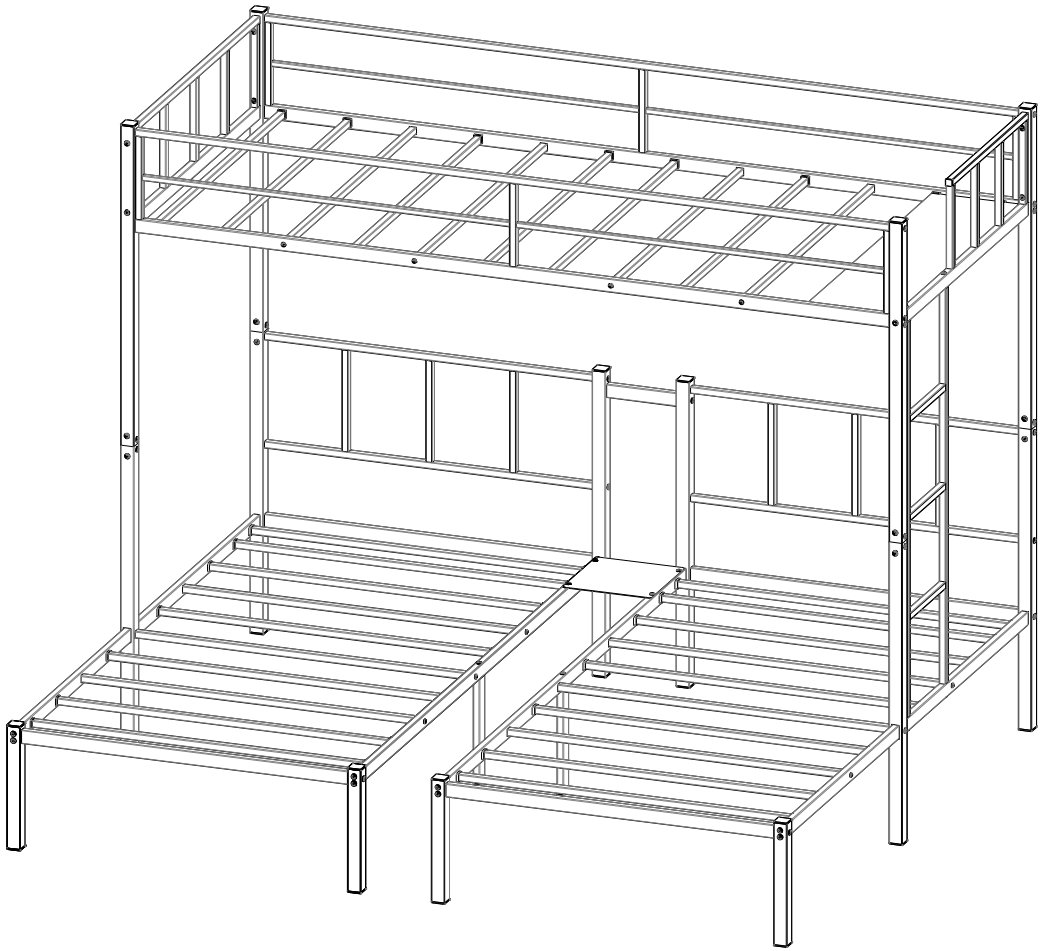

SAFETY WARNINGS AND GENERAL NOTES:

1. Follow the information on the warnings on the bunk bed end structure and on the carton. Do not remove the warning label from the bed.
2. Always use the recommended size mattress on mattress support, or both, to help prevent the likelihood of entrapment or falls.
3. Do not allow children under 6 years of age to use the upper bunk.
4. Periodically check and ensure the guardrail, ladder and other components are in their proper position, free from damage, and all connectors are tight.
5. Do not allow horseplay on or under beds.
6. Always prohibit jumping on the bed.
7. Prohibit more than one person on upper bunk.
8. Always use the ladder for entering and leaving the upper bunk.
9. Do not use substitute parts. Contact the manufacturer or dealer for replacement parts.
10. Use of a night-tight may provide added safety precaution for a child using the upper bunk.
11. Always use guardrails on both long sides of the upper bunk.
12. If the bunk bed will be placed next to a wall, the guardrail that runs the full length of the bed should be placed against the wall to prevent entrapment between the bed and the wall.
The use of water or sleep flotation mattresses is prohibited.
13. STRANGULATION HAZARD-Never attach or hang items to any part of the bunk bed that is not designed for use with the bed.
14. Keep these instructions for future reference.
15. We recommend assembling your bunk bed on the shipping carton to protect your floor or carpet.
16. Be certain all staples are out of the box before beginning assembly on the shipping carton.
17. U17. USE ONLY MATTRESSES WHICH ARE AS THE TABLE BELOW ON UPPER AND ON LOWER BUNKS.

Down bed

Bed type	Length	Width	Thickness
Twin Standard	74”- 75”	38 ½"	8”max

Up bed (bunk bed and tribed included)

Bed type	Length	Width	Thickness
Twin Standard	74”-75”	38 ½"	6”max

18. SURFACE OF MATTRESS MUST BE AT LEAST 5"(127MM) BELOW THE UPPER EDGE OF GUARDRAILS.
19. Replacement Parts:
Replacement Parts, including additional guardrails, may be obtained from any of our dealers.

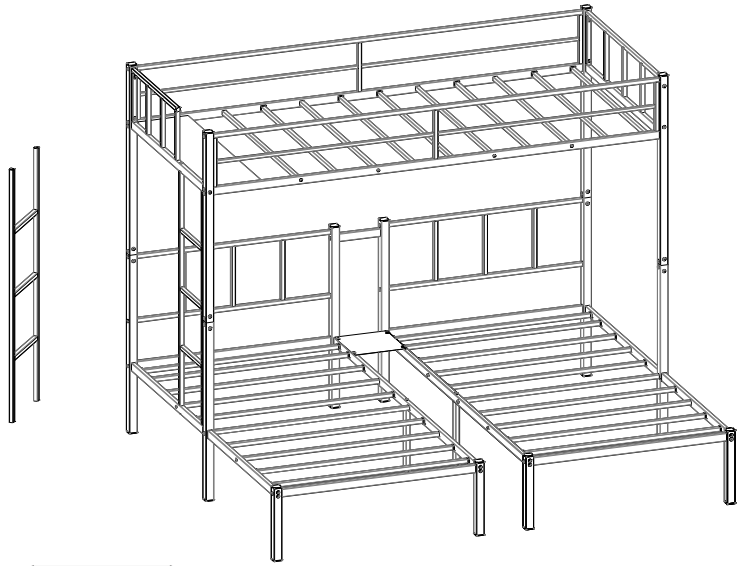

Stairs on the left

The stairs are installed in the left direction.

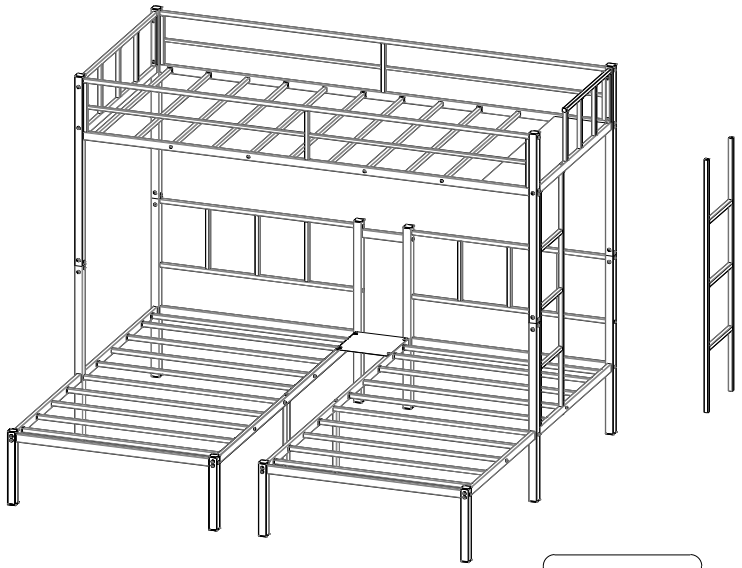

The stairs are installed in the right direction.

Stairs on the right

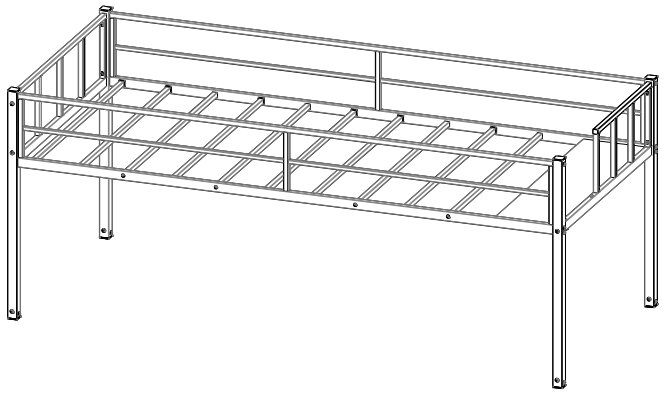

The upper bed can be detached and used alone.

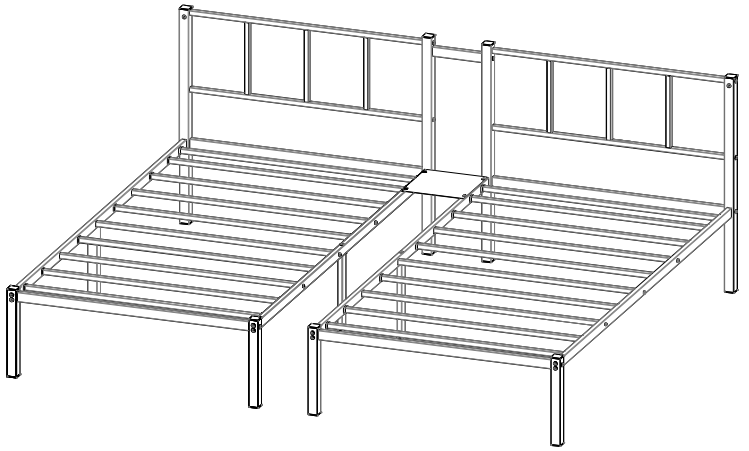

Explosion diagram

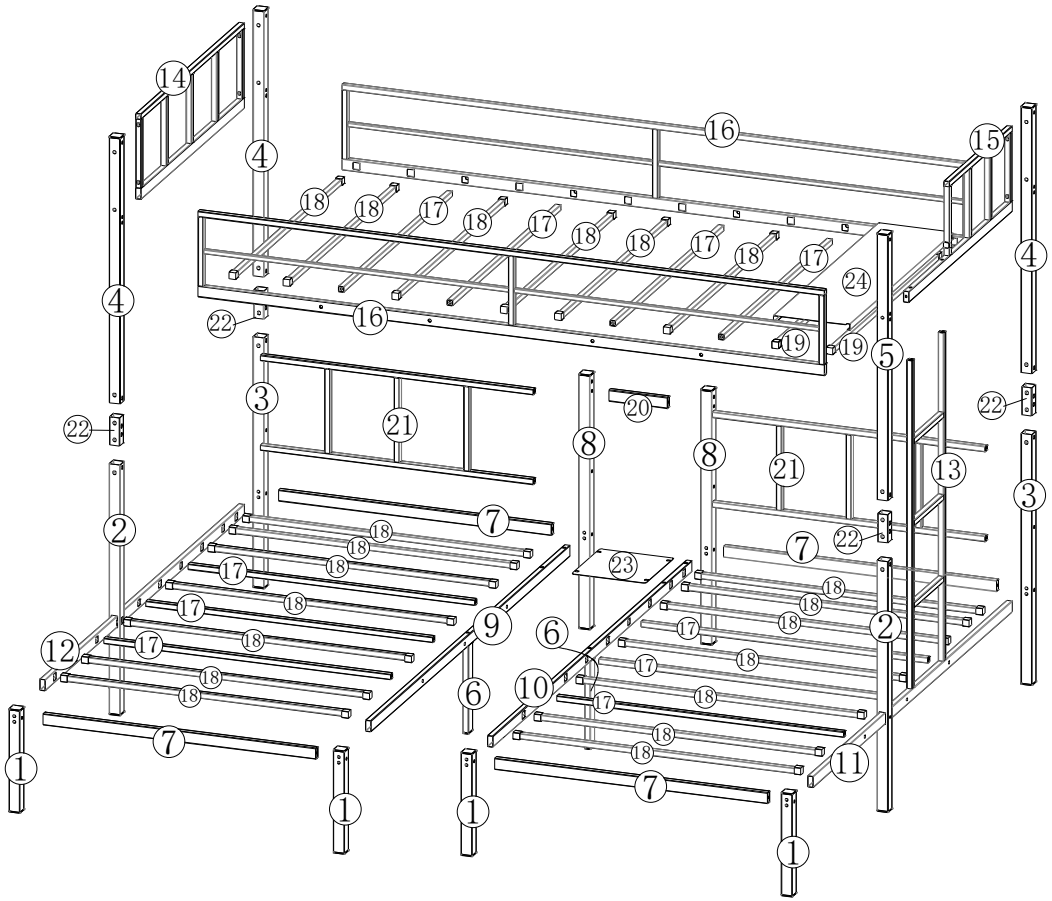

Part List

 1-4pcs	 2-2pcs	 3-2pcs
 4-3pcs	 5-1pcs	 6-2pcs
 7-4pcs	8-2pcs	9-1pcs
10-1pcs	11-1pcs	12-1pcs
 13-1pcs	 14-1pcs	 15-1pcs
 16-2pcs	17-10pcs	18-20pcs
19-2pcs	 20-1pcs	 21-2pcs
 22-4pcs	23-1pcs	 24-1pcs

Hardware List

A	B	C	D	E	F	G	H	I
8*15 18PCS	8*35 34PCS	8*55 59PCS	8*15 20PCS	(Installed)	(Installed)	(Installed)	H	40PCS

Step 1: Use hardware H and C to connect #1 and #7 together.

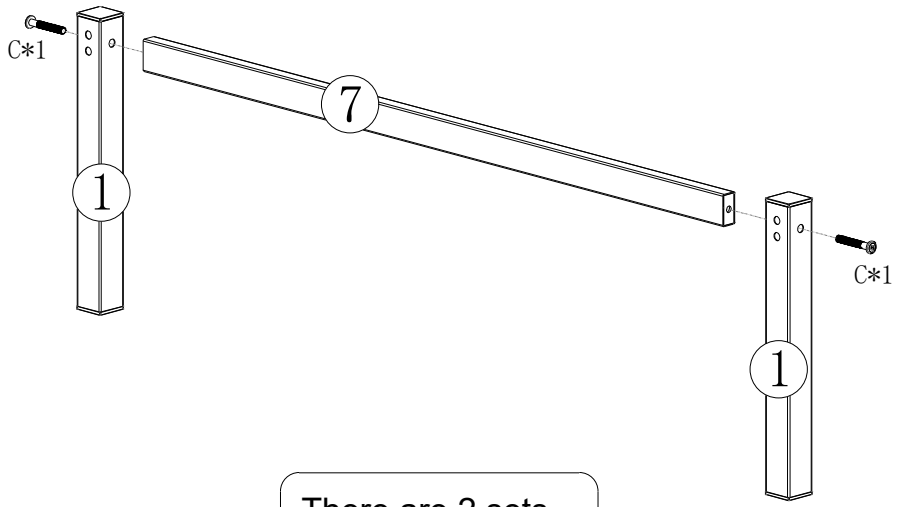

There are 2 sets of this component

1-4pcs	7-2pcs	C 8*55-4PCS	H

Step 2: Use hardware H,B,C and D to connect #3,#7 ,#8,#21and #22 together.

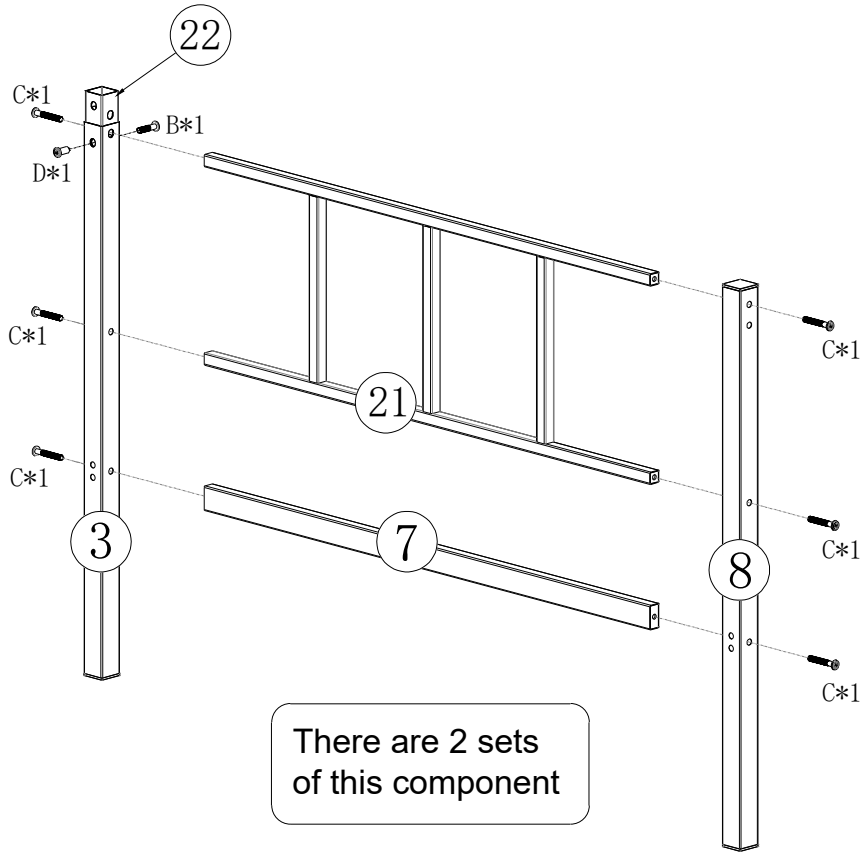

There are 2 sets of this component

3-2pcs	7-2pcs	21-2pcs	B 8*35 2PCS	C 8*55 12PCS	D 8*15 2PCS	H
8-2pcs	22-2pcs					

Step 3: Use hardware H、A 、B、D and I to connect #2,#9,#12,#17,#18 and #22 together.

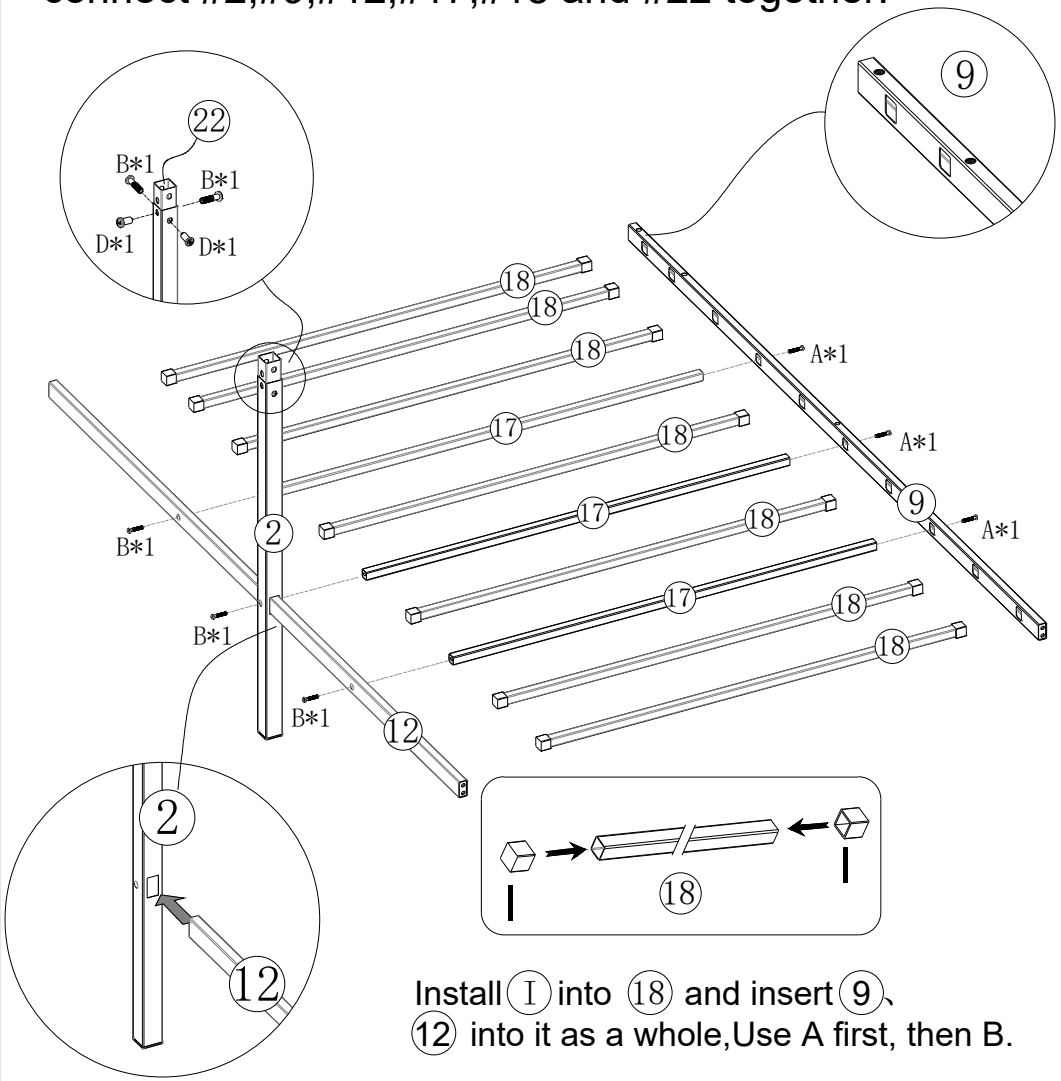

Install (I) into (18) and insert (9)、(12) into it as a whole,Use A first, then B.

2-1pcs	12-1pcs	A 8*15 3PCS	B 8*35-5PCS	H
9-1pcs	17-3pcs	22-1pcs	D 8*15-2PCS	I-14pcs
	18-7pcs			

Step 4: Use hardware H、A、B、D and I to connect #2,#10,#11,#17,#18 and #22 together.

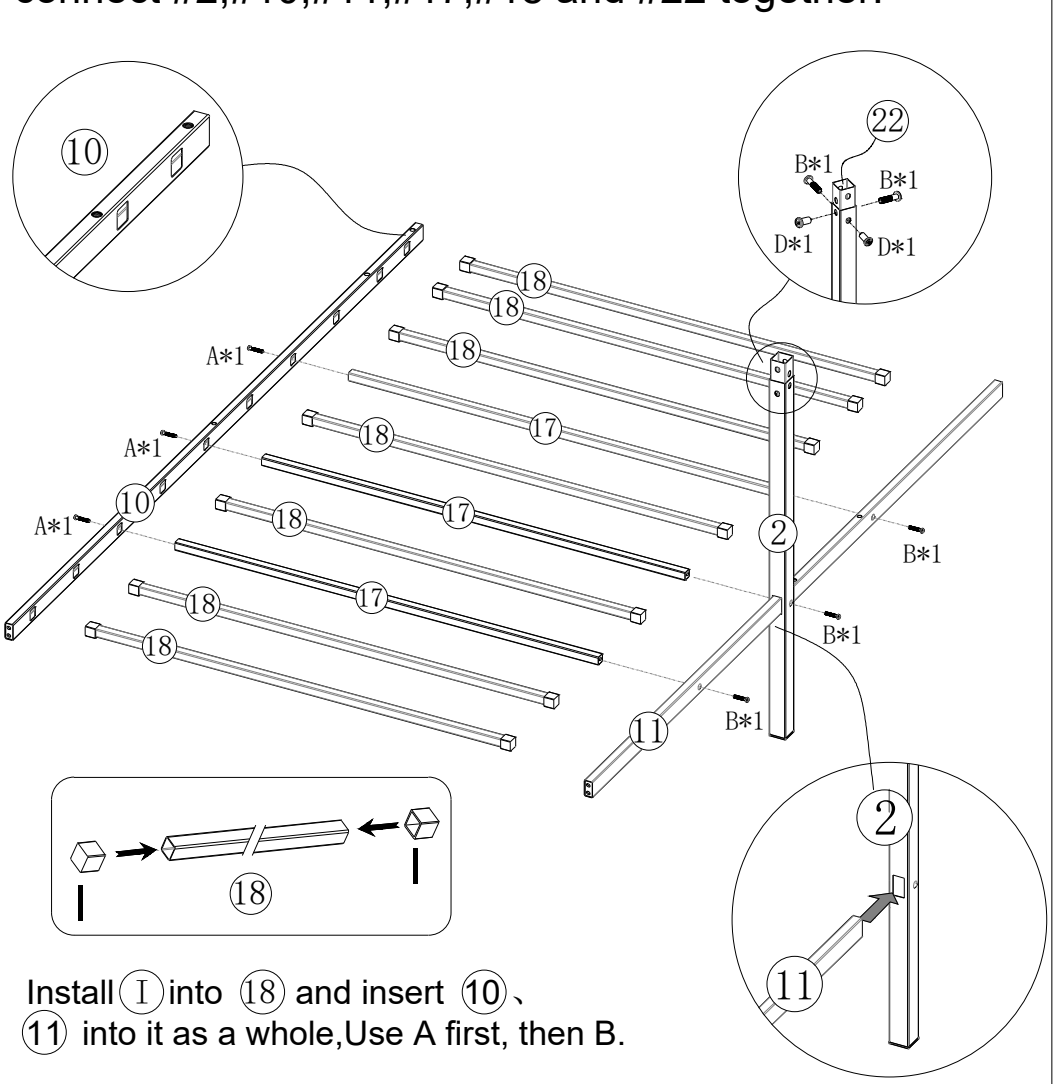

Install (I) into (18) and insert (10)、(11) into it as a whole,Use A first, then B.

2-1pcs	10-1pcs	A 8*15 3PCS	B 8*35-5PCS	H
11-1pcs	17-3pcs	22-1pcs	D 8*15-2PCS	I-14pcs
	18-7pcs			

Step 5: Use hardware H and C to connect “Step 1”、“Step 2” and “Step 3” together,and then install #6 onto this component

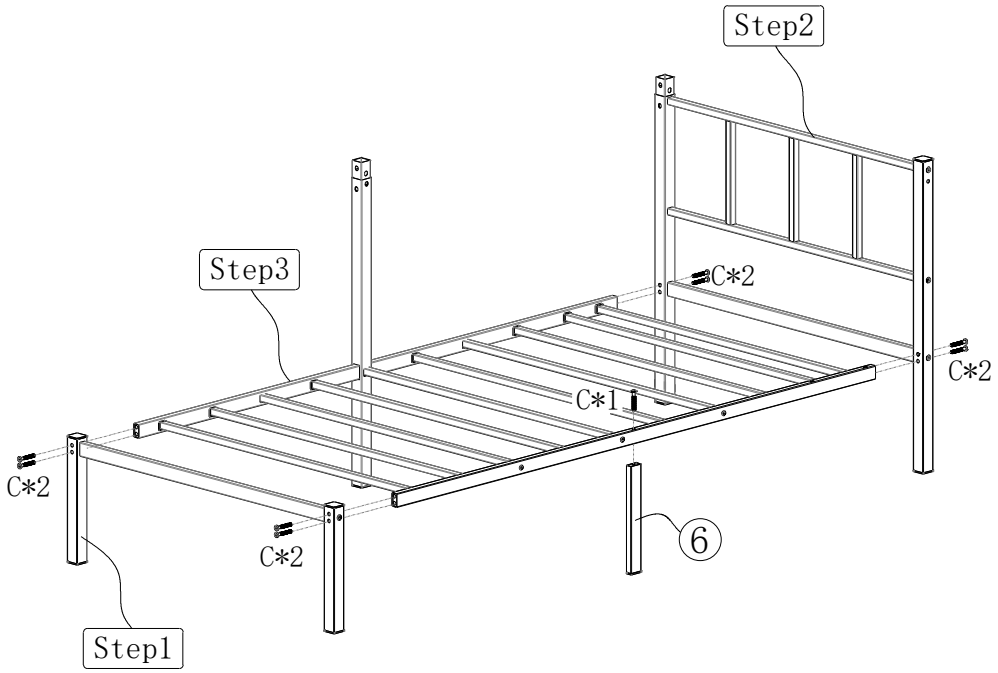

Left Bed



6-1pcs

C

8*55-9PCS

H

Page 11

Step 6: Use hardware H and C to connect “Step 1”、“Step 2” and “Step 4” together,and then install #6 onto this component

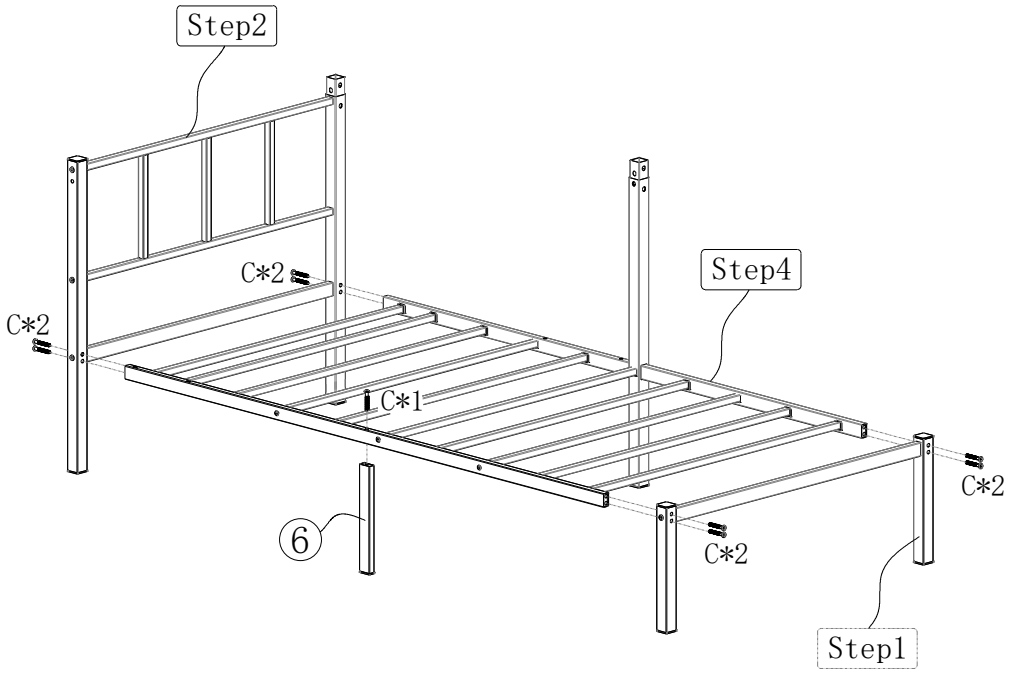

Right Bed



6-1pcs

C

8*55-9PCS

H

Page 12

Step 7: Use hardware H、C to connect #Left Bed, #Right Bed and #20 together.

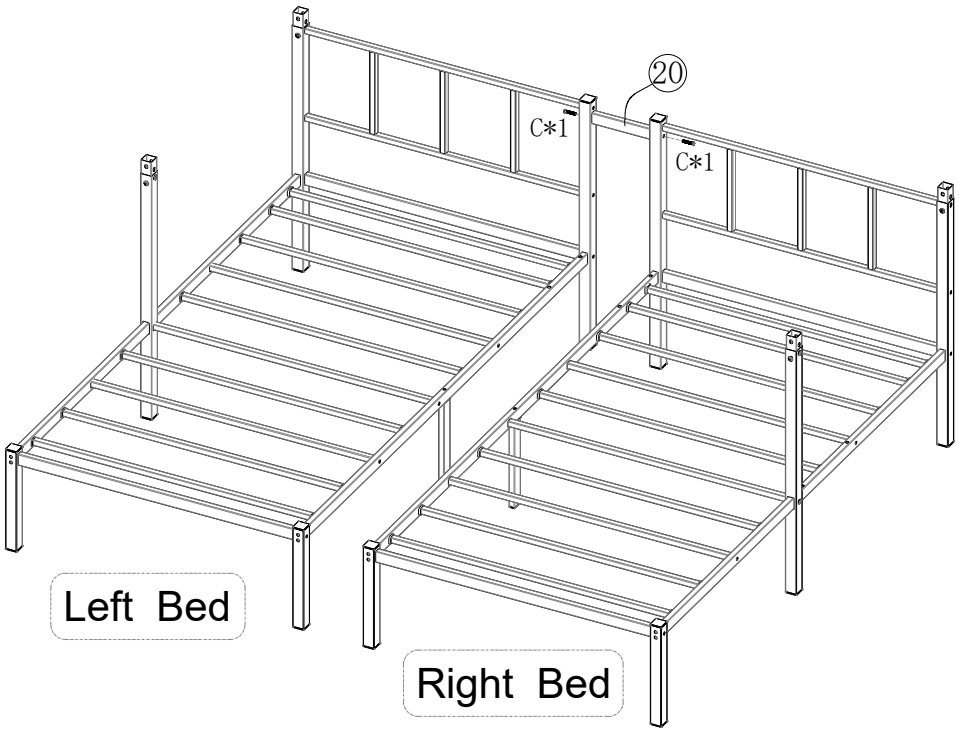



20-1pcs

C

8*55-2PCS



H

Page 13

Step 8: Use hardware H、C to connect #4, #5 and #16 together.

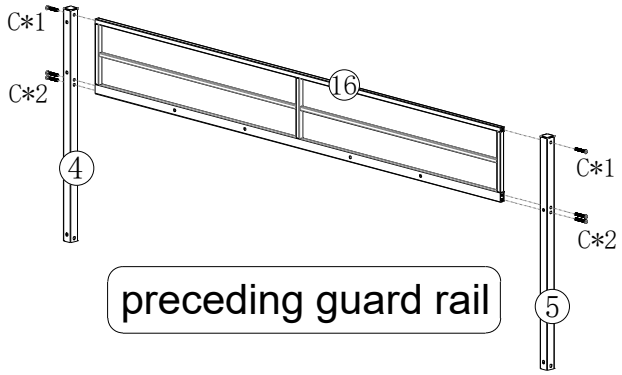



4-1pcs

5-1pcs

16-1pcs

C

8*55-6PCS

H

Step 9: Use hardware H、C to connect #4 and #16 together.

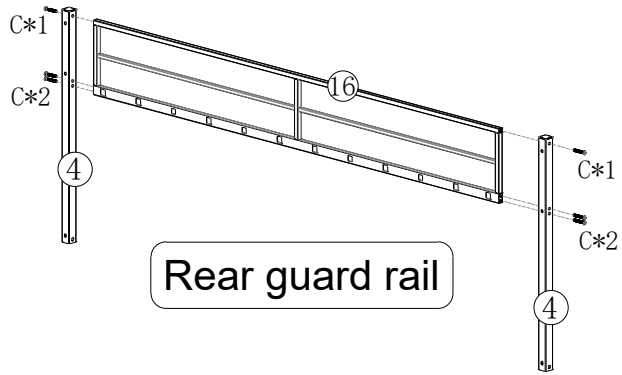

4-2pcs

16-1pcs

C

8*55-6PCS



H

Page 14

Step 10: Use hardware H ,B, D to connect #preceding guard rail and #Rear guard rail to the previously installed components.

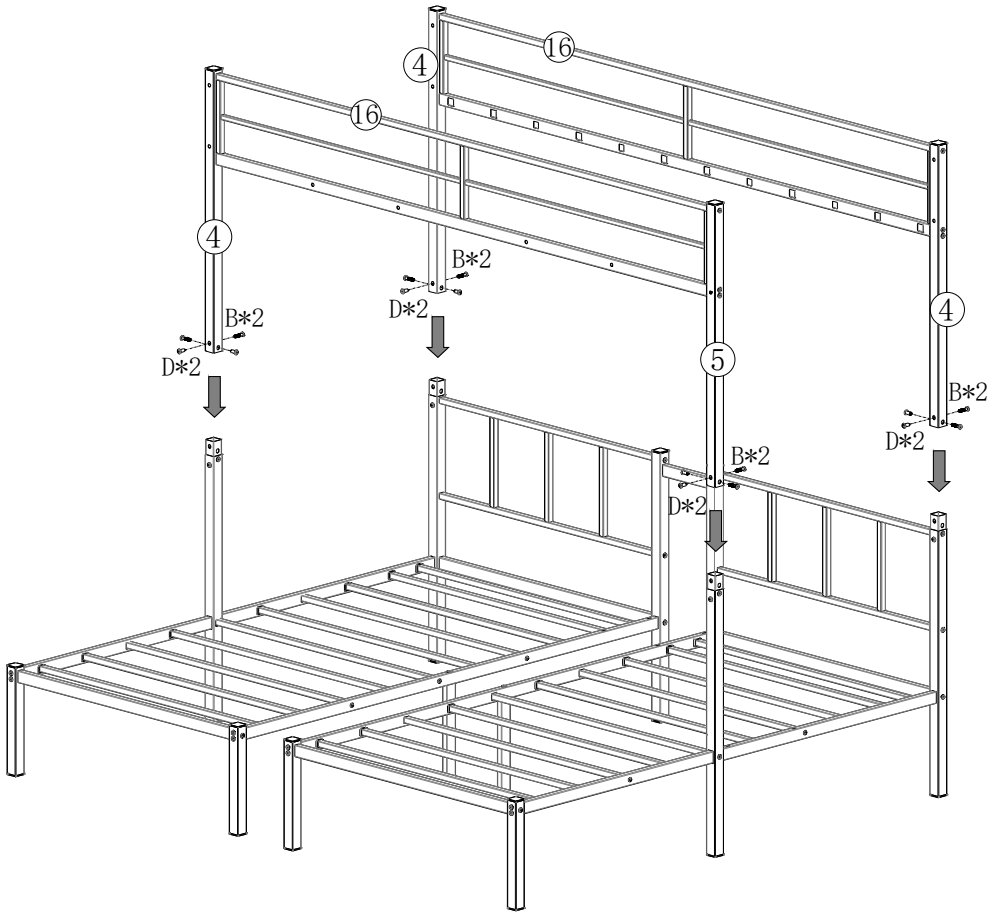

B	D	H
8*35-8PCS	D 8*15-8PCS	

Step11: Use hardware H,A,Band I to connect #17,#18 and #19 to the previously installed components.

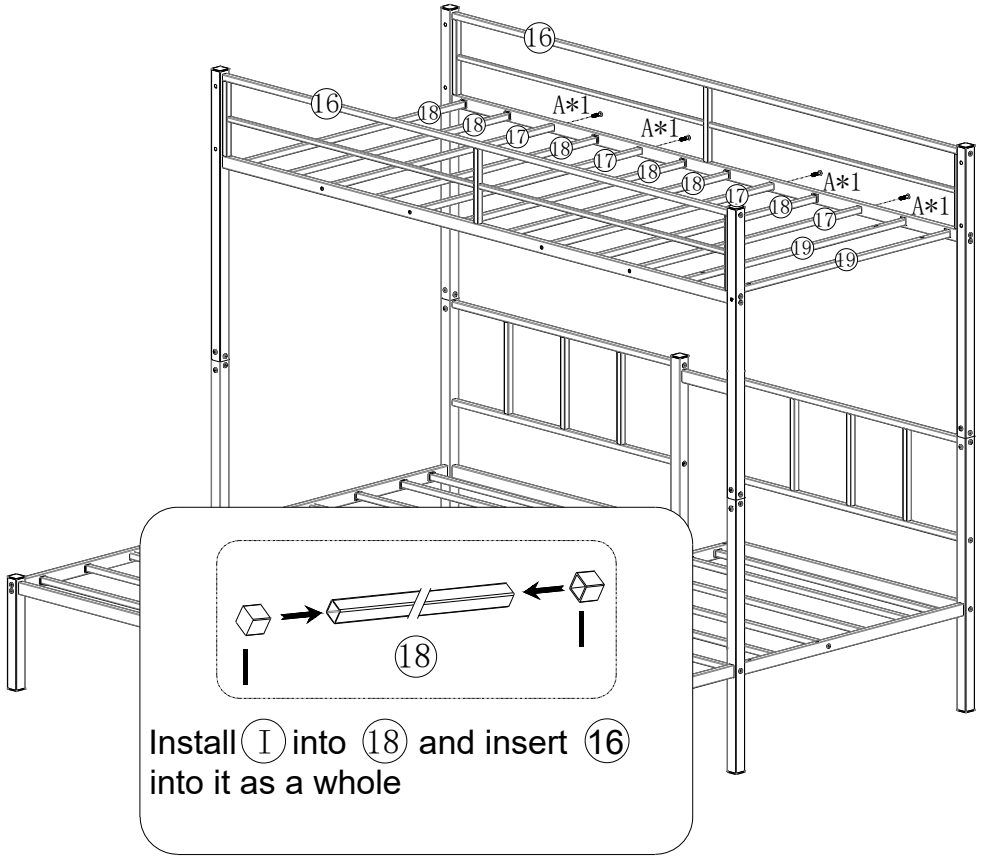

17-4pcs	I-12pcs 18-6pcs	19-2pcs	H A 8*15-4PCS

Step 12: Use hardware H、C and D to connect #14 to the previously installed components.

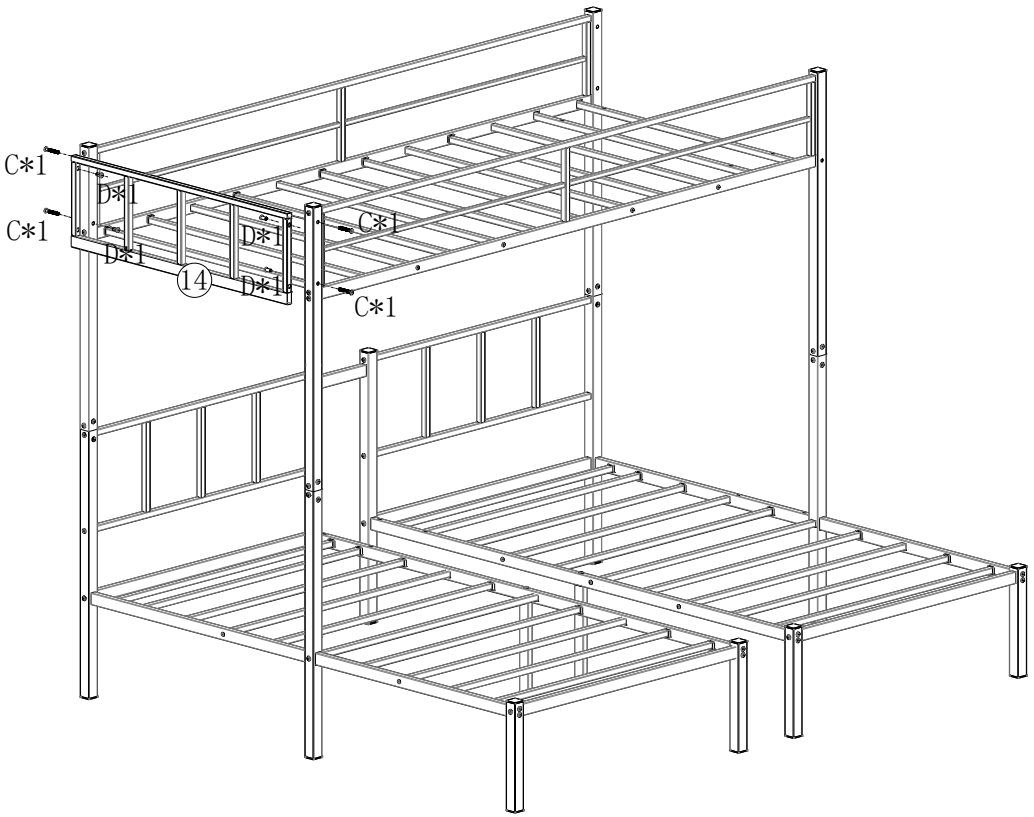



14-1pcs

C 8*55-4PCS

D 8*15-4PCS

H

Page 17

Step 13: Use hardware H、A to connect #23、#24 to the previously installed components.

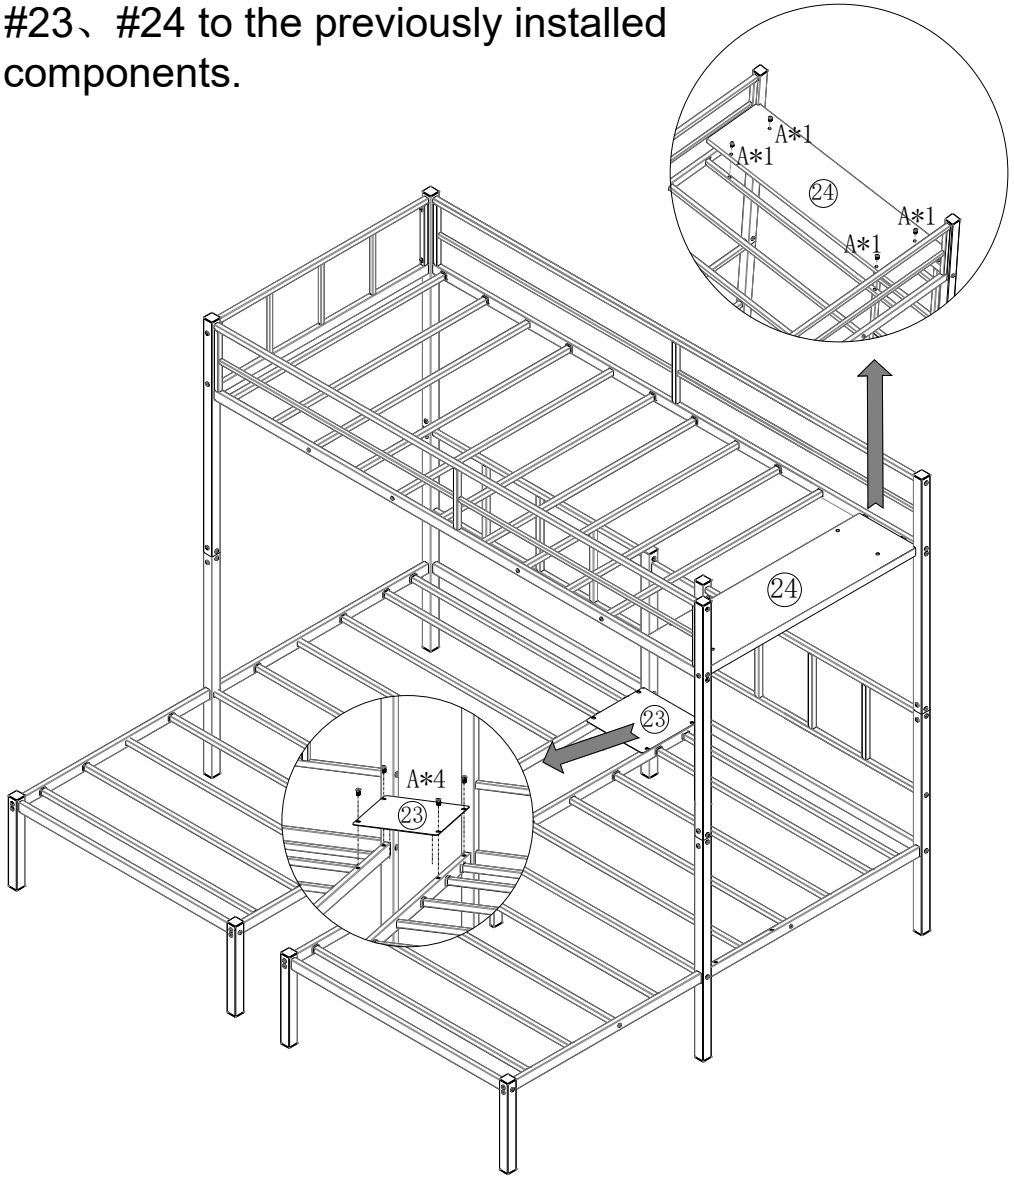

23-1pcs

24-1pcs

A 8*15-8PCS

H

Page 18

Step 13: Use hardware H、C and D to connect #15 to the previously installed components.

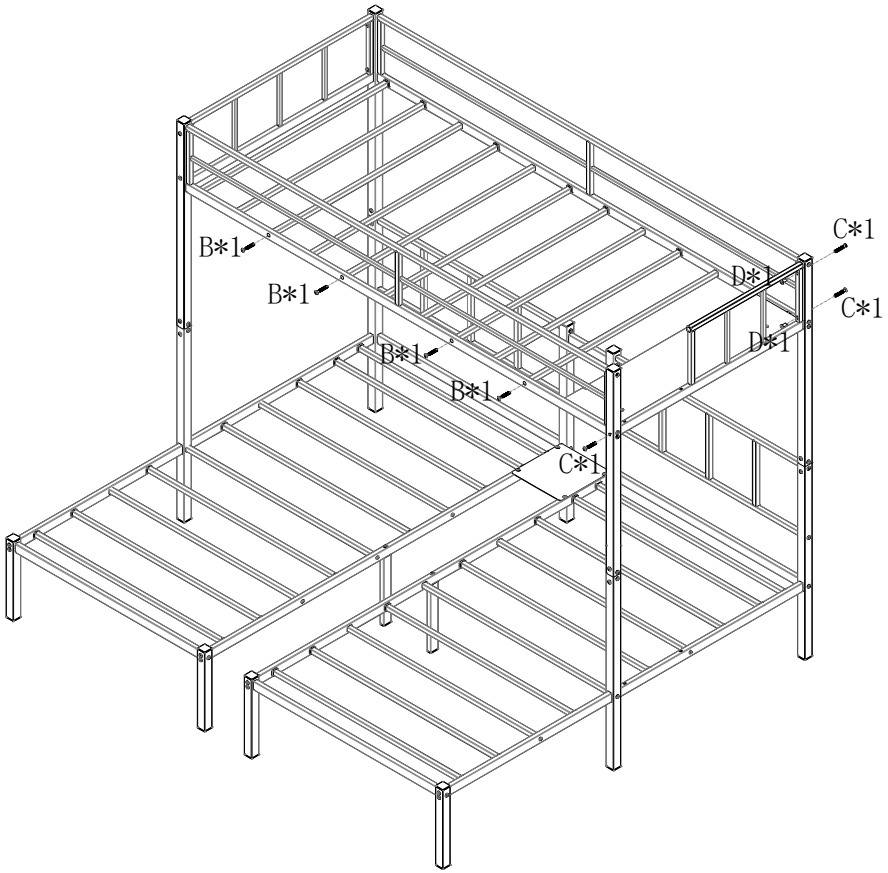



15-1pcs

B 8*35-4PCS

D 8*15-2PCS

C 8*55-3PCS

H

Step 14: Use hardware H、C to connect #13 to the previously installed components.

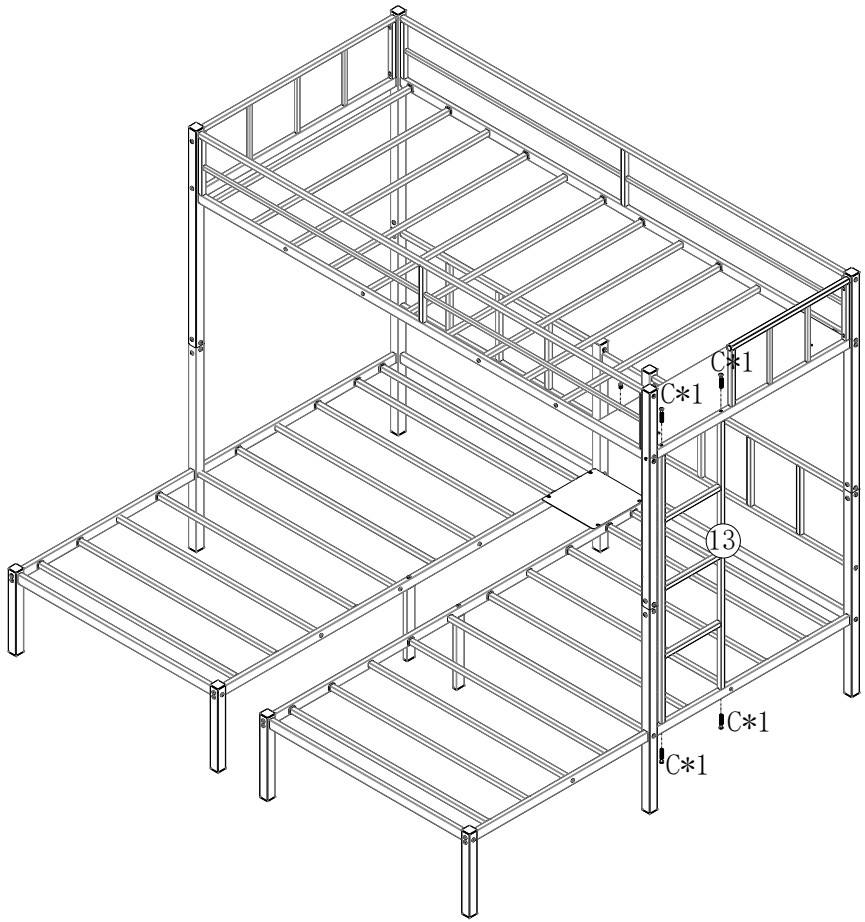



13-1pcs

C 8*55-4PCS

H
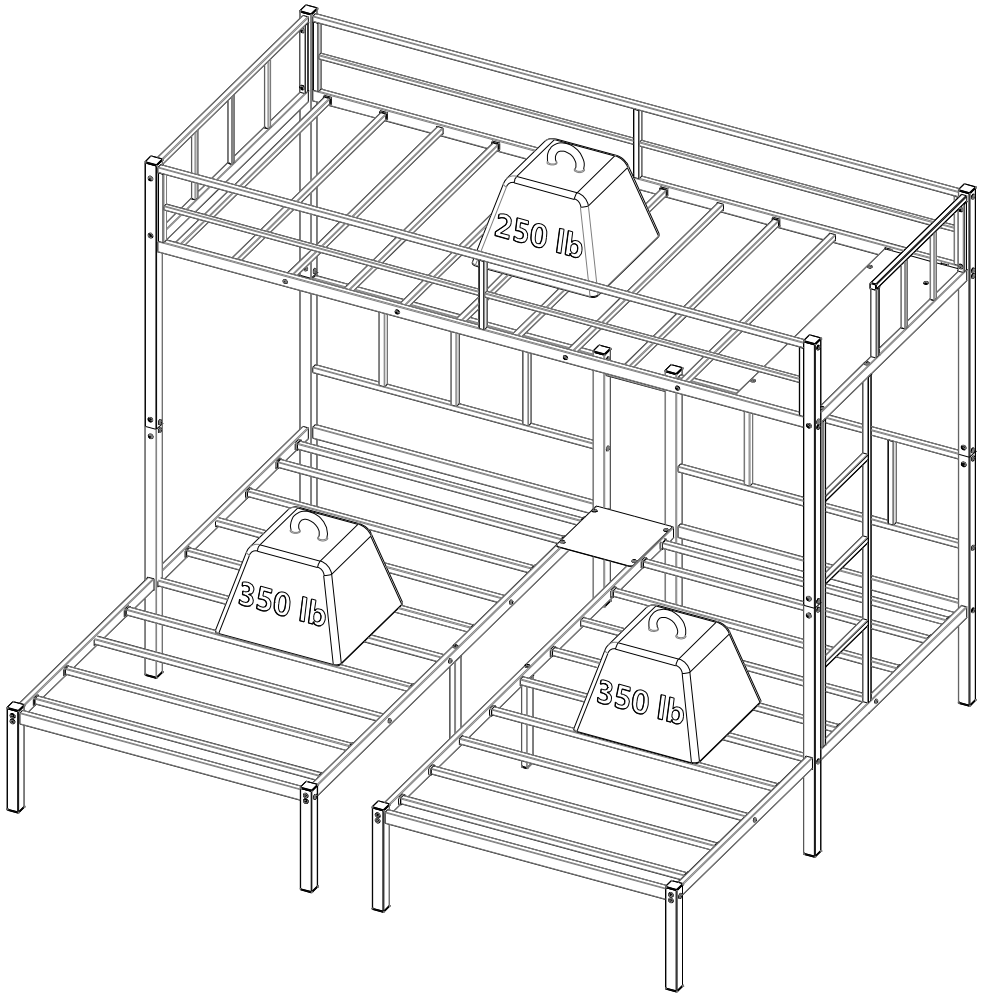
Completed