

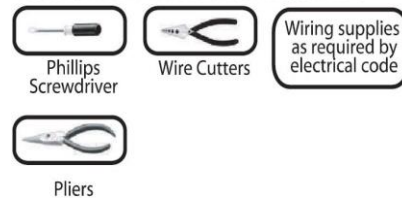
INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS  
READ ALL INSTRUCTIONS

**IMPORTANT SAFETY INSTRUCTIONS**

**SAVE THESE INSTRUCTIONS**



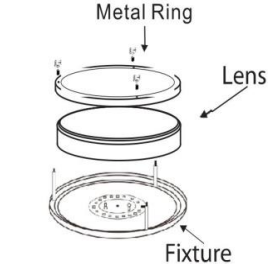
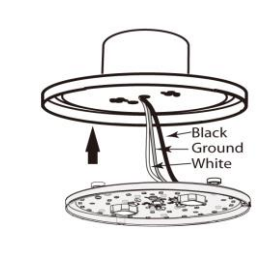
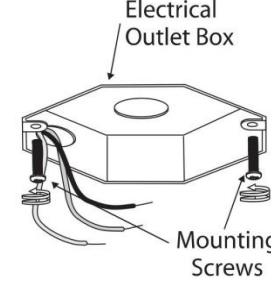
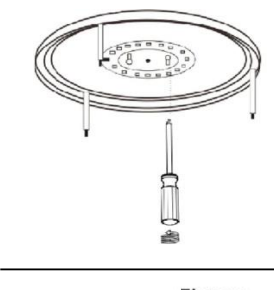
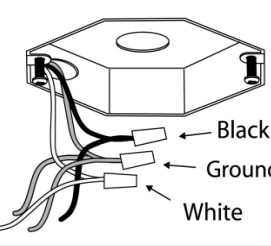
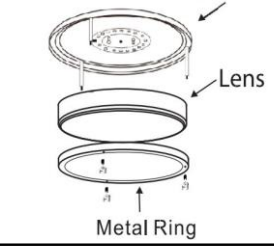
**TOOLS AND MATERIALS REQUIRED:**



**SAFETY PRECAUTIONS:**

- 1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.**
- 2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**
- 3. CAUTION-RISK OF ELECTRIC SHOCK. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.**

**INSTALLATION**

	<p><b>1.</b> Remove plastic lens by gently rotating the decorative knobs counter-clockwise and remove metal ring, then lift the lens.</p>		<p><b>4.</b> Attach fixture to mounting screws, turn fixture counter-clockwise to lock. You may adjust magnet PCB board light source.</p>
	<p><b>2.</b> Place mounting screws (included) in electrical box screwing in halfway.</p>		<p><b>5.</b> Secure fixture by tightening mounting screws.</p>
	<p><b>3.</b> Using wire nuts to connect ground wires (green) from Fixture to ground wire out of electrical box. Connect black wire from fixture to black wire from electrical box. Connect white wire from fixture to White wire from electrical box.</p>		<p><b>6.</b> Place acrylic lens over the fixture pan. Place the metal ring over the acrylic lens lining up the holes with the fixture pan posts and then secure it with the decorative knobs included.</p>