


INSTALLATION INSTRUCTION

Wall Sconce

E-WS-082503-CS-BK

East Grove

• H O M E •

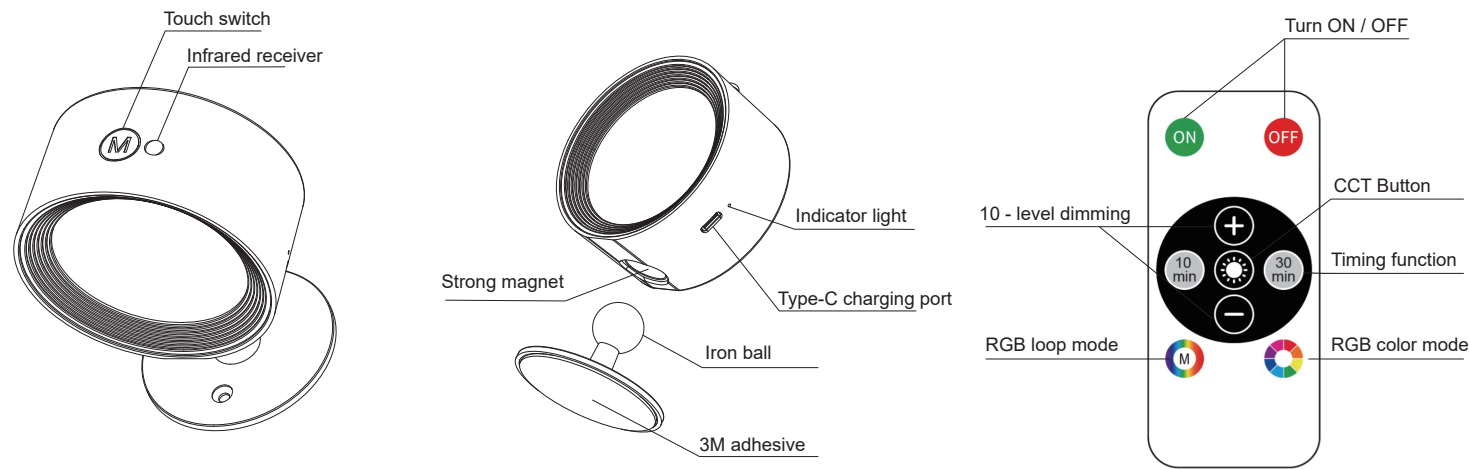

Preparation before first use:

Make sure to complete at least one full charge via the Type - C interface before the first use.

Installation steps:

- 1.Stick the base to the desired position with double - sided tape.
- 2.If you need to enhance the fixing effect, you can also use M3 screws for reinforcement.
- 3.When using, please pay attention to maintaining a good magnetic connection between the lamp body and the base.

Control methods:

(1) Touch button control:

Single - click to switch modes: Warm white → Cool white → Mixed white → Red light static state → Green light static state → Blue light static state → Off

Long - press to adjust brightness: Stepless dimming, and the brightness can be freely adjusted from full brightness to off.

(2) Remote control functions:

- 1.Power on/off button (ON/OFF)
- 2.Color temperature cycle switching: Warm white / Cool white / Mixed white
- 3.Brightness adjustment: There are 10 levels of increase or decrease in total.
- 4.Timing function: Automatically turn off in 10 minutes / 30 minutes (canceled by any key)
- 5.RGB colorful light switching: Red → Orange → Yellow → Green → Cyan → Blue → Purple, playing in a loop
- 6.Dynamic modes: Alternately running various special effect modes such as RGB gradient, breathing light effect, jump change, etc.

Precautions and Warnings

Important Notice: To ensure your safe use, please be sure to abide by the following rules:

- 1.It is strictly prohibited to expose the product to a high - temperature environment (such as over 60°C) to prevent the risk of explosion.
- 2.Do not look directly at the LED light source for a long time to avoid eye damage.
- 3.Avoid using this product in a humid environment. Do not immerse it in water to prevent short - circuits or damage to the circuit.
- 4.When the light brightness drops significantly, please recharge in a timely manner to ensure normal use.
- 5.During the charging process, keep away from flammable and explosive items. It is recommended not to charge continuously for more than 12 hours, and try to avoid using the product while charging.

1. Rated Input :	5V 1A	5. Battery :	3.7V,2600mAh
2. Rated Power :	1.5W ± 10%	6. Color Temperature :	3000K-6500K
3. Charging Time :	3-4Hours	7. Switch :	Button Switch
4. Working Time :	7-8Hours		