

Product Manual

Vanity Light



Installation Guide

Mount only on a sturdy surface to avoid injury or damage.

Warnings and Cautions

Please turn off the circuit breaker before installation and consult an electrician if unsure. Also, remember to turn off the fixture and wait for the bulbs to cool before replacing.

LIGHT SOURCE

3 bulbs required (bulbs not included)



BULB BASE TYPE
Medium (E26)



Package Contents

Preparation :

Identify and inspect all parts before beginning the installation.

Missing or damaged parts?

You can contact us

PARTS BAG :



Crossbar Assembly x1



Outlet Box Screw x2



White Glove x1







Wire Connector x2



————— **Metal Frame Body x1**

————— **Globe Glass Shade x3**

————— **Socket Ring x3**

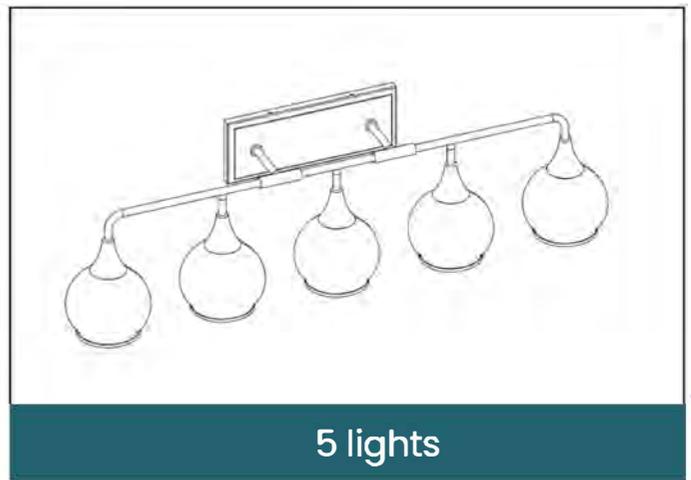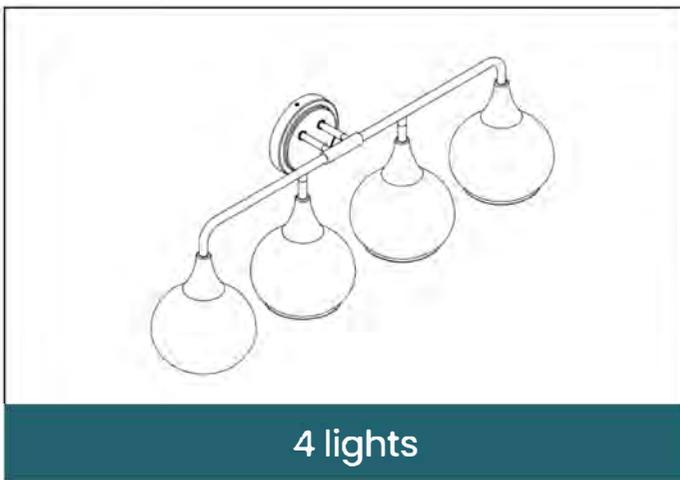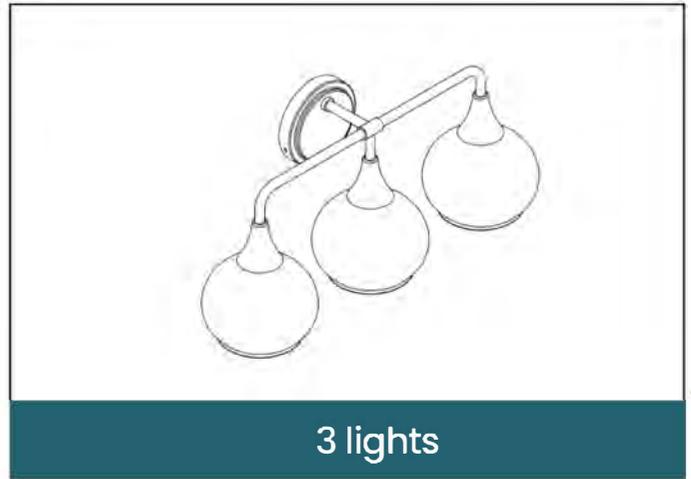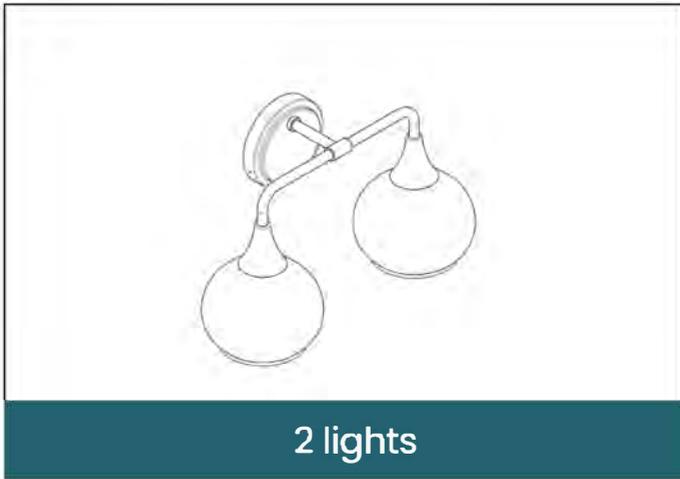

STEP 1

- Crossbar Assembly



1. Remove your old lights and get started.

Carefully remove your new vanity lamp from its packaging. Unscrew the Backplate Screw to remove the mount plate from the Backplate. Attach your mounting board to the wall, or place the mounting board over the junction box. Gently thread the wire from the junction box through the center hole of your mounting bracket, then secure the mounting bracket to the junction box by tightening the machine screws that come with your junction box.

STEP 2

- Wire the vanity light



2. Wire the vanity light.

Next, have a helper support the fixture while you complete the wiring. Attach your vanity light's wires to the power supply from the junction box using a wire connector:


Black to black (live)

White to white (grounded)


Grounding to ground (green or copper)

Twist the ends of the wire pairs together, and then twist the wire connector. Tuck the wires into the mounting bracket. Finally,

loop the sconce's ground wire around the grounding screw that was partially installed into the mounting bracket. Once that wire is looped, tighten the screw. If there is no ground wire (green or copper) coming from the junction box, contact a certified, professional electrician.

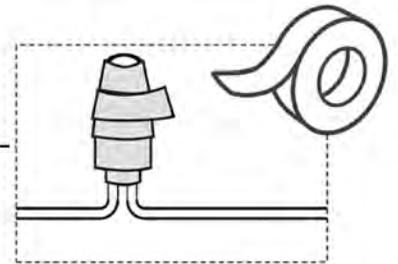


White wire (neutral)
from outlet box

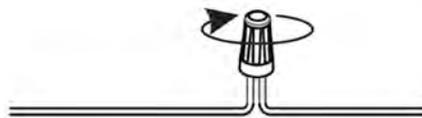


White wire
from fixture

Black or Red wire (hot)
from outlet box

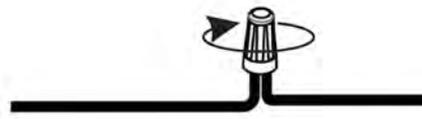

Black wire
from fixture

Bare or Green ground wire
from outlet box

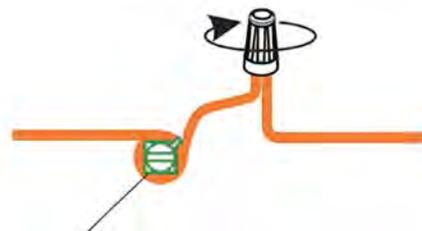

Ground wire
from Fixture

*Green Ground Screw on crossbar optional

STEP 3

- Install Light Body



3. Attach a vanity light fixture.

Place the backplate against the wall, making sure the holes on the top and bottom of the backplate are aligned with the holes in the mounting plate. Secure the backplate to the mounting plate with the backplate screws.

STEP 4

- Install Glass shade



4. Add glass shades.

Secure shade to the socket with a socket ring.

Note: The socket ring is attached to the socket. Remove it before installing the Shade.

STEP 5

- Bulb



5. Install E26 bulb (not included)

In accordance with your vanity light's specifications.

1. Free Warranty Policy:

Basic Terms

- ① The warranty period is effective from either the date of purchase or the date of delivery, if the latter is slightly later than the former. Please retain your purchase invoice or related documents as an essential basis for warranty service.
- ② The warranty policy applies solely to Our products purchased and utilized in the continental United States, except for American Samoa, Guam, Northern Mariana Islands, Puerto Rico, and the U.S. Virgin Islands. Furthermore, the warranty policy excludes products purchased from other vendors on other platforms.
- ③ We do not provide any warranty for product-related components, nor does it offer any replacement products for items sold individually or separately from the complete package.

2. Warranty period:

The warranty period for products is 1 years from the date of purchase. Within this period, customers can enjoy free warranty services provided by us.

Note:

- ① All products sold by do not include light bulbs, except for products that integrate new LED light sources.
- ② We clearly marks products with integrated LED light sources in the product description. However, we do not provide a warranty for light bulbs.

3. Warranty:

If your product is found to be faulty due to poor materials, workmanship, or functionality after inspection by us, we will determine the appropriate course of action. This may include replacement parts, a full machine replacement, or a full refund. If you encounter the following problems during the use of our products, we will provide free repair services:

- ① Scratch;
- ② Non-functional lamp head problems (except for integrated LED light sources, our products do not contain light bulbs);
- ③ Broken products (photo evidence required);
- ④ Missing essential accessories from the package (photo evidence required);
- ⑤ Damage caused by workmanship and quality issues during installation (photo evidence required).

However, in the following cases, we will not be able to provide free warranty services for your products within the warranty period:

- ① Product damage or damage to home circuits caused by improper installation or installation by an unlicensed electrician;
- ② Normal wear and tear, including bulbs, aging wires, etc.;
- ③ Parts not listed in the item list, such as bulbs, extra screws, extra rods, chains, etc.;
- ④ Use of the product in an environment outside the recommended use site;

Improper installation.

Please note that the above after-sales guarantee is authorized by us. If you have any questions, please contact us and we will reply within 24 hours. We fully comply with local laws and regulations and operate according to them to ensure that our product quality and service level meet the standards.

Our fees for repairing parts depend on the specific issue and your warranty status. If the problem is covered by the warranty and within the warranty period, you won't be required to pay for repairs. If the problem is not covered by the warranty or outside of the warranty period, you will need to pay for the out-of-warranty parts. Please note that some problems may not be fixable. If your product is severely damaged, destroyed, or malfunctioned due to unauthorized modifications or non-official authorized repairs, we may be unable to provide repair services.

Discontinued Products:

Products that have been discontinued by and have been out of production for over two years will not be serviced. Spare parts will no longer be available, and the warranty will no longer apply. This policy is subject to updates, as permitted by law.



**For any replacement parts or installation issues, please
Contact Us!**