




DIMENSIONS


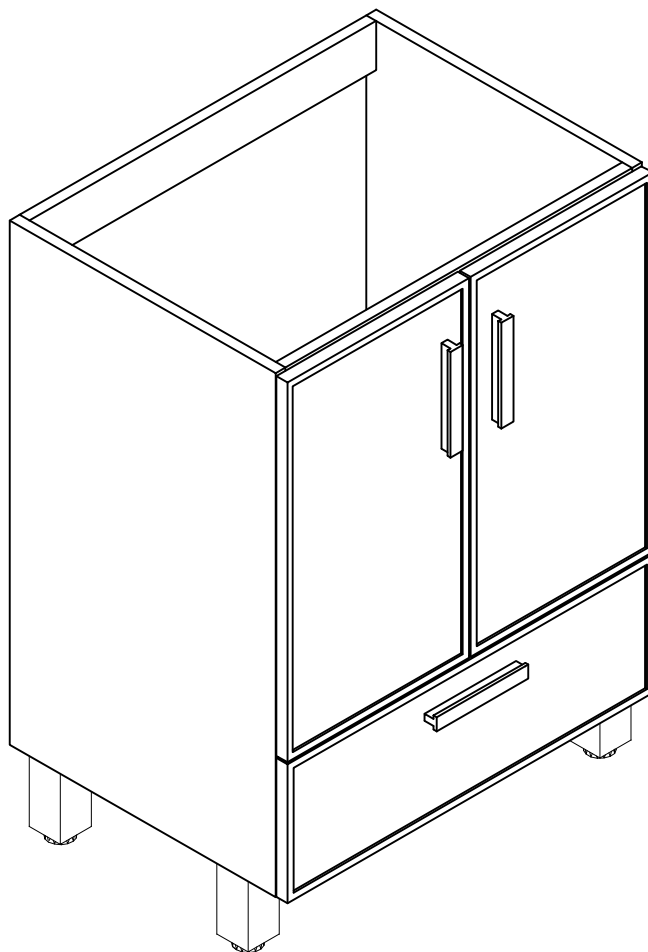


YOU MAY NEED (NOT SUPPLY)

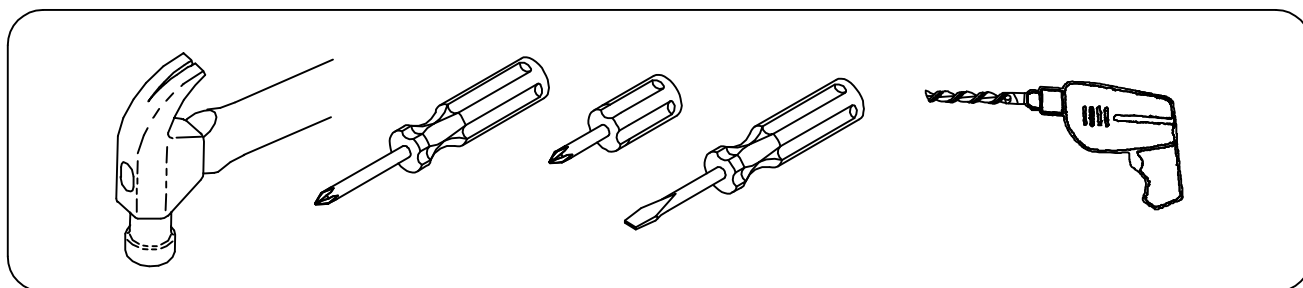

ASSEMBLY DIAGRAM

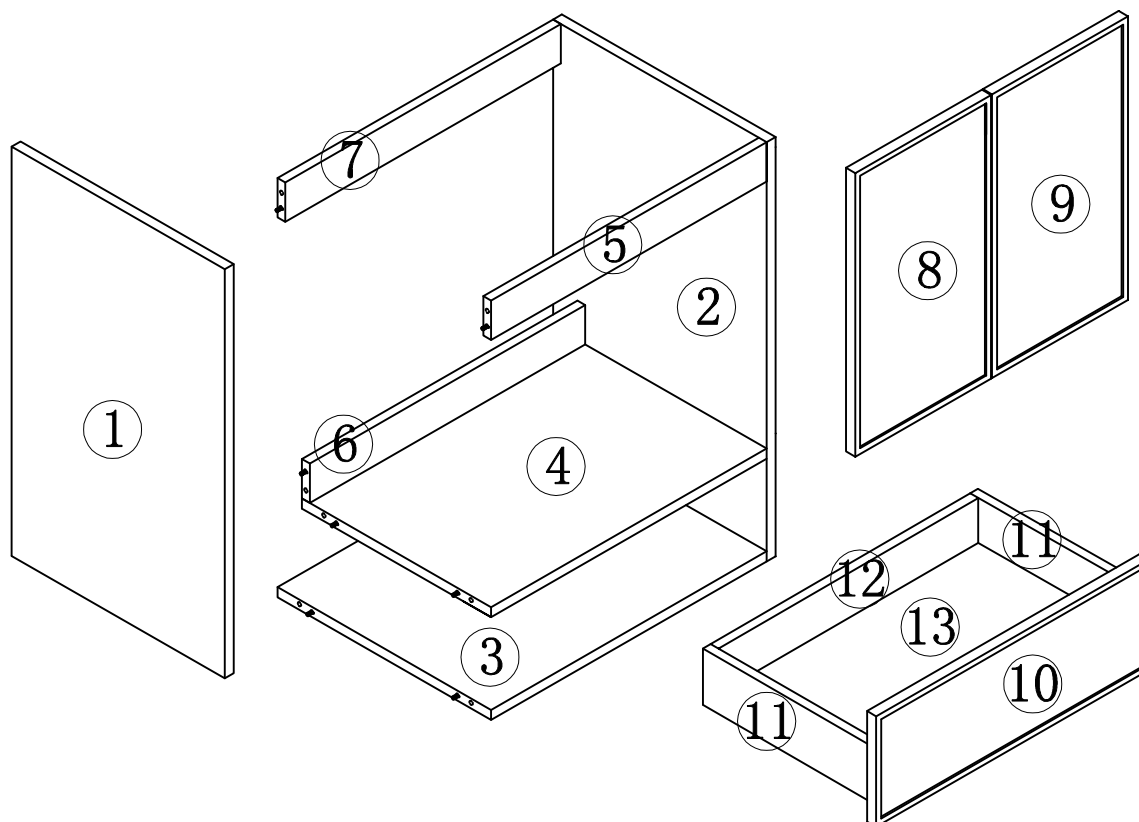


PARTS LIST					
PARTS LIST					
NO	DESCRIPTION	QTY	NO	DESCRIPTION	QTY
①	Left side panel 	1	⑧	Left door panel 	1
②	Right side panel 	1	⑨	Right door panel 	1
③	Bottom panel 	1	⑩	drawer panel 	1
④	laminate 	1	⑪	drawer side panel 	2
⑤	front pull-up 	1	⑫	drawer back panel 	1
⑥	rear drop down 	1	⑬	drawer bottom 	1
⑦	rear pull-up bar 	1			

PARTS LIST					
HARDWARE LIST					
NO	DESCRIPTION	QTY	NO	DESCRIPTION	QTY
A	Three-in-one eccentric wheel 	22	G	4*20mm screw 	6
B	Three-in-one connecting rod 	22	H	Door handle 	2
C	Three-in-one sticker 	22	I	Drawer handle 	1
D	8*40mm wood dowel pins 	14	J	Aluminum alloy leg 	4
E	Drawer slides 	2	K	Door hinge 	4
F	4*16mm screw 	48			
CAUTION: Please confirm the parts list before installation					


STEP 1

HARDWARE LIST	
Three-in-one connecting rod B 22PCS	


1.Put the three-in-one connecting rod in the 10mm hole of the following panels and tighten them with a cross screwdriver or an electric tool.

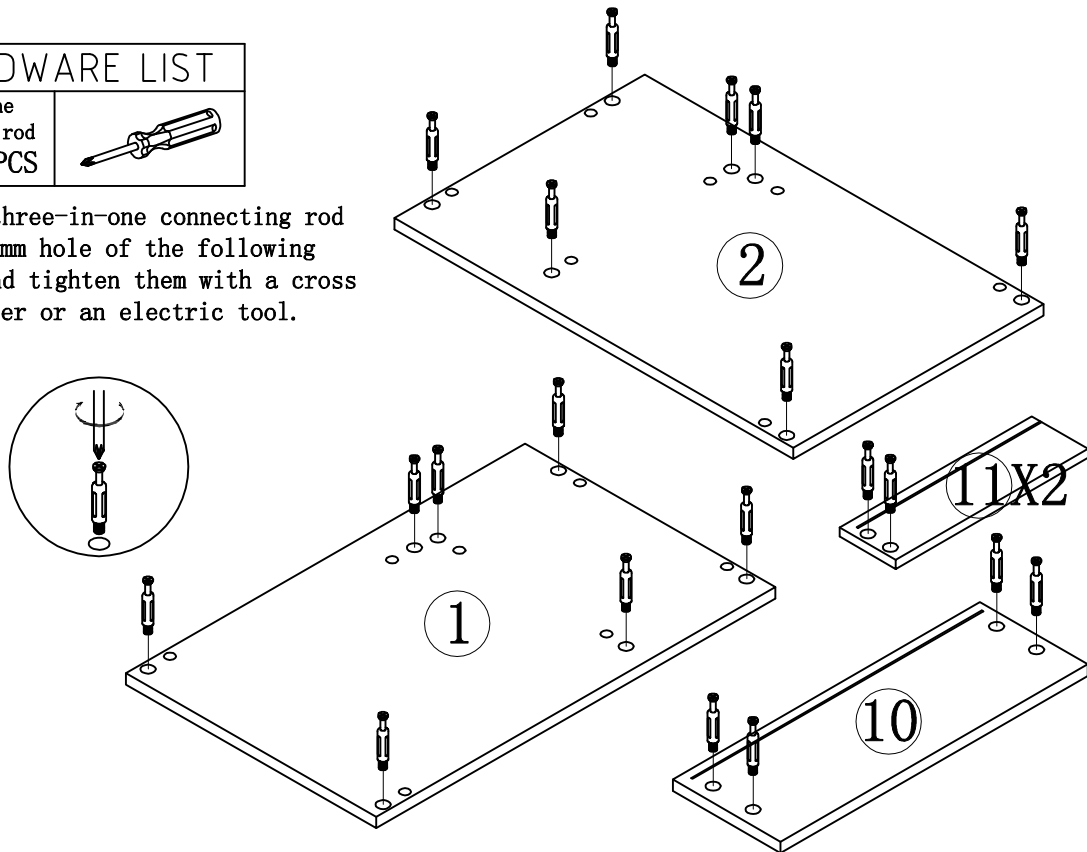

STEP 2

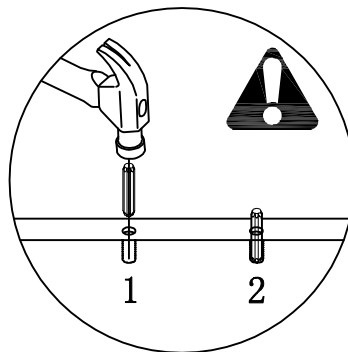


1.Strike the 08*40mm wood dowel pin into the 8m hole of the above panels with an iron hammer. Please note that the hole of the three-in-one connecting rod should also be 8mm. The hole of the three-in-one connecting rod connects to the hole of 15mm three-in-one eccentric wheel.

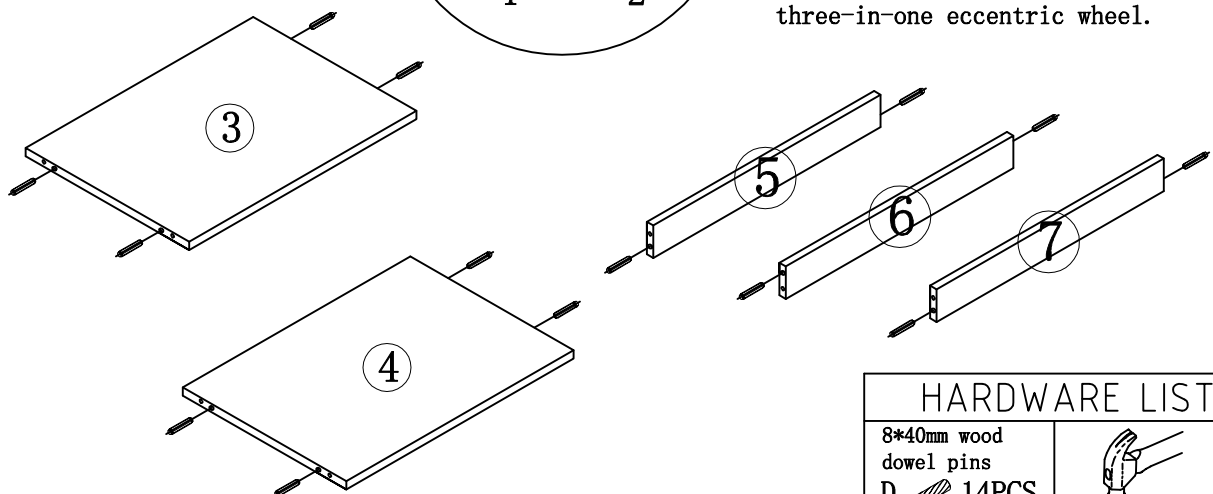

HARDWARE LIST	
8*40mm wood dowel pins D 14PCS	

STEP 3


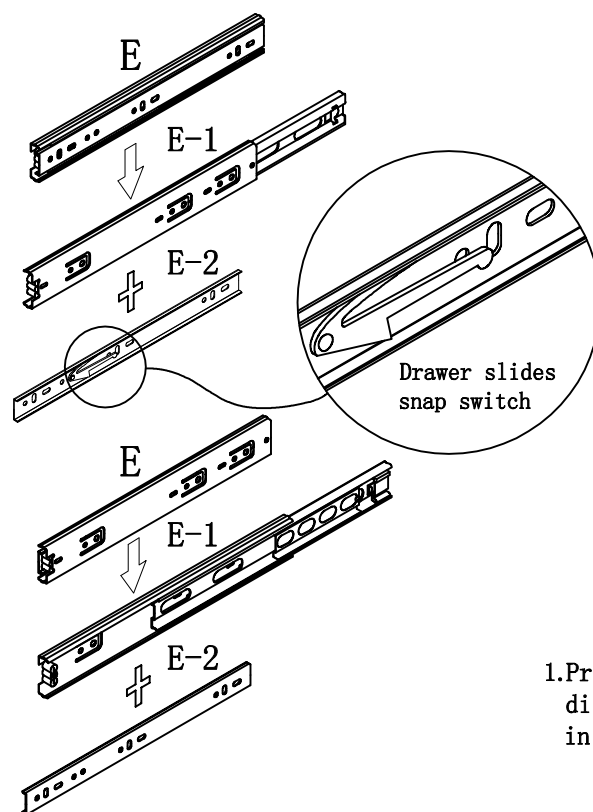


HARDWARE LIST	
Drawer slides	
E 2PCS	

1. Press the slide snap switch, disassemble slide blocks and put them in a place properly for further use.



STEP 4

1. Fix the drawer slide to the side panel with 4*16mm screws.

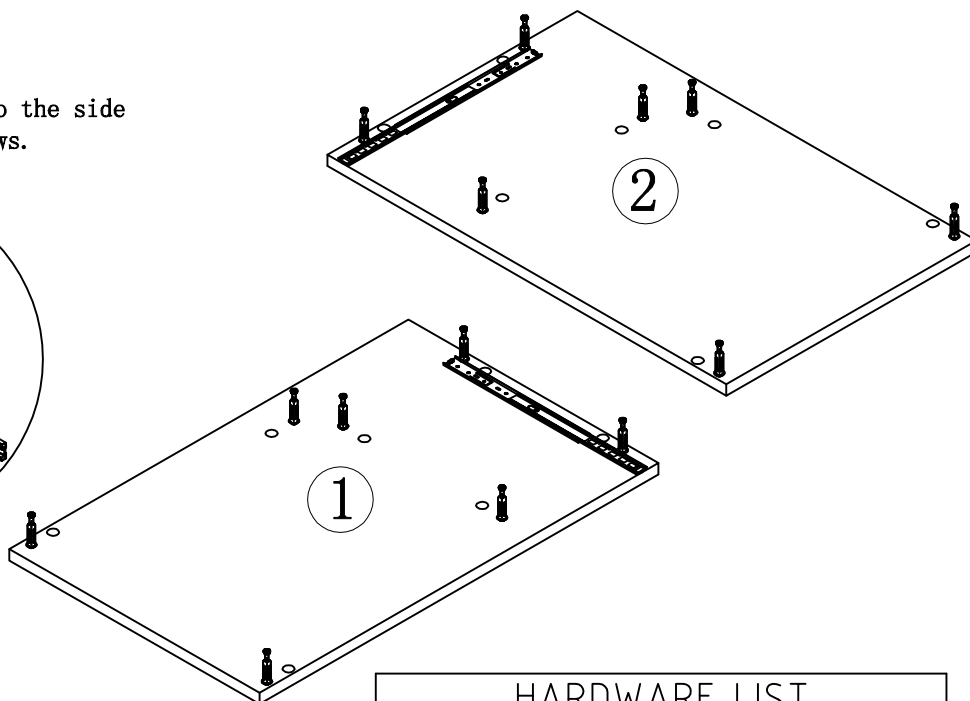


HARDWARE LIST		
4*16mm screw	Drawer slides	
F 6PCS	E-1 2PCS	

STEP 5

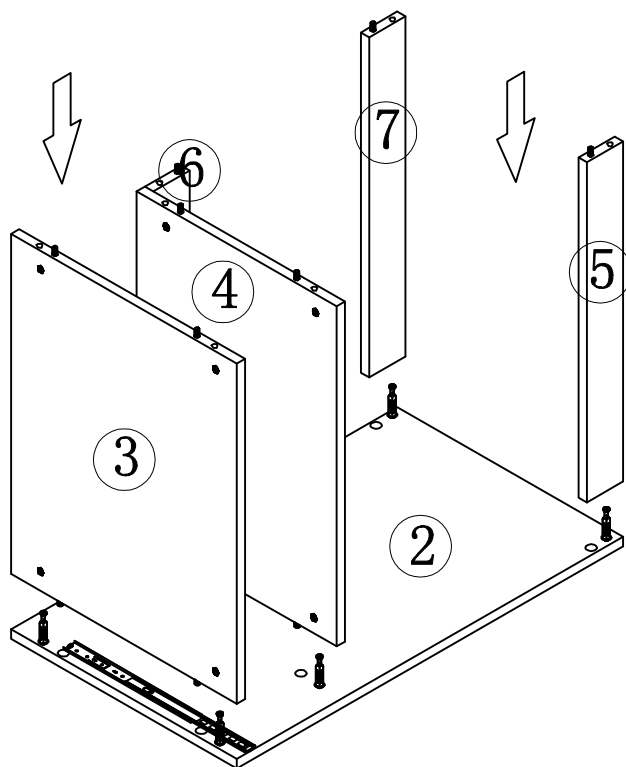

1. Connect No. 3-4-5-6-7 panel to No.2 panel tightly with the three-in-one eccentric wheel.



2. Cover the mounting hole of the eccentric wheel with a three-in-one sticker.



HARDWARE LIST

Three-in-one
eccentric wheel
A  7PCS


Three-in-one
sticker
C  7PCS



STEP 6

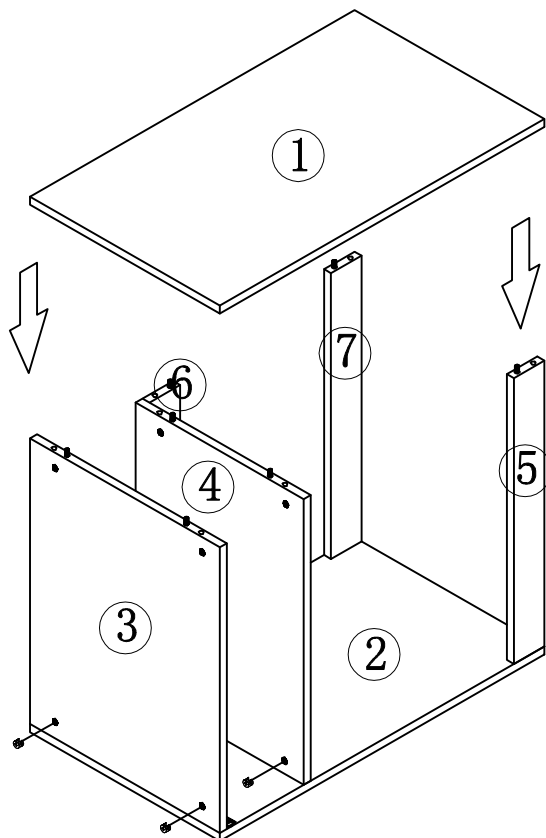

1. Connect No. 1 panel to No. 3-4-5-6-7 panel tightly with the three-in-one eccentric wheel.



2. Cover the mounting hole of the eccentric wheel with a three-in-one sticker.


HARDWARE LIST

Three-in-one
eccentric wheel
A  7PCS

Three-in-one
sticker
C  7PCS



STEP 7

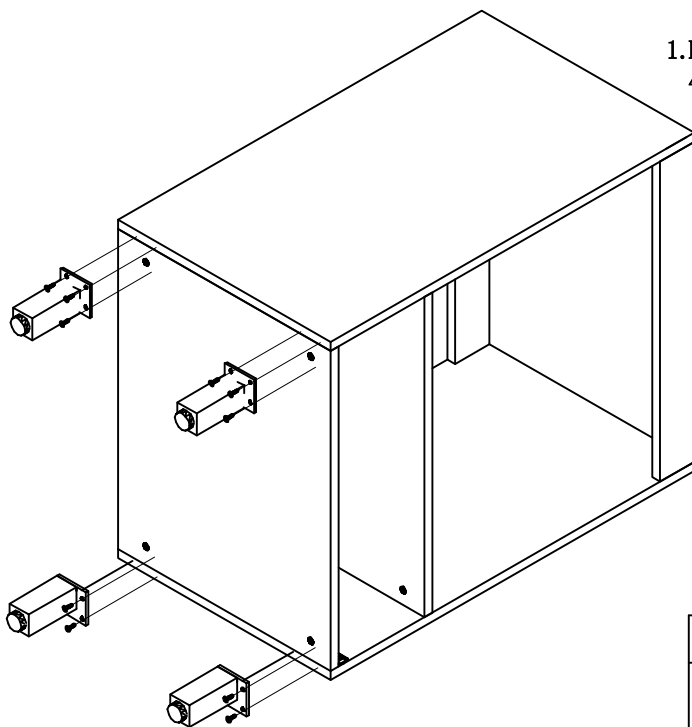

1. Fix feet of the cabinet with 4*16mm screws.


HARDWARE LIST

4*16mm screw



F  12PCS

Aluminum alloy leg


J  4PCS



STEP 8

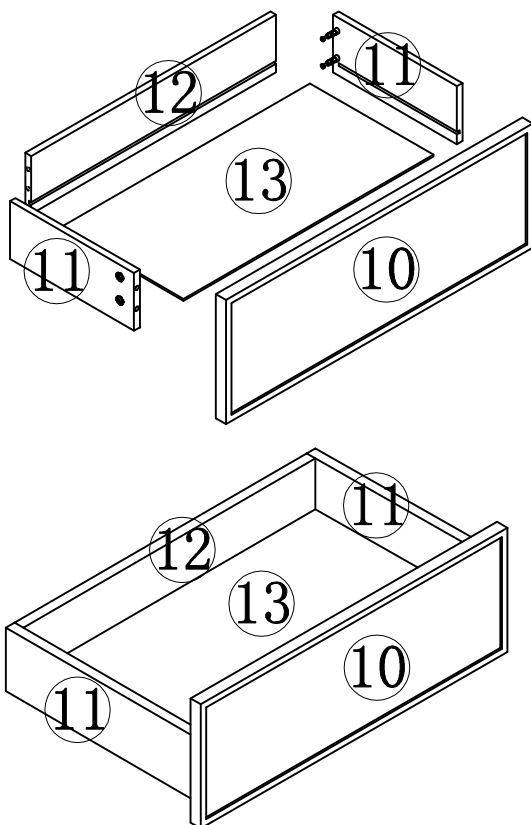

1. Install No. 10-11-12-13 panels with the three-in-one eccentric wheel tightly.



2. Cover the mounting hole of the eccentric wheel with a three-in-one sticker.

HARDWARE LIST

Three-in-one eccentric wheel



A  8PCS

Three-in-one sticker

C  8PCS





STEP 9

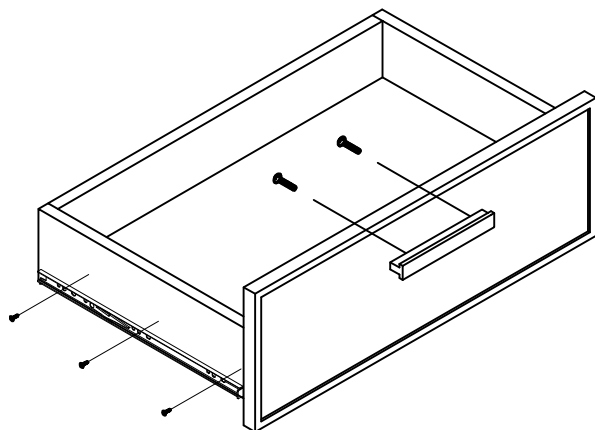

- 1.Lock the spare drawer slide block to the drawer.
- 2.Install the drawer handle with 4*20 handle screws.

HARDWARE LIST		
4*16mm screw	Drawer slides	
F 6PCS	E-2 2PCS	
4*20mm screw	Drawer handle	
G 2PCS	I 1PCS	


STEP 10

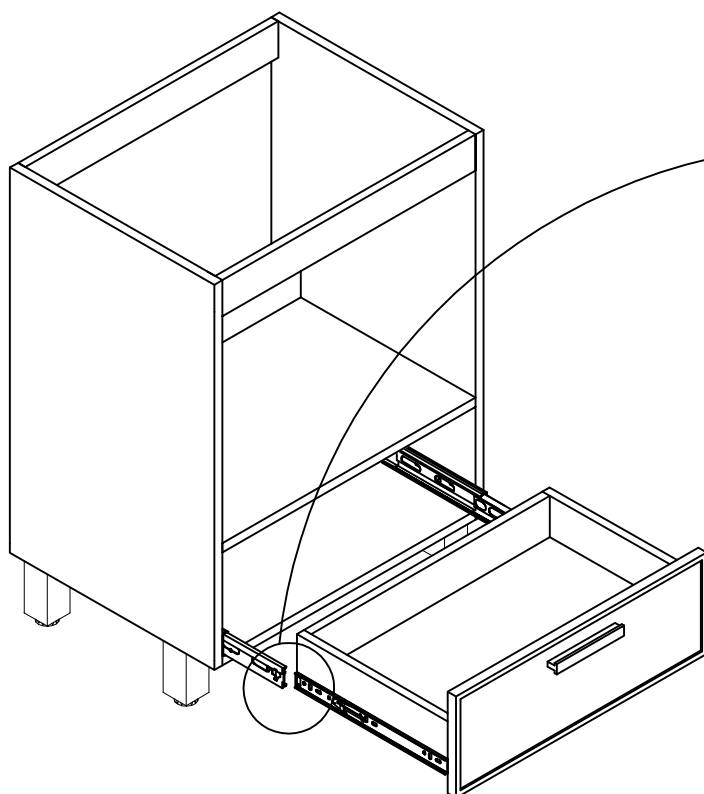

- 1.Align slide block with the trough on the guide rail, press the snap switch and press it forward to install the drawer.

- 2.Install drawer handles.

STEP 11

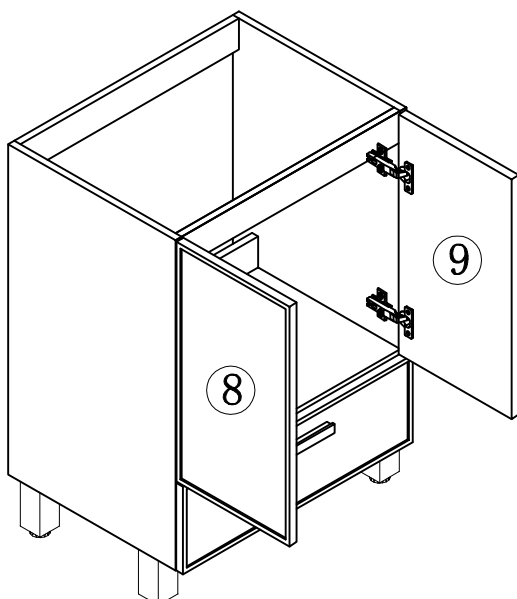


1. Install the hinge cup to the door panel with 4*16mm screws.


2. Install the hinge to the side panel with 4*16mm screws.

3. Install the hinge cup on the door panel to the hinge of the side panel.

4. Adjust the door panel clearance.

HARDWARE LIST		
4*16mm screw	Door hinge	
F  24PCS	K  4PCS	

STEP 12

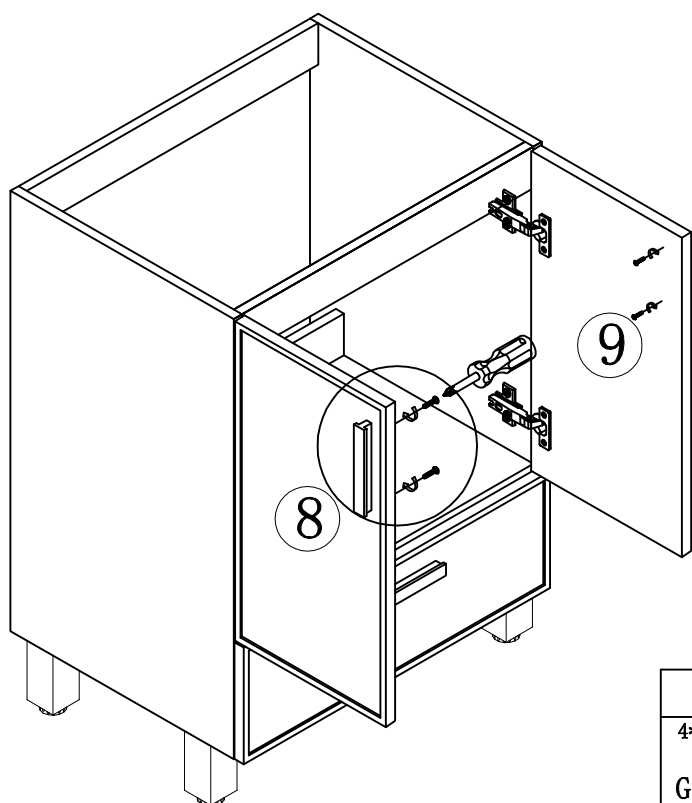

1. Install the door handle with 4*20mm handle screws.

HARDWARE LIST		
4*20mm screw	Door handle	
G  4PCS	H  2PCS	



Choking hazard-Small Parts : This unit contains small parts, not for children under 3 years.

Tip-over hazard : Secure finished unit to wall stud using L-Bracket and wall screw (#10*1.5"W/out provided). If a wall stud is not neccessible , Consault your local hardware store for appropriate mounting hardware . Failure to properly install will result in product collapse or tip-over. Serious injury can occur .