

# ASSEMBLY INSTRUCTIONS

## Caution:

- **FOR YOUR SAFETY:** Turn off the power to main electric circuit/ fuse box before beginning work.

## Important Safety Instructions:

- **Professional installation is recommended for hardwired lighting. Incorrect installation can lead to fires.**
- These instructions are provided for your safety. It is very important that they are read carefully and completely before assembling fixture.
- We strongly recommend that two people install the lighting fixture.
- This fixture has been rated for up to (1) **60-watt maximum TYPE A bulbs** (not included) or (1) **13-watt compact fluorescent light bulbs** (not included). To avoid the risk of fire, do not exceed the recommended wattage.
- This lighting fixture is intended for indoor, residential use.

## Warning:

- **To reduce the risk of fire, electrical shock or personal injury, do not turn on lighting fixture until light bulb is installed and assembly is complete.**
- **Always turn off the lighting fixture and allow it to cool before replacing the light bulb.**








## Care instructions:


- Do not polish or use harsh cleaners as they may damage the finish.
- Wipe clean with a non-colored, lint-free soft, dry cloth.

## Pre-assembly:





- Remove all parts and hardware from box along with any plastic protective packaging.
- Check that all parts listed are included.
- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
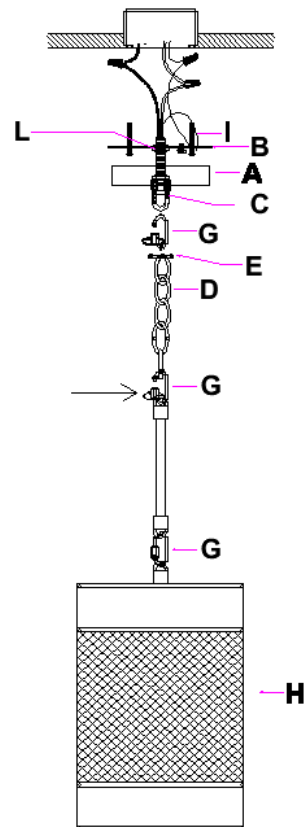
## Component List

Part code	Component	Description	Qty
A		Ceiling cap	1
B		Crossbar	1
C		Hang ring	1
D		Hang chain	1
E		Canopy Nut	1
F		Bulb	Not included
G		Quick link chain connector	3



## Hardware List


Part code	Component	Description	Qty
I		Mounting screw	2
J		Plastic wire nut connector	3
K		Ground screw	1
L		Hex nut	2

## To Adjust the Suspension Length of the Fixture:

- The adjustment or shortening of the lighting fixture's suspension length is only needed if the factory set length is not appropriate for your installation. We recommend that you adjust the lighting fixture to the proper desired length before cutting the electrical cord.
- Determine the lighting fixture suspension length from the ceiling for the product installation, allowing the extra cord length for the outlet junction box wire connections. If needed, cut off the extra power cord length on the 3 wire cords so that they are all at least 6 inches (152.4mm) long within the outlet junction box.


## Assembly Instructions:

- **Step 1:** Position the canopy nut (E) under the canopy (A), attach to the hang chain (D) to position the lighting fixture.

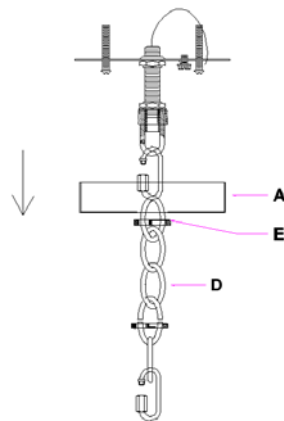


- **Step 2:** With the help of another person to hold the weight of the lighting fixture, attach the crossbar (B) onto the junction box by using 2 mounting screws (I) with a screwdriver, then make the wire connection.


Adjust the position of the threaded tube of the hang ring (C) and tightly connect the 2 upper hex nuts (L) to the crossbar (B). Connect the hand ring (C) to hang chain (D) with the quick link chain connector (G).

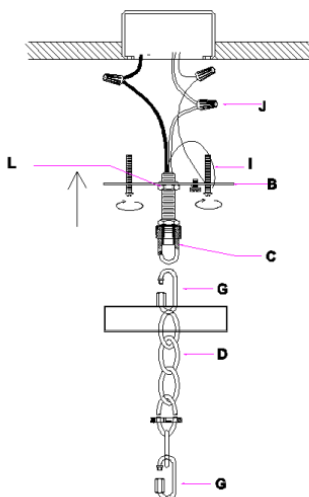

**Step 3:** Slide the canopy (A) and canopy nut (E) upwards. Make sure to hold the canopy (A) in place with the canopy nut (E).

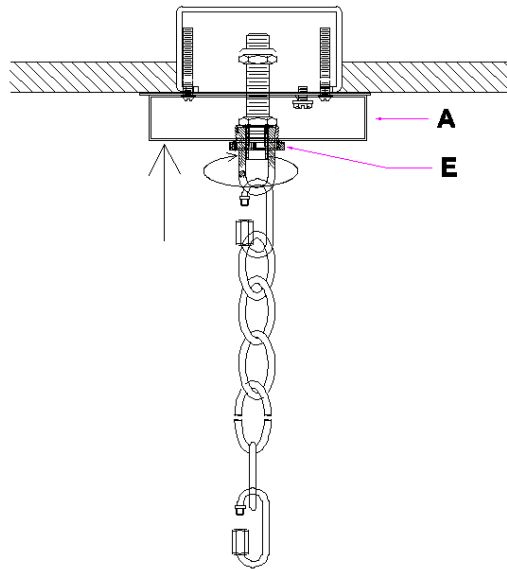

**Step 4:** Connect the light fixture (H) with the quick link chain connector (G). Install the bulb(F not included).

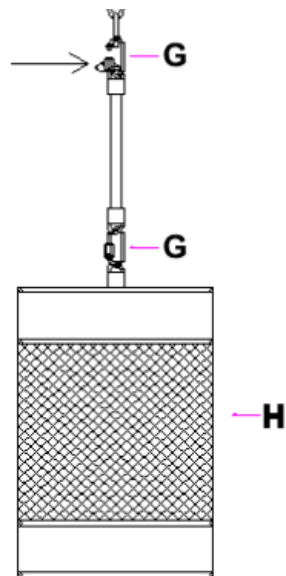

..

**Thank you for your purchase**